

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

### CERTIFICATION OF COMPLIANCE

#### FCC Part 15 Certification Measurement

**PRODUCT** : THERMAL PRINTER  
**MODEL/Serial No.** : PORTI-WC40 / Proto type  
**MULTIPLE MODEL** : -  
**FCC ID** : QDDPORTI-WC40  
**APPLICANT** : Woosim System Inc.  
#501, Daerung Technotown 3th, 448, Gasan-dong,  
Geumcheon-gu, Seoul, Korea  
**MANUFACTURER** : Woosim System Inc.  
#501, Daerung Technotown 3th, 448, Gasan-dong,  
Geumcheon-gu, Seoul, Korea  
**FCC CLASSIFICATION** : DSS: Part 15 Spread Spectrum Transmitter  
**TYPE OF MODULATION** : FHSS (GFSK)  
**FREQUENCY CHANNEL** : 2 402 MHz to 2 480 MHz and Channel Spacing 1 MHz (79 Ch)  
**ANTENNA TYPE** : Printed Monopole Antenna (Integral)  
**ANTENNA GAIN** : -3.00 dBi max  
**RF POWER** : 5.15 mW  
**RULE PART(S)** : FCC Part 15 Subpart C  
**FCC PROCEDURE** : ANSI C63.4-2003  
**TEST REPORT No.** : ETLE100108.04  
**DATES OF TEST** : January 11, 2010 to January 13, 2010  
**REPORT ISSUE DATE** : February 01, 2010  
**TEST LABORATORY** : ETL Inc. (FCC Designation No. : KR0022)

The THERMAL PRINTER, Model PORTI-WC40 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247.

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Hyung Seok, Lee / Chief Engineer

**ETL Inc.**

**#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea**

**Tel: 82-2-858-0786 Fax: 82-2-858-0788**

*This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the ETL Inc.*

## Table of Contents

### **FCC Measurement Report**

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
  - 5.1 Summary of Test Results**
  - 5.2 Channel Bandwidth and Frequency Separation**
  - 5.3 Maximum Peak Output Power**
  - 5.4 Bandwidth of Frequency Band Edges**
  - 5.5 Number of Hopping Channels**
  - 5.6 Time of Occupancy (Dwell time)**
  - 5.7 Spurious Emissions**
  - 5.8 Conducted Emissions Test**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

### **Appendix A. FCC ID Label and Location**

### **Appendix B. Test Setup Photographs**

### **Appendix C. External Photographs**

### **Appendix D. Internal Photographs**

### **Appendix E. Block Diagram**

### **Appendix F. Circuit Diagram**

### **Appendix G. User Manual**

### **Appendix H. Operational Description**

### **Appendix I. Antenna Requirement**

## FCC MEASUREMENT REPORT

**Scope** – Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

### General Information

|                       |                                                                                    |
|-----------------------|------------------------------------------------------------------------------------|
| <b>Applicant Name</b> | <b>: Woosim System Inc.</b>                                                        |
| <b>Address</b>        | <b>: #501, Daerung Technotown 3th, 448, Gasan-dong, Geumcheon-gu, Seoul, Korea</b> |
| <b>Attention</b>      | <b>: Moo-Seung Lim / Assistant Manager</b>                                         |

- **EUT Type** : THERMAL PRINTER
- **Model Number** : PORTI-WC40
- **S/N** : Proto type
- **Freq. Range** : 2 402 MHz - 2 480 MHz
- **Number of Channels** : 79
- **Modulation Technique** : FHSS (GFSK)
- **Frequency Channel** : 2 402 MHz to 2 480 MHz and Channel Spacing 1 MHz (79 Ch)
- **Antenna Type** : Printed Monopole Antenna (Integral)
- **Antenna Gain** : -3.00 dBi max
- **RF Power** : 5.15 mW
- **FCC Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.4-2003
- **FCC Classification** : DSS: Part 15 Spread Spectrum Transmitter
- **Place of Tests** : ETL Inc. Testing Lab.  
Radiated Emission test;  
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea  
  
Conducted Emission test;  
ETL Inc. Testing Lab.  
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

## 1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the Woosim System Inc. Model: PORTI-WC40

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the THERMAL PRINTER (model: PORTI-WC40).

### 2.2 General Specification

| Item                              | Specification                                                                                                                  |                          |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Printing method                   | Direct thermal line printing                                                                                                   |                          |
| Characters per line               | 92cpl                                                                                                                          |                          |
| Character size                    | Eng. : 9*24dots, 12*24dots    Kor. : 16*24dots, [24*24dots]                                                                    |                          |
| Optional Characters               | Simplified/Traditional Chinese, Arabic, Cyrillic, Russian, Turkish, Greek, Japanese, Persian, Latin9 and Others upon request.  |                          |
| Resolution                        | 203dpi, 8dots/mm                                                                                                               |                          |
| Print width                       | 4-inch (104mm, 832dots)                                                                                                        |                          |
| Printing speed                    | 50mm /sec                                                                                                                      |                          |
| Dimensions                        | 138.4*88.5*45.7                                                                                                                |                          |
| Weight                            | 418g (Including battery & roll paper)                                                                                          |                          |
| Interface                         | UART(RS-232C or TTL), Bluetooth Ver 2.1+EDR                                                                                    |                          |
| Paper supplied                    | Thermal roll paper (113mm wide, 38ø)                                                                                           |                          |
| Barcode supplied                  | 1-dimension : Code128, EAN 128, Code39, I2/5, Code93 UPC, EAN, KAN, JAN, CODABAR<br>2-dimension : PDF417, QR Code, DATA Matrix |                          |
| Black mark                        | Support black mark detection                                                                                                   |                          |
| H/W Spec.                         | MCU : 32bit RISC, FLASH : 4 Mbytes, RAM : 8 Mbytes                                                                             |                          |
| Receive buffer size               | 1M bytes                                                                                                                       |                          |
| Battery                           | Rechargeable 7.4V DC, 1400mAh (Li-ion)                                                                                         |                          |
| Battery duration                  | 1 hour continuous printing                                                                                                     |                          |
| Battery Charger                   | Input (100~250VAC, 50~60Hz)<br>Output(8.4VDC/0.8A), 4hours full charge time                                                    |                          |
| Environment Conditions            | Temperature                                                                                                                    | -20°C ~ 55°C (operating) |
|                                   | Humidity                                                                                                                       | 0% - 90% (operating)     |
| MCBF (Mean Cycle Between failure) | Mechanical                                                                                                                     | 37,000,000 lines         |
|                                   | Head                                                                                                                           | Approximately 50 Km      |

## Bluetooth

| Category                 | Specification                   |
|--------------------------|---------------------------------|
| Bluetooth Spec.          | Bluetooth V2.1 / Class2 (10m)   |
| Frequency Range          | 2.4GHz ISM BAND(2.402~2.480MHz) |
| Data Transmission Rate   | 57600bps Fixed.                 |
| Data bit                 | 8 Data bit Fixed.               |
| Parity bit               | No parity Fixed.                |
| Stop bit                 | 1 Stop bit Fixed.               |
| Output                   | Below 3mW/MHZ                   |
| Modulation type/rash way | GFSK SYSTEM / PLL               |

### Frequency Channel Table (Bluetooth)

| CH | MHz  | CH | MHz  | CH | MHz  | CH | MHz  | CH | MHz  | CH | MHz  | CH | MHz  | CH | MHz  |
|----|------|----|------|----|------|----|------|----|------|----|------|----|------|----|------|
| 1  | 2402 | 11 | 2412 | 21 | 2422 | 31 | 2432 | 41 | 2442 | 51 | 2452 | 61 | 2462 | 71 | 2472 |
| 2  | 2403 | 12 | 2413 | 22 | 2423 | 32 | 2433 | 42 | 2443 | 52 | 2453 | 62 | 2463 | 72 | 2473 |
| 3  | 2404 | 13 | 2414 | 23 | 2424 | 33 | 2434 | 43 | 2444 | 53 | 2454 | 63 | 2464 | 73 | 2474 |
| 4  | 2405 | 14 | 2415 | 24 | 2425 | 34 | 2435 | 44 | 2445 | 54 | 2455 | 64 | 2465 | 74 | 2475 |
| 5  | 2406 | 15 | 2416 | 25 | 2426 | 35 | 2436 | 45 | 2446 | 55 | 2456 | 65 | 2466 | 75 | 2476 |
| 6  | 2407 | 16 | 2417 | 26 | 2427 | 36 | 2437 | 46 | 2447 | 56 | 2457 | 66 | 2467 | 76 | 2477 |
| 7  | 2408 | 17 | 2418 | 27 | 2428 | 37 | 2438 | 47 | 2448 | 57 | 2458 | 67 | 2468 | 77 | 2478 |
| 8  | 2409 | 18 | 2419 | 28 | 2429 | 38 | 2439 | 48 | 2449 | 58 | 2459 | 68 | 2469 | 78 | 2479 |
| 9  | 2410 | 19 | 2420 | 29 | 2430 | 39 | 2440 | 49 | 2450 | 59 | 2460 | 69 | 2470 | 79 | 2480 |
| 10 | 2411 | 20 | 2421 | 30 | 2431 | 40 | 2441 | 50 | 2451 | 60 | 2461 | 70 | 2471 |    |      |

## 3. DESCRIPTION OF TESTS

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

### 3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2003 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was laced on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0,8 m high nonmetallic 1m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.4-2003 "measurement of intentional radiators". The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$  / 50  $\mu$ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.



## 3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 4. TEST CONDITION


### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

### 4.2 Description of Test modes

THERMAL PRINTER that has the control software.

### 4.3 The setup drawing(s)

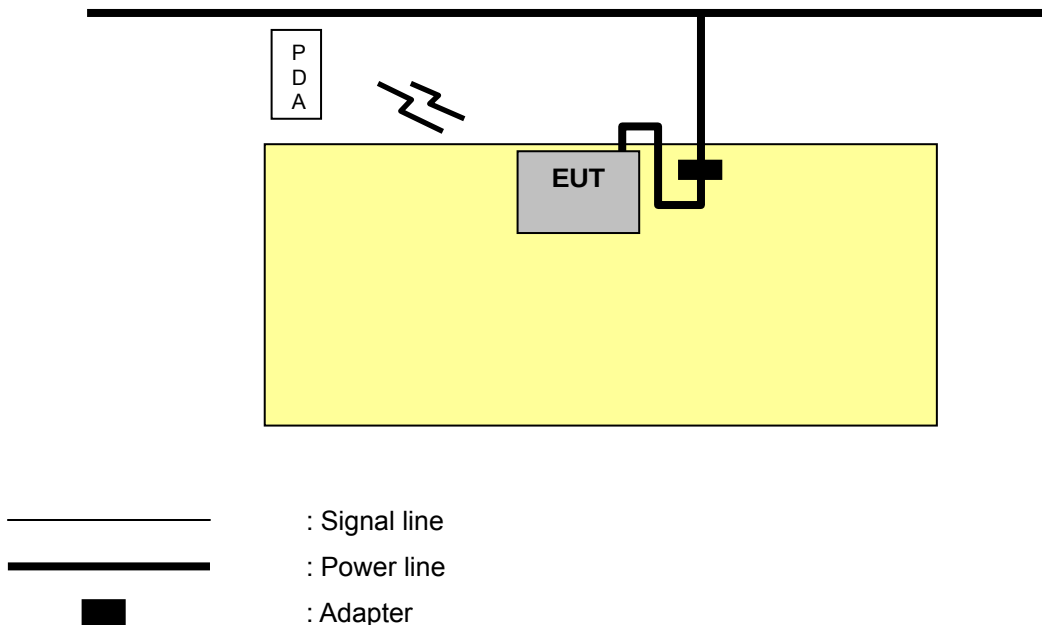

## 5. TEST RESULTS

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| 47 CFR Part 15, Subpart C | Measurement Required                    | Result |
|---------------------------|-----------------------------------------|--------|
| 15.247(a)(1)              | Channel Bandwidth, Frequency Separation | Pass   |
| 15.247(b)(3)              | Maximum Peak Output Power               | Pass   |
| 15.247(d)                 | Bandwidth of Frequency Band Edges       | Pass   |
| 15.247(a)(1)(iii)         | Number of Hopping Channels              | Pass   |
| 15.247(a)                 | Time of Occupancy(Dwell time)           | Pass   |
| 15. 209(a)                | Spurious Emissions                      | Pass   |
| 15. 207                   | Conducted Emissions                     | Pass   |
| 15.247(i)<br>1.1307(b)(1) | RF Exposure                             | Pass   |

The data collected shows that the **Woosim System Inc. / THERMAL PRINTER / PORTI-WC40** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5.2 Channel Bandwidth and Frequency Separation

|                     |                                                 |
|---------------------|-------------------------------------------------|
| EUT                 | THERMAL PRINTER                                 |
| Model               | PORTI-WC40                                      |
| Limit apply to      | FCC Part 15.247(a)(1)                           |
| Test Date           | January 11, 2010                                |
| Operating Condition | RF transmitting continuously during the tested. |
| Result              | Pass                                            |

### 5.2.1 Channel Bandwidth

#### BT mode

| Frequency [MHz] | 20 dB Bandwidth [MHz] | Limit                          |
|-----------------|-----------------------|--------------------------------|
| 2 402           | 0.936                 | < Carrier frequency separation |
| 2 441           | 0.936                 |                                |
| 2 480           | 0.936                 |                                |

#### NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.

### 5.2.2 Frequency Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### BT mode

| EUT Channel Separation [MHz] | 20 dB bandwidth [MHz] | Limit    |
|------------------------------|-----------------------|----------|
| 1.000 (Worst)                | 0.936 (Worst)         | > 25 kHz |

#### NOTES:


1. Measure frequency separation of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee

## Plots of 20 dB Bandwidth


[2 402 MHz]

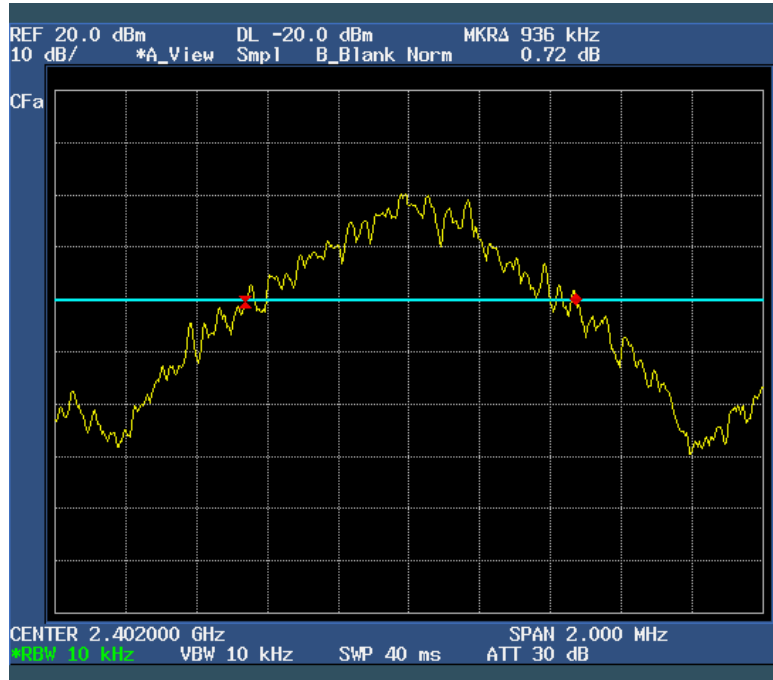

[2 441 MHz]

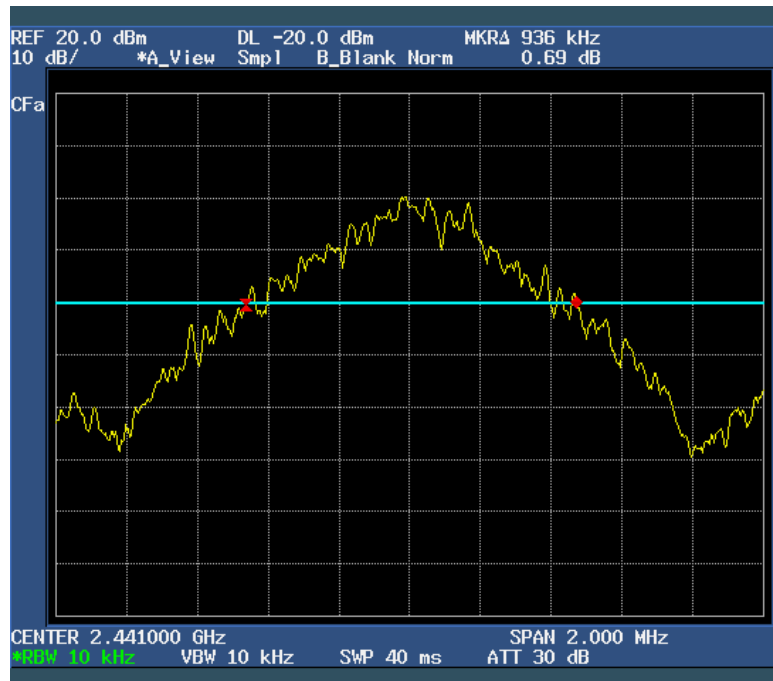


[2 480 MHz]

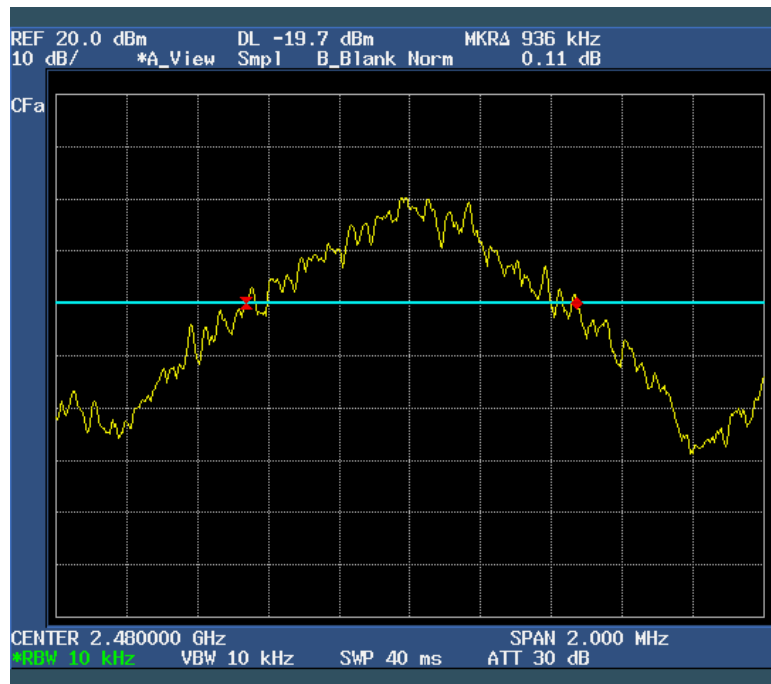

## Frequency Separation

[Channel Separation]

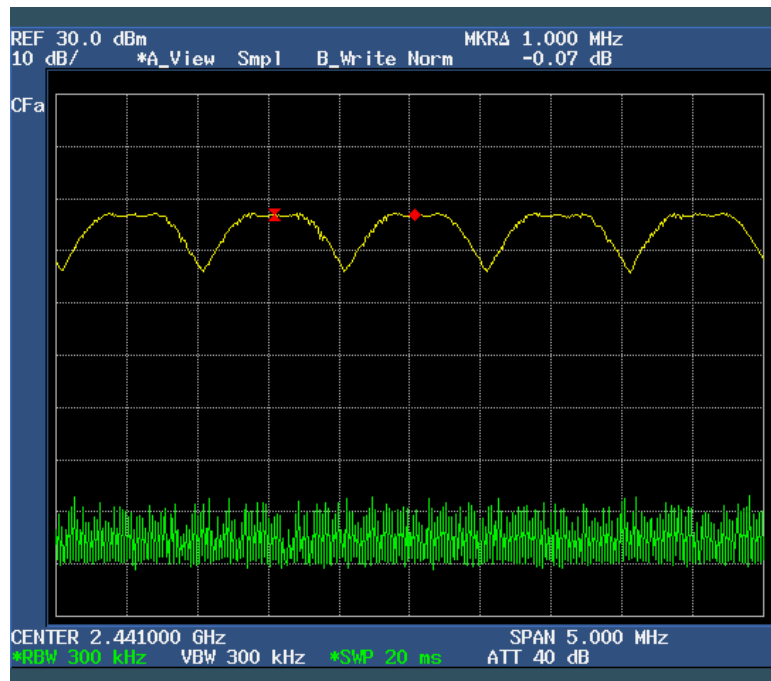

## 5.3 Maximum peak conducted output power

|                     |                                                 |
|---------------------|-------------------------------------------------|
| EUT                 | THERMAL PRINTER                                 |
| Model               | PORTI-WC40                                      |
| Limit apply to      | FCC Part 15.247(b)(3)                           |
| Test Date           | January 11, 2010                                |
| Operating Condition | RF transmitting continuously during the tested. |
| Result              | Passed                                          |

### Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2 400.0 MHz - 2 483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt

### Test Data

| Channel | Frequency [MHz] | Output Power [dBm] | Limit        |
|---------|-----------------|--------------------|--------------|
| Low     | 2 402           | 6.90               | < 30 dBm(1W) |
| Mid     | 2 441           | 7.07               |              |
| High    | 2 480           | 7.05               |              |

Maximum measured transmitter power (for RF Exposure):

| Output Power |      | Max Antenna Gain [dBi] | EIRP [mW] |
|--------------|------|------------------------|-----------|
| [dBm]        | [mW] |                        |           |
| 7.07         | 5.09 | -3.00                  | 1.62      |

- Theory value for RF Exposure

$$P_{e.i.r.p.}(mW) = A_{cond}(dBm) + G_{assembly\ antenna\ gain}(dBi)$$

### NOTES:


1. Measure conducted Channel power of relevant channel using Spectrum analyzer
2. RBW 1 MHz, VBW 1 MHz
3. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee

## Plots of Maximum Peak Output Power

[2 402 MHz]

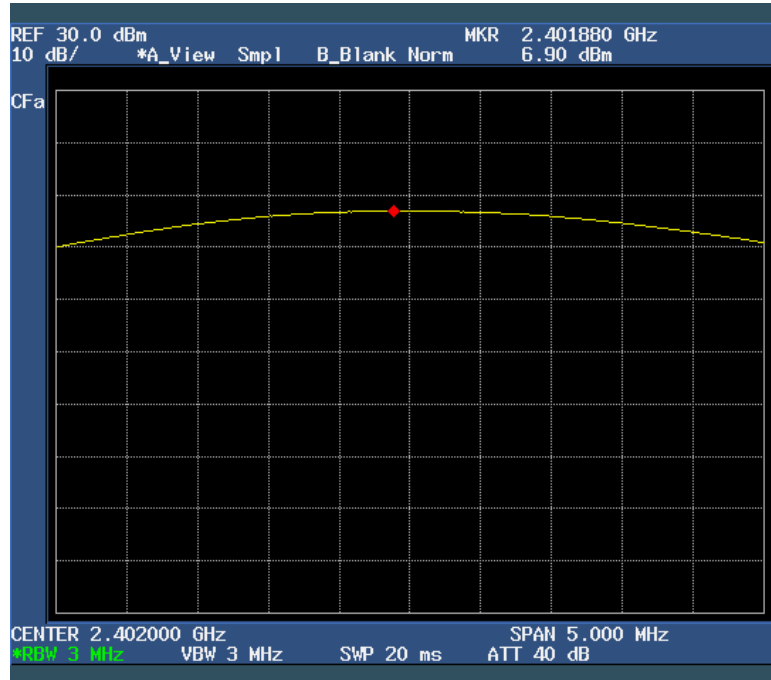


[2 441 MHz]

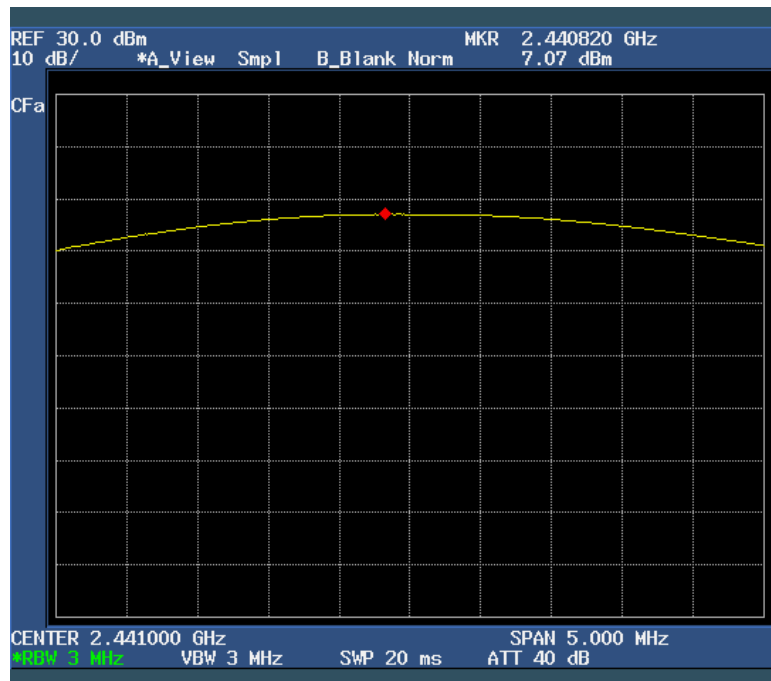



[2 480 MHz]

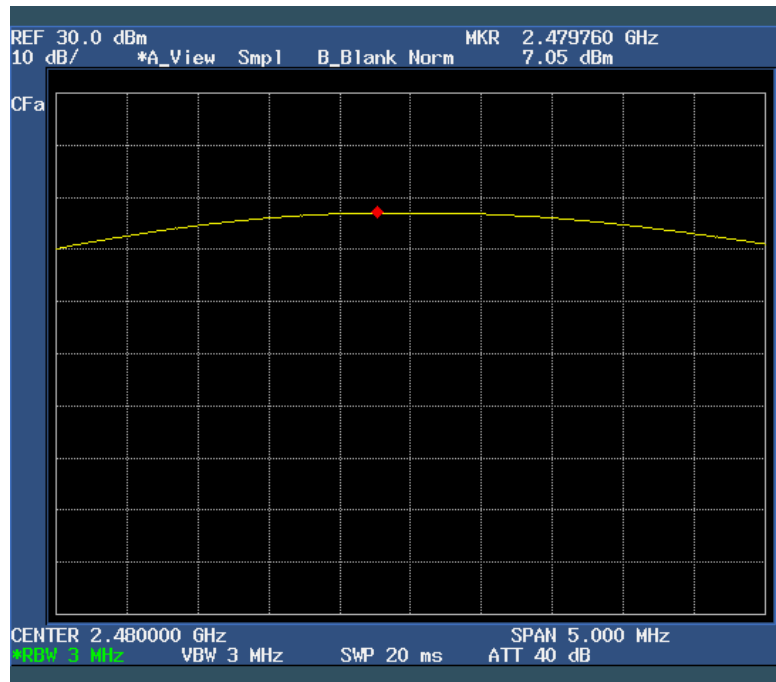

## 5.4 Bandwidth of Frequency Band Edges

|                     |                                                 |
|---------------------|-------------------------------------------------|
| EUT                 | THERMAL PRINTER                                 |
| Model               | PORTI-WC40                                      |
| Limit apply to      | FCC Part 15.247(d)                              |
| Test Date           | January 11, 2010 to January 12, 2010            |
| Operating Condition | RF transmitting continuously during the tested. |
| Result              | Passed                                          |

### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test Results

- Refer to see the measured plot in next page.

### NOTES:



1. The test was performed to make a direct field strength measurement at the band edge frequencies.



Test Engineer: Hoon Pyo, Lee

## Bandwidth of Frequency Band Edges


Conducted

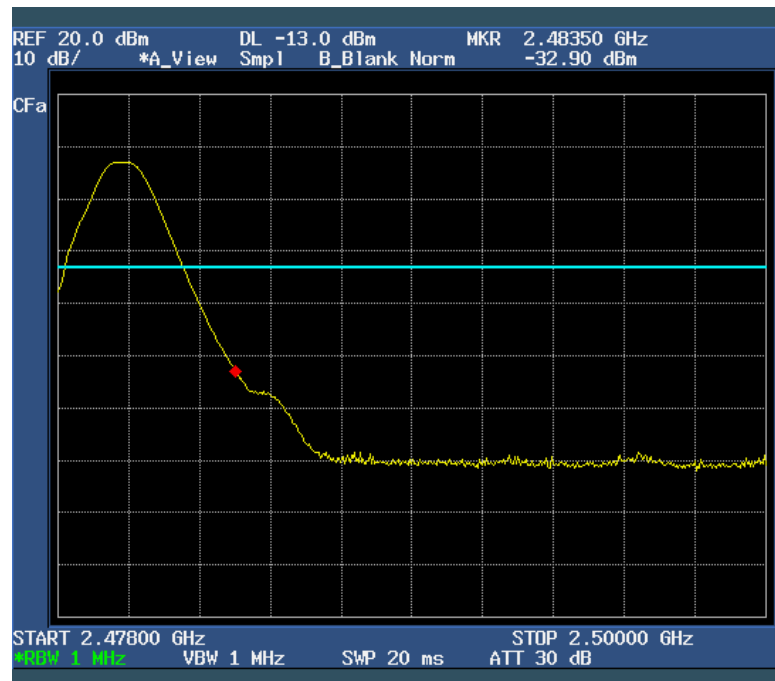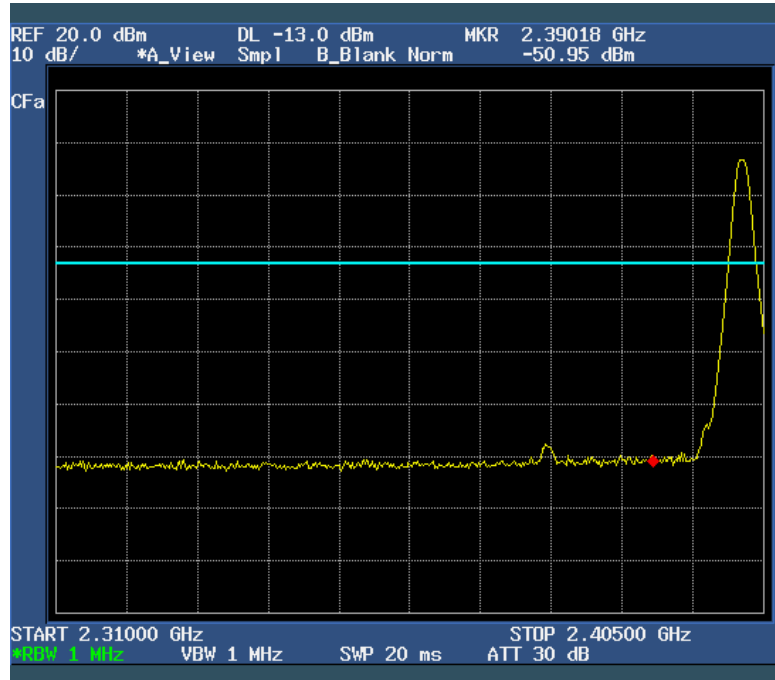

## Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2310 MHz – 2390 MHz), Worst case (Low, Vertical)

— Peak Limit Line  
— AV Limit Line

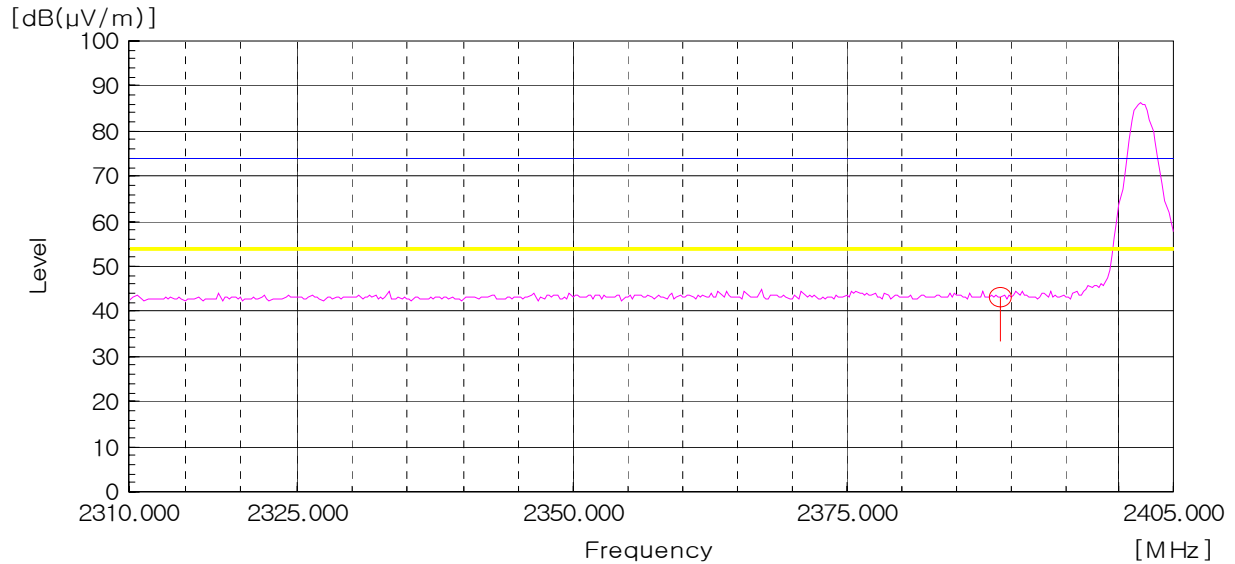


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2310 MHz – 2390 MHz), Worst case (Low, Vertical)

— Peak Limit Line  
— AV Limit Line

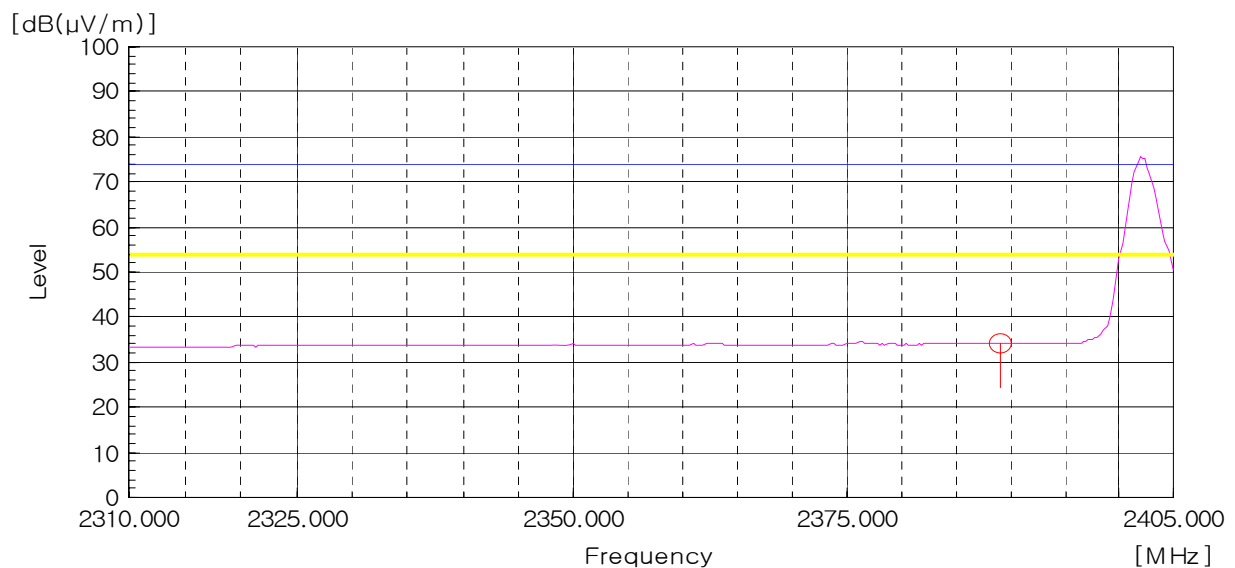


Peak Detector: RBW: 1MHz, VBW: 1MHz (2 483.5 MHz – 2 500 MHz), Worst case (High, Vertical)

— Peak Limit Line  
— AV Limit Line

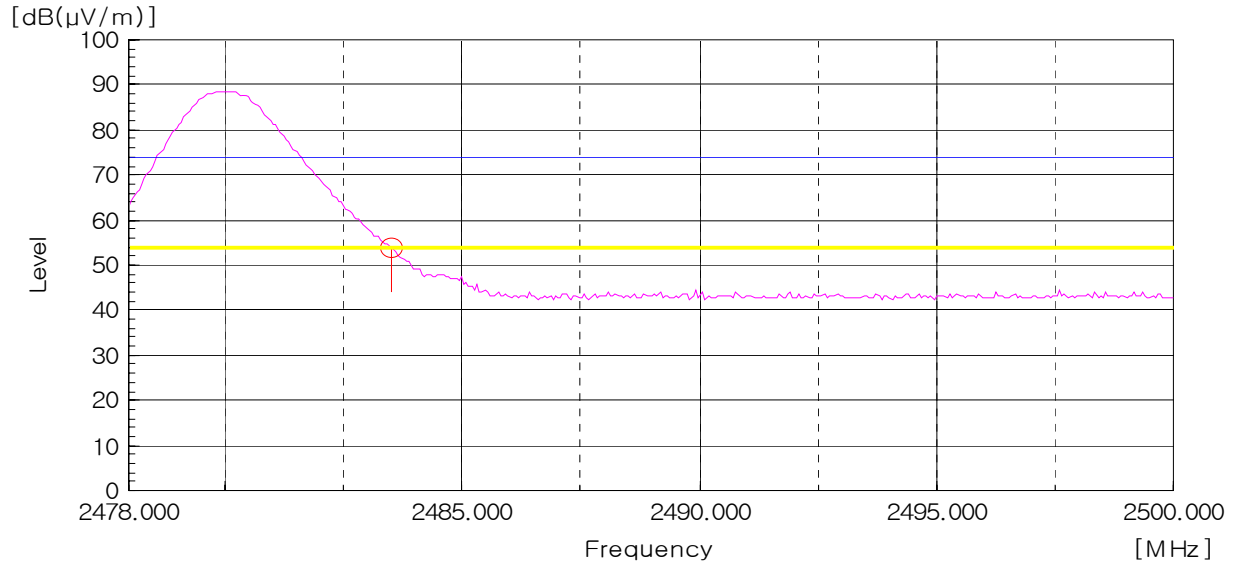

AV Detector: RBW: 1MHz, VBW: 10Hz (2 483.5 MHz – 2 500 MHz), Worst case (High, Vertical)

— Peak Limit Line  
— AV Limit Line

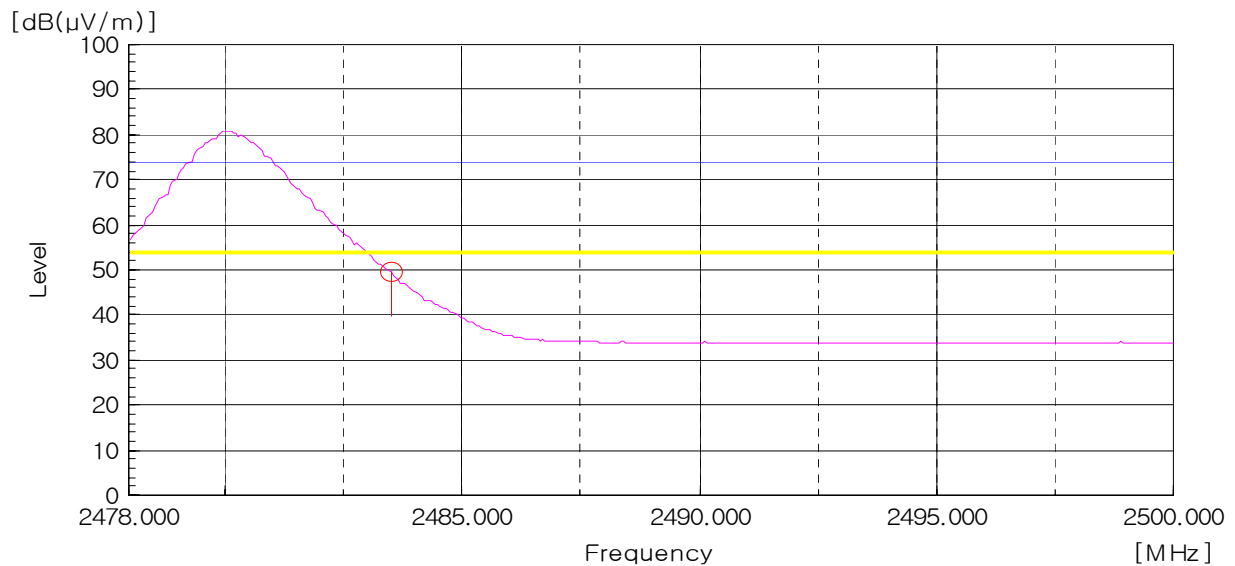

## 5.5 Number of Hopping Channels

|                     |                                                 |
|---------------------|-------------------------------------------------|
| EUT                 | THERMAL PRINTER                                 |
| Model               | PORTI-WC40                                      |
| Limit apply to      | FCC Part 15.247(a)(1)(iii)                      |
| Test Date           | January 11, 2010                                |
| Operating Condition | RF transmitting continuously during the tested. |
| Result              | Passed                                          |

### Limit

Frequency hopping systems in the 2 400.0 MHz - 2 483.5 MHz band shall use at least 15 channels.

### Test Data

#### BT mode

| Result | Limit        |
|--------|--------------|
| 79     | > 15 Channel |

### NOTES:


1. Measure number of hopping channel of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

## Number of Hopping Channels

[Hopping Channels]

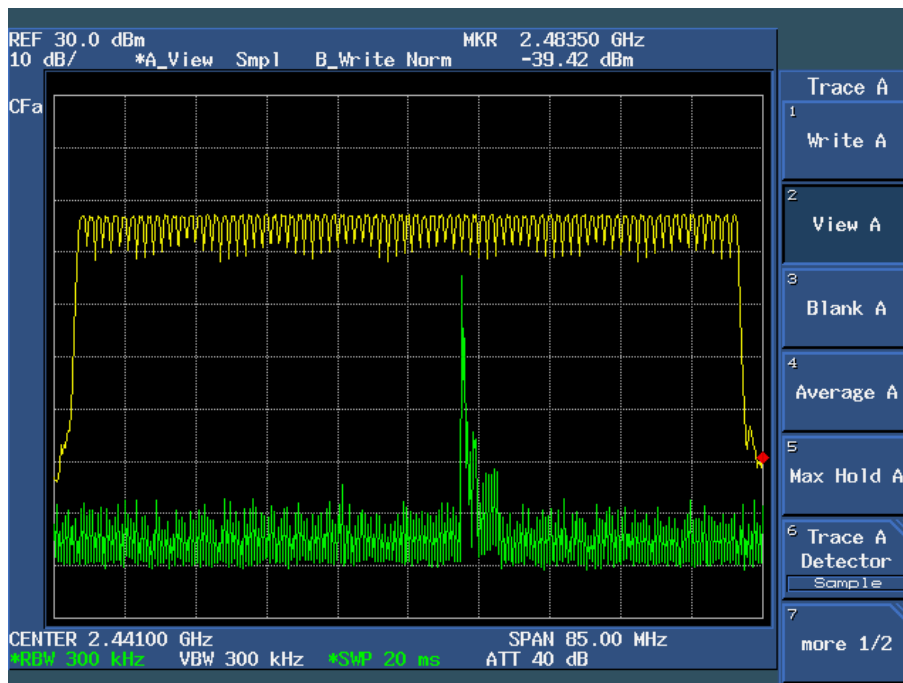

## 5.6 Time of Occupancy

|                     |                                                 |
|---------------------|-------------------------------------------------|
| EUT                 | THERMAL PRINTER                                 |
| Model               | PORTI-WC40                                      |
| Limit apply to      | FCC Part 15.247(a)(1)(iii)                      |
| Test Date           | January 11, 2010                                |
| Operating Condition | RF transmitting continuously during the tested. |
| Result              | Passed                                          |

### Limit

Frequency hopping systems in the 2 400.0 MHz - 2 483.5 MHz band. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Data

| Pulse Time<br>[ms] | Total of Dwell<br>[ms] | Limit<br>[ms] |
|--------------------|------------------------|---------------|
| 2.904              | 309.760                | 400.000       |

### NOTES:

1. Measure time of occupancy of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

## Time of Occupancy

Test period = 0.4 [seconds / channel] × 79 [channel]

Actual = Reading × (Hopping rate / Number of channels) × Test period

Hopping rate (DH5 Packet) = 1 600 [hopping / second] / 6 [time slot] = 266.667


0.4 s × 79(CH) = 31.6 s

2.904 ms × (266.667 / 79) × 31.6 s = 309.76 ms




## Time of Occupancy

[Continuous Time]

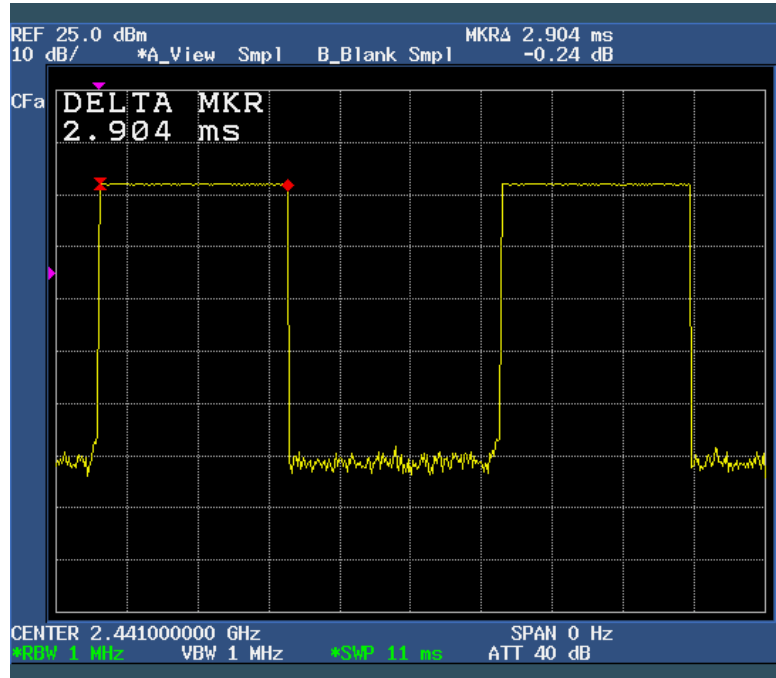

[Hopping Period]

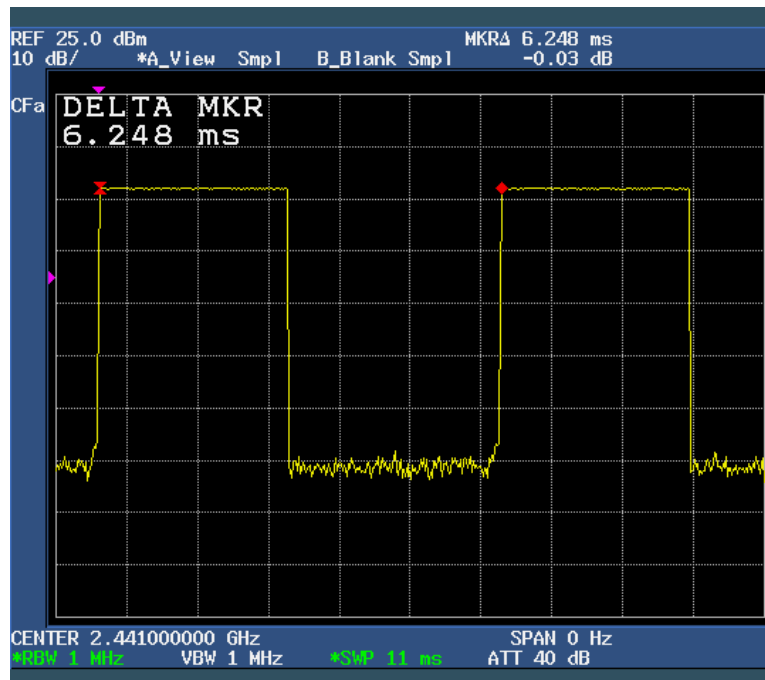

## 5.7 Spurious Emissions

### 5.7.1 Radiated Emissions (TX)

|                     |                                         |
|---------------------|-----------------------------------------|
| EUT                 | THERMAL PRINTER                         |
| Model               | PORTI-WC40                              |
| Limit apply to      | FCC Part 15.109, 209                    |
| Test Date           | January 11, 2010 to January 12, 2010    |
| Operating Condition | Low CH, Middle CH, High CH Transmission |
| Result              | Passed                                  |

#### Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequencies<br>[MHz] | Field Strength<br>[ $\mu\text{V}/\text{m}$ ] | Measurement Distance<br>[m] |
|----------------------|----------------------------------------------|-----------------------------|
| 0.009 - 0.490        | 2400/F(kHz)                                  | 300                         |
| 0.490 - 1.705        | 24000/F(kHz)                                 | 30                          |
| 1.705 - 30.0         | 30                                           | 30                          |
| 30 - 88              | 100                                          | 3                           |
| 88 - 216             | 150                                          | 3                           |
| 216 - 960            | 200                                          | 3                           |
| Above 960            | 500                                          | 3                           |

\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

#### Test Results

- Refer to see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

## Radiated Emissions Test data

### - 9 kHz to 30 MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.  
Detector mode: CISPR Quasi – Peak mode (100 Hz, 9 kHz)

BT mode

| Frequency<br>[MHz] | Reading<br>[dB( $\mu$ V)]                                             | Polarization<br>(*H/**V) | Ant. Factor<br>[dB/m] | Cable Loss<br>[dB] | Result<br>[dB( $\mu$ V/m)] | Limit<br>[dB( $\mu$ V/m)] | Margin<br>[dB] |
|--------------------|-----------------------------------------------------------------------|--------------------------|-----------------------|--------------------|----------------------------|---------------------------|----------------|
|                    |                                                                       |                          |                       |                    |                            |                           |                |
|                    | Emission attenuated more than 20 dB below the limit are not reported. |                          |                       |                    |                            |                           |                |
|                    |                                                                       |                          |                       |                    |                            |                           |                |

**Result: All emissions below noise floor of 20 dB( $\mu$ V/m)**

#### NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.

## Below 1 GHz (30 MHz to 1 GHz)


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.  
Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

BT mode

| Frequency [MHz] | Reading [dB(μV)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|-----------------|------------------|-----------------------|--------------------|-----------------|-------------------|------------------|-------------|
| 36.81           | 17.38            | V                     | 11.35              | 1.47            | 30.20             | 40.00            | 9.80        |
| 168.39          | 20.72            | V                     | 11.95              | 3.23            | 35.90             | 43.50            | 7.60        |
| 200.43          | 21.29            | H                     | 9.03               | 3.78            | 34.10             | 43.50            | 9.40        |
| 384.84          | 14.81            | H                     | 14.26              | 5.13            | 34.20             | 46.00            | 11.80       |
| 480.28          | 13.83            | V                     | 16.44              | 5.93            | 36.20             | 46.00            | 9.80        |

NOTES:

- \* H : Horizontal polarization , \*\* V : Vertical polarization
- Result = Reading + Antenna factor + Cable loss
- Margin = Limit - Result
- The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

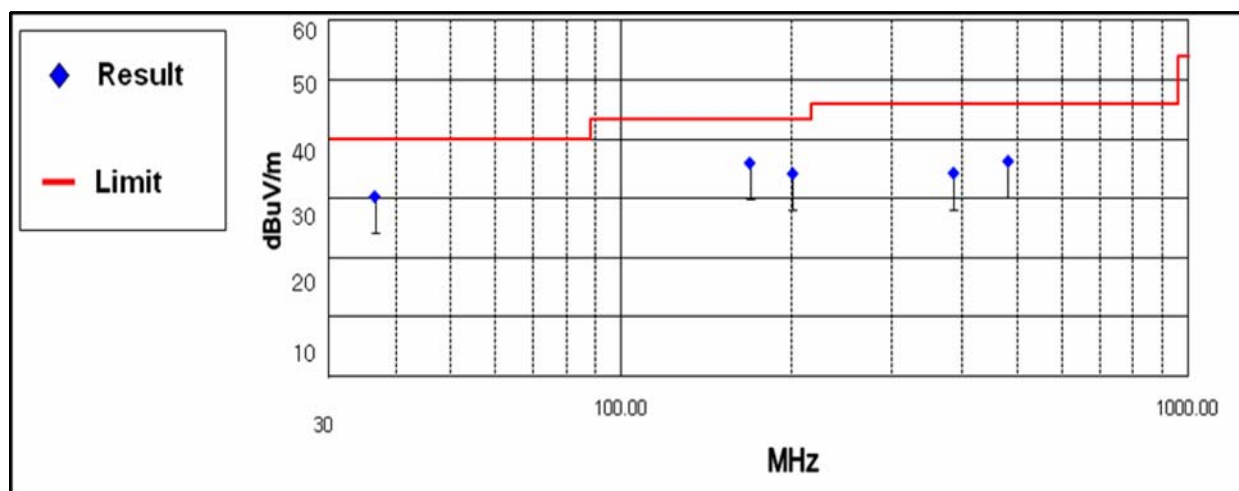

## Above 1 GHz

### 1. Low CH

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4804.00         | 21.74                  | V                     | 31.25              | 14.12                     | -34.80      | 32.31                   | 74.00                  | 41.69       |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4804.00         | 10.50                  | V                     | 31.25              | 14.12                     | -34.80      | 21.34                   | 54.00                  | 32.66       |

### 2. Middle CH

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4882.00         | 20.48                  | V                     | 31.40              | 14.22                     | -34.80      | 31.30                   | 74.00                  | 42.70       |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4882.00         | 10.67                  | V                     | 31.40              | 14.22                     | -34.80      | 21.49                   | 54.00                  | 32.51       |

### 3. High CH

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4960.00         | 21.39                  | V                     | 31.55              | 14.29                     | -34.80      | 32.43                   | 74.00                  | 41.57       |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4960.00         | 10.41                  | V                     | 31.55              | 14.29                     | -34.80      | 21.45                   | 54.00                  | 32.55       |

**Result: All emissions below noise floor of 20 dB $\mu$ V/m**

## NOTES:



1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss + Preamp
3. Margin = Limit - Result
4. Measuring frequencies from 1GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded(ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Spectrum setting:
  - a. Peak Setting 1 GHz to 10<sup>th</sup> harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
  - b. AV Setting 1 GHz to 10<sup>th</sup> harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

- Operating mode: TX / CH: Low, Mid, High



The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

— Peak Limit Line  
— AV Limit Line

## Final data Peak

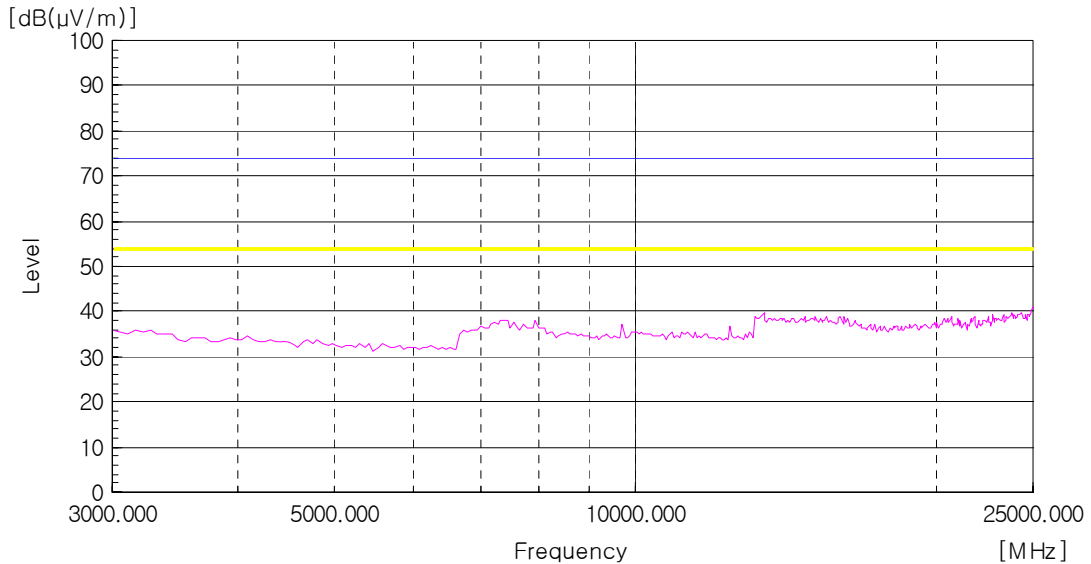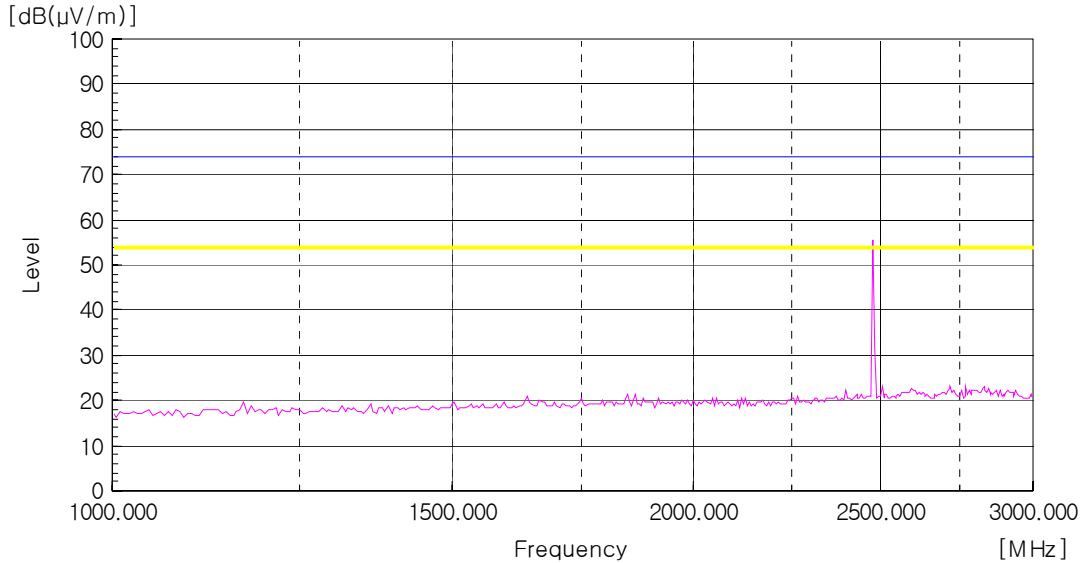


## Final data AV

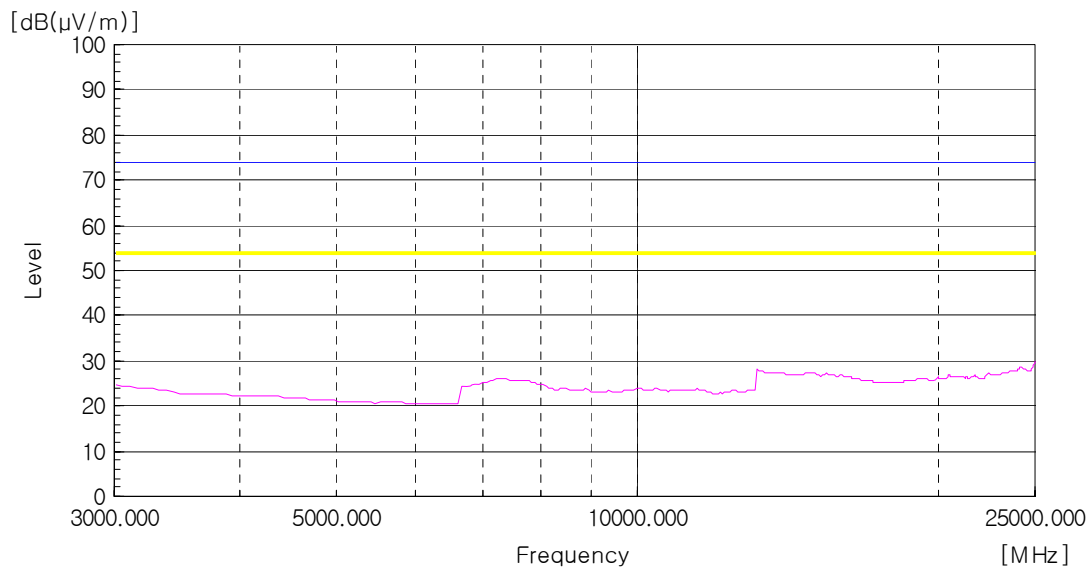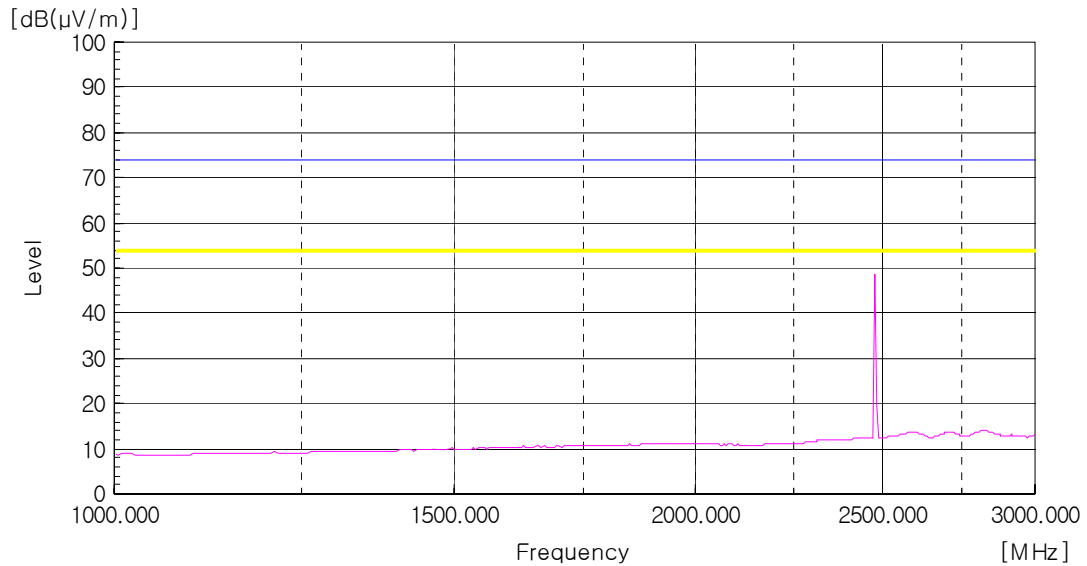




## Spurious Emissions (Conducted Measurement)


[CH Low]

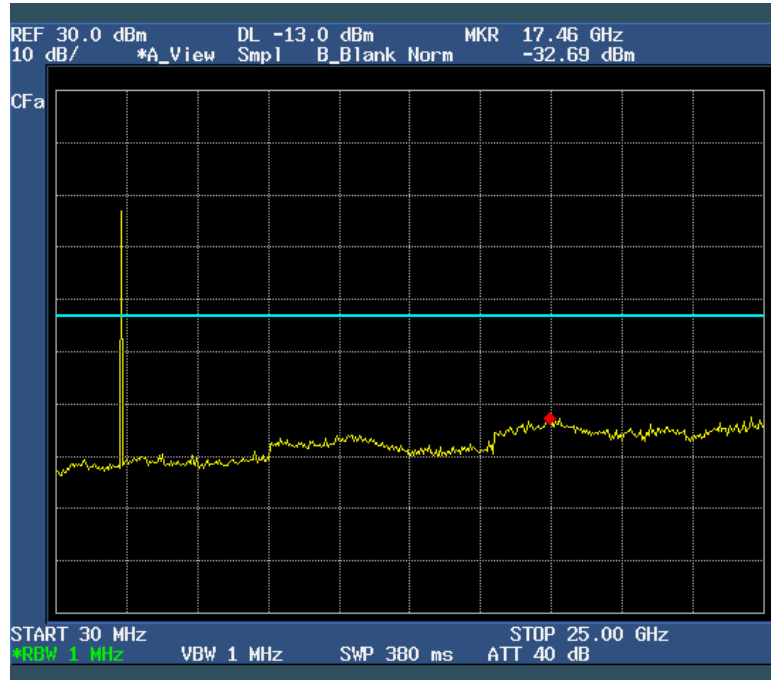

[CH Mid]

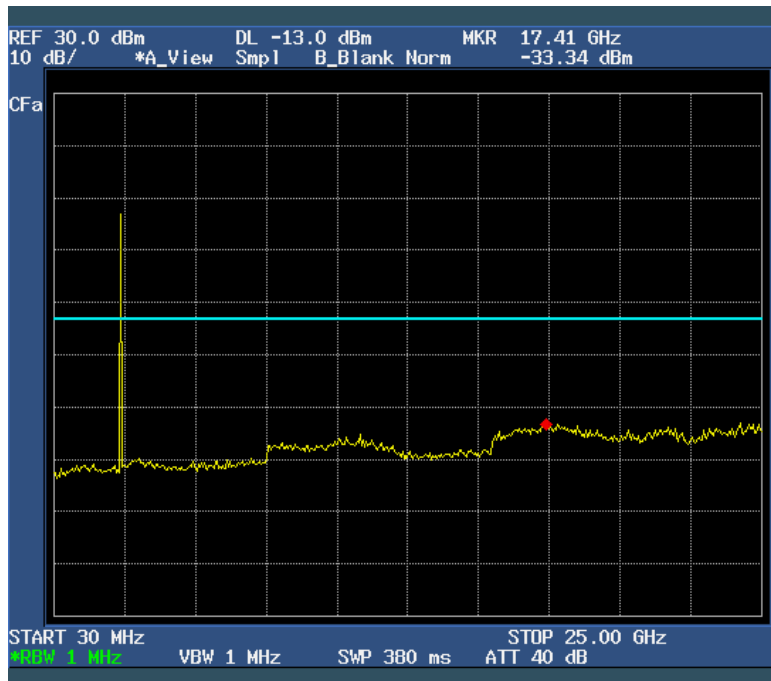

[CH High]

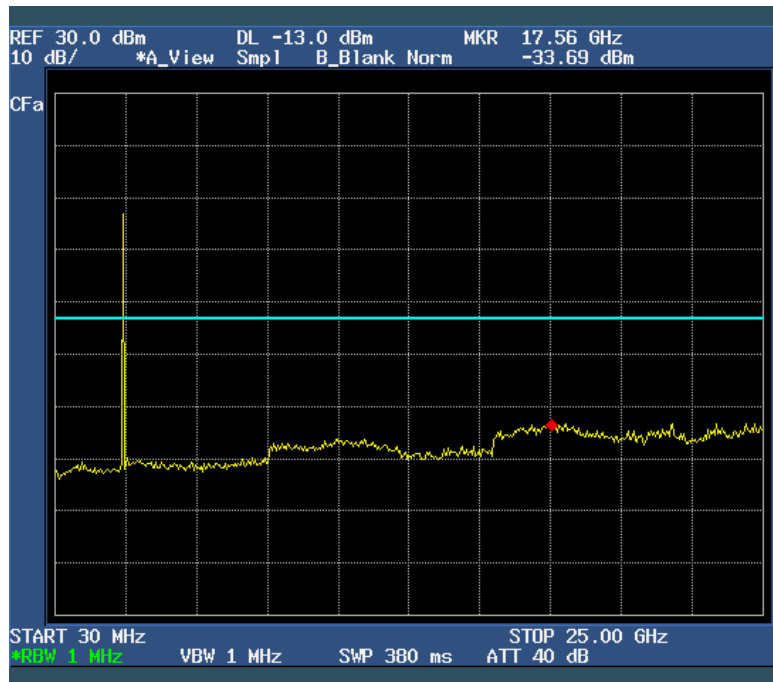

## 5.7.2 Radiated Emissions (RX)

|                     |                                      |
|---------------------|--------------------------------------|
| EUT                 | THERMAL PRINTER                      |
| Model               | PORTI-WC40                           |
| Limit apply to      | FCC Part 15.109, 209                 |
| Test Date           | January 11, 2010 to January 12, 2010 |
| Operating Condition | Low CH, Middle CH, High CH RX Mode   |
| Result              | Passed                               |

### Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequencies [MHz] | Field Strength [uV/m] | Field Strength [dB(uV/m)] | Measurement Distance [m] |
|-------------------|-----------------------|---------------------------|--------------------------|
| 30 - 88           | 100*                  | 40.0                      | 3                        |
| 88 - 216          | 150*                  | 43.5                      | 3                        |
| 216 - 960         | 200*                  | 46.0                      | 3                        |
| Above 960         | 500                   | 54.0                      | 3                        |

\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### Test Results

- Refer to see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

## Radiated Emissions Test data


### Below 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|-----------------|-------------------------|------------------------|-------------|
| 46.36           | 17.11                  | V                     | 12.12              | 1.57            | 30.80                   | 40.00                  | 9.20        |
| 153.39          | 16.51                  | V                     | 12.65              | 3.04            | 32.20                   | 43.50                  | 11.30       |
| 170.44          | 16.30                  | V                     | 11.75              | 3.25            | 31.30                   | 43.50                  | 12.20       |
| 432.56          | 12.89                  | H                     | 15.58              | 5.63            | 34.10                   | 46.00                  | 11.90       |

### NOTES:

- \* H : Horizontal polarization , \*\* V : Vertical polarization
- Result = Reading + Antenna factor + Cable loss
- Margin = Limit - Result
- The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

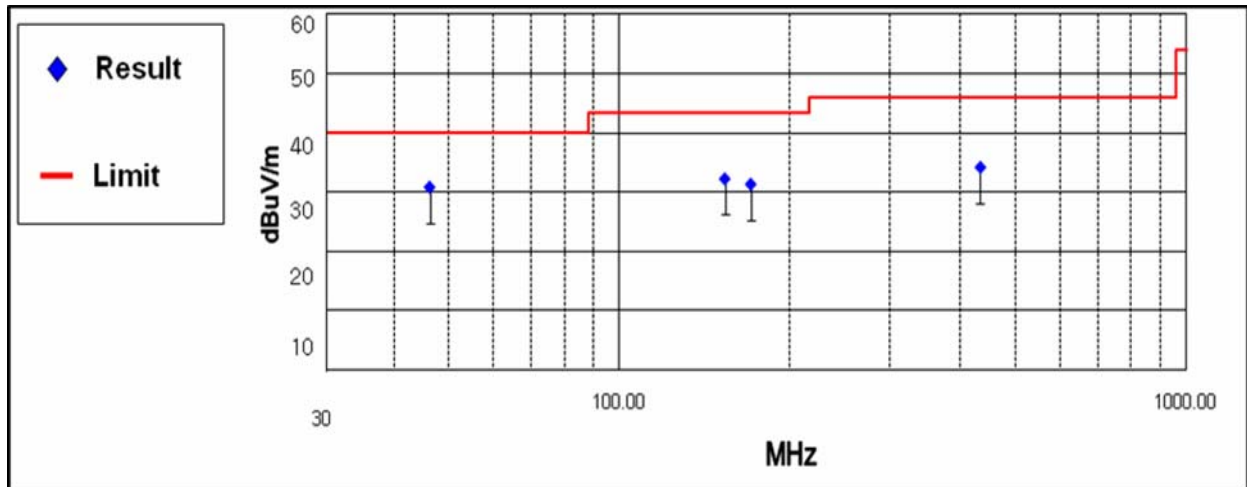

**Above 1 GHz****1. Low CH**

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4804.00         | 20.59                  | V                     | 31.25              | 14.12                     | -34.80      | 31.16                   | 74.00                  | 42.84       |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4804.00         | 10.61                  | V                     | 31.25              | 14.12                     | -34.80      | 21.18                   | 54.00                  | 32.82       |

**2. Middle CH**

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4882.00         | 20.62                  | V                     | 31.40              | 14.22                     | -34.80      | 31.44                   | 74.00                  | 42.56       |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4882.00         | 10.50                  | V                     | 31.40              | 14.22                     | -34.80      | 21.40                   | 54.00                  | 32.60       |

**3. High CH**

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4960.00         | 20.52                  | V                     | 31.55              | 14.29                     | -34.80      | 31.56                   | 74.00                  | 42.44       |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB( $\mu$ V)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB( $\mu$ V)] | Preamp [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-----------------|------------------------|-----------------------|--------------------|---------------------------|-------------|-------------------------|------------------------|-------------|
| 4960.00         | 10.34                  | V                     | 31.55              | 14.29                     | -34.80      | 21.36                   | 54.00                  | 32.64       |

**Result: All emissions below noise floor of 20 dB $\mu$ V/m**

## NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss + Preamp
3. Margin = Limit - Result
4. Measuring frequencies from 1GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded(ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Spectrum setting:
  - a. Peak Setting 1 GHz to 10<sup>th</sup> harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
  - b. AV Setting 1 GHz to 10<sup>th</sup> harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto



## Above 1 GHz

- Operating mode: TX / CH: Low, Mid, High



The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

— Peak Limit Line  
— AV Limit Line

### Final data Peak

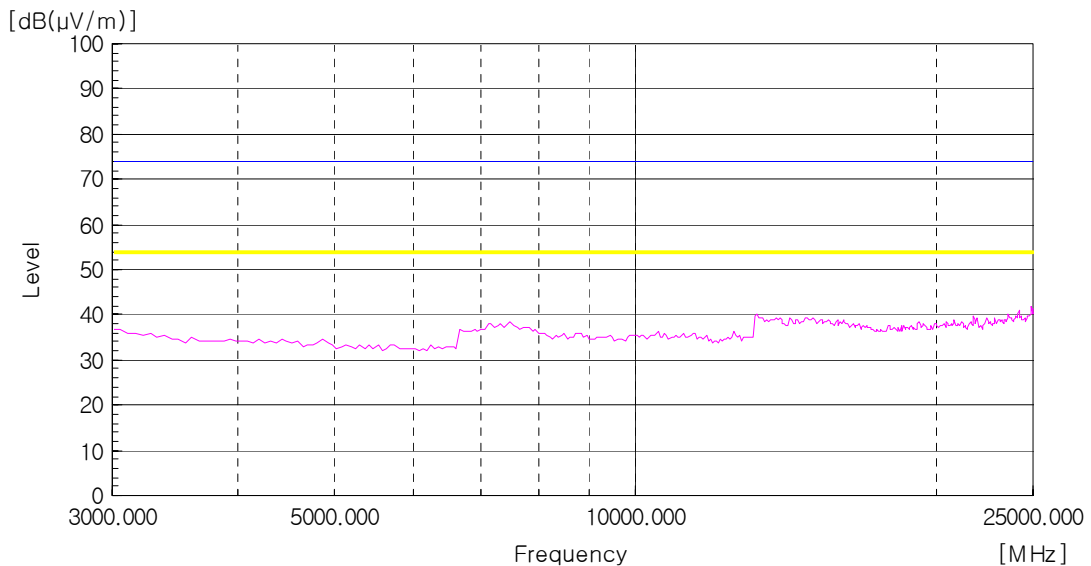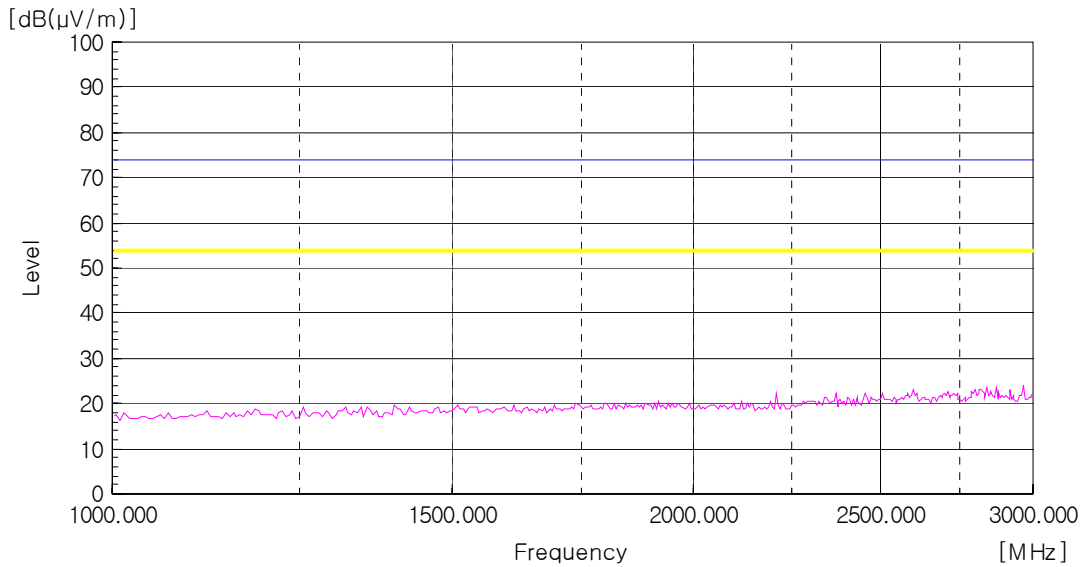

## Final data AV

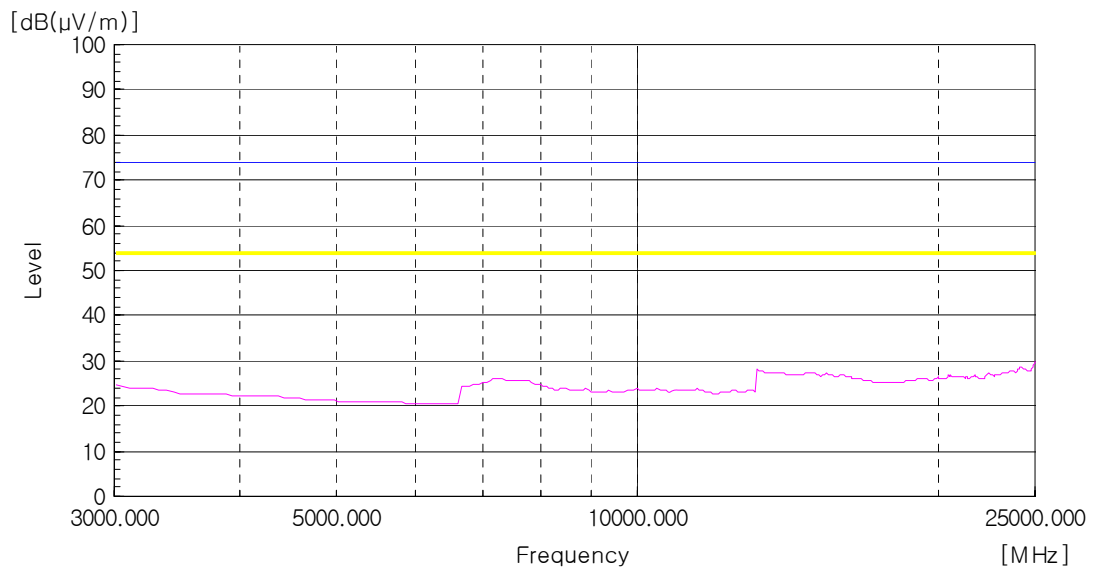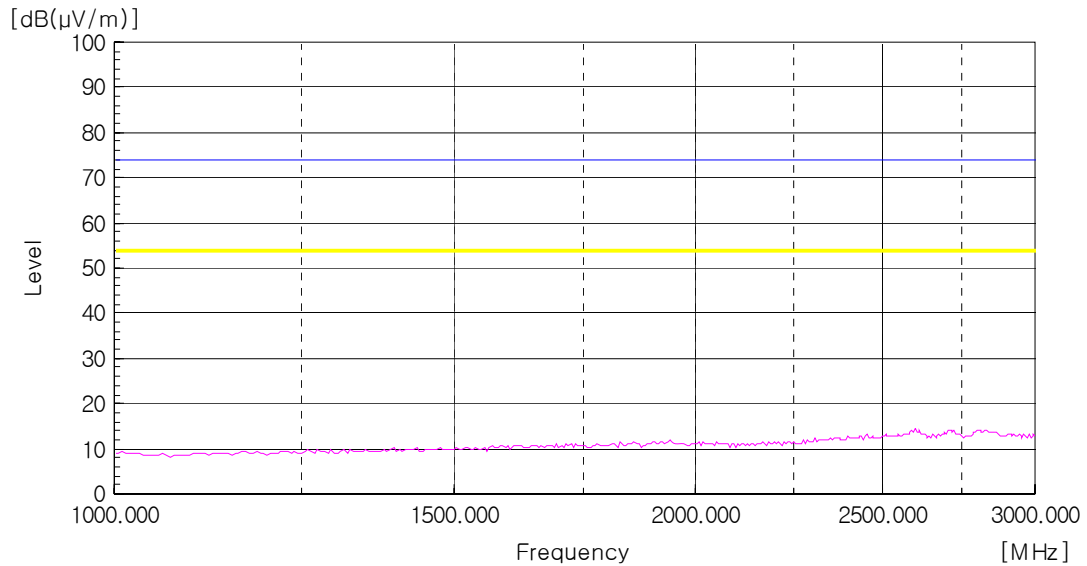



## 5.8 Conducted Emissions Measurement

|                     |                                                 |
|---------------------|-------------------------------------------------|
| EUT                 | THERMAL PRINTER                                 |
| Model               | PORTI-WC40                                      |
| Limit apply to      | FCC Part 15.107, 207                            |
| Test Date           | January 13, 2010                                |
| Operating Condition | RF transmitting continuously during the tested. |
| Result              | Passed                                          |

### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.  
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

| Frequency<br>[MHz] | Result<br>[dB( $\mu$ V)] |         | Phase<br>(*L/**N) | Limit<br>[dB( $\mu$ V)] |         | Margin<br>[dB] |         |
|--------------------|--------------------------|---------|-------------------|-------------------------|---------|----------------|---------|
|                    | Quasi-peak               | Average |                   | Quasi-peak              | Average | Quasi-peak     | Average |
| 0.203              | 50.40                    | -       | N                 | 63.50                   | 53.50   | 13.10          | 3.10    |
| 0.306              | 43.30                    | -       | N                 | 60.10                   | 50.10   | 16.80          | 6.80    |
| 0.409              | 43.70                    | -       | N                 | 57.70                   | 47.70   | 14.00          | 4.00    |
| 0.784              | 40.40                    | -       | H                 | 56.00                   | 46.00   | 15.60          | 5.60    |
| 0.921              | 37.80                    | -       | H                 | 56.00                   | 46.00   | 18.20          | 8.20    |
| 1.227              | 37.20                    | -       | H                 | 56.00                   | 46.00   | 18.80          | 8.80    |
| 1.305              | 36.80                    | -       | H                 | 56.00                   | 46.00   | 19.20          | 9.20    |

#### NOTES:


- \* H : HOT Line , \*\*N : Neutral Line
- Margin = Limit - Result
- Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class B.




Test Engineer: Hoon Pyo, Lee

## Line: HOT Line

Limit : — Quasi-Peak  
— Average

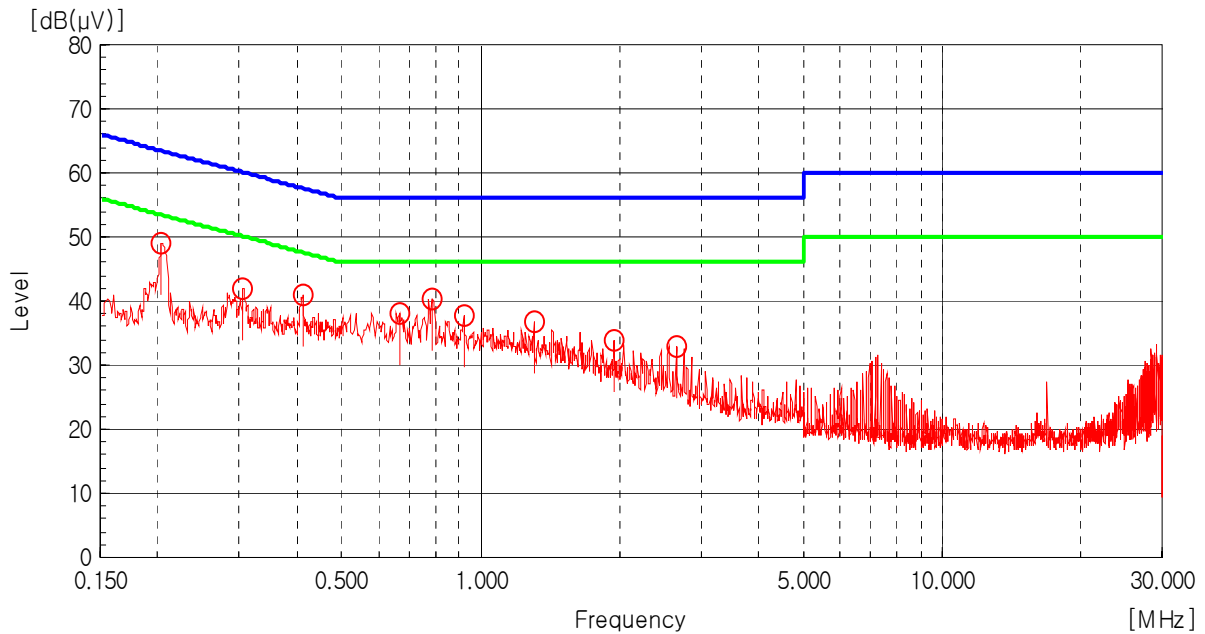

## Line: Neutral Line

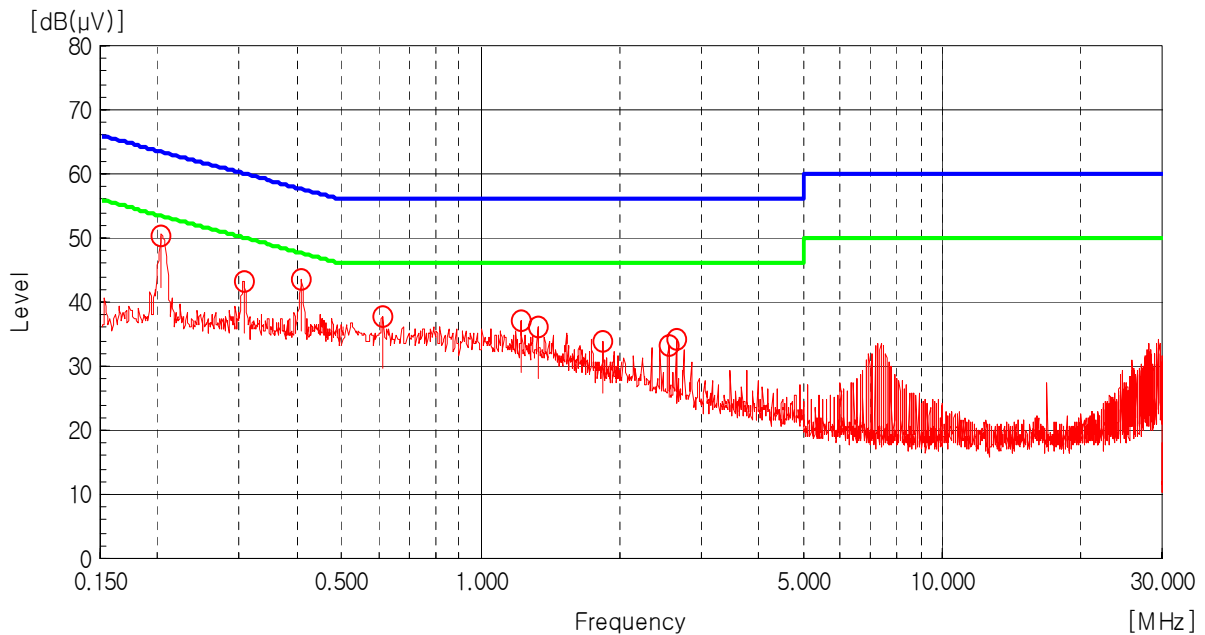

Quasi-peak  Average 

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (uV) : \text{Equation}$$

Example : @ 372.46 MHz

$$\text{Class B Limit} = 46.00 \text{ dB}(\mu V/m)$$

$$\text{Reading} = 23.78 \text{ dB}(\mu V)$$

$$\text{Antenna Factor} + \text{Cable Loss} = 14.03 + 4.99 = 19.02 \text{ dB}(\mu V/m)$$

$$\text{Total} = 42.80 \text{ dB}(\mu V/m)$$

$$\text{Margin} = 46.00 - 42.80 = 3.20 \text{ dB}$$

$$= 3.20 \text{ dB below Limit}$$

## 7. List of test equipments used for measurements

| Test Equipment |                         | Model      | Mfg.                  | Serial No. | Cal. Due Date |
|----------------|-------------------------|------------|-----------------------|------------|---------------|
| ■              | EMI Test Receiver       | ESVS10     | R & S                 | 835165/001 | 10-04-02      |
| ■              | EMI TEST Receiver       | ESPI3      | R & S                 | 100478     | 10-09-18      |
| ■              | Spectrum Analyzer       | E7405A     | H.P                   | US41160290 | 10-09-18      |
| ■              | Spectrum Analyzer       | R3273      | Advantest             | 95090411   | 10-04-02      |
| ■              | LogBicon Antenna        | VULB9160   | Schwarzbeck           | 3082       | 10-01-25      |
| ■              | Loop Antenna            | AL-130     | Com-Power             | 17100      | 11-03-02      |
| ■              | Broad band Horn antenna | BBHA 9120D | Schwarz Beck          | 227        | 11-03-16      |
| ■              | Broad band Horn antenna | BBHA 9120D | Schwarz Beck          | 285        | 11-03-16      |
| ■              | Preamplifier            | 8447D      | H.P                   | 3307A02865 | 10-09-18      |
| ■              | System Power Supply     | 6030A      | Agilent               | 1036546    | 10-04-03      |
| ■              | Power Meter             | NRVS       | R & S                 | 834053/060 | 10-09-18      |
| ■              | Controller              | HD2000     | HD GmbH               | C/125      | N/A           |
| ■              | Antenna Master          | MA2400     | HD GmbH               | N/A        | N/A           |
| ■              | Turn-Table              | MFT-120S   | Max-Full Antenna Corp | N/A        | N/A           |
| ■              | Antenna Master          | MFA-440E   | Max-Full Antenna Corp | N/A        | N/A           |