



Product Specification

BLE Antenna

(ARTS-BBEM-278)



Confidential

Supplier : ART SIGNAL Co.,LTD.
R&D Center : 1008-A, Woolim Lion's Valley 2nd, 146-8, Sangdaewon-dong,
Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea.
Tel : 070-4414-7188 Fax : 031-734-7188

 Antenna Total Solution	Description			
	BLE Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022	

ANTENNA APPROVAL

Product Name	BLE Antenna
Model Name / Freq.	BLE Ant / 2400~2485 MHz
Antenna PART No.	ARTS-BBEM-278
Customer PART No.	
Customer	(주)비콘테크놀로지
Supplier	(주)아트시그널

RF PART		ME PART		QA PART	
Submitted	Approval	Submitted	Approval	Submitted	Approval
					



이 문서는 (주)아트시그널에서 대외비로 발행 되었으며, (주)아트시그널의 사전 허가 없이 이 서류의 일부분 또는 전체를 재 발행 하지 않는다. 여기서 포함하고 있는 정보는 (주)아트시그널의 소유이며, 제출된 목적 이외의 용도나 (주)아트시그널의 사전 허가 없이 일부 또는 전체가 공개되지 않는다.

 ART SIGNAL Antenna Total Solution	Description			
	BLE Antenna Product Specification			
	Specification No.	Customer.	Rev.	Date
	ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022

Table of Contents

1 Log of Changes	4
2 Part Number List	4
3 Product Description & Terminology	5
3.1 Description	5
3.2 Product Number	5
3.3 Units, Definitions & Abbreviations	5
3.4 Co-ordinates System	5
4 Electrical Properties	6
4.1 Specification	6
4.2 Impedance	6
4.3 Matching Circuit	7
4.4 V.S.W.R	7
4.5 Directive ness	8
4.6 Gain	8
5 Electric Performance data	8
5.1 V.S.W.R.	8
5.2 Radiation Pattern	9
6 Mechanical Drawing	10
6.1 Chip Ant	10
6.2 PCB Pattern	11
7 ROHS	12

 Antenna Total Solution	Description			
	BLE Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022	

1 Log of Changes

NO	Date	Mark	Changes	Remark	Rev.
1	2022.04.01				1.0
2					
3					
4					
5					
6					
7					

2 PART NUMBER LIST

No.	PART NO.	Color & Appearance	ART-SIGNAL Antenna Product Number	Remark
1	BLE Ant		ARTS-BBEM-278	
2				
3				
4				
5				
6				

 Antenna Total Solution	Description			
	BLE Antenna Product Specification			
	Specification No.	Customer.	Rev.	Date
	ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022

3 Product Description & Terminology

3.1 Description

This is the product specification of Internal Antenna applied to Set.

3.2 Product Number

ART SIGNAL Antenna Part Number **ARTS-BBEM-278**

3.3 Unit, Definitions & Abbreviations

SI unit will be used, unless any specialties are announced

Tx	Transmit Band
Rx	Receive Band
PCB	Printed Circuit Board
VSWR	Voltage Standing Wave Ratio
dBi	Antenna gain in dB relative to a isotropic antenna
Room Temperature	+20 ± 3°C
CW	Clock Wise
g	Acceleration of gravity 9.82 m/s ²
RH	Relative Humidity
gf / kgf	Gram weight (1gf=980.665dyn) / Kilogram weight (1kgf=9.80665N)
Ph	Potential of hydrogen
F	Force
T	Torque

3.4 Co-ordinates System




Figure 3.4.1 Coordinate within the Handset

 Antenna Total Solution	Description			
	BLE Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022	

4 Electrical Properties

4.1 Specification

Item	Specifications	
Antenna	Center Frequency	2400~2485 $\pm$ 1MHz
	Band Width	85 MHz
	Polarization	Linear
	Dimension	3.2 * 1.6 * 1.2 mm
	Working Temperature	-40~60°C
	Storage Temperature	-20~40°C

4.2 Impedance`

4.2.1 Nominal Impedance

- R = 50Ω

4.2.2 Measuring Method

By using Network analyzer , connect the antenna-installed handset to the reflection Point of Analyzer and measure the impedance value within the designated frequency band. Testing is corresponded to the figure 4.2.1



Figure 4.2.1 Test by network analyzer

 Antenna Total Solution	Description			
	BLE Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022	

4.3 Matching Circuit

Matching Circuit is composed in free space of 4.1 frequency band while satisfying customer's Requirements. Matching Circuit is corresponded to the figure 4.3.1

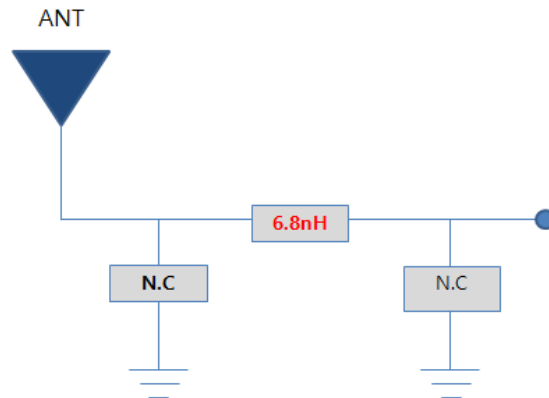


Figure 4.3.1 Matching circuit

4.4 V.S.W.R

Impedance Matching optimization is performed under the below mentioned environment.

4.4.1 Free Space Environment

Service(MHz)		2400	2485
Mode			
VSWR	TEST DATA	2.21	4.38
	SPEC	2.71	4.88

4.4.2 Measuring Method

Connect(soldering) 50Ω copper cable to the 50Ω spot in handset. To minimize the loss of transmission, copper cable is used.

Including PCB, the handset shouldn't be different from the one, which will be used for mass production.

Specification should be the same for all frequency bands. Free space means that handset is put on the surface of no conducting plastic.

 Antenna Total Solution	Description			
	Specification No.	Customer.	Rev.	Date
	ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022

4.5 Directive ness

Omni-directional


4.6 Gain

Free Space

Service(MHz) Mode(dBi)	Main Antenna				
Freq.(MHz)	2400	2420	2440	2460	2485
PEAK	-1.31	-1.10	-1.07	-2.41	-4.62
AVG	-7.37	-7.31	-7.23	-8.10	-9.93
SPEC	-7.87	-7.81	-7.73	-8.60	-10.43

5 Electric Efficiency

5.1 ANT- VSWR, Return loss, Smith Chart

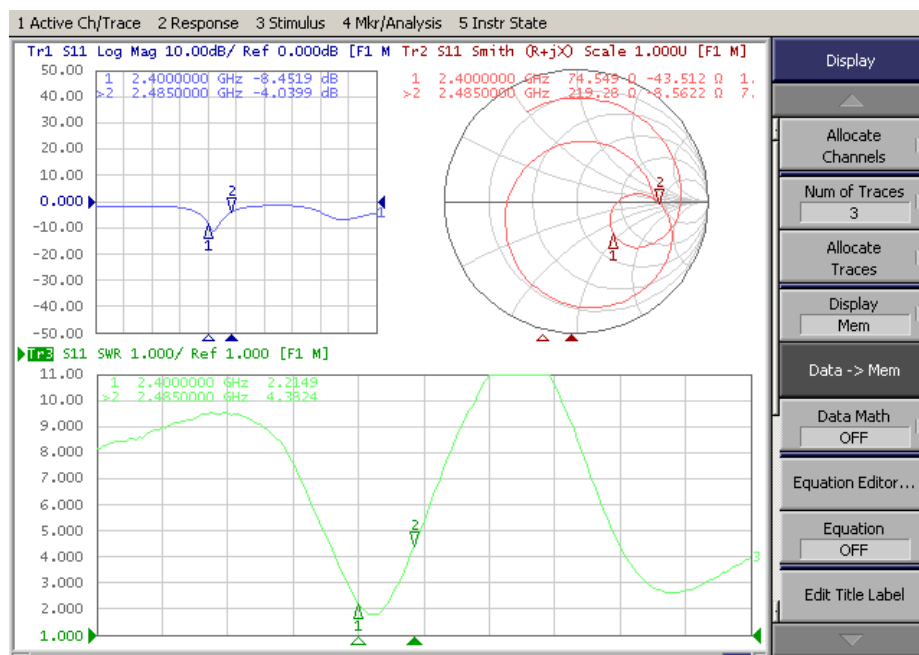


 Antenna Total Solution	Description			
	Specification No.	Customer.	Rev.	Date
	ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022


5.2 Radiation Pattern (XY-Plane)

	1	2	3	4	5
Frequency [MHz]	2400	2420	2440	2460	2485
Efficiency [dB]	-7.37	-7.31	-7.23	-8.10	-9.93
Efficiency [%]	18.3	18.6	18.9	15.5	10.2
TRG_θ [dB]	-11.81	-11.50	-11.02	-11.58	-13.54
Gain_{θ Peak} [dB]	-3.82	-4.15	-3.56	-4.02	-6.21
Gain_{θ Min} [dB]	-30.39	-32.01	-40.95	-28.64	-25.14
TRG_φ [dB]	-9.31	-9.39	-9.57	-10.67	-12.42
Gain_{φ Peak} [dB]	-2.00	-1.93	-1.95	-3.37	-5.92
Gain_{φ Min} [dB]	-23.26	-20.66	-18.93	-22.52	-32.63
UHRG [dB]	-11.53	-11.35	-11.18	-11.88	-13.46
UHRG/TRG [%]	38.4	39.4	40.3	41.8	44.3
H-Plane	-12.20	-11.76	-11.47	-12.23	-14.30
E1-Plane, AVG [dB]	-11.24	-11.38	-11.15	-11.89	-14.02
E2-Plane, AVG [dB]	-11.54	-10.90	-10.28	-10.68	-12.43
Peak Gain [dB]	-1.31	-1.10	-1.07	-2.41	-4.62
Directivity [dB]	6.07	6.21	6.16	5.69	5.31
Minimum Gain [dB]	-15.21	-14.48	-14.82	-18.35	-21.43


2400




2420




2440



2460



2485




3D GAIN (H/E1/E2-plane)

 Antenna Total Solution	Description			
	BLE Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022	

6. Mechanical Drawing


6.1 Chip Ant

DIMENSIONS

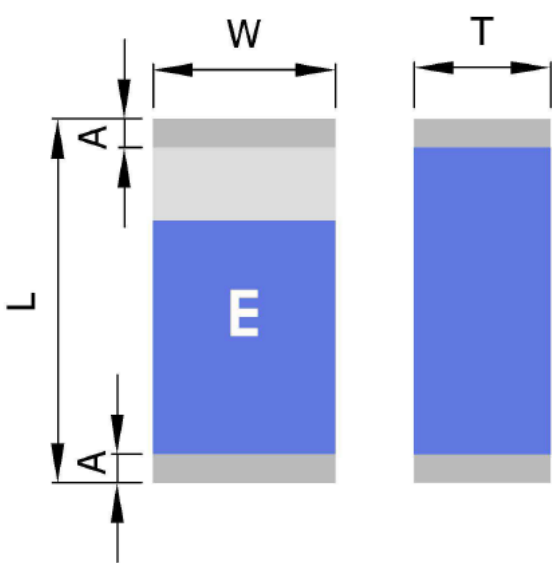Figure	Symbol	Dimension (mm)
	L	3.20 ± 0.20
	W	1.60 ± 0.10
	T	1.20 ± 0.10
	A	0.25 ± 0.15

 Antenna Total Solution	Description			
	Specification No.	Customer.	Rev.	Date
	ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022

6.2 PCB Pattern Dimensions

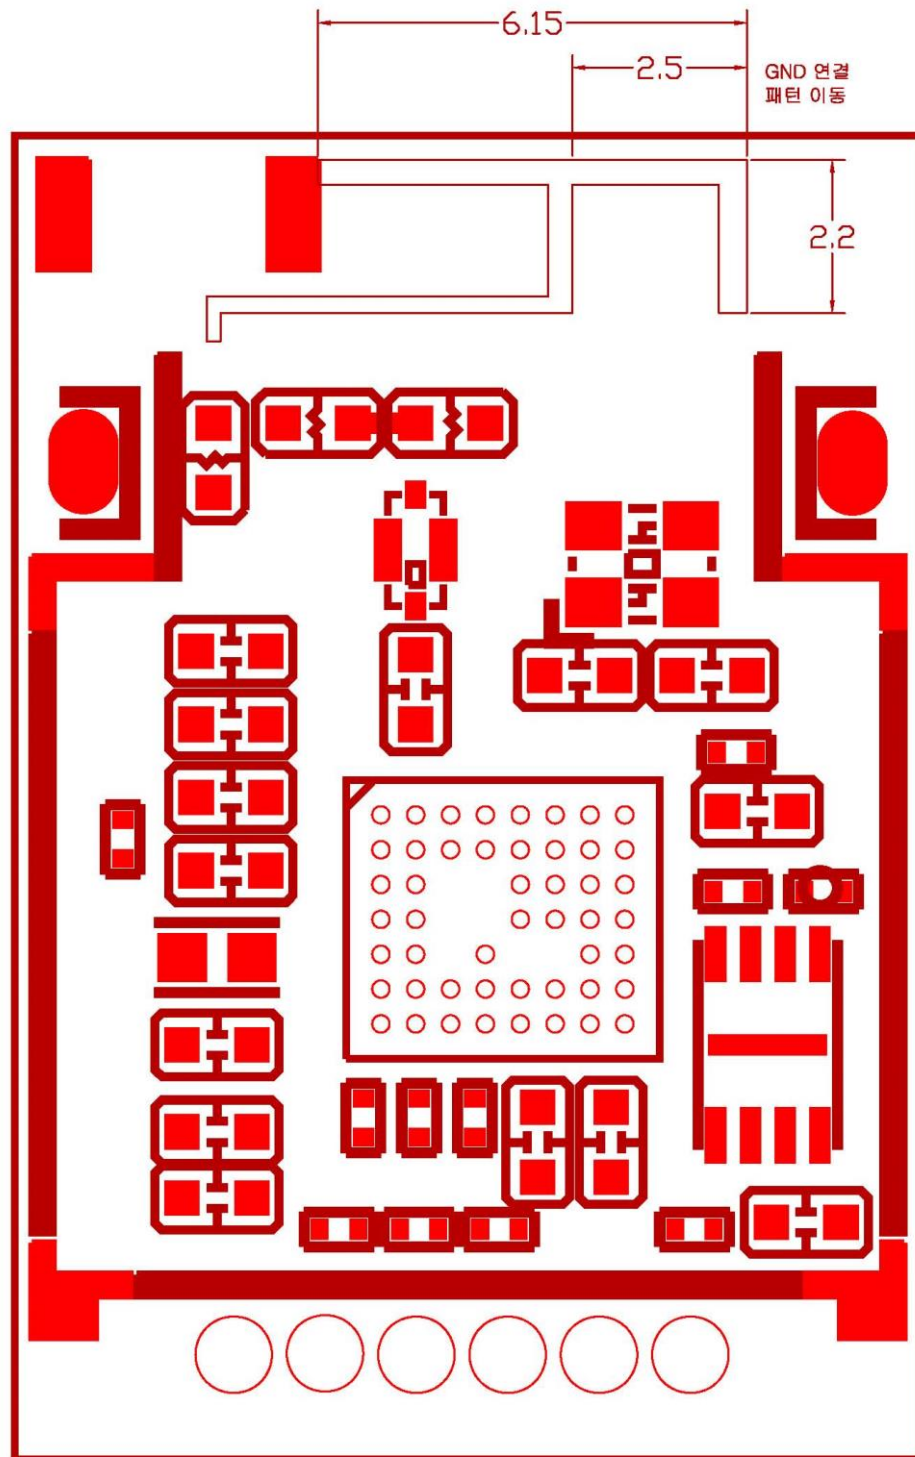

	Description		
	BLE Antenna Product Specification		
Specification No.	Customer.	Rev.	Date
ARTS-BBEM-278	(주)비콘테크놀로지	1.0	Apr. 01, 2022

7. ROHS

7.1 ROHS List

- Refer to Attached file