

Test Report

Bluetooth Supplemental Report

Project Number: 3071804

Report Number: 3071804EMC04A

Revision Level: 0

Client: Airo Wireless, Inc.

Equipment Under Test: Intrinsically Safe Cellular Phone

Model: I-SAFE™28

Applicable Standards: RSS 210: Issue 8

Frequency Hopping Requirements

Report issued on: 10 December 2013

Test Result: Compliant

Tested by:



Jeremy O. Pickens, Senior EMC Engineer

Reviewed by:



David Schramm, EMC Manager

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or Testing done by SGS International Electrical Approvals in connection with distribution or use of the product described in this report must be approved by SGS international Electrical Approvals in writing.

Table of Contents

1	SUMMARY OF TEST RESULTS.....	3
1.1	MODIFICATIONS REQUIRED FOR COMPLIANCE	3
2	GENERAL INFORMATION	3
2.1	CLIENT INFORMATION	3
2.2	TEST LABORATORY	3
2.3	GENERAL INFORMATION OF EUT	3
2.4	EUT CONNECTION BLOCK DIAGRAM	4
2.5	SYSTEM CONFIGURATIONS.....	4
3	PSEUDO-RANDOM HOP SEQUENCE	5
3.1	TEST RESULT	5
3.2	TEST METHOD.....	5
4	CHANNEL SEPARATION	6
4.1	TEST RESULT	6
4.2	TEST METHOD.....	6
4.3	TEST SITE.....	6
4.4	TEST EQUIPMENT	6
4.5	TEST DATA	7
5	NUMBER OF HOPPING CHANNELS	8
5.1	TEST RESULT	8
5.2	TEST METHOD.....	8
5.3	TEST SITE.....	8
5.4	TEST EQUIPMENT	8
5.5	TEST DATA	9
6	DWELL TIME.....	10
6.1	TEST RESULT	10
6.2	TEST METHOD.....	10
6.3	TEST SITE.....	10
6.4	TEST EQUIPMENT	10
6.5	TEST DATA	11
6.6	PLOTS	12
7	REVISION HISTORY	21

1 Summary of Test Results

Test Description	Test Specification	Test Result
Pseudo-Random Hop Sequence	RSS-210 A8.1(a)	Compliant ⁽¹⁾
Channel Separation	RSS-210 A8.1(b)	Compliant
Number of Hopping Channels	RSS-210 A8.1(d)	Compliant
Dwell Time	RSS-210 A8.1(d)	Compliant

1.1 Modifications Required for Compliance

None

2 General Information

2.1 Client Information

Name: Airo Wireless, Inc
Address: 12 Piedmont Center, Suite 205
City, State, Zip, Country: Atlanta, GA 30035, USA

2.2 Test Laboratory

Name: SGS North America, Inc.
Address: 620 Old Peachtree Road NW, Suite 100
City, State, Zip, Country: Suwanee, GA 30024, USA

2.3 General Information of EUT

Type of Product: Intrinsically Safe Cellular Phone
Model: I-SAFE™ 28
Serial Number: Not Labeled
FCC ID: QDL-ISAFE28
Frequency Range: 2402 to 2480 MHz
Number of channels: 79
Modulation type: GFSK, EDR 2, EDR 3
Channel spacing: 1 MHz
Antenna: Integral


Rated Voltage: 3.7 VDC Internal Battery

Sample Received Date: 03 July 2013
Dates of testing: 10 December 2013

Operating Modes and Conditions

The EUT was placed into test mode and controlled by the Bluetooth Tester for Hopping Sequence, Data Rates and Packet Types.

2.4 EUT Connection Block Diagram

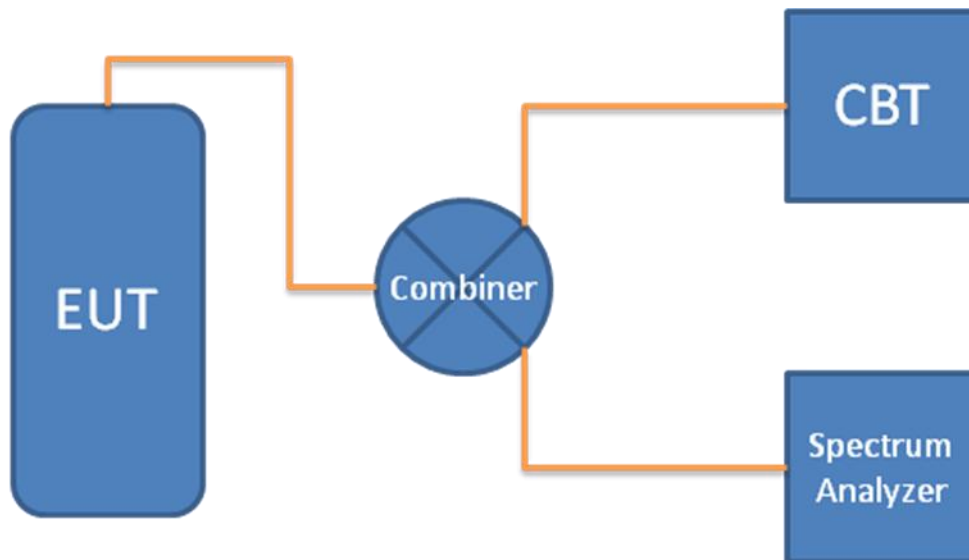

2.5 System Configurations

Device reference	Manufacturer	Description	Model Number	Serial Number
EUT	Airo Wireless	Intrinsically Safe Cell Phone		Not Labeled
CBT	R&S	Bluetooth Tester	CBT	See Equipment List
Spectrum Analyzer	R&S	Spectrum Analyzer	FSV	See Equipment List

3 Pseudo-Random Hop Sequence

3.1 Test Result

Test Description	Test Specification	Test Result
Pseudo-Random Hop Sequence	RSS-210 A8.1(a)	Compliant ⁽¹⁾

Note (1): The theory of operation states that the device is Bluetooth and operates using a pseudo-random hopping technique.

3.2 Test Method

Compliance is demonstrated by Manufacturer's declaration or is stated in the Theory of Operation.

Requirement

The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset, while the long-term distribution appears evenly distributed.

4 Channel Separation

4.1 Test Result

Test Description	Test Specification	Test Result
Number of Hopping Channels	RSS-210 A8.1(b)	Compliant

4.2 Test Method

The test data was measured using a spectrum analyzer with Peak detector (max hold) and a resolution bandwidth of 100 kHz. The trace was allowed to stabilize until all channels were displayed.

Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

4.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 22.7 °C


Relative Humidity: 37.8 %

4.4 Test Equipment

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
Spectrum Analyzer	FSV 30	R&S	101595	28 Aug 2014
Bluetooth Tester	CBT	R&S	100011	CNR

Note: The calibration period equipment is 1 year.

4.5 Test Data

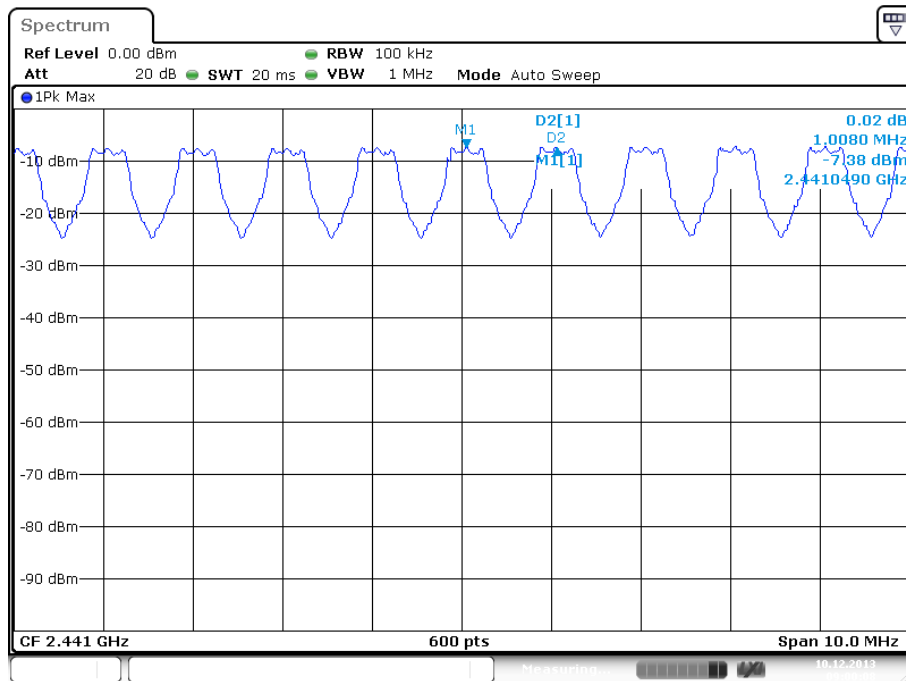

Date: 10.DEC.2013 09:00:09

5 Number of Hopping Channels

5.1 Test Result

Test Description	Test Specification	Test Result
Number of Hopping Channels	RSS-210 A8.1(d)	Compliant

5.2 Test Method

The test data was measured using a spectrum analyzer with Peak detector (max hold) and a resolution bandwidth of 30 kHz. The trace was allowed to stabilize until all channels were displayed.

Requirement

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

5.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 22.7 °C

Relative Humidity: 37.8 %


5.4 Test Equipment

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
Spectrum Analyzer	FSV 30	R&S	101595	28 Aug 2014
Bluetooth Tester	CBT	R&S	100011	CNR

Note: The calibration period equipment is 1 year.

5.5 Test Data

There are 79 Channel.

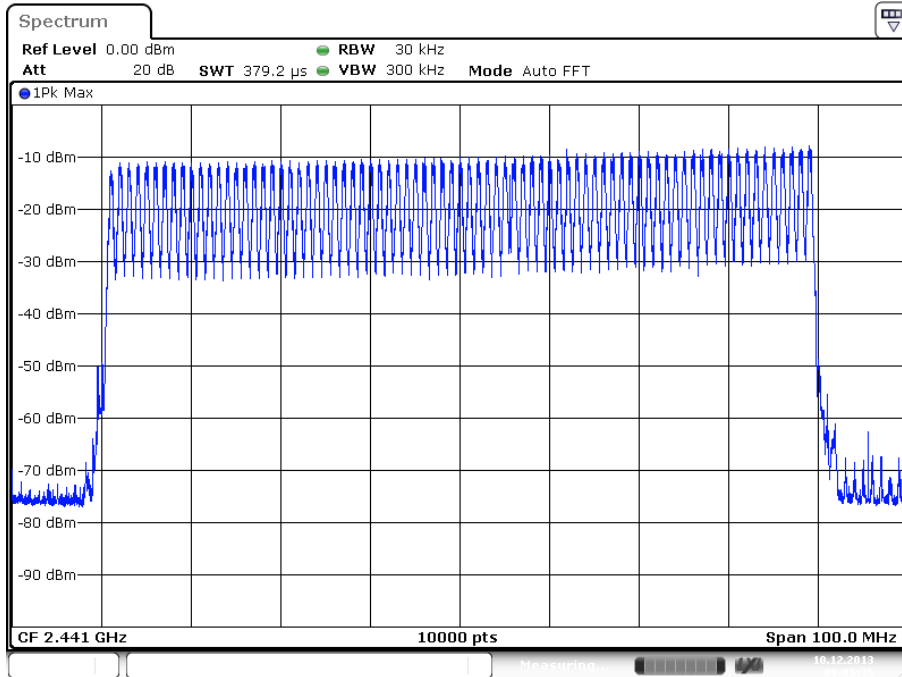

Date: 10.DEC.2013 09:05:35

6 Dwell Time

6.1 Test Result

Test Description	Test Specification	Test Result
Dwell Time	RSS-210 A8.1(d)	Compliant

6.2 Test Method

The EUT was set to test mode which allowed it to be controlled by the Bluetooth Tester. The Bluetooth Tester was then set to operate on US/EU Hopping Scheme with pseudo-random data. For each packet type and data rate, the pulse width of the packet was measured and the number of pulses were counted over the total observation period.

Requirement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

6.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 21.7 °C

Relative Humidity: 46.9 %

6.4 Test Equipment

Equipment	Model	Manufacturer	Asset Number	Cal Due Date
Spectrum Analyzer	FSV 30	R&S	101595	28 Aug 2014
Bluetooth Tester	CBT	R&S	100011	CNR


Note: The calibration period equipment is 1 year.

6.5 Test Data


	Packet Type	Pulse Width ms	Pulses per 31.6 sec	Dwell Time Sec	Limit	Result
BR	DH1	0.4004	303	0.121	0.4	PASS
	DH3	1.652	157	0.259	0.4	PASS
	DH5	2.898	109	0.316	0.4	PASS
EDR2	DH1	0.4104	334	0.137	0.4	PASS
	DH3	1.662	175	0.291	0.4	PASS
	DH5	2.908	124	0.361	0.4	PASS
EDR3	DH1	0.4104	317	0.130	0.4	PASS
	DH3	1.657	163	0.270	0.4	PASS
	DH5	2.904	113	0.328	0.4	PASS

6.6 Plots

DH1 Packet Type, Basic Rate

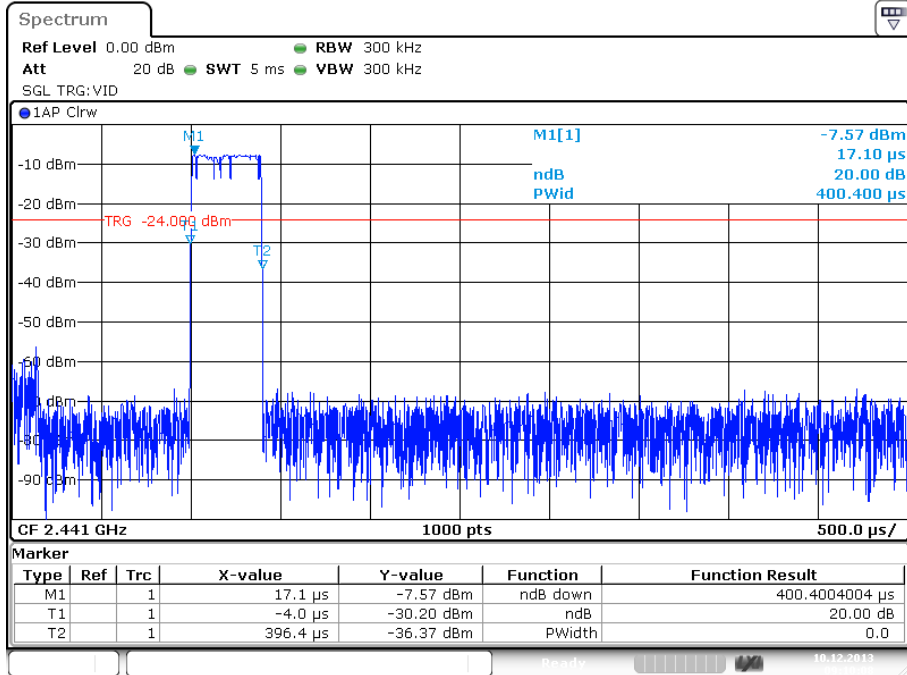


Date: 10.DEC.2013 09:10:08

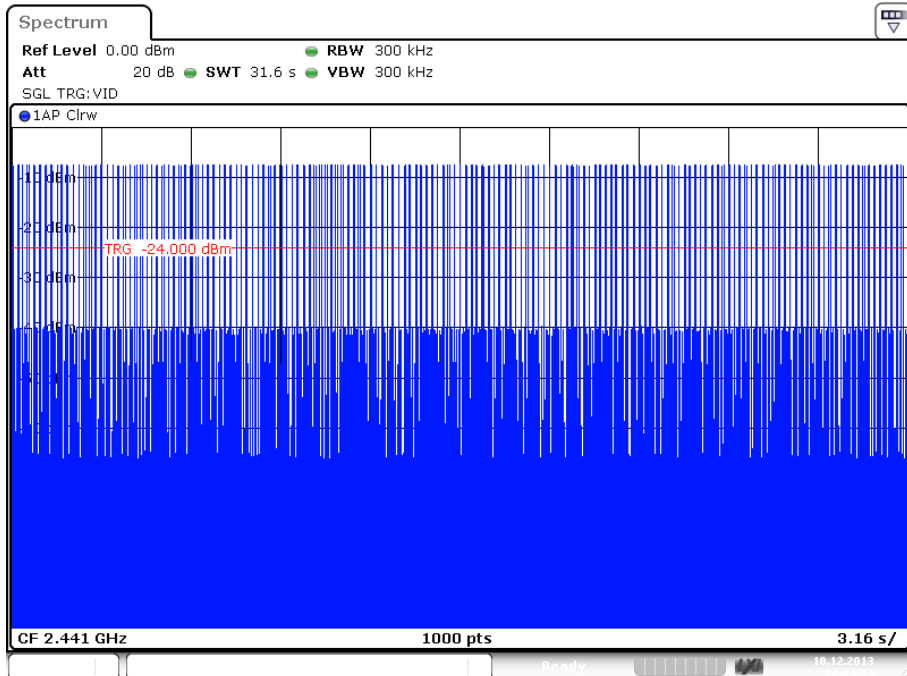


Date: 10.DEC.2013 10:04:53

DH3 Packet Type, Basic Rate

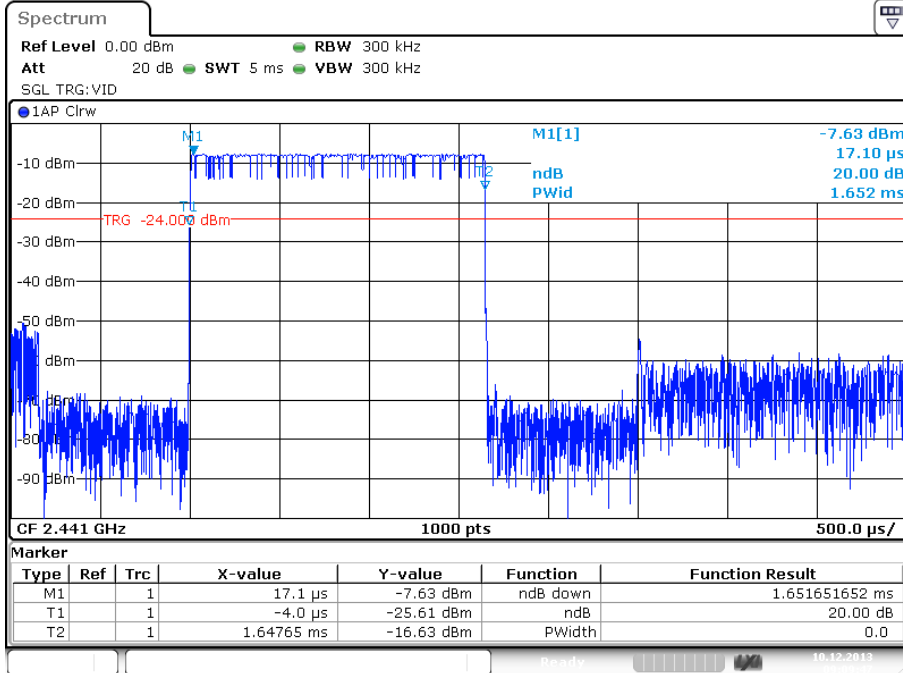


Date: 10.DEC.2013 09:09:48

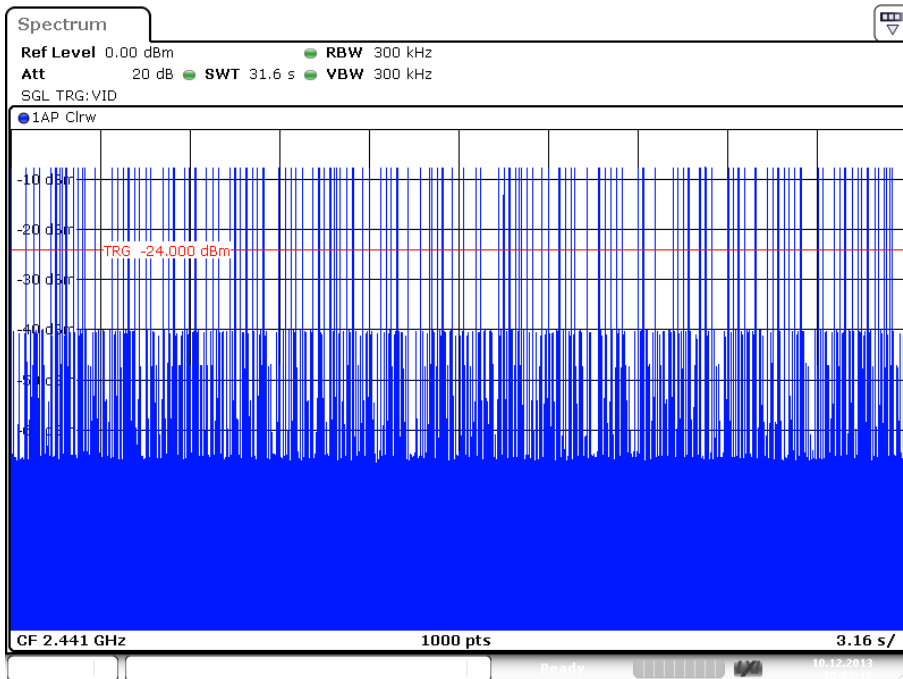


Date: 10.DEC.2013 10:03:16

DH5 Packet Type, Basic Rate

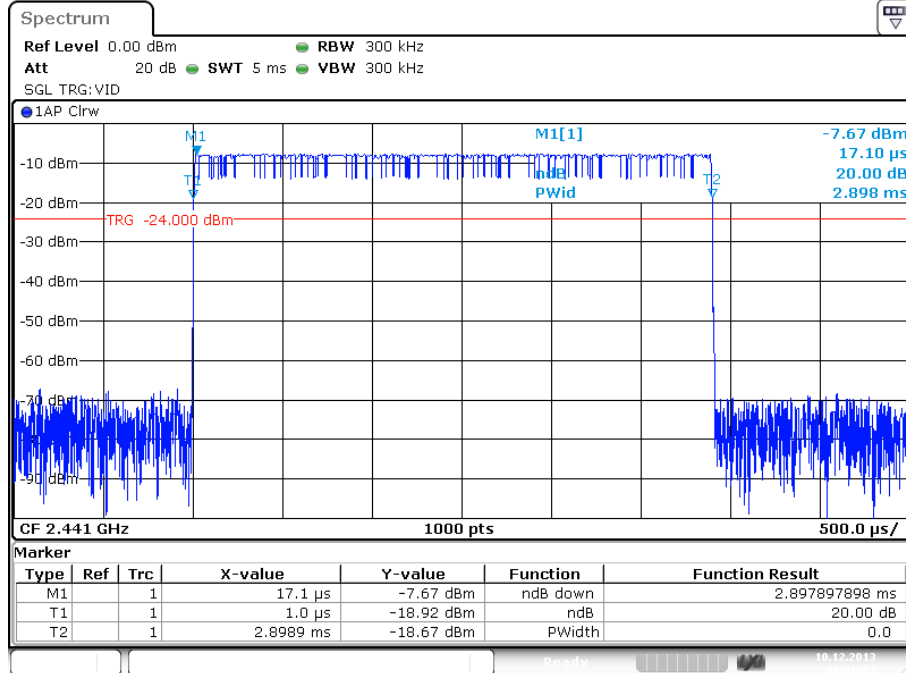


Date: 10.DEC.2013 09:16:04

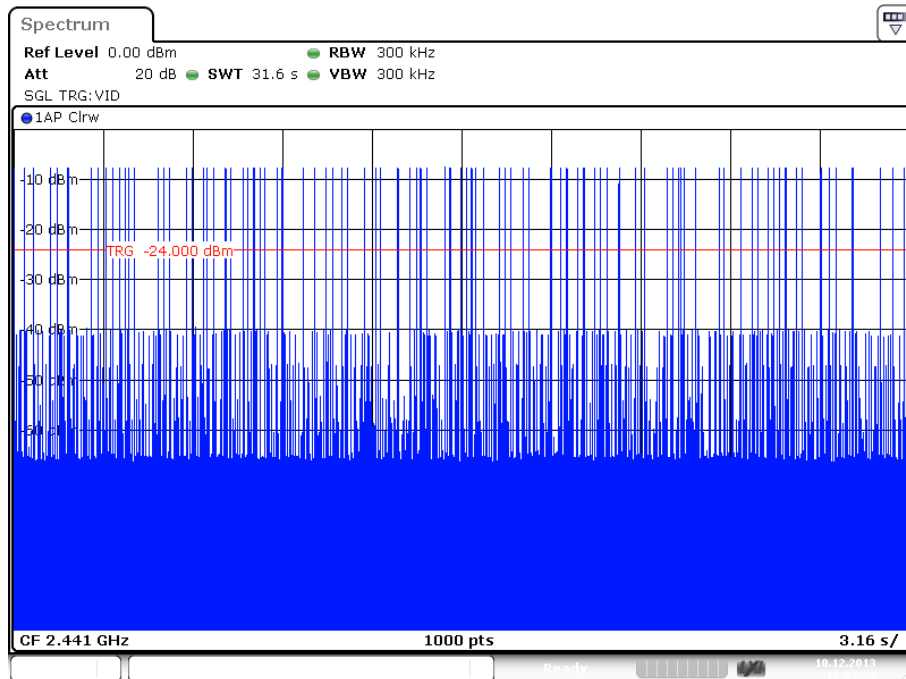


Date: 10.DEC.2013 10:02:02

DH1 Packet Type, EDR 2

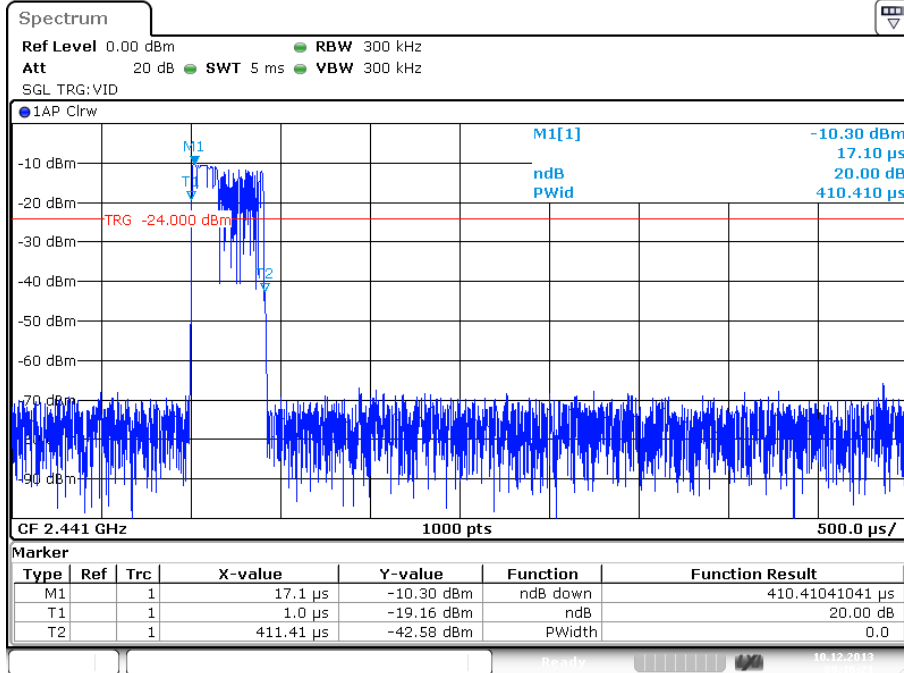


Date: 10.DEC.2013 09:16:22

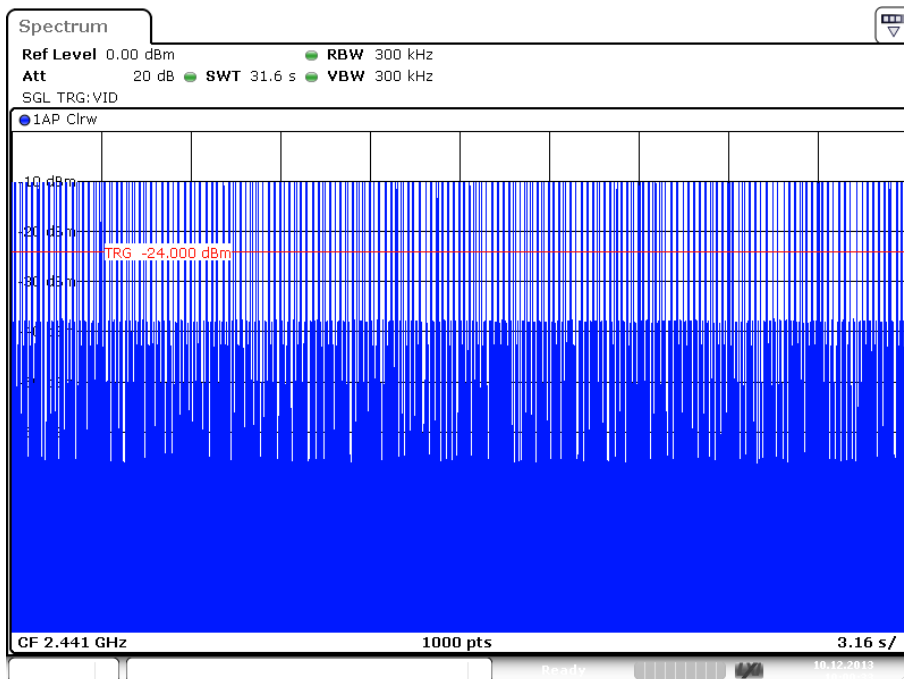


Date: 10.DEC.2013 10:00:33

DH3 Packet Type, EDR 2

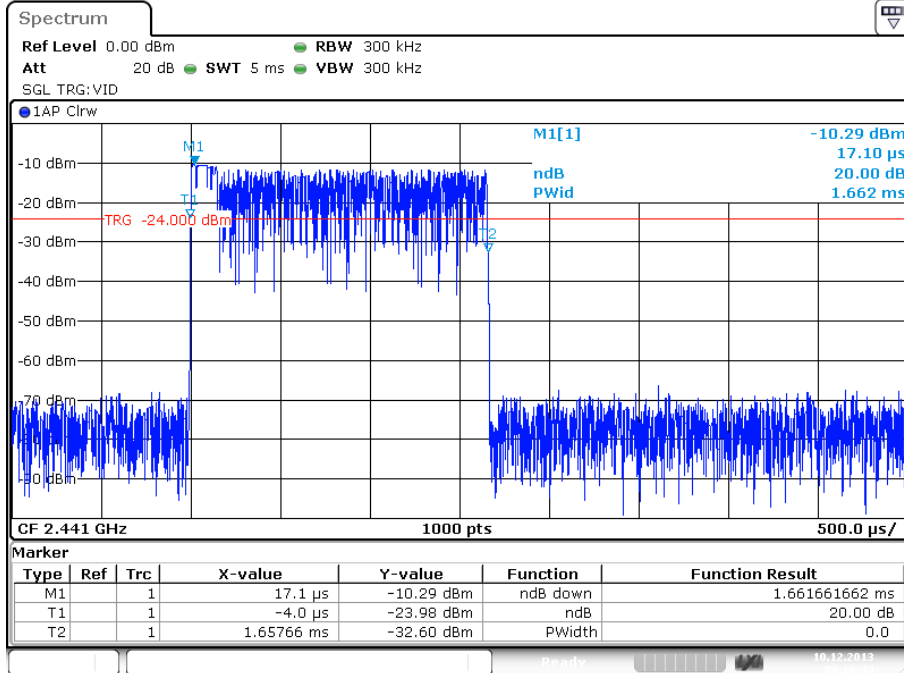


Date: 10.DEC.2013 09:16:45

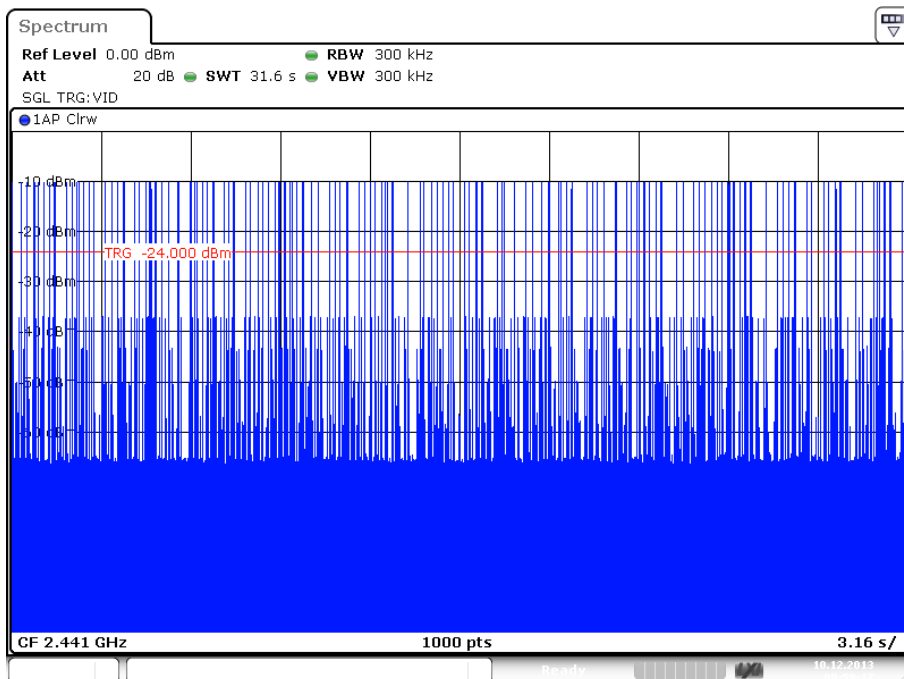


Date: 10.DEC.2013 09:59:17

DH5 Packet Type, EDR 2

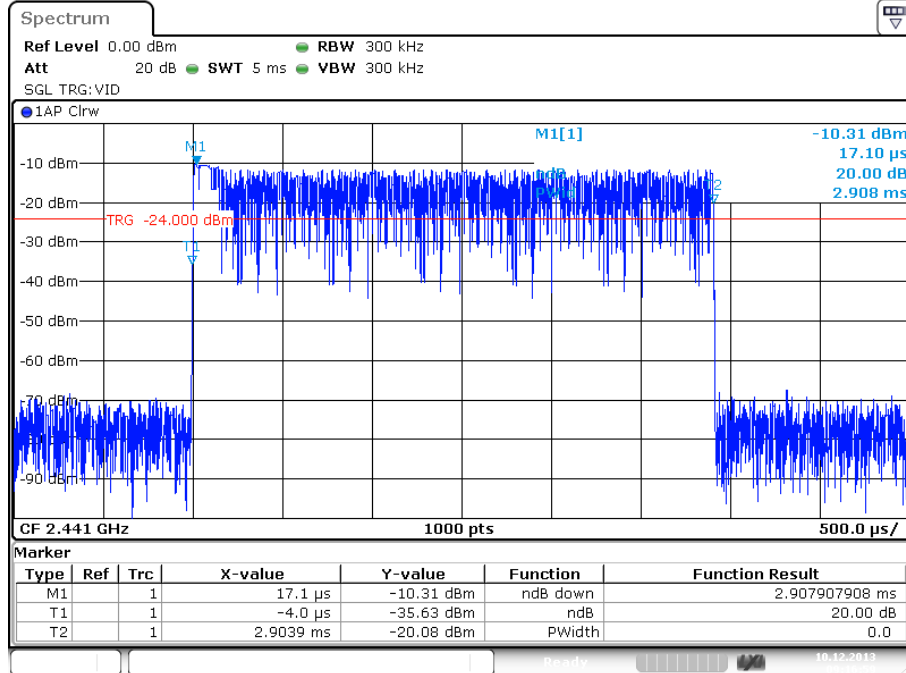


Date: 10.DEC.2013 09:17:00

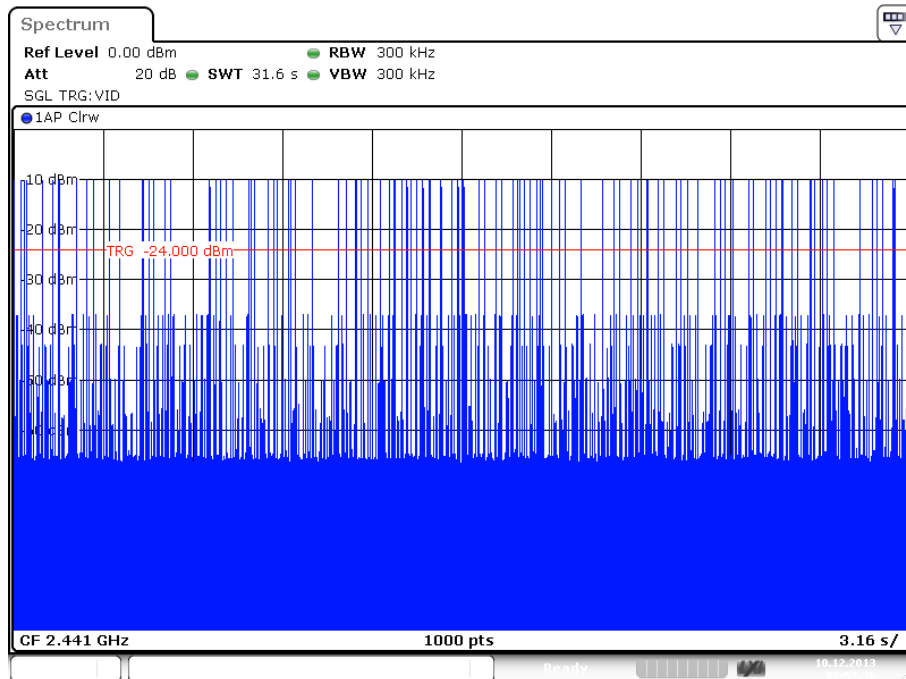


Date: 10.DEC.2013 09:57:37

DH1 Packet Type, EDR 3

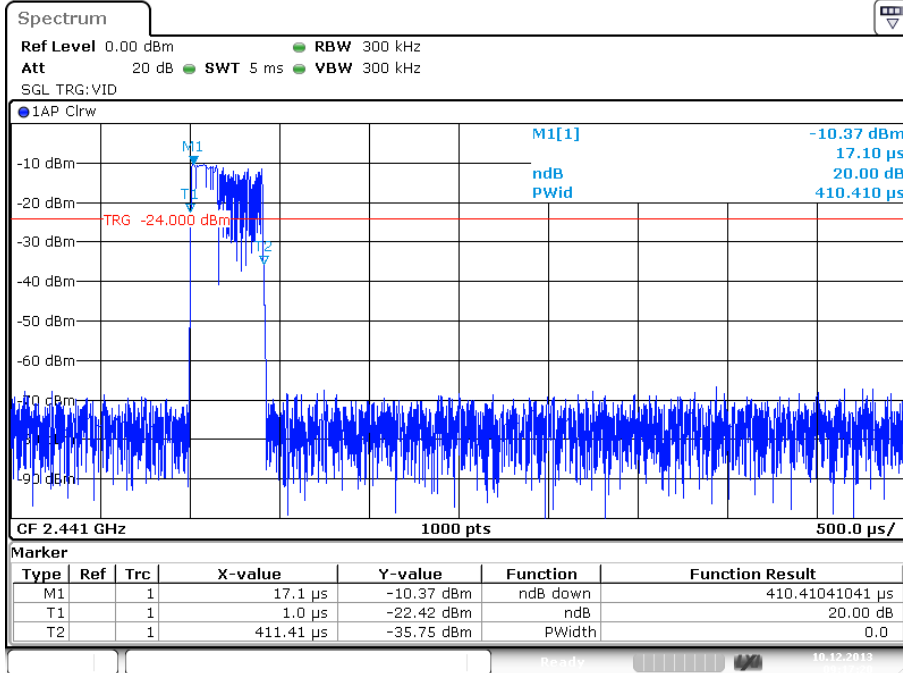


Date: 10.DEC.2013 09:17:21

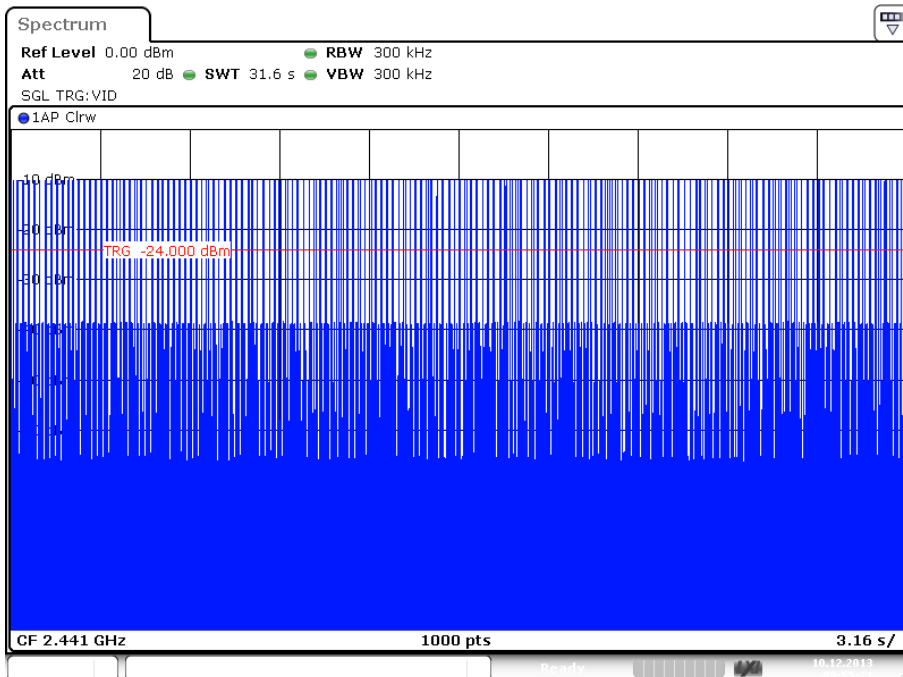


Date: 10.DEC.2013 09:55:22

DH3 Packet Type, EDR 3

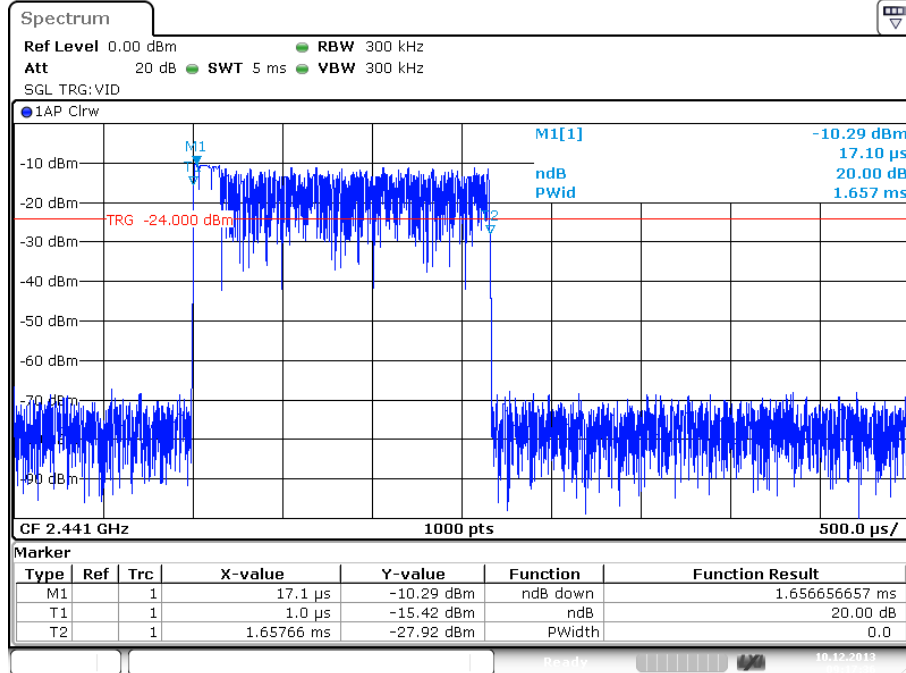


Date: 10.DEC.2013 09:17:37

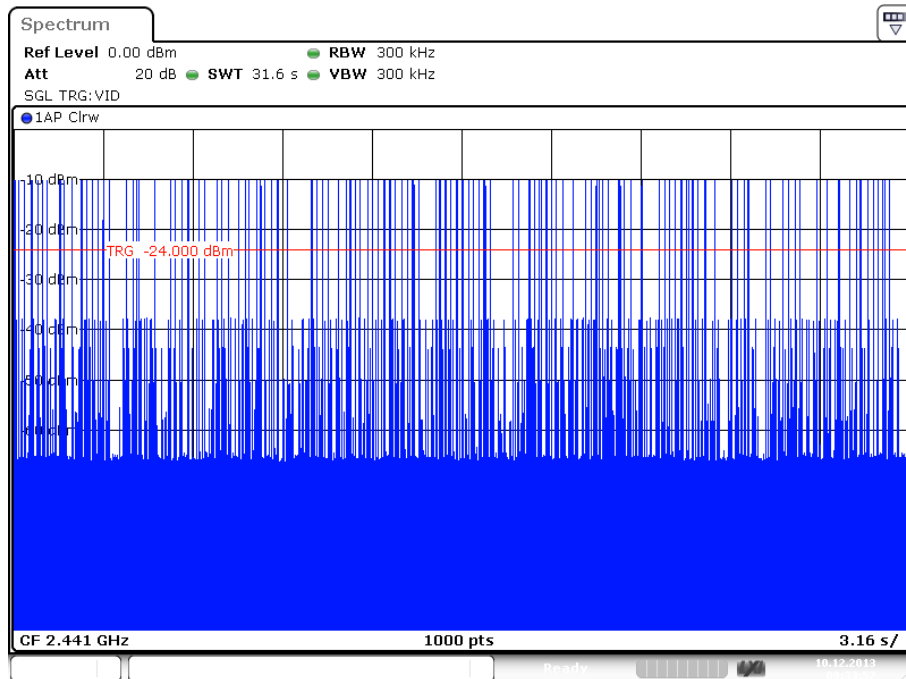


Date: 10.DEC.2013 09:33:58

DH5 Packet Type, EDR 3

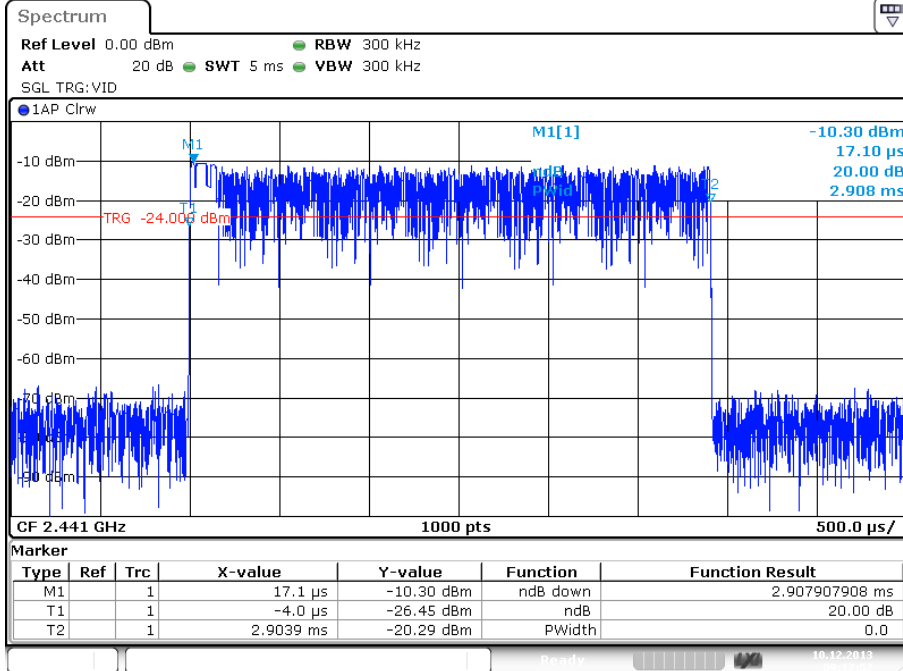

Date: 10.DEC.2013 09:17:52

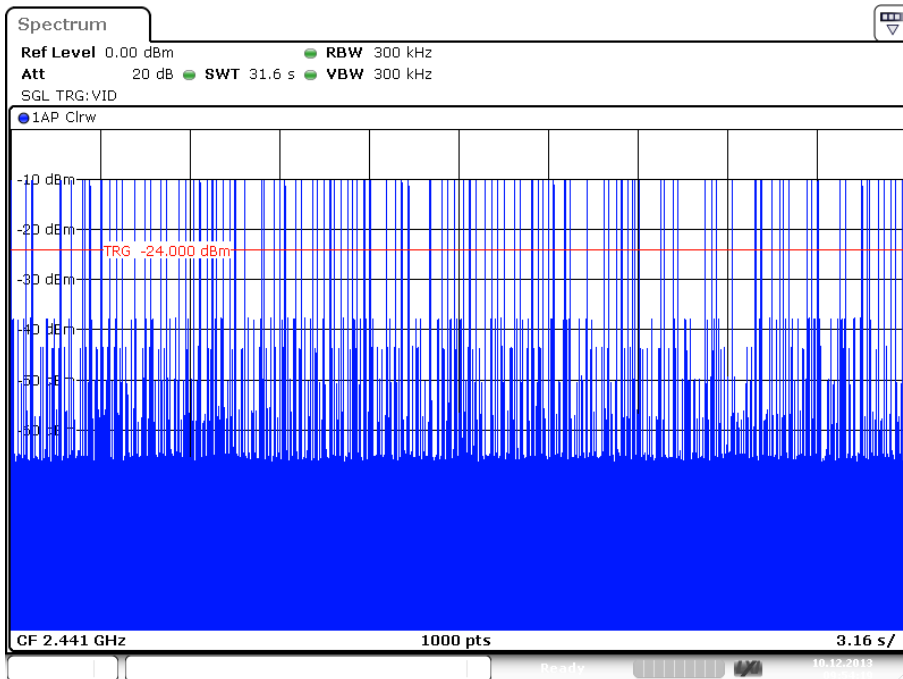

Date: 10.DEC.2013 09:54:20

7 Revision History

Revision Level	Description of changes	Revision Date
0	Initial release	10 Dec 2013