



# CERTIFICATION TEST REPORT

## FCC CFR47 PART 15 SUBPART C

Test Report File No.	14-IST-0646	<input checked="" type="checkbox"/> Basic	<input type="checkbox"/> Alternate
Date of Receipt	October 08, 2014	Begin of test date	October 20, 2014
Date of Issue	November 15, 2014	End of test date	November 12, 2014

Kind of Product	Network audio player
Basic Model(s)	DPF11
FCC ID	QDMDPF11

Applicant	IRIVER LIMITED.
Address	Irivhouse, 5, Bangbae-ro 18-gil, Seocho-gu, Seoul, Korea
Manufacturer	IRIVER LIMITED.
Address	Irivhouse, 5, Bangbae-ro 18-gil, Seocho-gu, Seoul, Korea

Test Result  Positive  Negative

Tested By

B.O.KO

Reviewed By

S.J.CHO

### Comment (s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart C.
- The test report is consists of 59 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST Co., Ltd.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4  
I assume full responsibility for accuracy and completeness of these data.





## TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Measurement Uncertainty	3
Product Information	4
Summary of the test results	5
- Conducted Emissions	6-10
- Peak Output Power	11-14
- 6dB BandWidth	15-18
- Power Spectral Density	19-22
- 99% Occupied Bandwidth	23-26
- Conducted Spurious Emissions & Band Edge	27
- Conducted Spurious Emissions	28-32
- Conducted Band Edges	33-35
- Radiated Emissions	36-58
- Radiated Spurious Emissions & Restricted bands Emission	38
- Radiated Emissions, 9KHz to 30MHz(Magnetic Field Test)	39
- Radiated Spurious Emissions	40-46
- Radiated Restricted Band Edge	47-58
- Antenna Requirements	59




## INFORMATION OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd.  
52-20, Sinjeong-ro 4lbeon-gil, Giheung-gu  
Yongin-si, Gyeonggi-do, Korea.

TEL : +82 31 326 6700 FAX : +82 31 326 6797

**KOLAS Testing No. : KT118**  
**RRA Designation No. : KR0018**  
**FCC Registration No. : 400603**  
**VCCI Member No. : 1739**

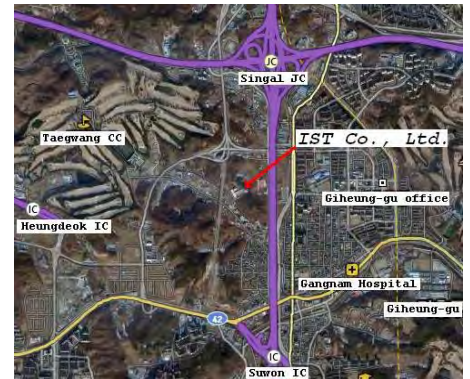

## Measurement Uncertainty

Conducted Emissions(#1)	$U = 2.59$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Conducted Emissions(#2)	$U = 2.59$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions 30 MHz - 1000 MHz (Antenna - Horizontal)	$U = 3.02$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions 30 MHz - 1000 MHz (Antenna - Vertical)	$U = 3.68$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions Above 1 GHz	$U = 4.20$ [dB] (Confidence level approximately 95 %, $k = 2$ )



## PRODUCT INFORMATION

### Network audio player(DPF11)

Display	7" WVGA(1280x800) Touch Display
DAC	Cirrus Logic CS4398 x 2(Dual DAC)
Digital _Out _Input	AES/EBU x1, BNC x1, Coaxial x1, Optical x1 AES/EBU x1, BNC x1, Coaxial x1, Optical x1
Analog _Fixed & Variable Out	Balanced (L/R) x2, RCA (L/R) x2
Fixed output level	3 V(RCA, Balanced)
Variable output level	7.5 V(RCA) / 10 V(Balanced)
Channel Separation	>135dB / 1Khz
Frequency Response	$\pm 0.02\text{dB} / 20\text{Hz} \sim 20\text{Khz}$ , $\pm 0.4\text{dB} / 10\text{Hz} \sim 70\text{Khz}$
THD(Total Harmonic Distortion)	$< 0.0008\% / 1\text{Khz} / 10\text{ V}$ , $< 0.001\% / 10\text{Hz} \sim 20\text{Khz} / 10\text{ V}$
SNR(Signal to Noise Ratio)	118dB / 10 V
Audio File Supported	WAV, FLAC, WMA, MP3, OGG, APE, AAC, ALAC, AIFF, DFF,DSF
Audio Sample Rate	8Khz ~ 384Khz (8/16/24 bits per sample) DSD Native : DSD64(1bit / 2.8 MHz) / DSD 128(1bit / 5.6 MHz)
USB Supported	Type A(Host) x2, Type B(Device) x1
USB DAC Supported	UAC(USB Audio Class)2.0 / DSD64, DSD128, PCM
Network Supported	Wi-Fi 802.11b/g/n(2.4 GHz) & Ethernet 10/100/1000, DLNA(DMS,DMC,SMR), BT 4.0
CD Ripping audio format	WAV, FLAC
Battery	Capacity : 10.4 A / Voltage : 7.4 V(Normally) / Type : Li-Ion
Dimension / Weight	214[W] x 238[H] x 243[D](mm) / 11.4 Kg

**Note: All the testing were performed according to the procedures in  
FCC 47CFR PART 15 SUBPART C**



## SUMMARY

Standard Section	Description	result	remark
15.207	AC Conducted Emission	Pass	Meet the requirements
15.209	Field Strength of Harmonics	Pass	Meet the requirements
15.247(b)	Peak Output Power	Pass	Meet the requirements
15.247(d)	Conducted Band Edges	Pass	Meet the requirements
	Conducted Spurious Emission	Pass	Meet the requirements
	Radiated restricted bands Emission	Pass	Meet the requirements
	Radiated Spurious Emission	Pass	Meet the requirements
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirements
15.247(e)	Power Spectral Density	Pass	Meet the requirements
15.203 & 15.247(b)	Antenna requirement	-	Meet the requirements

### Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the Following standards:

- ◇ FCC Part 15 Subpart C § 15.247
- ◇ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ◇ FCC TCB Workshop 2013, April 9.
- ◇ ANSI C63.4-2003 and ANSI C63.10-2009




## Conducted Emissions:

The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "quasi-peak" & "Average" within a bandwidth of 9 KHz.

### - Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1 m X 1.5 m wooden table 80 cm height is placed 40 cm away from the vertical wall and 1.5 m away from the other wall of the shielded room. The R/S ENV216 and R/S ESH3-Z5 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80 cm from the LISN and powered from the R/S ENV216 LISN. The peripheral equipment is powered from the other LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the R/S ESH3-Z6 LISN. All interconnected cables more than 1 m were shortened by non-inductive bundling to a 1 m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

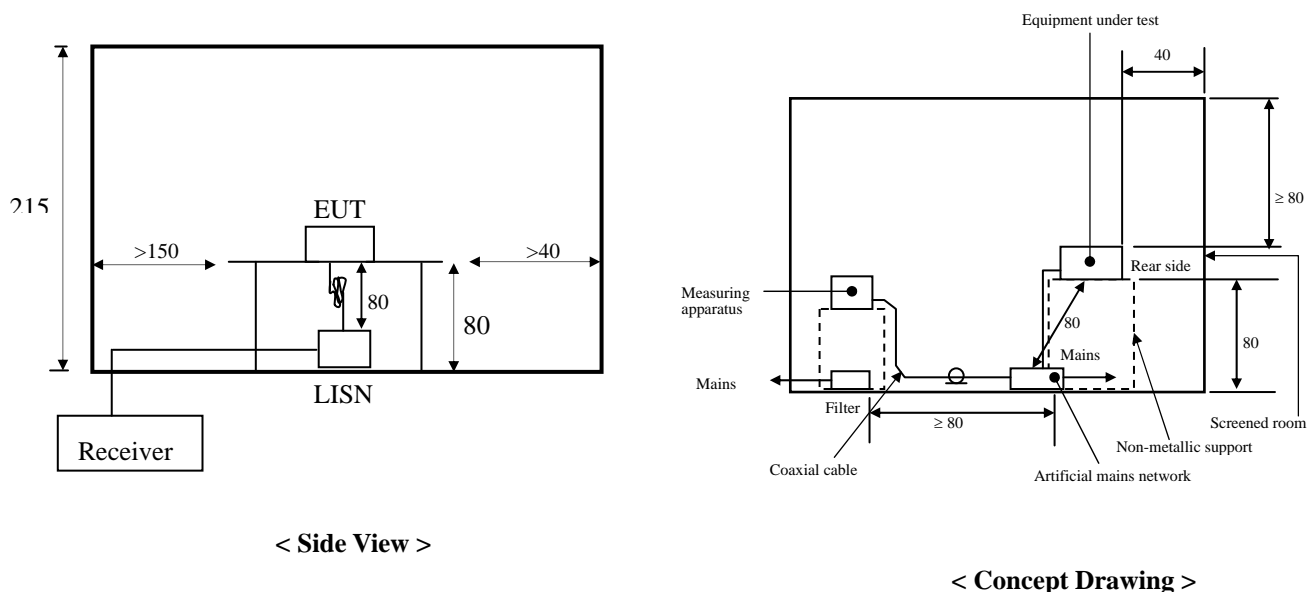



## Limits

According to §15.207(a) except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

Test specification.

According to FCC 47 CFR Part 15 Subpart C Section 15.207



## Conducted Emissions

**[Applicable]**

◆ Test Equipment Used

Model Name	Description	Manufacturer	Due for Cal	Serial No.
ESCI	Test Receiver	Rohde & Schwarz	Jul. 09, 2015	100373
ENV216	LISN	Rohde & Schwarz	Dec. 09, 2014	101718

Note : The equipment used is calibrated in regular for every year.

◆ Test Accessories Used

Equipment	Type	Brand	Serial No.
EUT	DPF11	IRIVER LIMITED.	N/A
Laptop	20188	LENOVO INFORMATION PRODUCTS CO., LTD.	814VU01006G000 1T
Adapter(Laptop)	KPL-060F	Ningbo ISO Electronic Co., Ltd	N/A
Speaker	N/A	N/A	N/A
AP	DIR-825	D-Link Corporation	F3T02C9000588
LED Board	AK500N_LED_TP1 _141013	IRIVER LIMITED.	N/A
Headphone	N/A	N/A	N/A
Earphone	N/A	N/A	N/A
Earphone	N/A	IRIVER LIMITED.	N/A
Micro SD	N/A	SanDisk	N/A
USB Drive	UF516G	LG Electronics	N/A
BT remote control	BC-01	IRIVER LIMITED.	N/A

Connecting Interface Cables :

Unshielded Ethernet(RJ-45) Cable : 3.0 m  
 Unshielded LED Power Cable : 1.8 m  
 Unshielded Earphone Cable : 1.5 m  
 Unshielded Earphone Cable : 1.5 m  
 Unshielded Variable RCA Cable : 1.8 m  
 Unshielded USB Cable : 1.6 m  
 Unshielded Adapter Power Cable : 1.8 m  
 Unshielded Headset Cable : 2.0 m

◆ Test Conditions

Temperature ( 22.5 ± 0.3 ) °C  
 Humidity ( 44.6 ± 0.2 ) % R.H.  
 Atmosphere ( 1007 ) mbar

◆ Test Area Conducted Room #1

◆ Test Date October 20, 2014

Note :






### Conducted Emissions result

Live



REW 9 kHz  
MT 160 ms  
PREAMP OFF

Att 10 dB

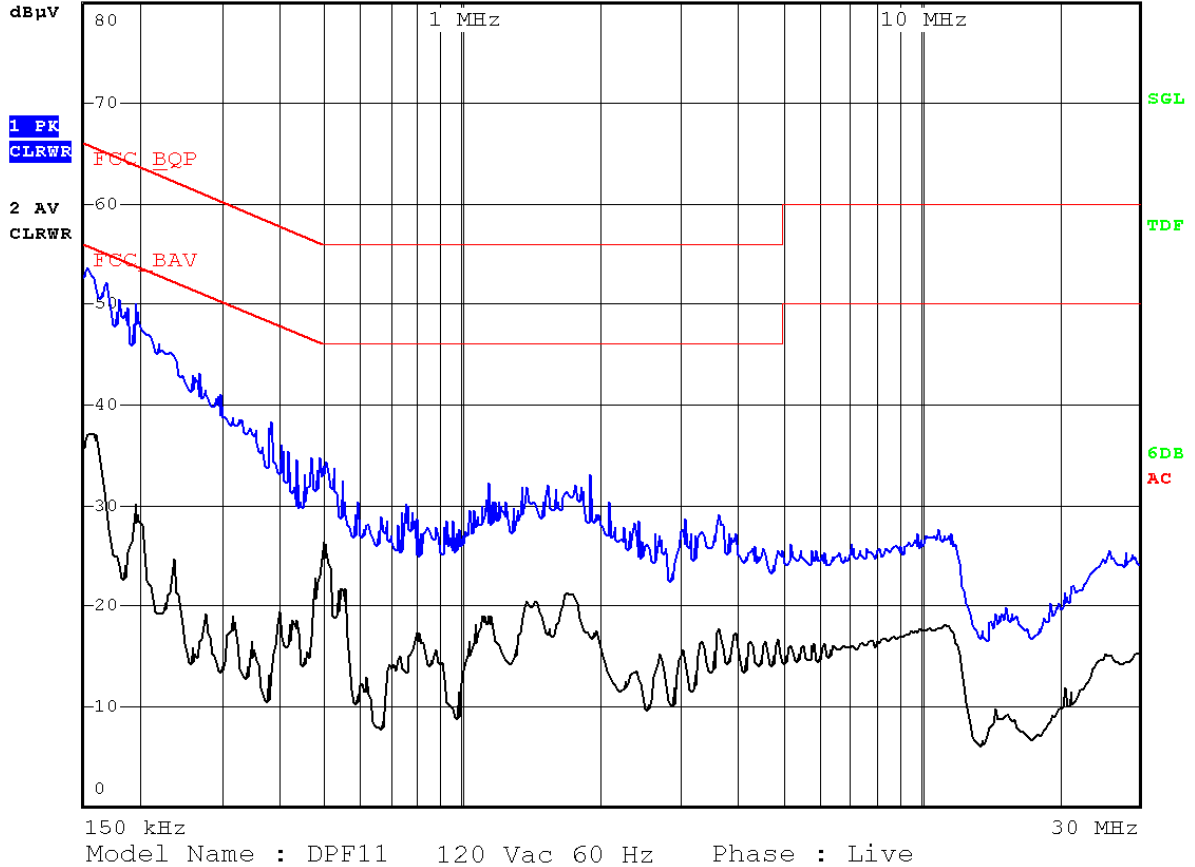

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.153	38.61	28.23	65.84	55.84	9.55	0.05	48.21	37.83	17.63	18.01
0.194	33.17	20.25	63.86	53.86	9.55	0.03	42.75	29.83	21.11	24.03
0.382	18.19	3.69	58.24	48.24	9.56	0.11	27.86	13.36	30.38	34.88
0.491	19.23	14.86	56.15	46.15	9.56	0.05	28.84	24.47	27.31	21.68
1.143	14.56	8.82	56.00	46.00	9.56	0.07	24.19	18.45	31.81	27.55
1.895	14.43	7.27	56.00	46.00	9.57	0.10	24.10	16.94	31.90	29.06




### Conducted Emissions result

Neutral



RBW 9 kHz  
MT 160 ms  
PREAMP OFF

Att 10 dB

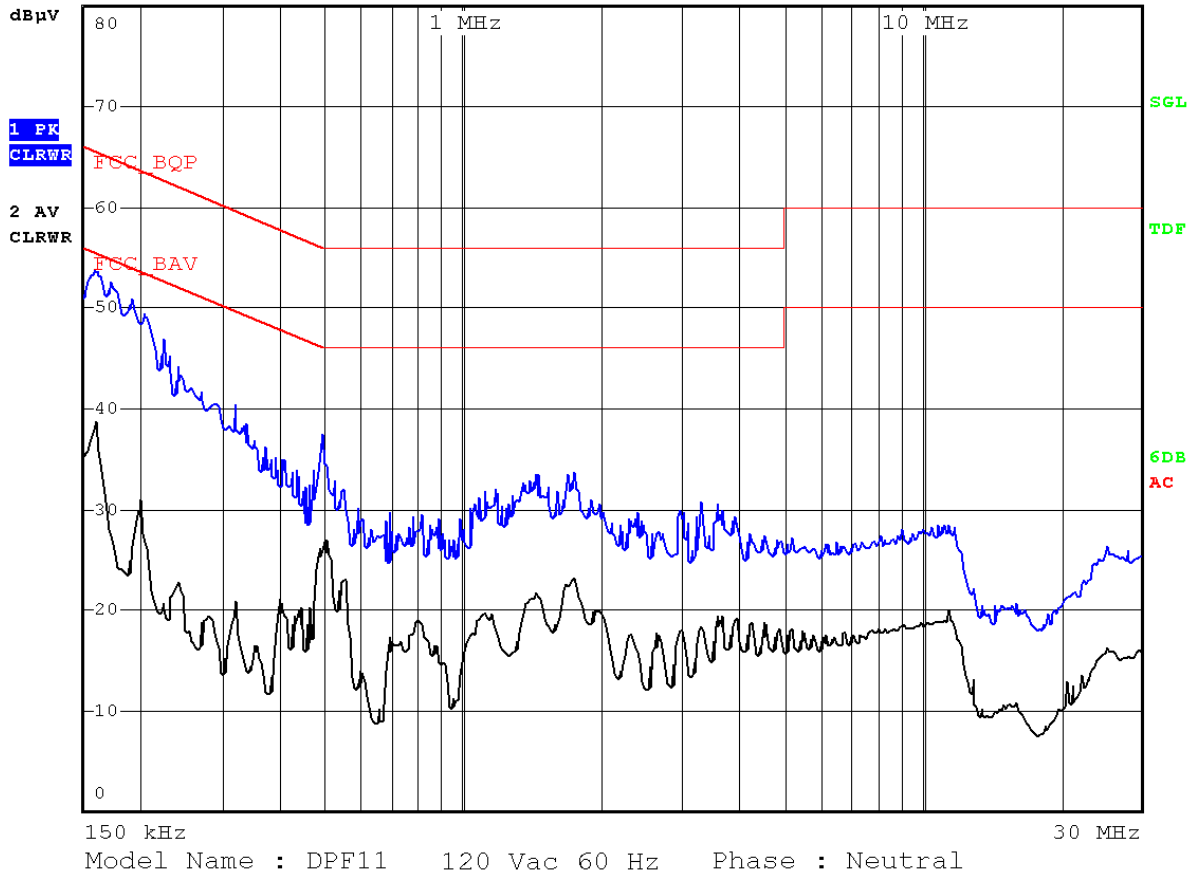

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.157	38.49	28.40	65.62	55.62	9.56	0.05	48.10	38.01	17.52	17.61
0.189	32.65	17.40	64.08	54.08	9.56	0.04	42.25	27.00	21.83	27.08
0.319	21.59	10.49	59.73	49.73	9.56	0.05	31.20	20.10	28.54	29.64
0.495	21.24	16.72	56.08	46.08	9.56	0.05	30.85	26.33	25.24	19.76
1.455	17.23	11.74	56.00	46.00	9.57	0.08	26.88	21.39	29.12	24.61
1.753	20.01	13.20	56.00	46.00	9.57	0.09	29.67	22.86	26.33	23.14



## Peak Output Power

### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Power Meter	Agilent	N1911A/ MY53280018	Aug. 07, 2015
2	Wideband Power Sensor	Agilent	N1921A/ MY52300024	Aug. 06, 2015
3	RF ROOM			


Note : All equipment upon which need to calibrated are with calibration period of 1 year.

### ◆ Limits

The maximum peak output power of the intentional radiator shall not exceed the following :

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz : 1Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, is transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs(b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### ◆ Test Setup

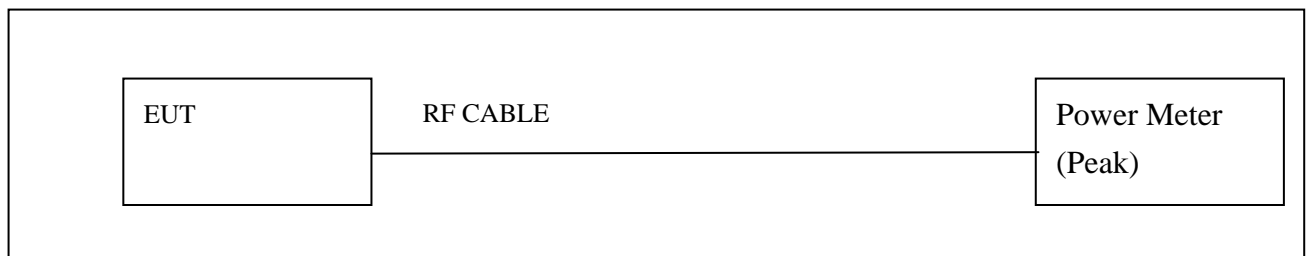

### ◆ Test Procedure

1. The transmitter output is connected to the Power meter.  
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v03r02.  
9.1.2 PKPM1 Peak power meter method.



### Peak Output Power Test result

Product	DPF11
Test Method	PKPM1 Peak Power Meter method
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

802.11b Mode		Rate (Mbps)	Measure Power (dBm)	Limit (dBm)
Frequency (MHz)	Channel No.			
2412	1	1 Mbps	15.10	1Watt=30dBm
		2 Mbps	15.16	1Watt=30dBm
		5.5 Mbps	15.14	1Watt=30dBm
		11 Mbps	15.15	1Watt=30dBm
2437	6	1 Mbps	15.41	1Watt=30dBm
		2 Mbps	15.43	1Watt=30dBm
		5.5 Mbps	15.42	1Watt=30dBm
		11 Mbps	15.44	1Watt=30dBm
2462	11	1 Mbps	14.95	1Watt=30dBm
		2 Mbps	14.98	1Watt=30dBm
		5.5 Mbps	14.85	1Watt=30dBm
		11 Mbps	15.10	1Watt=30dBm

Note : Measurement Power = reading level + correct factor



802.G Mode		Rate (Mbps)	Measure Power (dBm)	Limit (dBm)
Frequency (MHz)	Channel No.			
2412	1	6 Mbps	16.32	1Watt=30dBm
		9 Mbps	16.15	1Watt=30dBm
		12 Mbps	15.99	1Watt=30dBm
		18 Mbps	15.98	1Watt=30dBm
		24 Mbps	16.30	1Watt=30dBm
		36 Mbps	16.02	1Watt=30dBm
		48 Mbps	16.03	1Watt=30dBm
		54 Mbps	16.04	1Watt=30dBm
2437	6	6 Mbps	16.70	1Watt=30dBm
		9 Mbps	16.39	1Watt=30dBm
		12 Mbps	16.64	1Watt=30dBm
		18 Mbps	16.18	1Watt=30dBm
		24 Mbps	16.19	1Watt=30dBm
		36 Mbps	16.31	1Watt=30dBm
		48 Mbps	16.47	1Watt=30dBm
		54 Mbps	16.52	1Watt=30dBm
2462	11	6 Mbps	15.90	1Watt=30dBm
		9 Mbps	15.70	1Watt=30dBm
		12 Mbps	15.53	1Watt=30dBm
		18 Mbps	15.52	1Watt=30dBm
		24 Mbps	15.55	1Watt=30dBm
		36 Mbps	15.62	1Watt=30dBm
		48 Mbps	15.66	1Watt=30dBm
		54 Mbps	15.57	1Watt=30dBm

Note : Measurement Power = reading level + correct factor



802.N Mode (HT20)		Rate (Mbps)	Measure Power (dBm)	Limit (dBm)
Frequency (MHz)	Channel No.			
2412	1	6.5 Mbps	15.14	1Watt=30dBm
		13 Mbps	14.75	1Watt=30dBm
		19.5 Mbps	14.61	1Watt=30dBm
		26 Mbps	14.91	1Watt=30dBm
		39 Mbps	14.54	1Watt=30dBm
		52 Mbps	15.23	1Watt=30dBm
		58.5 Mbps	14.63	1Watt=30dBm
		65 Mbps	14.70	1Watt=30dBm
2437	6	6.5 Mbps	14.95	1Watt=30dBm
		13 Mbps	14.21	1Watt=30dBm
		19.5 Mbps	14.51	1Watt=30dBm
		26 Mbps	14.44	1Watt=30dBm
		39 Mbps	14.13	1Watt=30dBm
		52 Mbps	14.60	1Watt=30dBm
		58.5 Mbps	14.38	1Watt=30dBm
		65 Mbps	14.20	1Watt=30dBm
2462	11	6.5 Mbps	14.17	1Watt=30dBm
		13 Mbps	13.49	1Watt=30dBm
		19.5 Mbps	13.90	1Watt=30dBm
		26 Mbps	13.83	1Watt=30dBm
		39 Mbps	13.59	1Watt=30dBm
		52 Mbps	13.87	1Watt=30dBm
		58.5 Mbps	13.65	1Watt=30dBm
		65 Mbps	13.79	1Watt=30dBm

Note : Measurement Power = reading level + correct factor



## 6dB BandWidth


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May.08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

### ◆ Test Setup

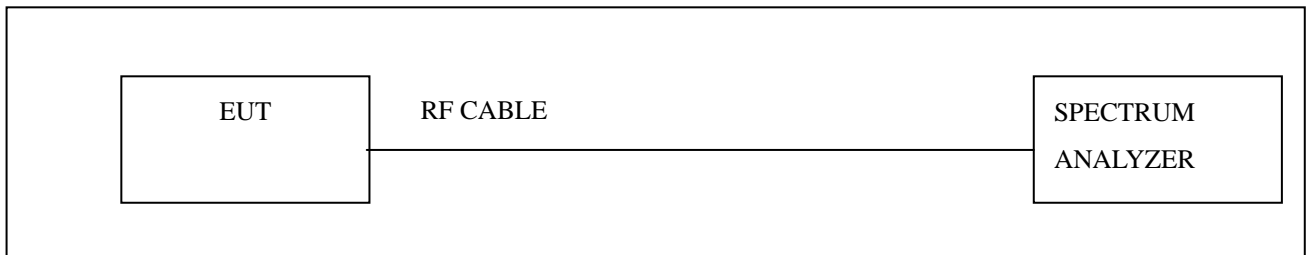

### ◆ Limits

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions :

(2) systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### ◆ Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02. 8.0 DTS bandwidth 8.1 Option 1.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set the spectrum analyzer`s resolution bandwidth (RBW) = 100KHz.  
Set the Video bandwidth (VBW) > 3 \*RBW.  
Set Peak Detector, max hold trace mode and auto couple sweep.
4. Measure the Maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (Upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.





### 6dB Bandwidth Test result

Product	DPF11
Test Method	DTS bandwidth 8.1 Option 1
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted


802.11b				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (KHz)	Result
Low	2412	8.66	>500	Pass
Mid	2437	8.54	>500	Pass
High	2462	8.56	>500	Pass

Low(2412 MHz)

Mid(2437 MHz)

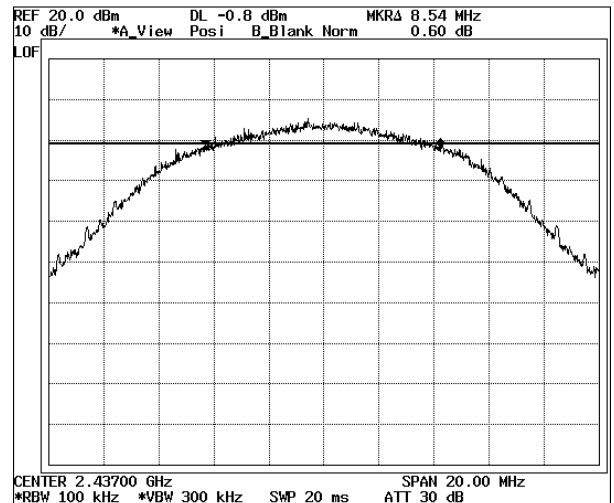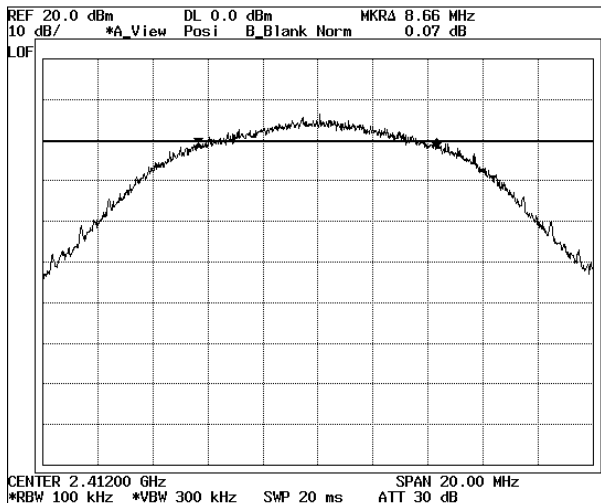

High(2462 MHz)

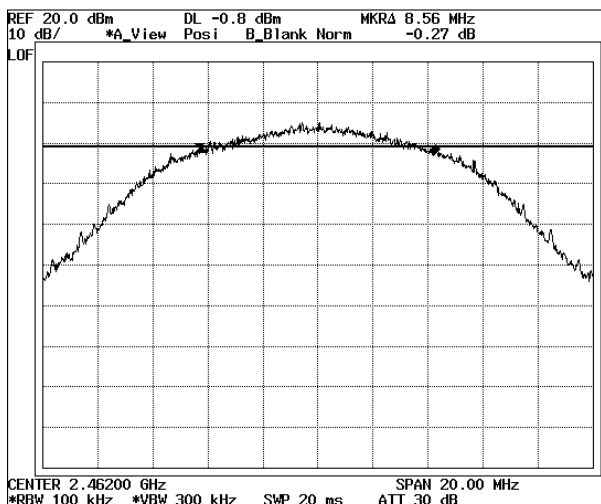







802.11g				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (KHz)	Result
Low	2412	16.50	>500	Pass
Mid	2437	16.46	>500	Pass
High	2462	16.62	>500	Pass


Low(2412 MHz)

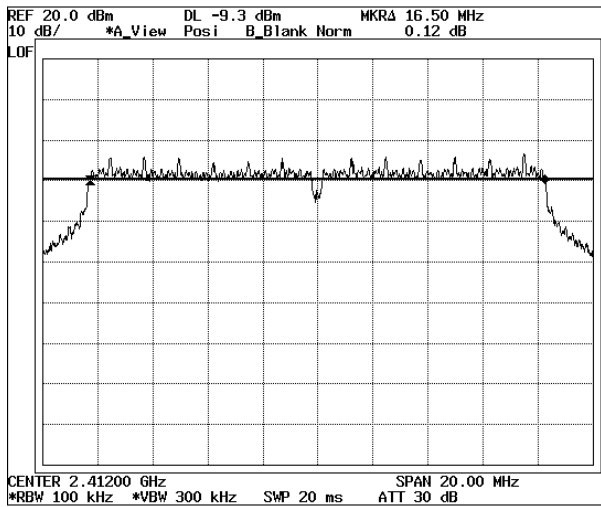

Mid(2437 MHz)

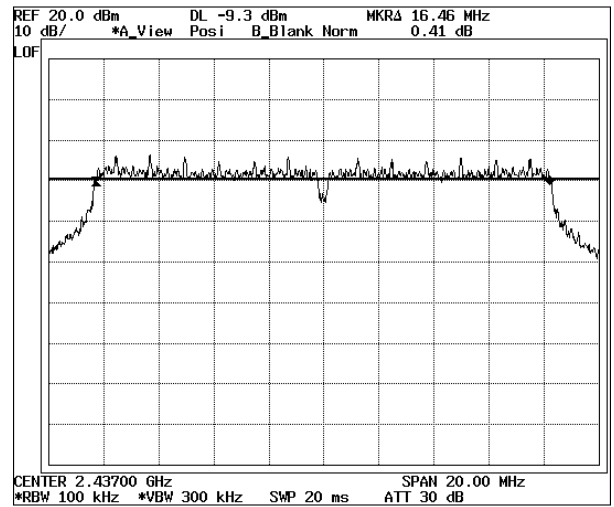

High(2462 MHz)

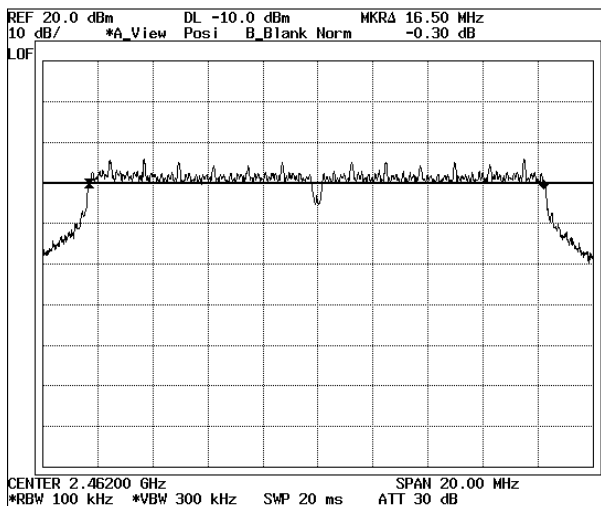


Note : Measurement level = reading level + correct factor




802.11n(ht20)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (KHz)	Result
Low	2412	17.70	>500	Pass
Mid	2437	17.70	>500	Pass
High	2462	17.66	>500	Pass


Low(2412 MHz)

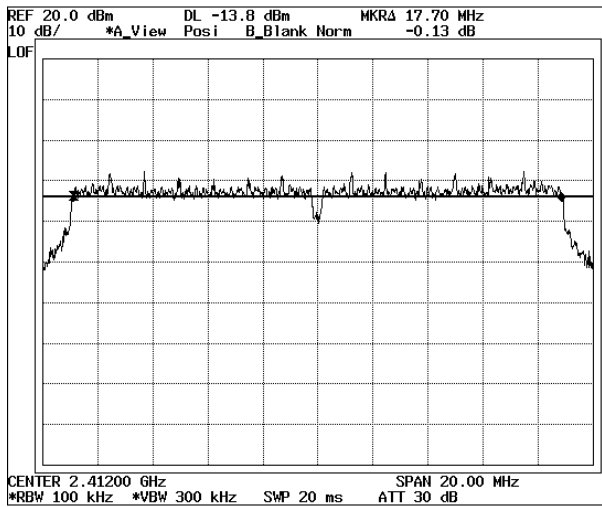

Mid(2437 MHz)

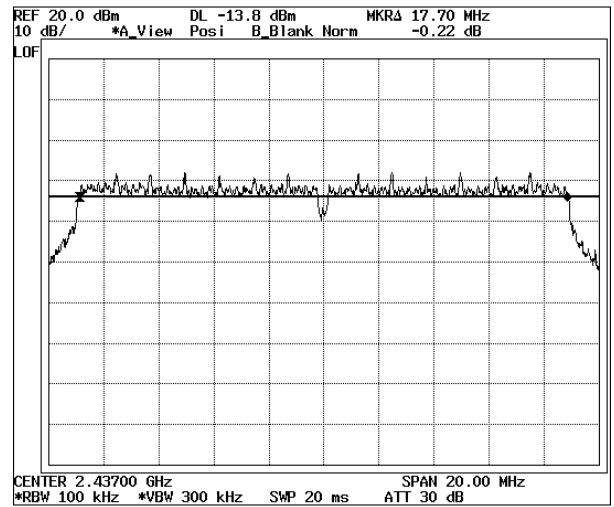

High(2462 MHz)

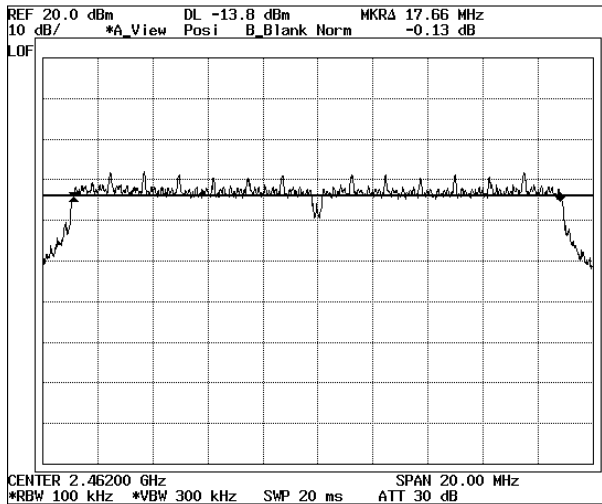

Note : Measurement level = reading level + correct factor



## Power Spectral Density


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

### ◆ Test Setup

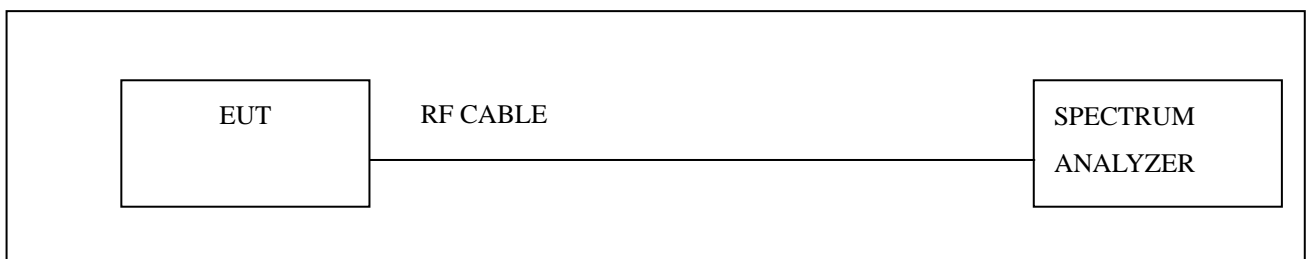

### ◆ Limits

Section 15.247 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (v) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### ◆ Test Procedure

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 DTS Meas Guidance v03r02. 10.2 Method PDPSD (peak PSD).

Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental RBW.

(VBW  $\geq$  3 xRBW, Sweep time = auto couple, Trace mode = Max hold)

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/ 3 kHz.





## PSD Test result

Product	DPF11
Test Method	Method PKPSD (peak PSD)
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted


802.11b				
Channel	Frequency (MHz)	PSD/3KHz (dBm)	Limit (dBm)	Result
Low	2412	-9.41	< 8	Pass
Mid	2437	-9.31	< 8	Pass
High	2462	-8.84	< 8	Pass

Low(2412 MHz)

Mid(2442 MHz)

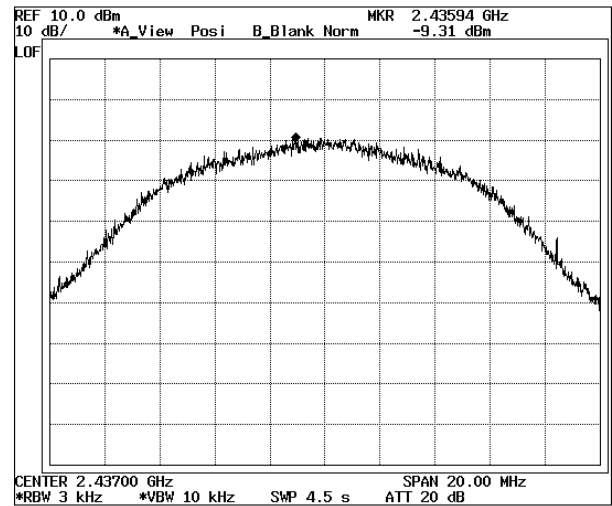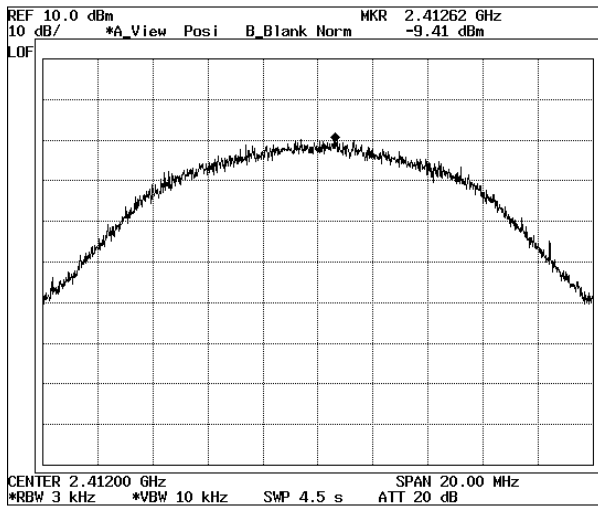


High(2462 MHz)

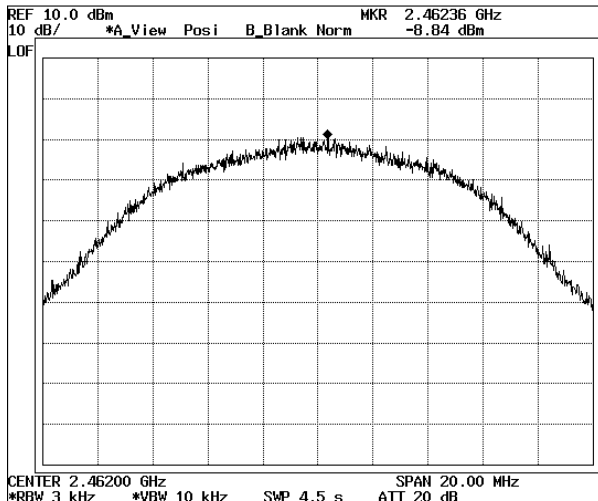




802.11g				
Channel	Frequency (MHz)	PSD/3KHz (dBm)	Limit (dBm)	Result
Low	2412	-18.15	< 8	Pass
Mid	2437	-17.47	< 8	Pass
High	2462	-17.69	< 8	Pass


Low(2412 MHz)

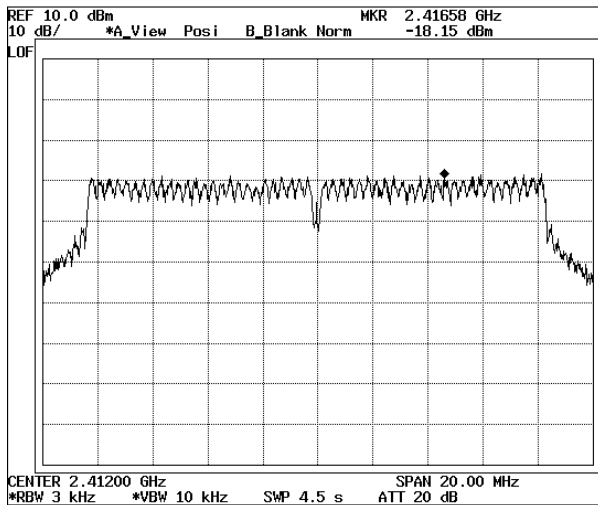

Mid(2442 MHz)

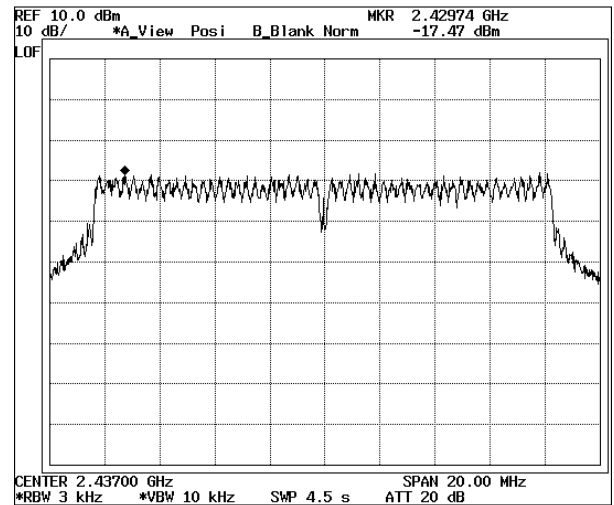

High(2462 MHz)

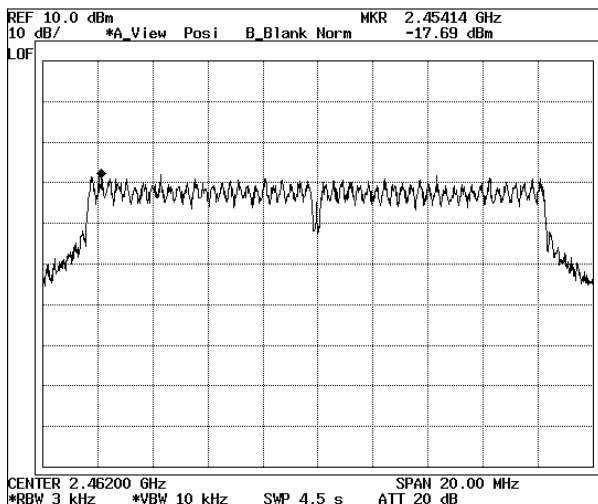


Note : Measurement level = reading level + correct factor




802.11n(ht20)				
Channel	Frequency (MHz)	PSD/3KHz (dBm)	Limit (dBm)	Result
Low	2412	-21.25	< 8	Pass
Mid	2437	-20.94	< 8	Pass
High	2462	-21.53	< 8	Pass


Low(2412 MHz)

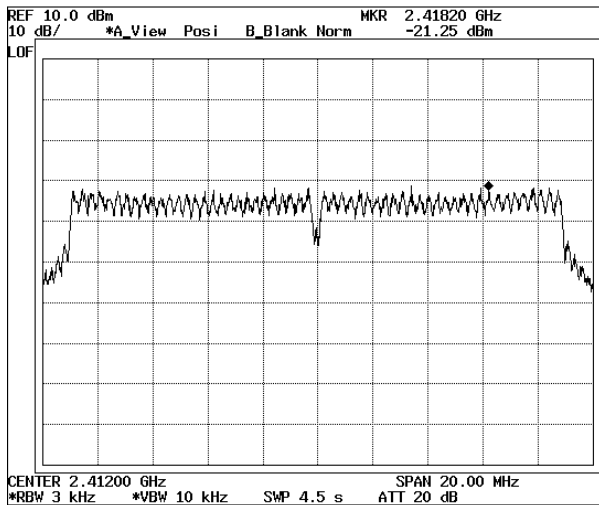

Mid(2437 MHz)

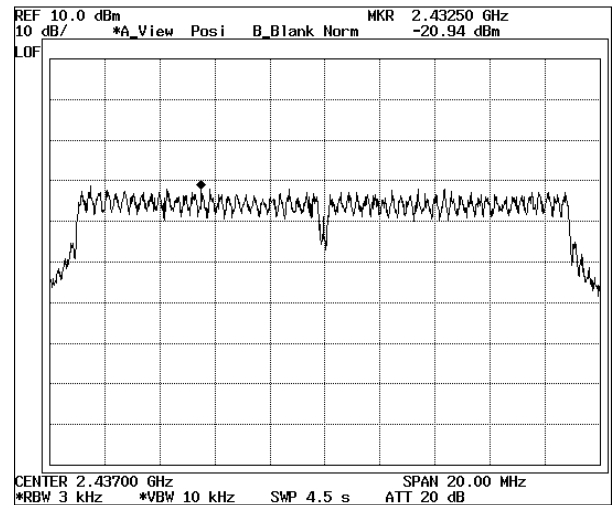

High(2462 MHz)

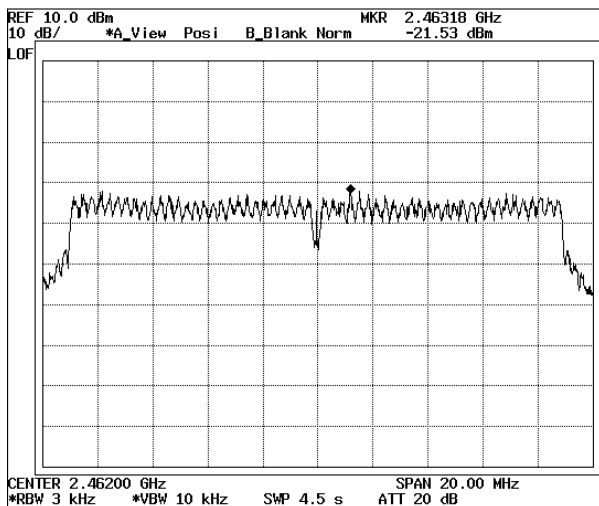

Note : Measurement level = reading level + correct factor



## 99% Occupied Bandwidth


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

### ◆ Test Setup

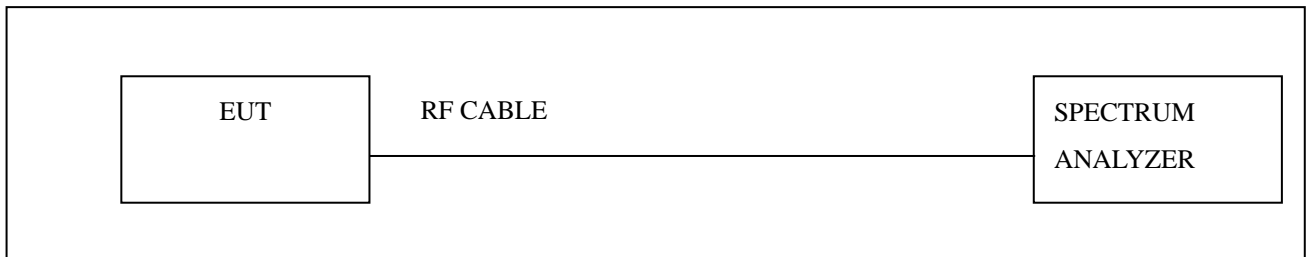

### ◆ Limits

None; for reporting purposes only

### ◆ Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the Span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.





## 99% Occupied Bandwidth Test result

Product	DPF11
Test Item	99% Occupied Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted


802.11b		
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)
Low	2412	12.78
Mid	2437	12.75
High	2462	12.75

Low(2412 MHz)

Mid(2442 MHz)

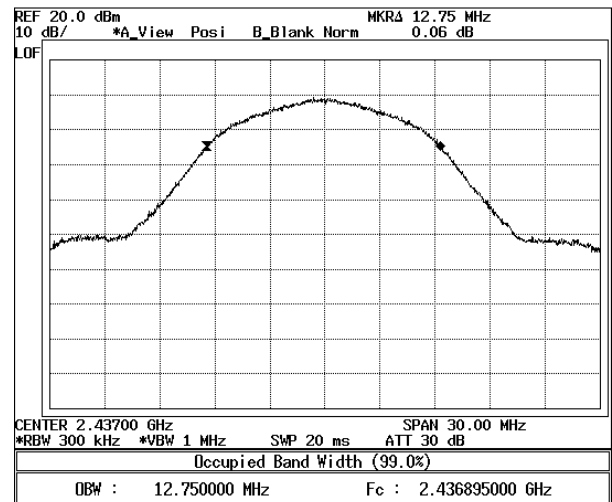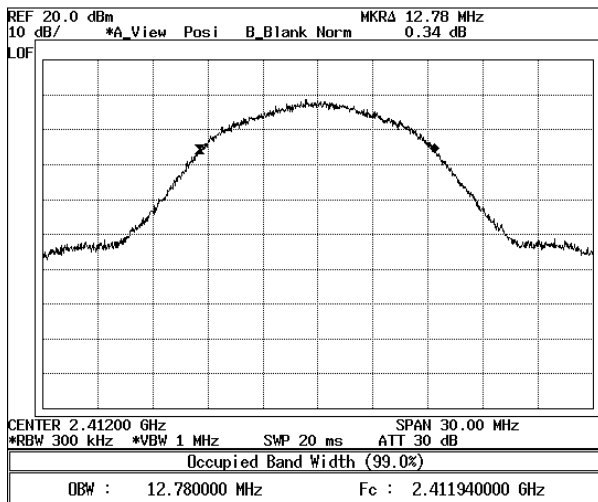

High(2462 MHz)

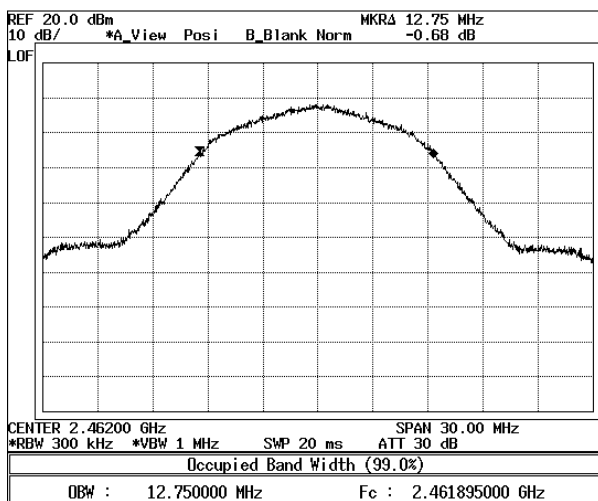







802.11g		
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)
Low	2412	17.49
Mid	2437	17.49
High	2462	17.49


Low(2412 MHz)

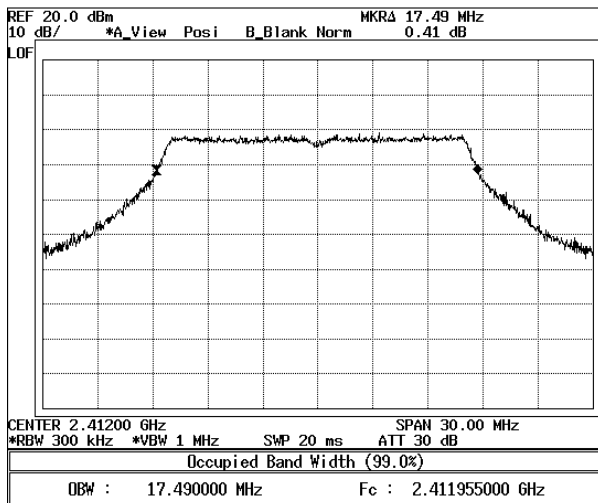

Mid(2442 MHz)

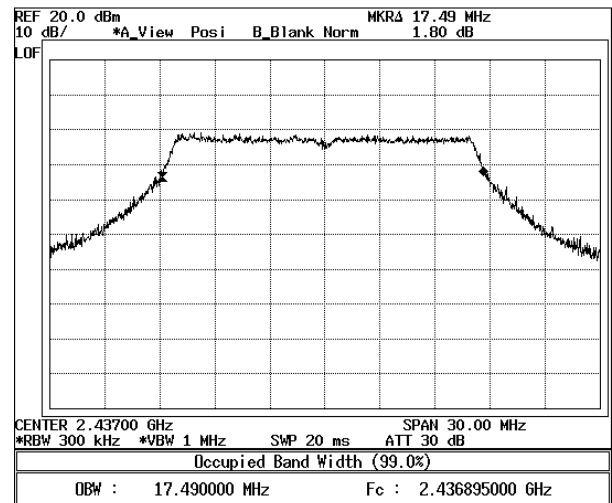

High(2462 MHz)

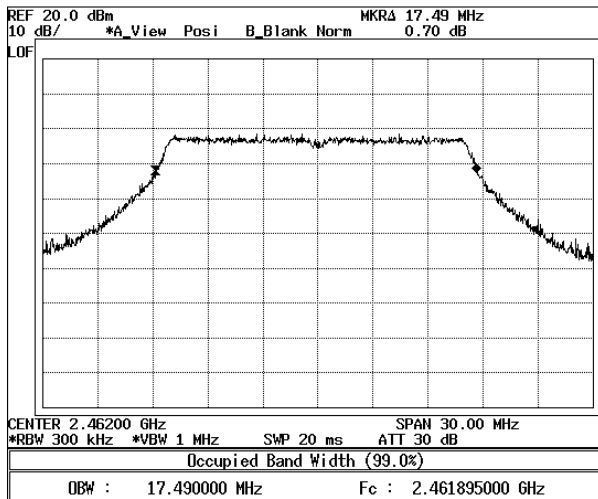


Note : Measurement level = reading level + correct factor




802.11n(ht20)		
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)
Low	2412	18.45
Mid	2437	18.39
High	2462	18.36


Low(2412 MHz)

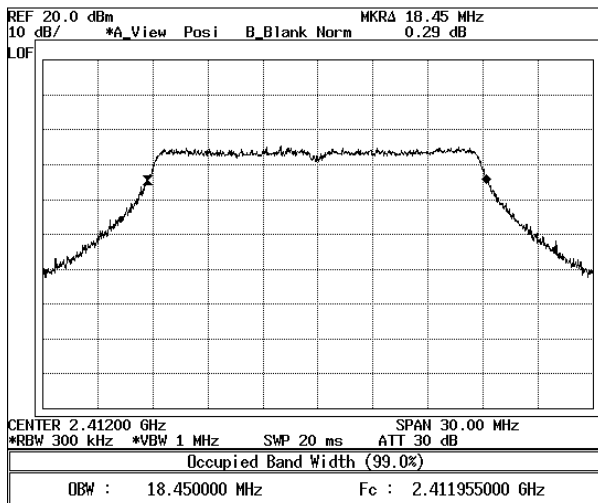

Mid(2437 MHz)

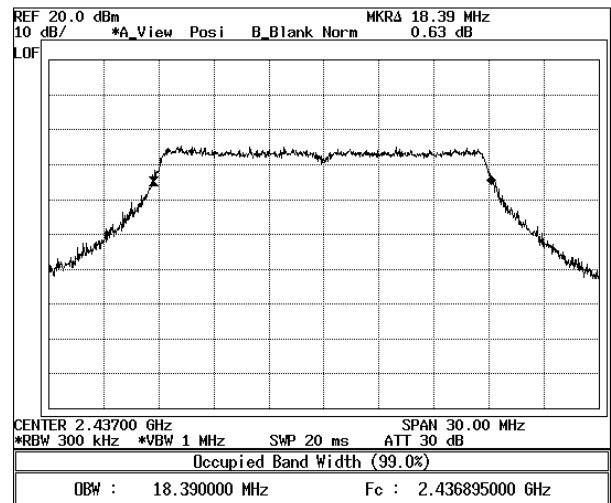

High(2462 MHz)

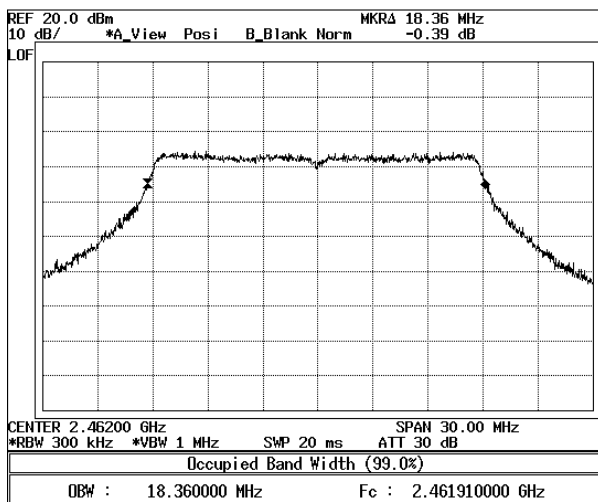

Note : Measurement level = reading level + correct factor



## Conducted Spurious Emissions & Band Edge

### ◆ TEST Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : 1. The calibration interval of the above test instruments is 12 months  
and the calibrations are traceable to RRL, KRISS, KTL and HCT.

### ◆ Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio Frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within The band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a)(see Section 15.205(c)).

### ◆ Test Setup



### ◆ Test Procedure

- 1.The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas Guidance v03r02.
  - 11.2 Reference level measurement.
  - 11.3 Emission level measurement.





## Spurious Emission Test result



Product	DPF11
Test Method	11.2 Reference level measurement 11.3 Emission level measurement (30 MHz ~ 25 GHz)
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

### ● 802.11b

Low(2412 MHz)

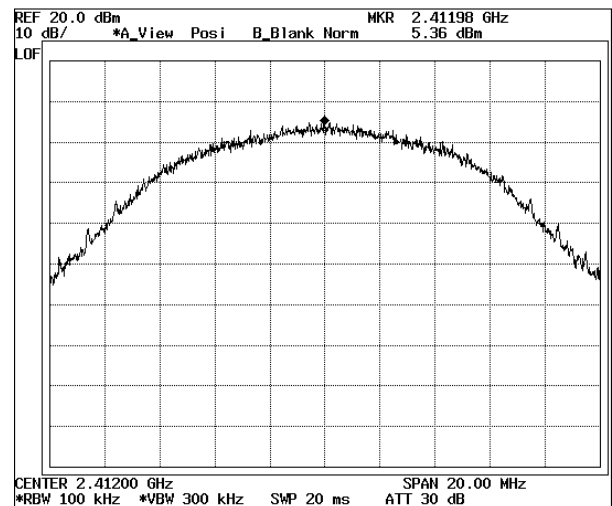
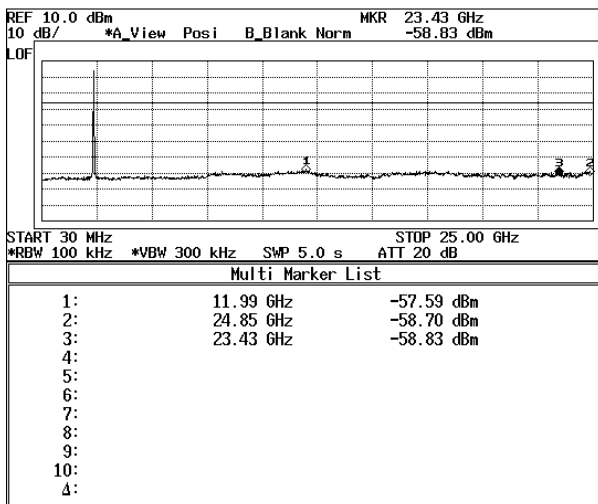


Mid(2437 MHz)

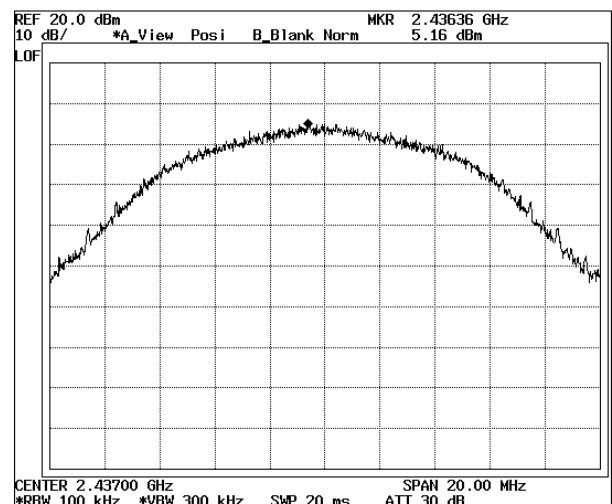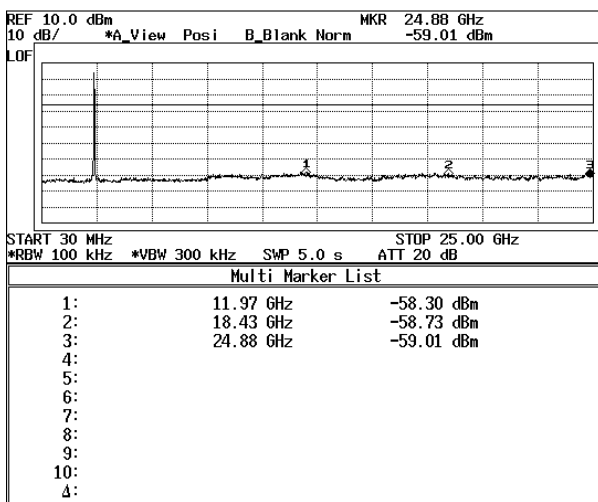





High(2462 MHz)

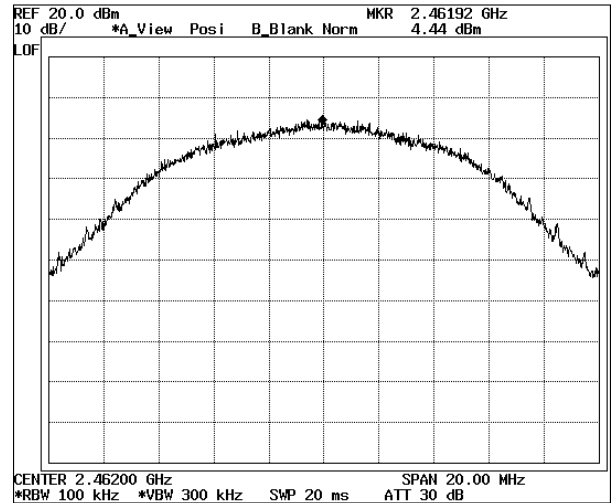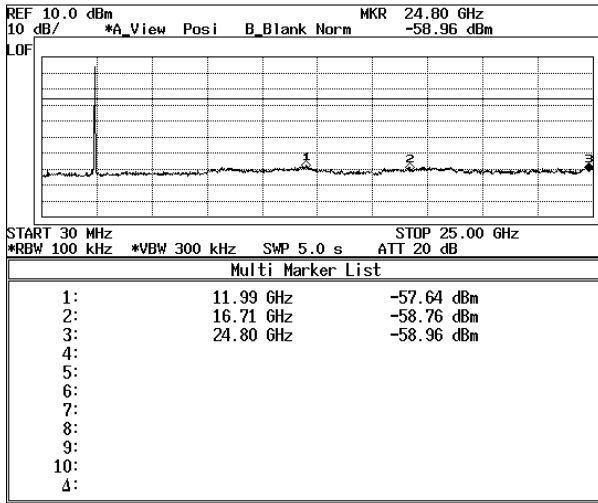

Note : Measurement level = reading level + correct factor



● 802.11g

Low(2412 MHz)

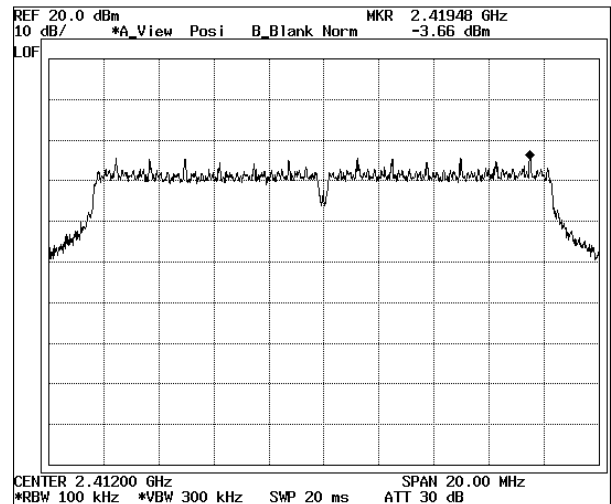
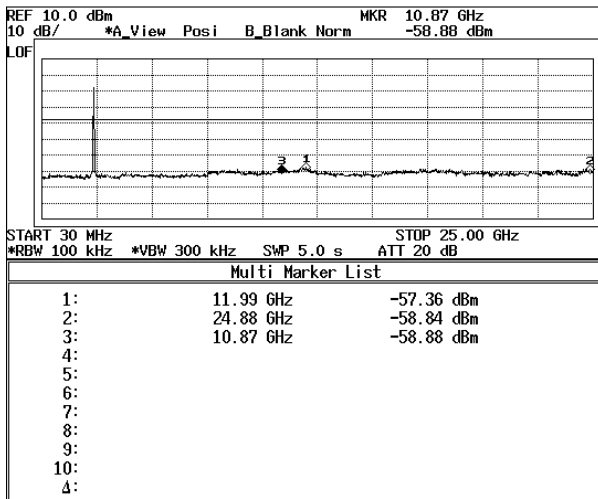




Mid(2437 MHz)

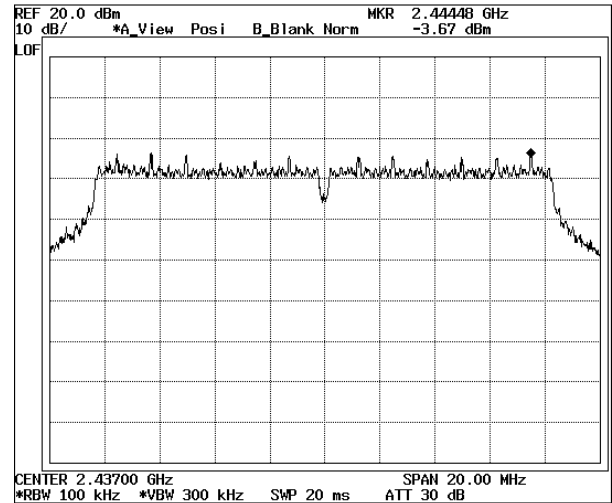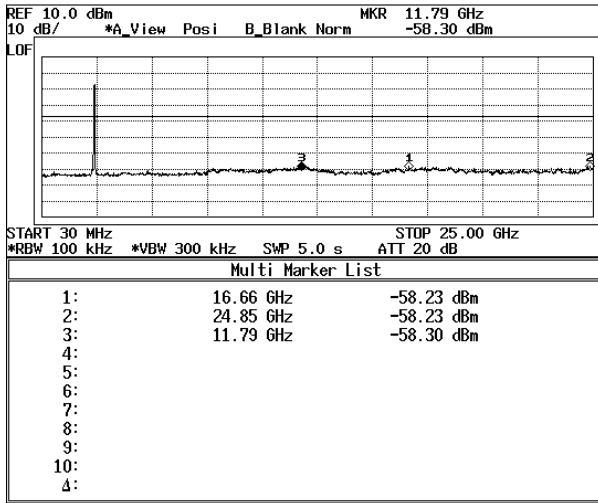

High(2462 MHz)

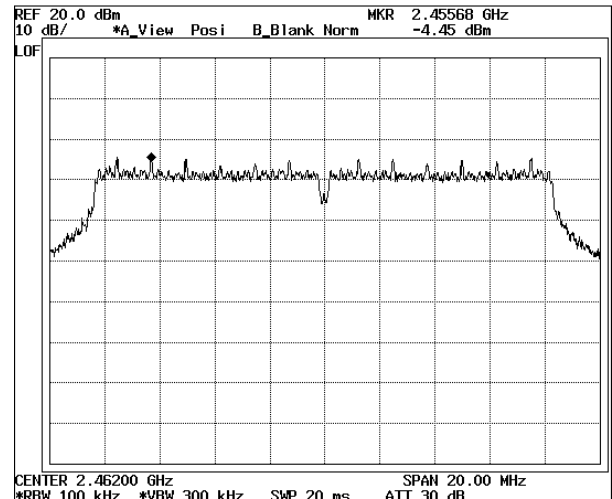
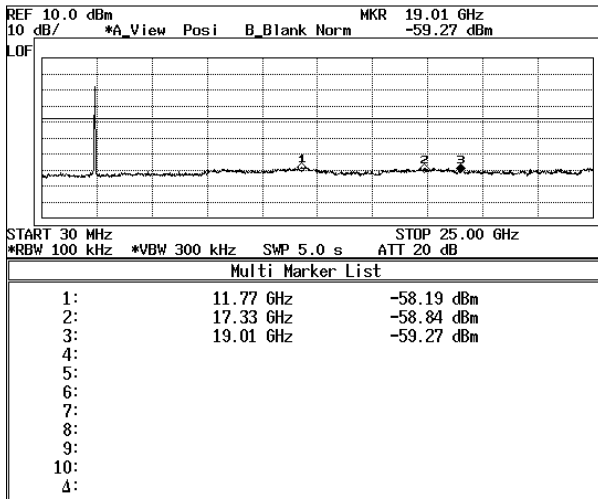


Note : Measurement level = reading level + correct factor





● 802.11n(ht20)

Low (2412 MHz)

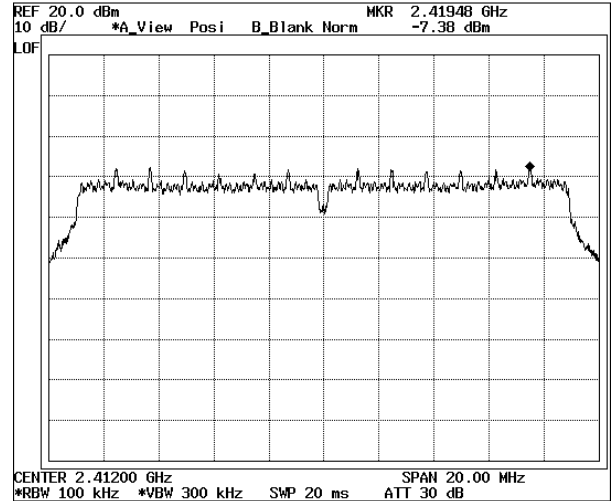
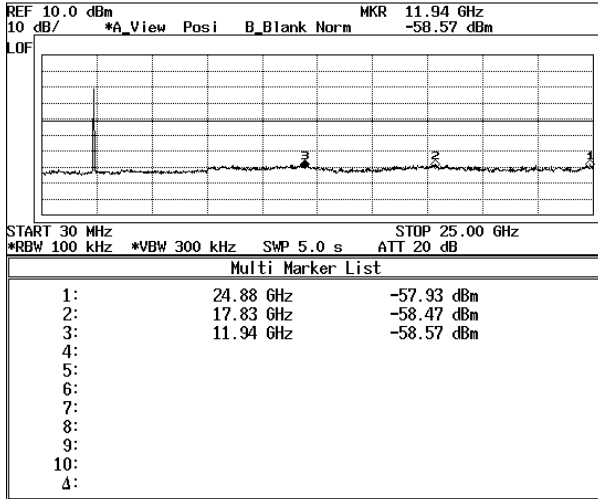


Mid (2437 MHz)

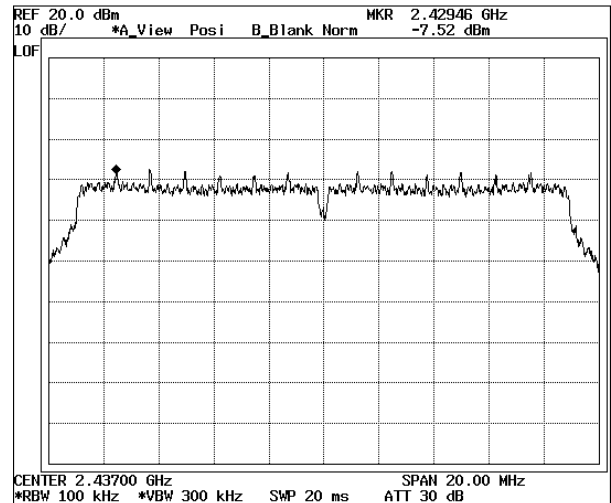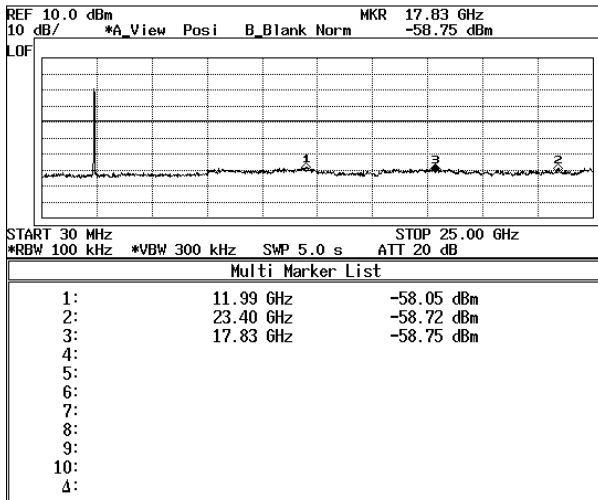



High(2462 MHz)

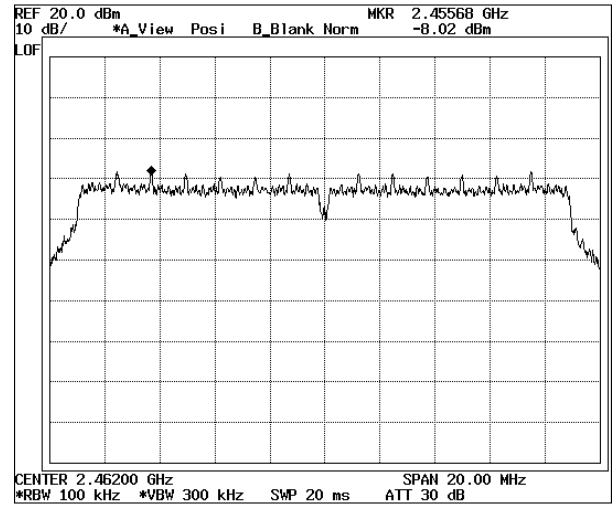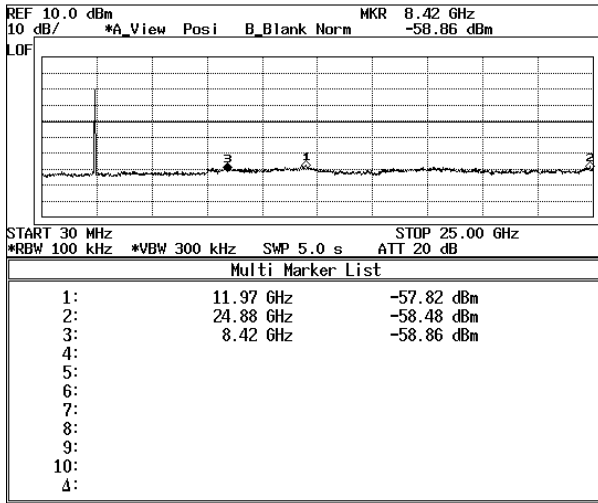

Note : Measurement level = reading level + correct factor






## Band Edge Test result


Product	DPF11
Test Item	Band Edge
Test Mode	Transmit Low/High
Test Site	RF Room
Measurement Method	Conducted

### ● 802.11b

Low (2412 MHz)

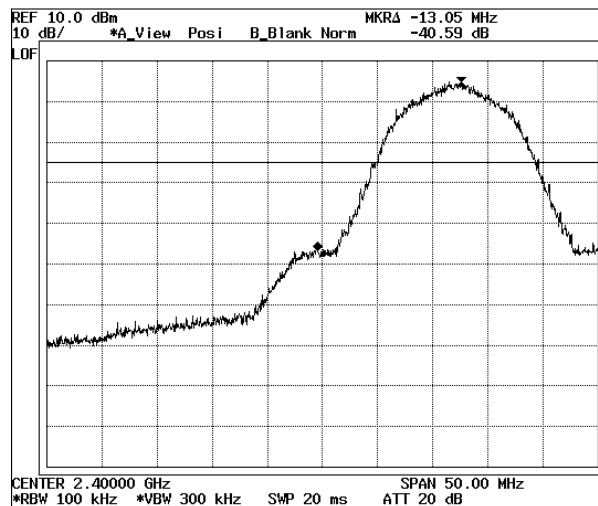

High (2462 MHz)

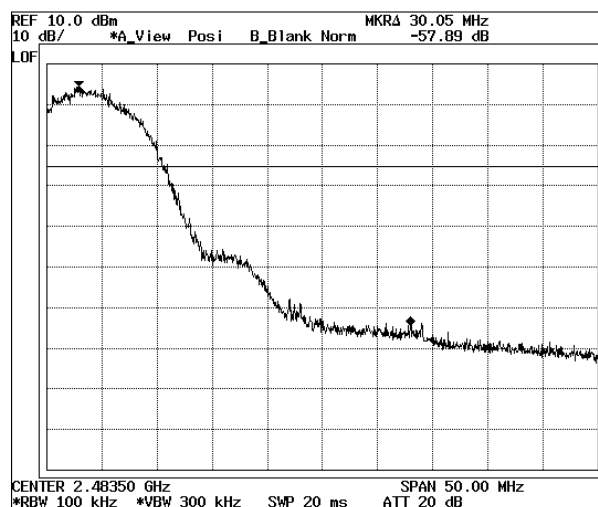


Note : Measurement level = reading level + correct factor




● 802.11g

Low (2412 MHz)

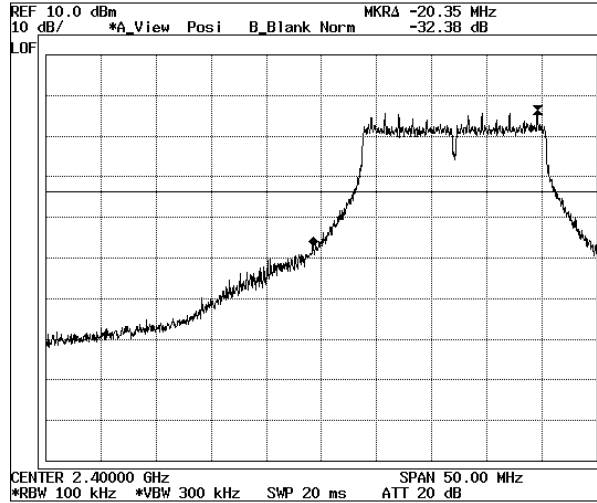

High (2462 MHz)

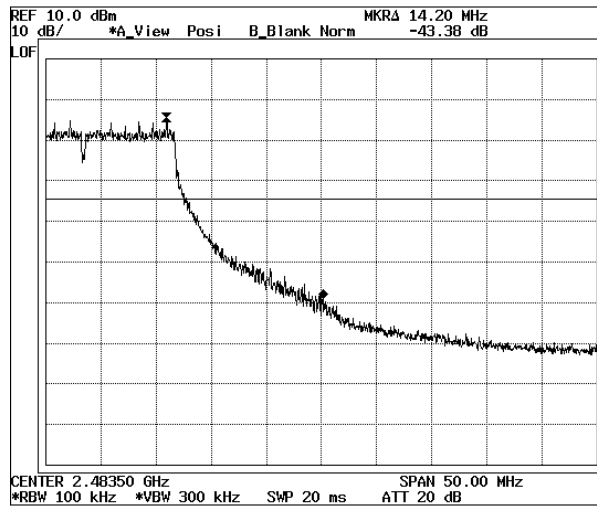


Note : Measurement level = reading level + correct factor




● 802.11n(ht20)

Low (2412 MHz)

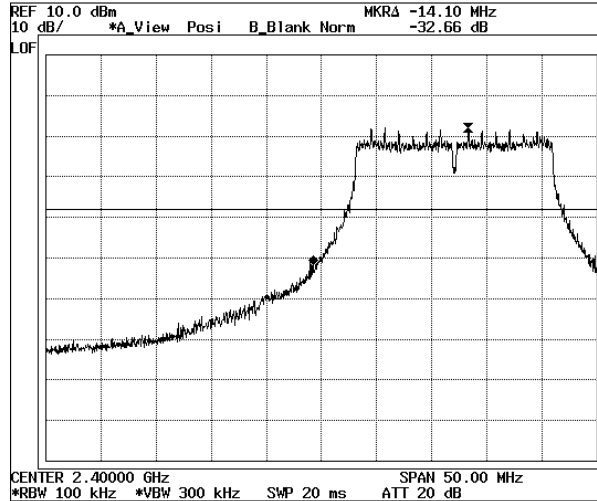

High (2462 MHz)

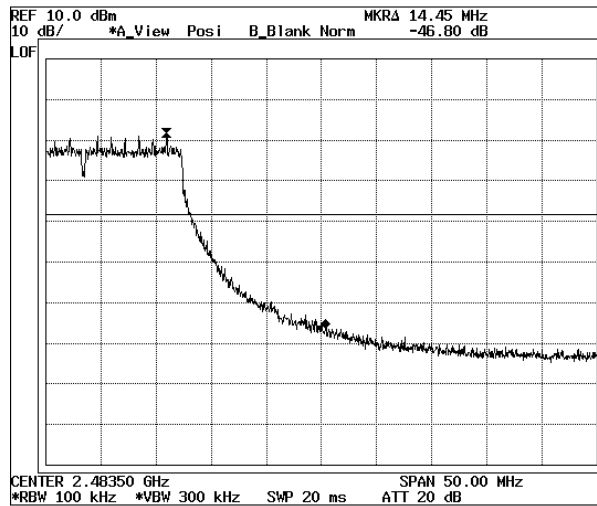

Note : Measurement level = reading level + correct factor




## Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120kHz.


### Procedure of Test

Preliminary measurements were made at 3 meter using bi-log antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using bi-log antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission. (The bandwidth below 1GHz setting on the field strength meter is 120KHz and above 1GHz is 1MHz.)

Under 1GHz Test Setup:

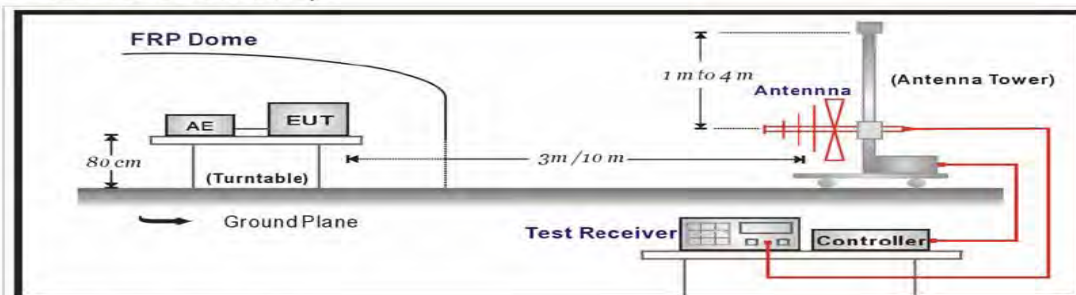


Above 1GHz Test Setup:

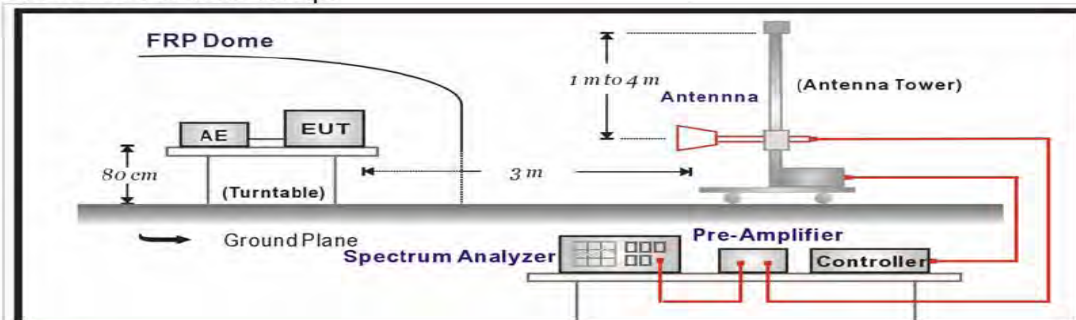



**Below 30 MHz**

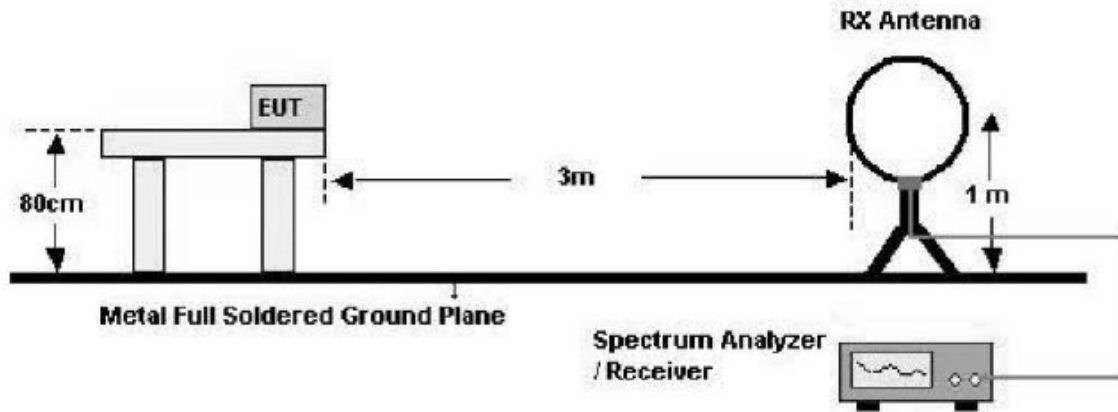

**Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, Shall be attenuated by at least 20dB below the level of the fundamental or to the General radiated emission limits in paragraph 15.209, whichever is the lesser attenuation:

FCC Part 15 Subpart C Section 15.209 Limits		
Frequency(MHz)	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}(3\text{m})$
0.009-0.490	$2400/F(\text{KHz})$ at 300 m	$20\log 2400/F(\text{KHz})+80$
0.490-1.705	$24000/F(\text{KHz})$ at 30m	$20\log 24000/F(\text{KHz})+40$
1.705-30	30 at 30 m	49.5
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1.  $\text{RF Voltage}(\text{dB}\mu\text{v})=20\log \text{RF Voltage}(\mu\text{v})$
2.  $\text{dB}\mu\text{V}/\text{m} = \text{ERP}(\text{dBm})+106.92 \text{ dB} + 20\log(10\text{m}/3\text{m}) + 2.15\text{dB}(\text{conversion Factor for E.I.R.P})$
3. In the Above Table, the tighter limit applies at the band edges.
4. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.209



## Radiated Spurious Emissions & Restricted bands Emissions

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Due for Cal	Serial Number
EMI Receiver	ESCS30	Rohde & Schwarz	May. 08, 2015	100171
EMI Receiver	ESCI7	Rohde & Schwarz	Jul. 21, 2015	100872
SPECTRUM ANALYZER	R3273	ADVANTEST	May. 08, 2015	110600587
Loop Antenna	HFH2-Z2	Rohde & Schwarz	Oct. 15, 2016	8620771017
Log-bicon Antenna	VULB9160	Schwarz beck	Jun. 03, 2015	3071
HORN-Antenna	3115	EMCO	Dec. 04, 2015	9012-3602
BROADBAND HORN-Antenna	BBHA9170	Schwarzbeck	Sep. 06, 2015	BBHA9170318
PRE AMPLIFIER	8449B OPT H02	HP	Oct. 06, 2015	3008A0530

Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRL, KRISS, KTL and HCT.  
2. The calibration interval of horn ant. and loop ant. is 24 months

◆ Test Conditions

Temperature ( 20.0 ± 0.2 ) °C  
Humidity ( 41.9 ± 0.2 ) % R.H.  
Atmosphere ( 1012 ) mbar

◆ Test Area Full-Anechoic Room (3m)

◆ Test Date November 05, 2014

**Note :**

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

Where Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)



## Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector with specified bandwidth.
5. The result was 20dB lower than the limit line 15.31(o) was not reported.

### Radiated Emissions Result

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB

Note : The measured value have enough margin over 20dB than the limit, therefore they are not reported.



### Radiated Spurious Emissions Result

[Applicable]

**Spurious Emissions Test (Below 1GHz) :**

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types and antenna ports(if EUT with antenna diversity architecture), and X,Y,Z Axis.

EUT	DPF11	PROBE	Below 1 GHz
POWER	DC 7.4 V	NOTE	802.11g Low channel

Frequency MHz	Reading dBuV	P (H,V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
42.613	20.50	V	11.75	1.06	40.00	33.31	-6.69
99.846	21.80	V	8.56	1.66	43.50	32.02	-11.48
166.775	17.60	H	12.24	2.11	43.50	31.95	-11.55
*528.581	19.30	H	18.52	3.88	46.00	41.70	-4.30
842.852	14.20	V	22.45	4.81	46.00	41.46	-4.54

EUT	DPF11	PROBE	Below 1 GHz
POWER	DC 7.4 V	NOTE	802.11g Mid channel

Frequency MHz	Reading dBuV	P (H,V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
56.192	20.70	H	11.19	1.27	40.00	33.16	-6.84
90.148	26.20	V	7.53	1.54	43.50	35.27	-8.23
147.376	19.00	V	12.52	2.00	43.50	33.52	-9.98
199.756	18.50	H	9.14	2.45	43.50	30.09	-13.41
362.713	18.30	V	14.50	3.19	46.00	35.99	-10.01
*729.361	15.60	V	21.03	4.56	46.00	41.19	-4.81





EUT	DPF11	PROBE	Below 1 GHz
POWER	DC 7.4 V	NOTE	802.11g High channel

Frequency MHz	Reading dBuV	P (H,V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
*42.615	23.20	V	11.75	1.06	40.00	36.01	-3.99
54.253	18.90	H	11.41	1.25	40.00	31.56	-8.44
99.849	12.60	H	8.56	1.66	43.50	22.82	-20.68
150.281	17.40	V	12.60	2.02	43.50	32.02	-11.48
299.662	17.10	H	12.92	2.92	46.00	32.94	-13.06
576.110	14.20	V	19.25	4.12	46.00	37.57	-8.43

*Note :*

- 1. Remark "\*" means that the data is the worst emission level.*
- 2. 802.11g mode is the worst case based on peak output power.*
- 3. All reading levels are Quasi-peak value.*
- 4. Measurement level = reading level + correct factor*



**Spurious Emissions Test (Above 1GHz) :**

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types and antenna ports(if EUT with antenna diversity architecture), and X,Y,Z Axis.

● **802.11b**

EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	1 Channel (2412 MHz)
MODE	802.11b		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.082	33.99	21.65	H	74.00	54.00	40.01	32.35
3.001	43.28	30.55	H	74.00	54.00	30.72	23.45
4.835	46.03	34.51	H	74.00	54.00	27.97	19.49
5.927	45.57	34.19	H	74.00	54.00	28.43	19.81
8.026	48.12	36.69	H	74.00	54.00	25.88	17.31
1.701	40.29	25.19	V	74.00	54.00	33.71	28.81
3.906	44.16	31.58	V	74.00	54.00	29.84	22.42
4.834	62.93	45.28	V	74.00	54.00	11.07	8.72
5.612	45.94	34.20	V	74.00	54.00	28.06	19.80

EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	6 Channel (2437 MHz)
MODE	802.11b		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.013	34.08	21.94	H	74.00	54.00	39.92	32.06
3.004	43.93	30.33	H	74.00	54.00	30.07	23.67
3.931	43.25	31.67	H	74.00	54.00	30.75	22.33
4.885	48.81	36.33	H	74.00	54.00	25.19	17.67
1.701	40.81	26.02	V	74.00	54.00	33.19	27.98
4.372	43.66	32.22	V	74.00	54.00	30.34	21.78
4.885	64.29	46.29	V	74.00	54.00	9.71	7.71
5.401	45.16	33.30	V	74.00	54.00	28.84	20.70



EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	11 Channel (2462 MHz)
MODE	802.11b		

### Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.723	37.35	23.08	H	74.00	54.00	36.65	30.92
3.005	43.86	30.45	H	74.00	54.00	30.14	23.55
4.932	48.12	35.72	H	74.00	54.00	25.88	18.28
5.171	45.76	33.53	H	74.00	54.00	28.24	20.47
1.702	39.20	25.71	V	74.00	54.00	34.80	28.29
3.904	43.37	31.71	V	74.00	54.00	30.63	22.29
4.932	64.64	47.98	V	74.00	54.00	9.36	6.02
5.145	45.21	34.24	V	74.00	54.00	28.79	19.76

Note : -Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

- The measured value from 6GHz to 25GHz have enough margin over 20dB than the limit, therefore they are not reported.

### ● 802.11g

EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	1 Channel (2412 MHz)
MODE	802.11g		

### Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.032	34.52	21.83	H	74.00	54.00	39.48	32.17
1.531	35.79	22.24	H	74.00	54.00	38.21	31.76
5.715	46.26	33.97	H	74.00	54.00	27.74	20.03
1.704	38.85	25.81	V	74.00	54.00	35.15	28.19
3.772	43.42	30.71	V	74.00	54.00	30.58	23.29
4.826	53.98	42.39	V	74.00	54.00	20.02	11.61
5.621	45.48	33.68	V	74.00	54.00	28.52	20.32



EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	6 Channel (2437 MHz)
MODE	802.11g		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.153	34.17	20.70	H	74.00	54.00	39.83	33.30
1.975	38.87	25.81	H	74.00	54.00	35.13	28.19
3.814	43.35	30.83	H	74.00	54.00	30.65	23.17
5.227	45.25	34.33	H	74.00	54.00	28.75	19.67
1.702	39.03	25.79	V	74.00	54.00	34.97	28.21
4.881	51.03	41.77	V	74.00	54.00	22.97	12.23
5.296	45.70	33.62	V	74.00	54.00	28.30	20.38
7.823	46.52	34.18	V	74.00	54.00	27.48	19.82

EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	11 Channel (2462 MHz)
MODE	802.11g		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.491	35.45	22.22	H	74.00	54.00	38.55	31.78
1.992	38.59	26.01	H	74.00	54.00	35.41	27.99
3.894	43.39	31.91	H	74.00	54.00	30.61	22.09
1.701	39.05	25.76	V	74.00	54.00	34.95	28.24
3.245	42.54	31.18	V	74.00	54.00	31.46	22.82
4.346	43.97	32.03	V	74.00	54.00	30.03	21.97
4.932	51.51	40.57	V	74.00	54.00	22.49	13.43
5.613	46.26	34.05	V	74.00	54.00	27.74	19.95

Note : -Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

- The measured value from 6GHz to 25GHz have enough margin over 20dB than the limit, therefore they are not reported.



● 802.11n(ht20)

EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	1 Channel (2412 MHz)
MODE	802.11n		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
3.004	44.42	30.31	H	74.00	54.00	29.58	23.69
3.902	43.06	31.57	H	74.00	54.00	30.94	22.43
4.431	43.70	31.38	H	74.00	54.00	30.30	22.62
5.207	45.41	34.06	H	74.00	54.00	28.59	19.94
1.703	39.35	25.77	V	74.00	54.00	34.65	28.23
3.195	42.42	30.86	V	74.00	54.00	31.58	23.14
4.832	48.16	37.02	V	74.00	54.00	25.84	16.98
5.714	45.74	34.11	V	74.00	54.00	28.26	19.89

EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	CHANNEL	6 Channel (2437 MHz)
MODE	802.11n		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.284	34.02	20.35	H	74.00	54.00	39.98	33.65
3.007	42.80	30.37	H	74.00	54.00	31.20	23.63
5.201	44.69	34.20	H	74.00	54.00	29.31	19.80
5.913	45.72	33.94	H	74.00	54.00	28.28	20.06
1.702	39.48	25.82	V	74.00	54.00	34.52	28.18
3.434	43.54	30.85	V	74.00	54.00	30.46	23.15
4.346	44.34	31.57	V	74.00	54.00	29.66	22.43
4.885	46.58	35.82	V	74.00	54.00	27.42	18.18
5.241	45.51	33.75	V	74.00	54.00	28.49	20.25



EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	11 Channel (2462 MHz)
MODE	802.11n		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.051	33.61	21.14	H	74.00	54.00	40.39	32.86
2.163	38.60	25.59	H	74.00	54.00	35.40	28.41
3.007	42.73	30.27	H	74.00	54.00	31.27	23.73
5.184	45.11	33.57	H	74.00	54.00	28.89	20.43
1.704	38.91	25.73	V	74.00	54.00	35.09	28.27
4.935	47.92	35.89	V	74.00	54.00	26.08	18.11
5.962	46.02	33.94	V	74.00	54.00	27.98	20.06
8.633	47.98	36.08	V	74.00	54.00	26.02	17.92

Note :- Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

- The measured value from 6GHz to 25GHz have enough margin over 20dB than the limit, therefore they are not reported.




## Radiated Restricted bands Emissions Result

### ● 802.11b


EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	1 Channel (2412 MHz)
MODE	802.11b		

#### Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.3857	43.73	34.21	H	74.00	54.00	30.27	19.79
2.3899	47.74	38.46	V	74.00	54.00	26.26	15.54

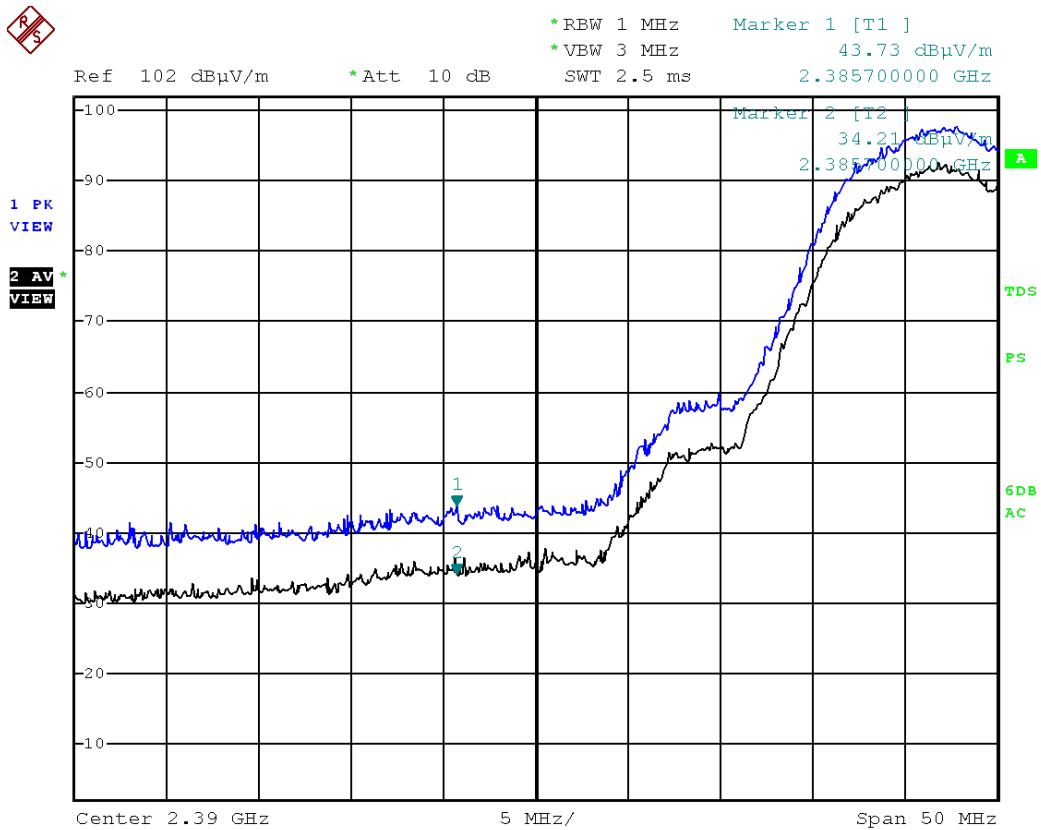

802.11b Low (Horizontal)

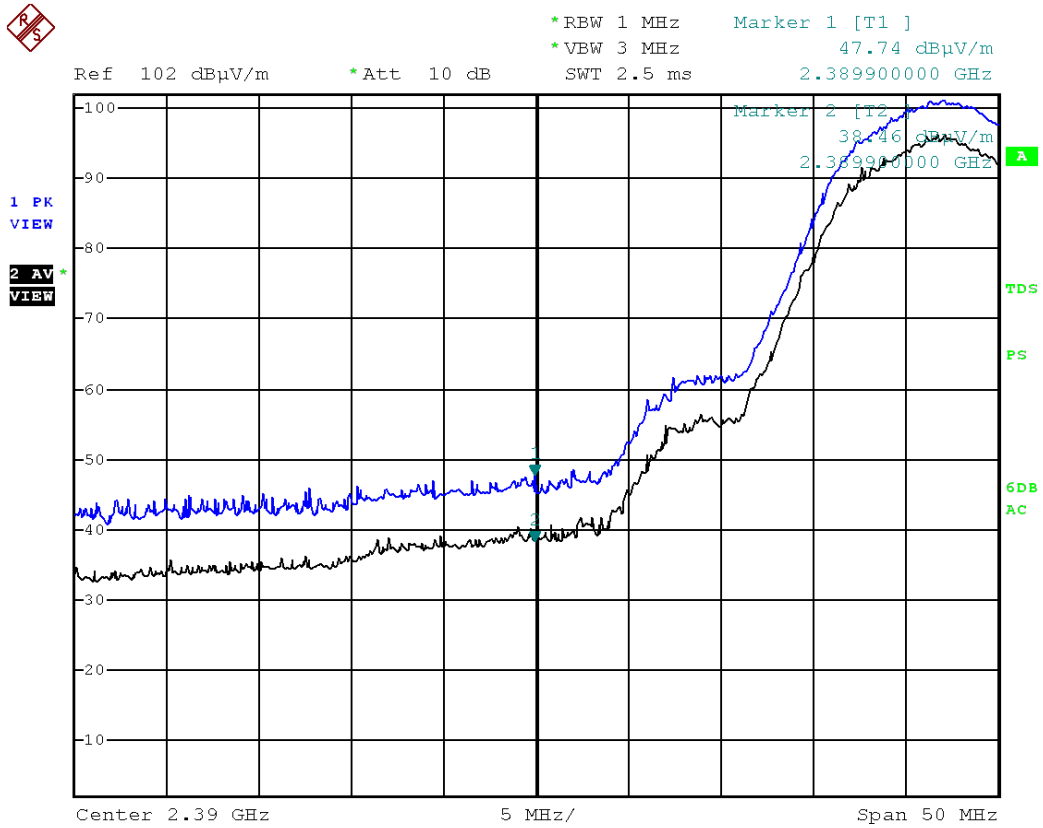

### 802.11b Low (Vertical)







EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	11 Channel (2462 MHz)
MODE	802.11b		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.4838	41.22	32.47	H	74.00	54.00	32.78	21.53
2.4861	45.27	37.41	V	74.00	54.00	28.73	16.59

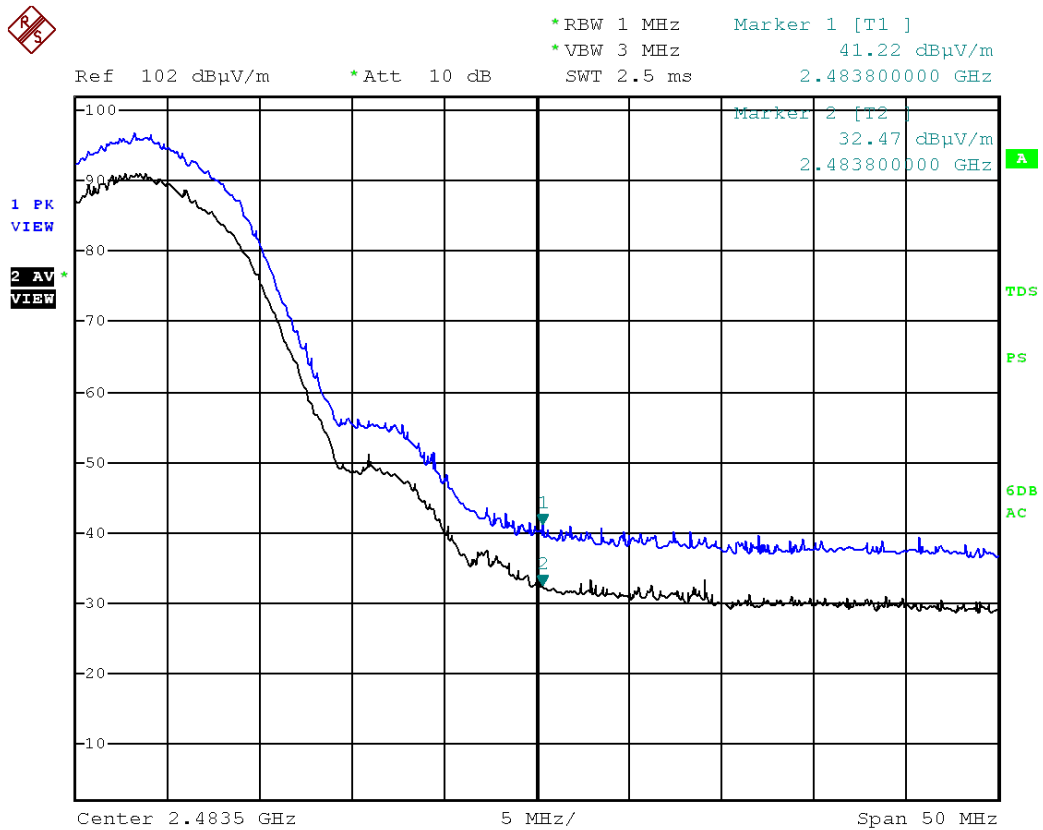

802.11b High (Horizontal)

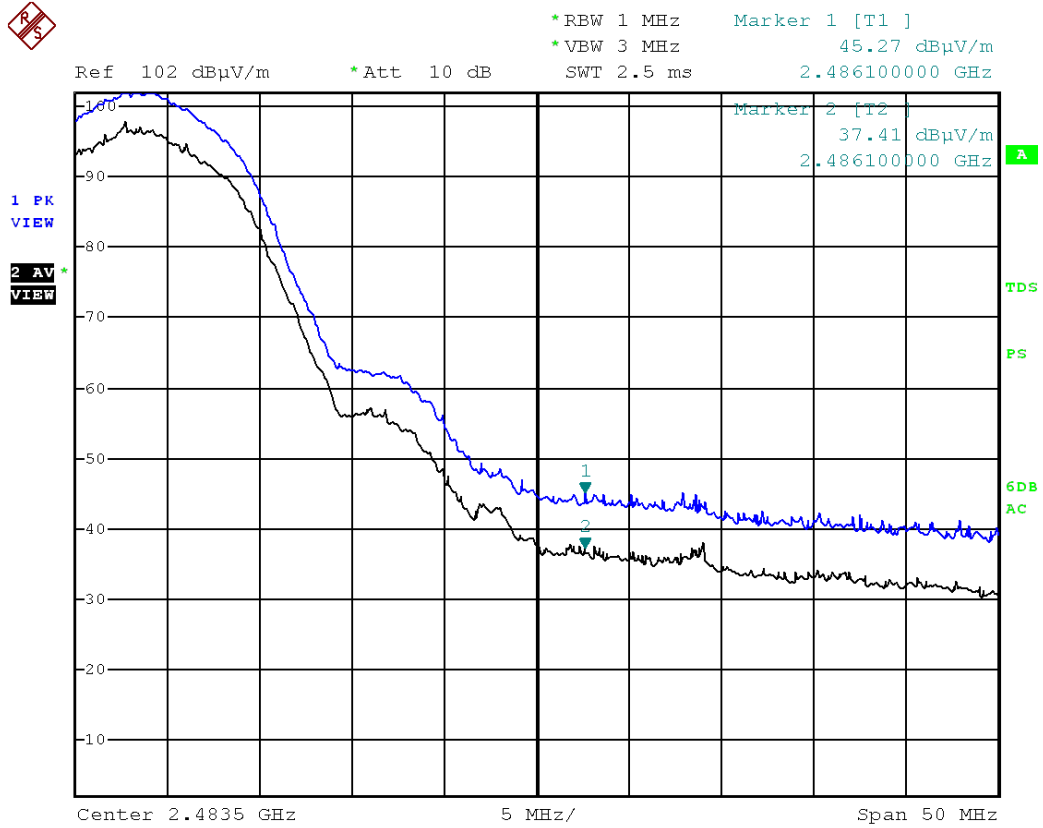

### 802.11b High (Vertical)

Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain




● 802.11g


EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	1 Channel (2412 MHz)
MODE	802.11g		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.3899	51.77	38.40	H	74.00	54.00	22.23	15.60
2.3897	63.93	50.18	V	74.00	54.00	10.07	3.82

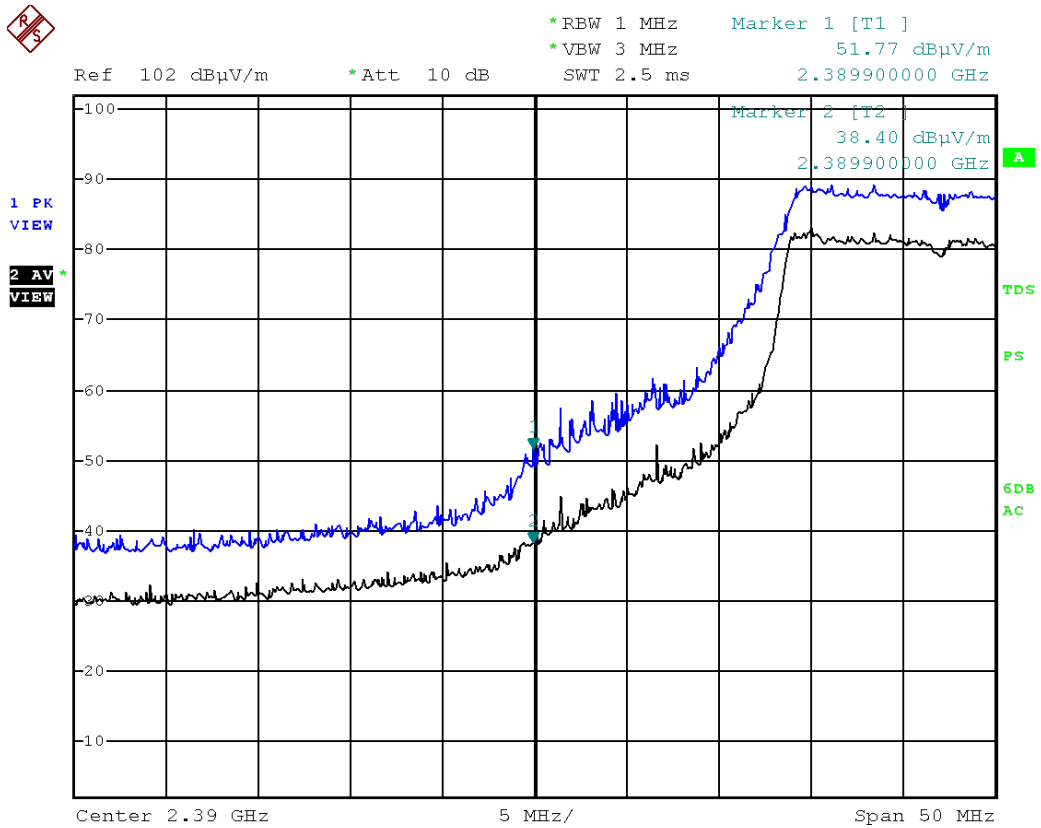

802.11g Low (Horizontal)

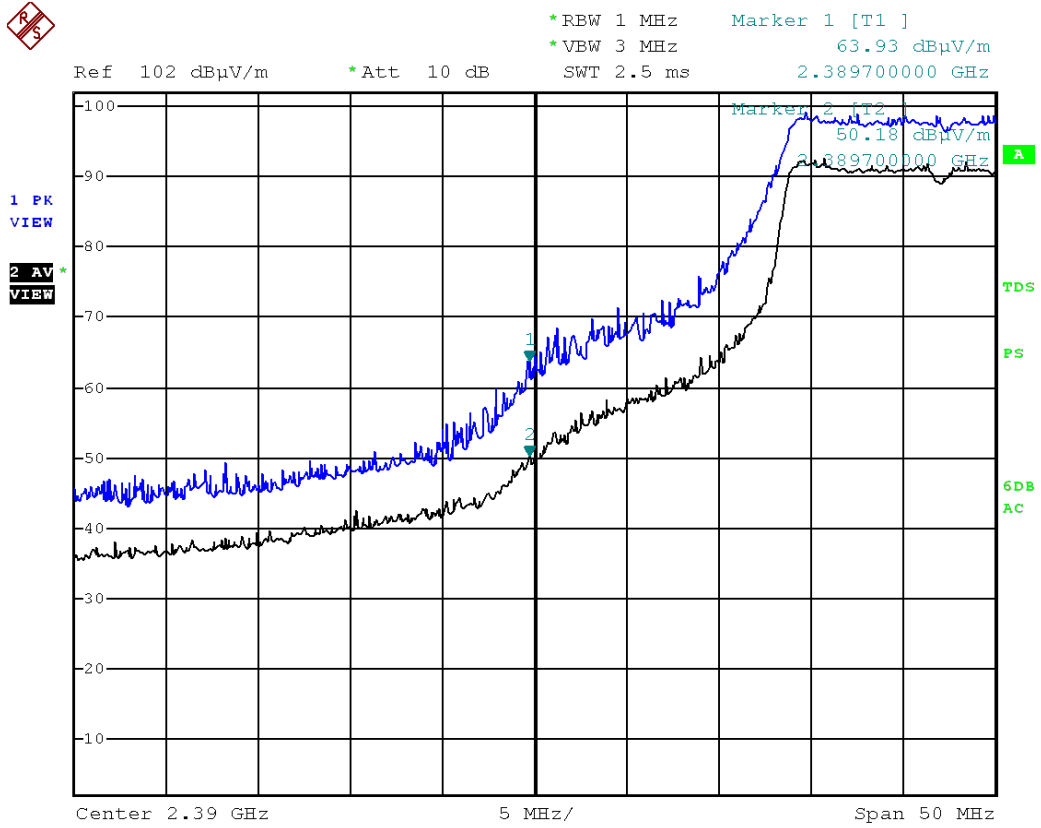


### 802.11g Low (Vertical)




EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	11 Channel (2462 MHz)
MODE	802.11g		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.4838	48.42	34.70	H	74.00	54.00	25.58	19.30
2.4836	60.47	48.54	V	74.00	54.00	13.53	5.46

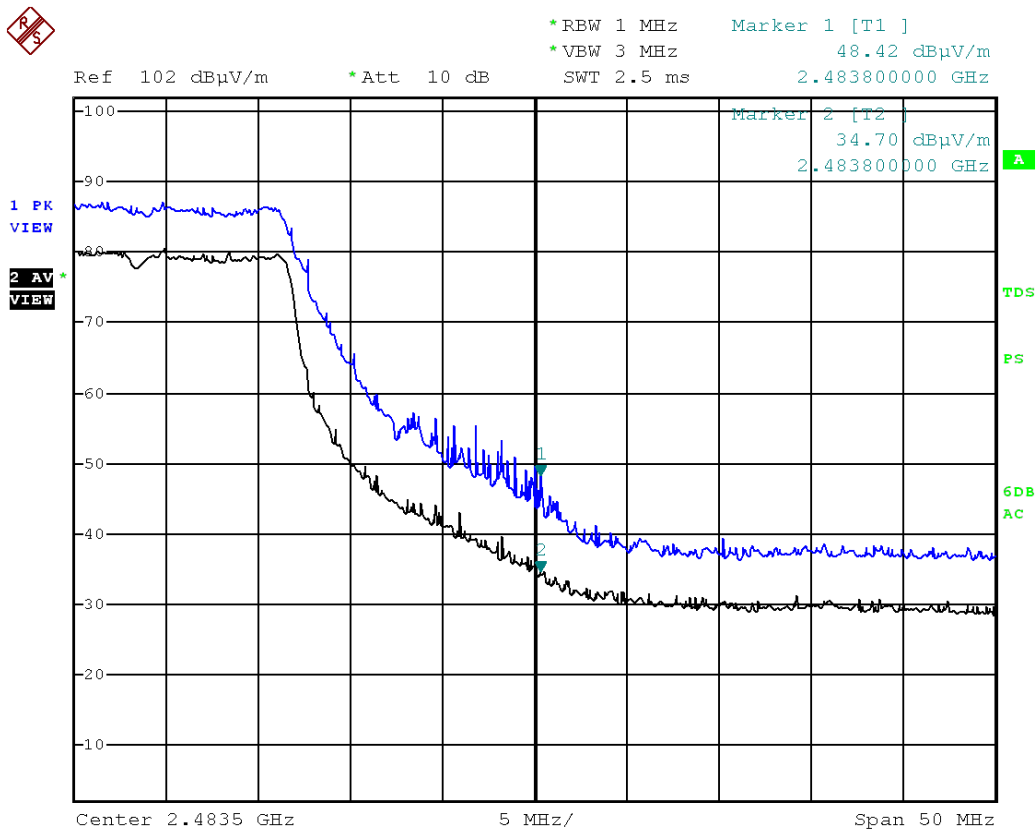

802.11g High (Horizontal)

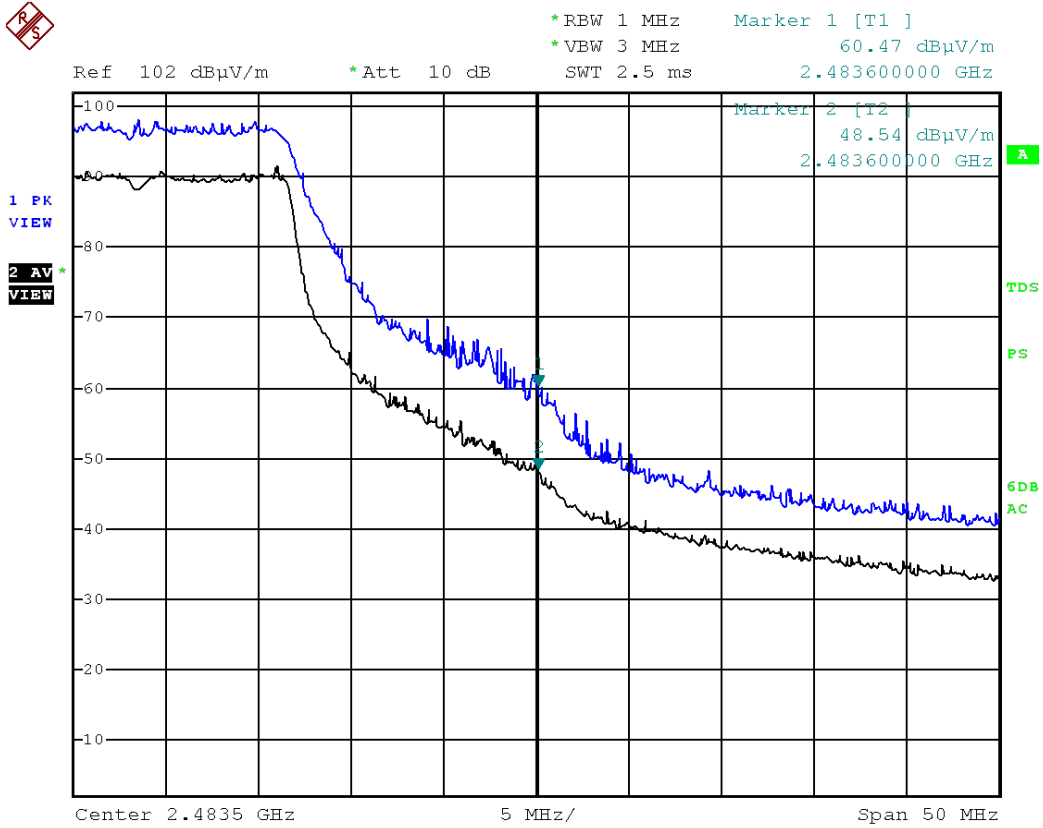

### 802.11g High (Vertical)

Note : Reading(dBuV) : Measurement Level + Ant Factor + Cable Loss - Amp Gain




● 802.11n(ht20)


EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	1 Channel (2412 MHz)
MODE	802.11n(ht20)		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.3887	43.42	33.10	H	74.00	54.00	30.58	20.90
2.3899	57.42	44.65	V	74.00	54.00	16.58	9.35

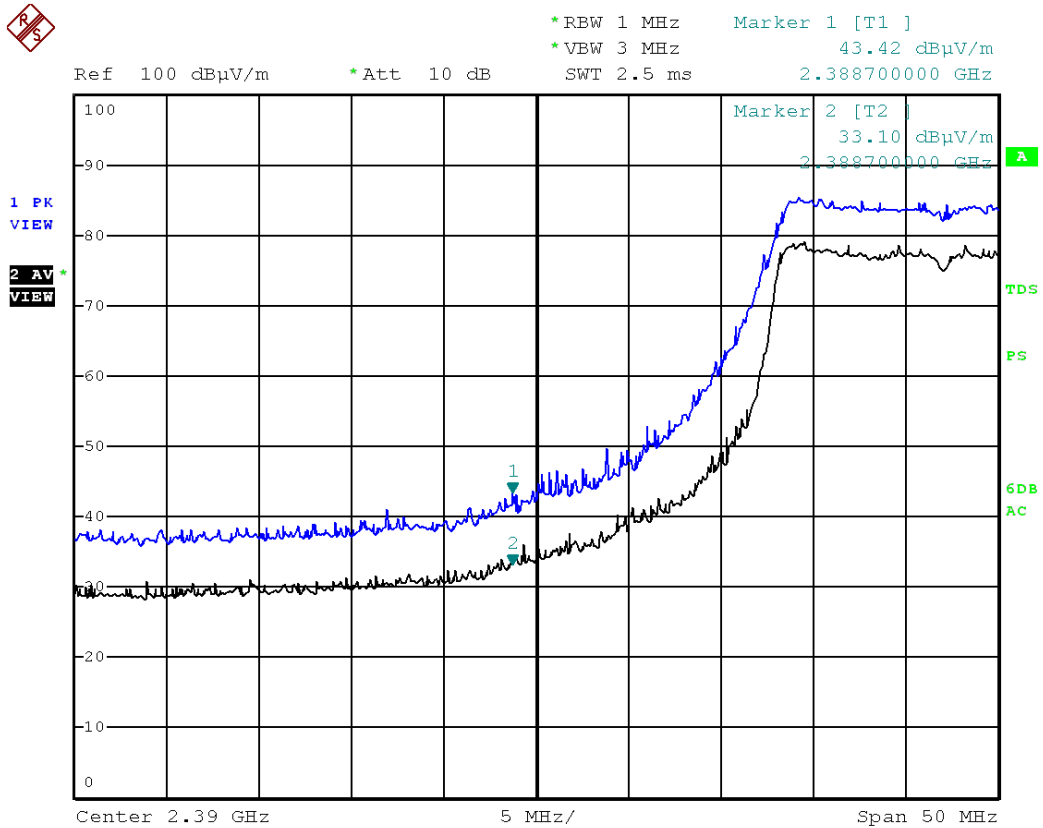

802.11n(ht20) Low (Horizontal)

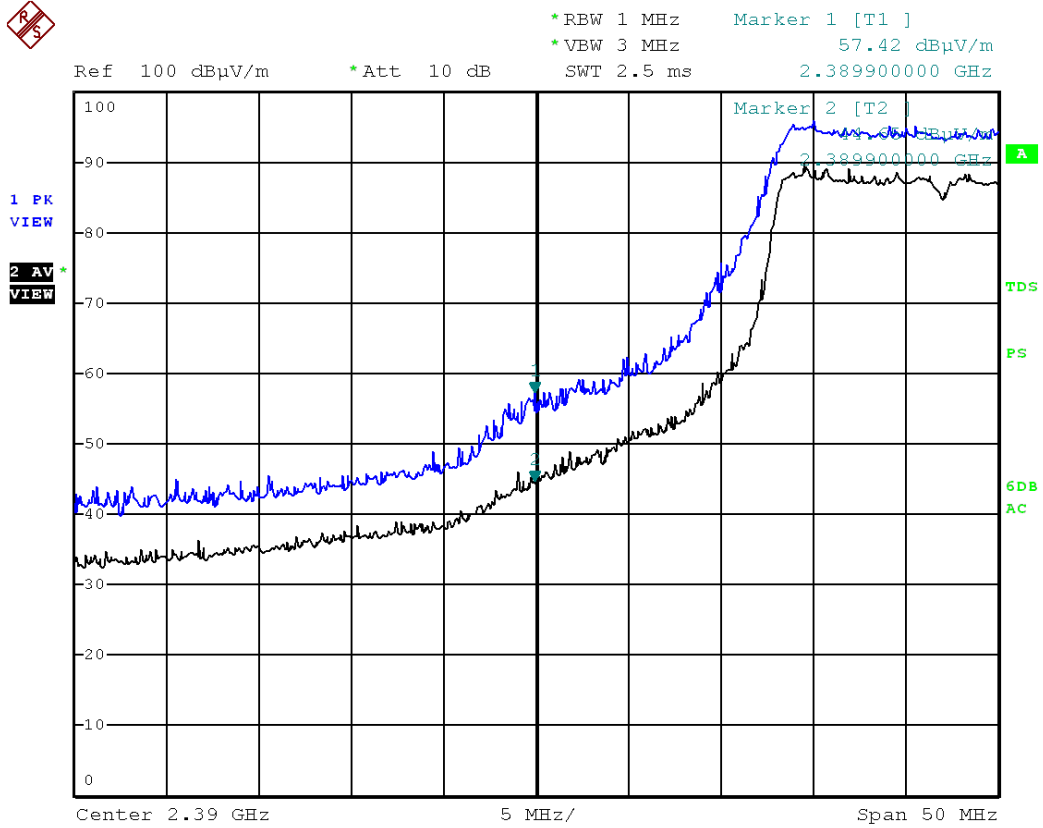

### 802.11n(ht20) Low (Vertical)







EUT	DPF11	PROBE	Above 1 GHz
POWER	DC 7.4 V	NOTE	11 Channel (2462 MHz)
MODE	802.11n(ht20)		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.4837	40.00	30.78	H	74.00	54.00	34.00	23.22
2.4839	52.38	42.12	V	74.00	54.00	21.62	11.88

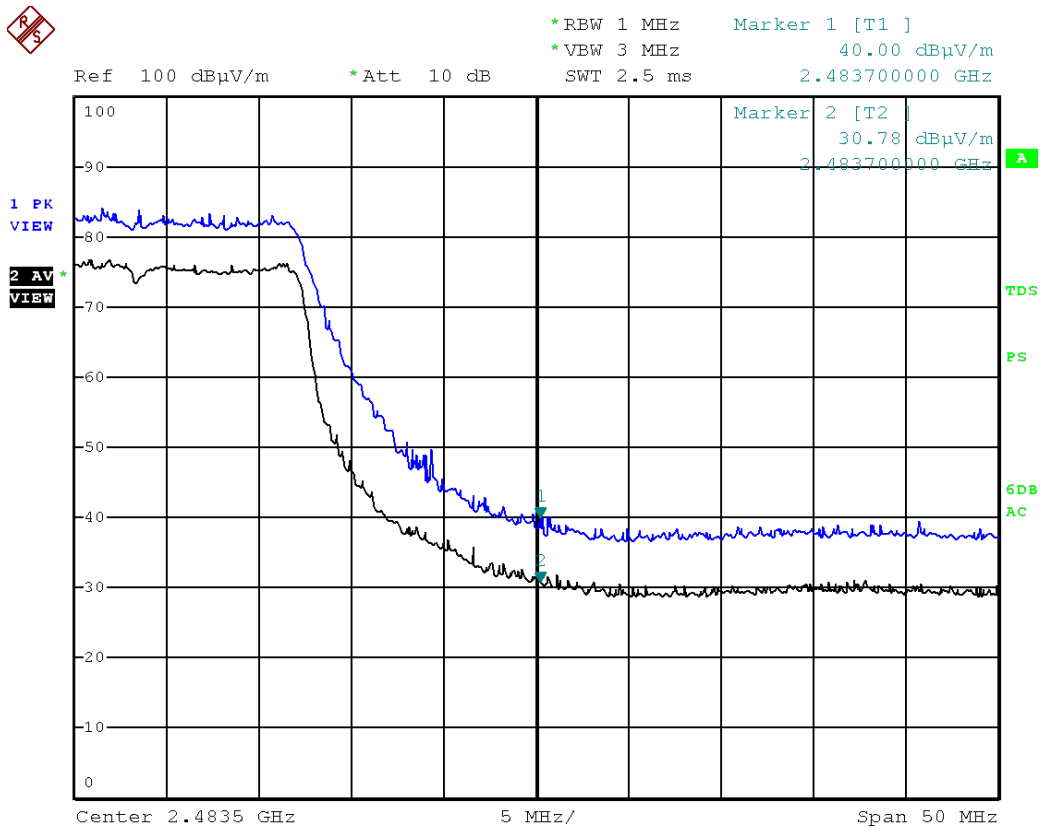

802.11n(ht20) High (Horizontal)

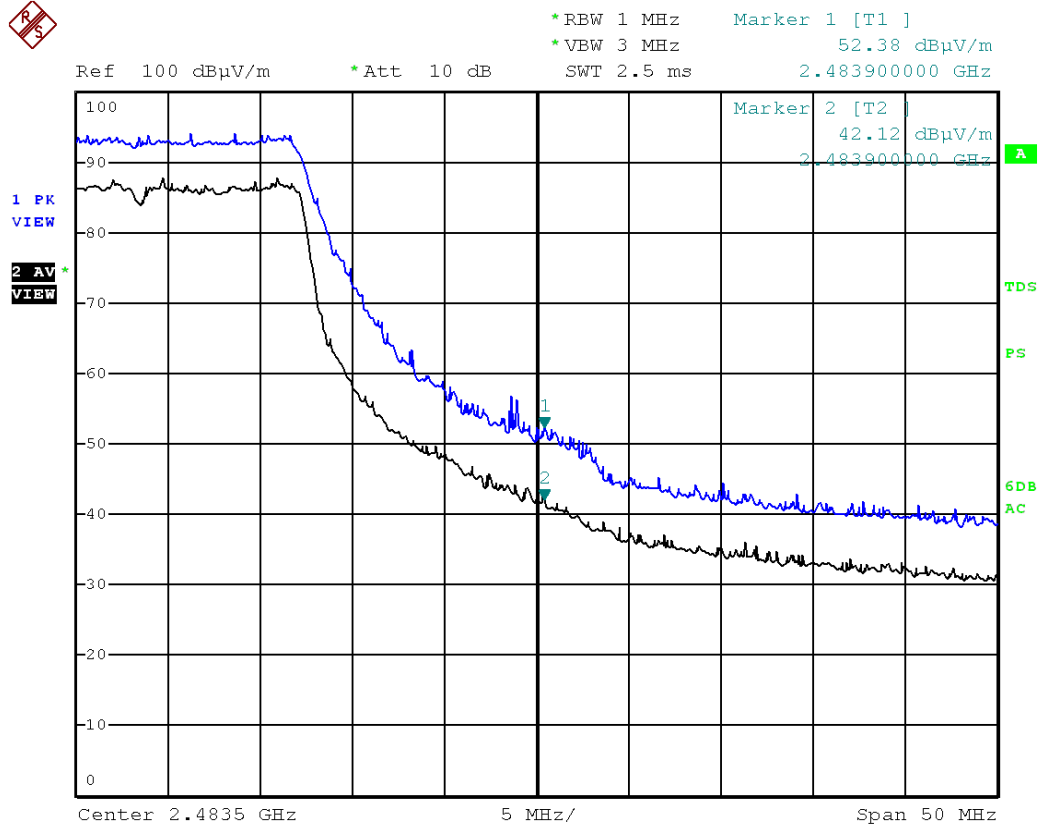

### 802.11n(ht20) High (Vertical)

Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain



## Antenna requirements

### According to FCC 47 CFR 15.203

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

\* The antenna of this EUT is a unique(opposite direction scroll).



\* The EUT complies with the requirement of 15.203