

# CERTIFICATION TEST REPORT

**FCC CFR47 Part 15 Subpart C**

Test Report File No.	13-IST-0216	<input checked="" type="checkbox"/> Basic	<input type="checkbox"/> Alternate
Date of Receipt	February 20, 2013	Begin of test date	February 26, 2013
Date of Issue	March 27, 2013	End of test date	March 12, 2013
Kind of Product	Portable Multimedia Player		
Model(s)	ITQ700		
FCC ID	QDMITQ700		
Applicant	IRIVER LIMITED.		
Address	iriverhouse, 902-5, Bangbae-dong, Seocho-gu, Seoul, Korea		
Manufacturer	IRIVER LIMITED.		
Address	iriverhouse, 902-5, Bangbae-dong, Seocho-gu, Seoul, Korea		

**Test Result**

**Positive**

**Negative**

Tested By

Reviewed By




B.O. KO.

S.J. CHO

**Comment (s)**

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart C.
  - The test report is consists of 38 pages.
  - The test result only responds to the tested sample.
  - It is not allowed to copy this report even partly without the allowance of IST Co., Ltd.
  - This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4
- I assume full responsibility for accuracy and completeness of these data.

## TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Product information	3~4
Measurement Uncertainty, Summary	5
Descriptions of Test	6
- Conducted Emission	6~10
- Radiated Emission	11~12
- Radiated Emission, 9KHz to 30MHz(Magnetic Field Test)	13~18
- Peak power output	19~21
- Band edge	22~26
- Frequency Separation/Occupied Bandwidth	27~33
- Number of hopping frequency	34~35
- Time of occupancy(Dwell time)	36~37
- Antenna requirements	38

Note:

## INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd.  
 400-19, Singal-dong, Giheung-gu, Yongin-si,  
 Gyeonggi-Do, 446-599, Korea  
 TEL: +82 31 326 6700 FAX: +82 31 326 6797

VCCI Registration No. : 1739  
 FCC Registration No. : 400603  
 KCC Registration No. : KR0018  
 KOLAS Registration No. : KT118



## PRODUCT INFORMATION

### Portable Multimedia Player

		7inch
Product	Denomination	NA
	Region	Korea
Chipset	CPU	NVIDIA T30L Quad-core Cortex-A9 1.3/1.2GHz
	Audio Codec	Yes
OS	Android	Android 4.1 Jelly Bean
Memory	DRAM	1GB DDR3L
	eMMC	8GB/16GB
Display & TP module	LCD size & resolution	7" 1280x800 WXGA IPS
	TP Type	Capactive
	Multi-touch	Yes, 5-points gesture
Camera	Front	2M (Fixed Focus)
	Rear	N/A
Audio I/O	Microphone	Yes
	Speakers	Stereo, built-in
Connectivity	WiFi	Yes, 802.11b/g/n, TI WL1281
	Bluetooth	Yes, BT4.0 BLE, TI WL1281
	GPS	Yes, TI WL1281
	3G/LTE	Optional
Sensors	Ambient Light Sensor	No
	Proximity	No

	3-axis Accelerometer	Yes, ST LSM303D
	e-Compass	Yes, ST LSM303D
	Gyroscope	No
Codec	Audio	Check T30L Codec sheet
	Image	
	Video	
Buttons	Physical Buttons	Power, Volume Up, Volume Down
	Virtual Key (labeled on TP)	No
Battery	Capacity	4000mAH Li-Polymer (base on ID)
SIM Card	SIM Card Socket	Yes, for 3G model
External Interfaces	MicroSD slot	Yes, up to 32GB microSDHC
	Earphone jack	Yes, 3.5mm
	DC-Jack (charging)	No
	MicroUSB	Yes. Slave, support charging thru USB adapter
	Mini HDMI	Yes
	System Docking Connector	No
Certifications	CE	Yes
	FCC	Yes
	RoHS	Yes
	GMS	No
Service	OTA update	Yes

**Test Mode :**

Mode 1: Transmit (DH5)

Mode 2: Transmit (3DH5)

1. DH5 is for GFSK modulation, and 3DH5 is for Pi/4 DQPSK
2. Regards to the frequency band operation; the highest that was included the lowest, middle and highest frequency of channel were selected to perform the test, and then shown on this report.

- Please refer to user's manual.

## Measurement Uncertainty

Conducted Emissions	$U = 2.98$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions (Antenna - Horizontal)	$U = 3.83$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions (Antenna - Verical)	$U = 4.50$ [dB] (Confidence level approximately 95 %, $k = 2$ )

## SUMMARY

### Bluetooth Mode(2402MHz ~2480MHz)

Applied Standard : FCC CRF Part 15 Subpart C


Description of Test	FCC Rule Parts	Results
Carrier Frequency Separation	15.247(a)(1)	Compliant
20 dB Bandwidth	15.247(a)(1)(ii) or (iii)	Compliant
Time of Occupancy	15.247(a)(1)(ii) or (iii)	Compliant
Number of Hopping Frequencies	15.247(a)(1)(ii) or (iii)	Compliant
Conducted Maximum Peak Output Power	15.247(b)(1)	Compliant
Spurious RF Conducted Emission	15.247(d)	Compliant
Spurious Radiated Emission	15.247(d), 15.209	Compliant
Receiver Spurious Emission		Compliant
Out-of- Band Emission	15.247(d)	Compliant
Occupied Bandwidth		Compliant

## Conducted Emissions:


The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" & "Average" within a bandwidth of 9 KHz.

### -Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1 m X 1.5 m wooden table 80 cm height is placed 40 cm away from the vertical wall and 1.5 m away from the other wall of the shielded room. The R/S ESCI and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80 cm from the LISN and powered from the EMCO LISN .The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30 MHz. The bandwidth of the receiver was set to 10 kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

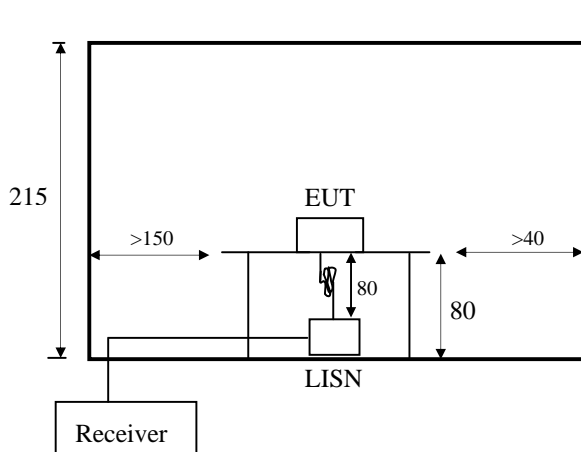

< Side View >

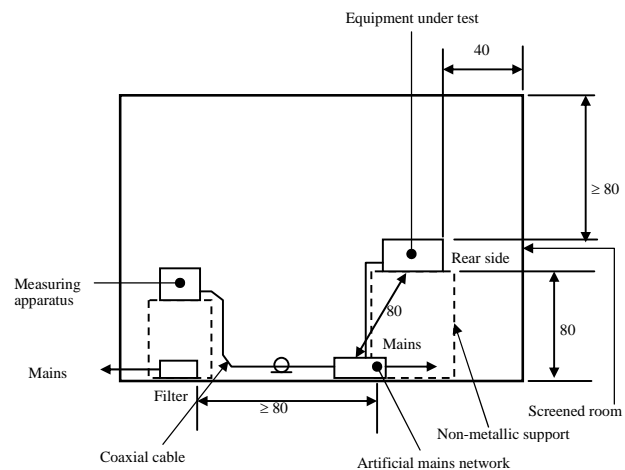

< Concept Drawing >

## Limits

According to §15.207(a) except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207

## Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacturer	Calibration Date	Serial No.
ESCI	Test Receiver	Rohde & Schwarz	May. 11, 2012	100374
ESH2-Z5	LISN	Rohde & Schwarz	May. 11, 2012	842966/007
ESH3-Z2	Pulse Limiter	Rohde & Schwarz	May. 11, 2012	357.8810.52

◆ Test Accessories Used

Equipment	Type	Brand	Serial No.
ITQ700	ITQ700	IRIVER LIMITED.	N/A
AC ADAPTER	KSAPK0110500200HO	KUANTECH(BEIHAI)CO.,.LTD	N/A
Micro SD Card	N/A	SANDISK	N/A
BLUETOOTH SPEAKER	XAM11	X-MINI	N/A

Connecting Interface Cables :

AC Power Cable : 1.0 m

◆ Test Conditions

Temperature                   ( 17.8 ) °C  
 Humidity                       ( 47.7 ) % R.H.  
 Atmosphere                   ( 1016 ) mbar


◆ Test Date                   February 26, 2013

◆ Test Area                   Conducted Room #2

*Note : The equipment used is calibrated in regular for every year.*




### Conducted Emissions result

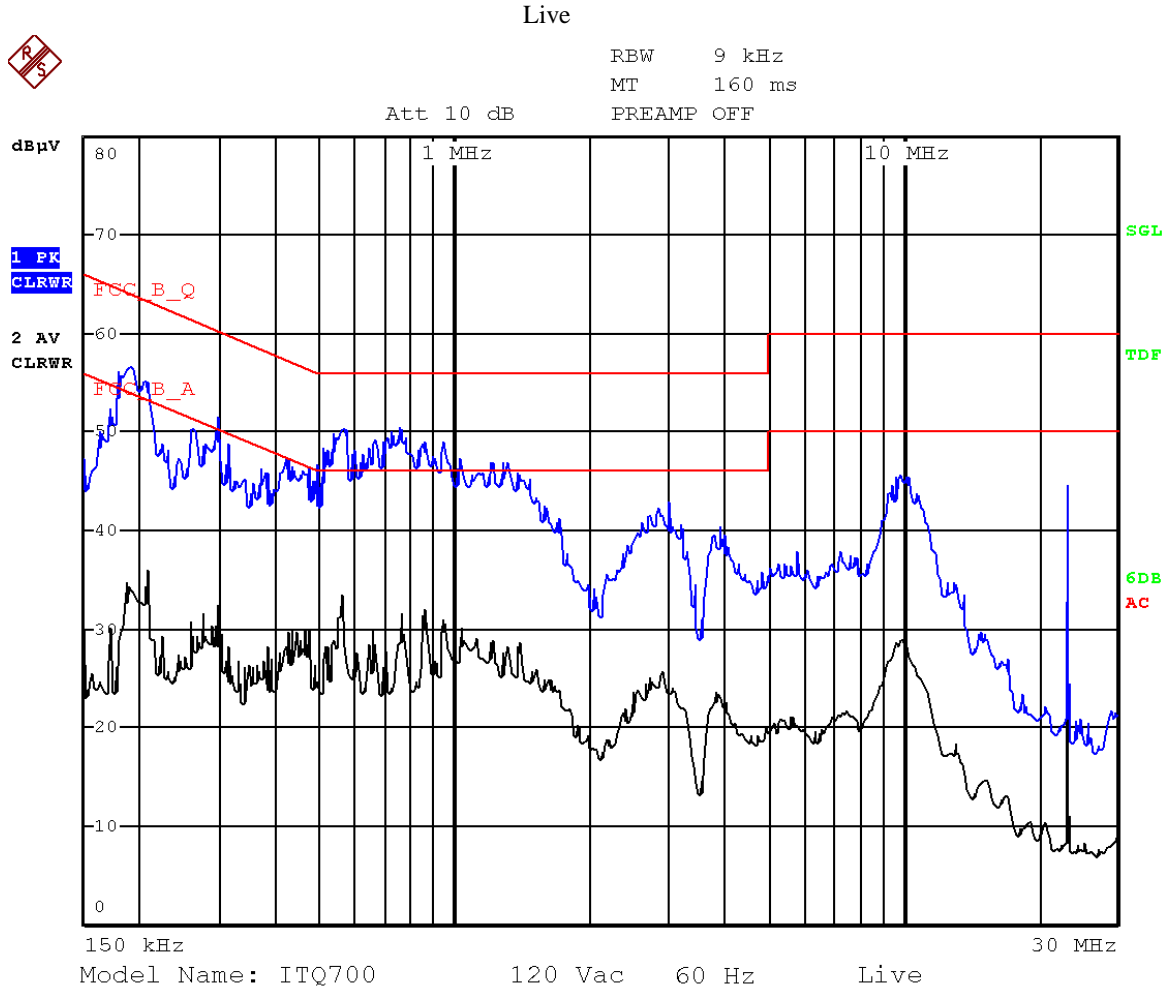

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.190	51.82	33.87	64.04	54.04	0.16	0.02	52.00	34.05	12.04	19.99
0.294	46.13	30.36	60.41	50.41	0.16	0.03	46.32	30.55	14.09	19.86
0.758	46.64	30.04	56.00	46.00	0.18	0.05	46.87	30.27	9.13	15.73
3.010	35.14	23.52	56.00	46.00	0.27	0.07	35.48	23.86	20.52	22.14
9.894	39.73	27.45	60.00	50.00	0.48	0.14	40.35	28.07	19.65	21.93
23.294	16.56	9.57	60.00	50.00	0.06	0.20	16.82	9.83	43.18	40.17

### Conducted Emissions result

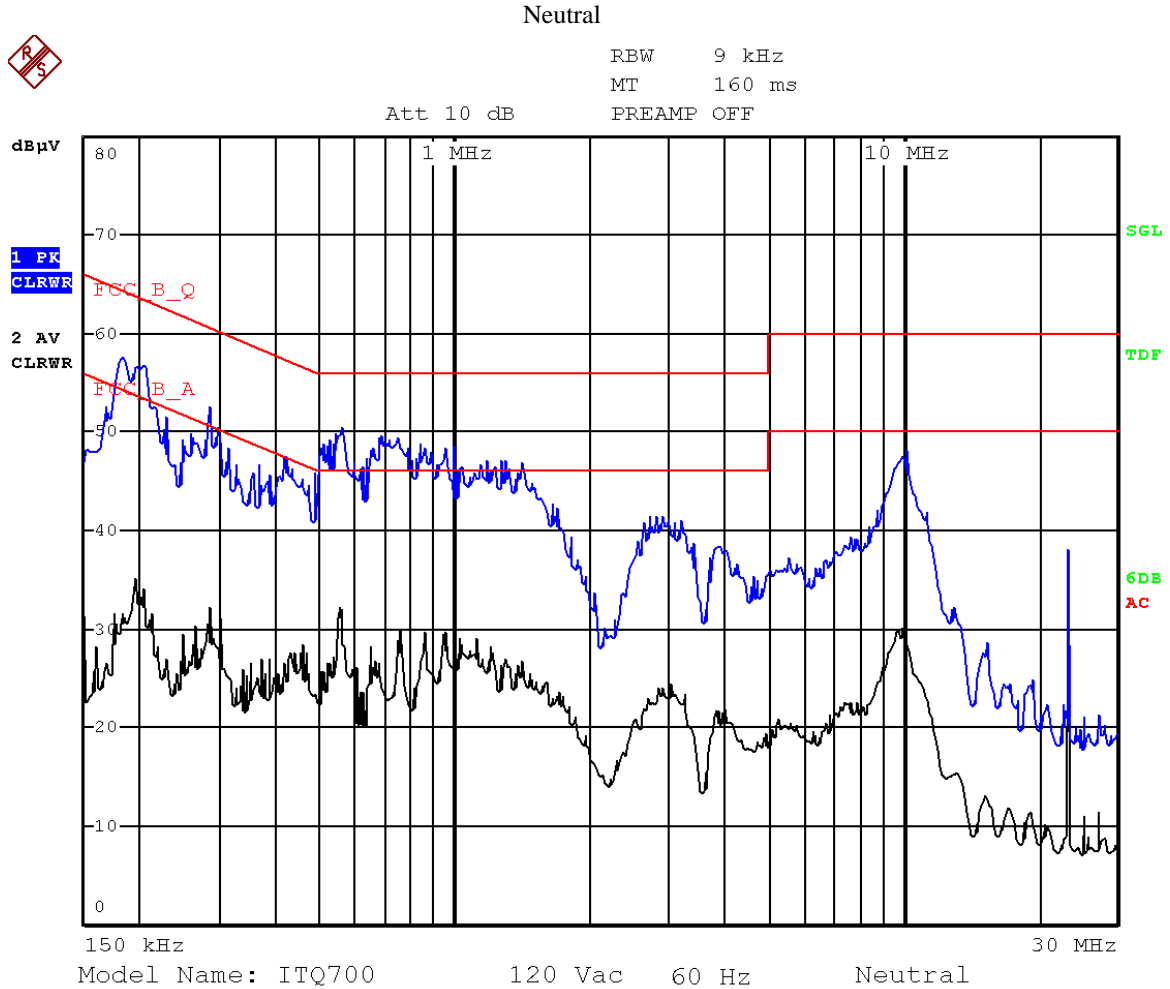


Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.182	52.58	32.74	64.39	54.39	0.12	0.02	52.72	32.88	11.67	21.51
0.282	45.73	30.52	60.76	50.76	0.13	0.03	45.88	30.67	14.87	20.08
0.562	46.81	31.16	56.00	46.00	0.14	0.03	46.98	31.33	9.02	14.67
2.826	35.13	22.67	56.00	46.00	0.23	0.07	35.43	22.97	20.57	23.03
10.138	40.72	27.74	60.00	50.00	0.46	0.14	41.32	28.34	18.69	21.67
23.350	13.87	8.52	60.00	50.00	0.14	0.20	14.20	8.85	45.80	41.15

## Radiated Emissions:


The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120kHz. Procedure of Test

Preliminary measurements were made at 3 meter using bi-log antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using bi-log antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission. (The bandwidth below 1GHz setting on the field strength meter is 120KHz and above 1GHz is 1MHz.)


Under 1GHz Test Setup:

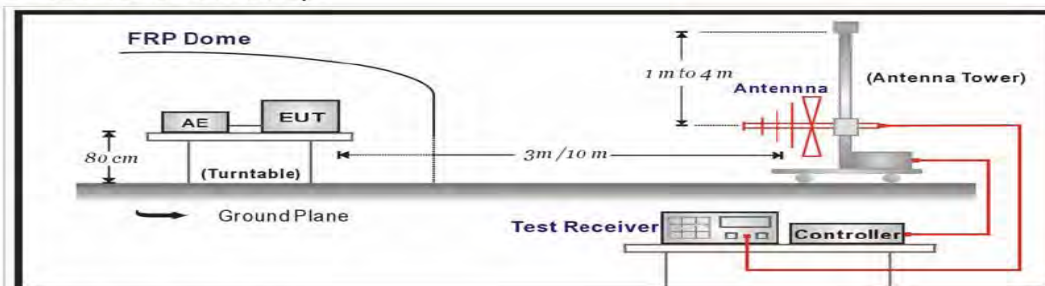

Above 1GHz Test Setup:

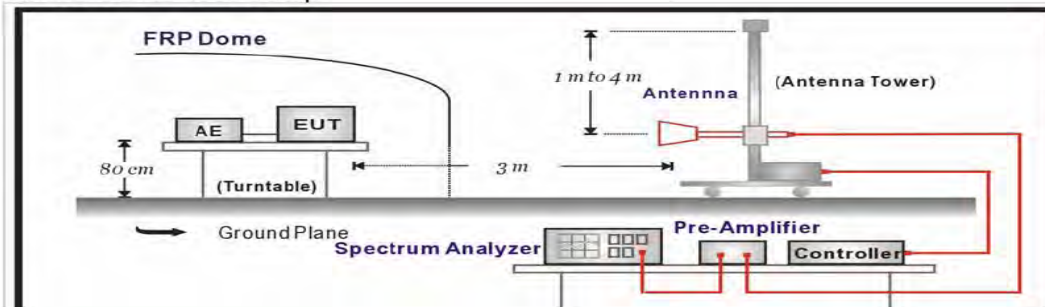

Below 30 MHz

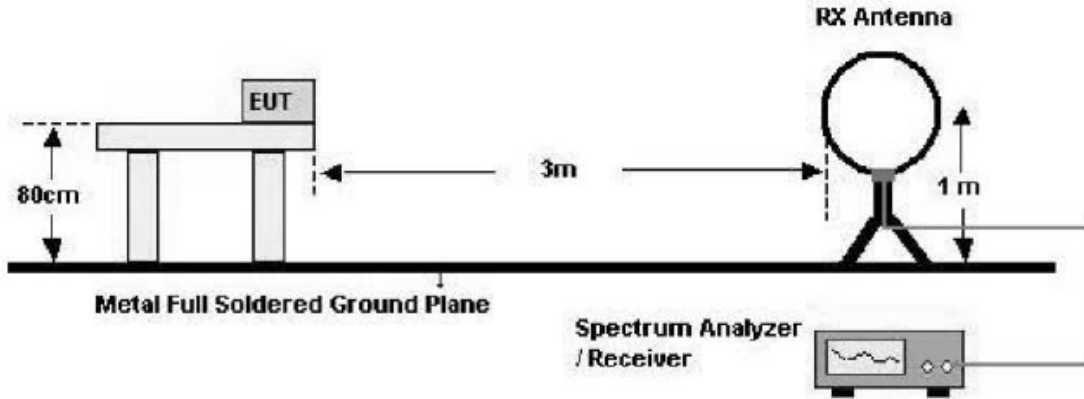

## Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the General radiated emission limits in paragraph 15.209, whichever is the lesser attenuation:

FCC Part 15 Subpart C Section 15.209 Limits		
Frequency(MHz)	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}(3\text{m})$
0.009-0.490	$2400/F(\text{KHz})$ at 300 m	$20\log 2400/F(\text{KHz})+80$
0.490-1.705	$24000/F(\text{KHz})$ at 30m	$20\log 24000/F(\text{KHz})+40$
1.705-30	30 at 30 m	49.5
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1.  $\text{RF Voltage}(\text{dB}\mu\text{v})=20\log \text{RF Voltage}(\mu\text{v})$
2.  $\text{dB}\mu\text{V}/\text{m} = \text{ERP}(\text{dBm})+106.92 \text{ dB} + 20\log(10\text{m}/3\text{m}) + 2.15\text{dB}(\text{conversion Factor for E.I.R.P})$
3. In the Above Table, the tighter limit applies at the band edges.
4. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.209.

### Radiated Spurious Emission

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESCS30	EMI Receiver	Rohde & Schwarz	May 10, 2012	100171
SPECTRUM ANALYZER	R3273	ADVANTEST	Oct. 10, 2012	95090431
Loop Antenna	HFH2-Z2	Rohde & Schwarz	Oct. 26, 2012	8620771017
Log-bicon Antenna	VULB9161SE	Schwarz beck	Jul. 28, 2011	4089
HORN-Antenna	3115	EMCO	Nov. 21, 2011	9012-3602
HORN-Antenna	SAS-571	A.H. SYSTEMS	Nov. 21, 2011	500
PRE AMPLIFIER	8449B OPT H02	Rohde & Schwarz	Oct. 11, 2012	3008A0530

Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRA, KRISS, KTL and HCT.  
 2. The calibration interval of horn ant. and loop ant. is 24 months

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$Peak = Reading + Corrected Factor$$

Where Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

**Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)**

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector with specified bandwidth.
5. The result was 20dB lower than the limit line 15.31(o) was not reported.

### Radiated Emission Result

[Applicable]

DH5

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
36.789	6.50	H	11.35	1.02	40.00	18.87	-21.13
129.924	8.10	V	11.68	1.90	43.50	21.68	-21.82
160.927	12.20	V	13.22	2.13	43.50	27.55	-15.95
*475.361	13.30	H	17.31	3.70	46.00	34.31	-11.69

3DH5

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
36.778	6.30	H	11.35	1.02	40.00	18.67	-21.33
84.364	8.90	V	7.75	1.53	40.00	18.18	-21.82
136.713	9.10	H	12.03	1.94	43.50	23.07	-20.43
*456.863	12.60	H	16.80	3.61	46.00	33.01	-12.99

Note :

1. Remark "\*" means that the data is the worst emission level.
2. All reading levels are Quasi-peak value.
3. Measurement level = reading level + correct factor

EUT :	ITQ700	PROBE :	Above 1 GHz
MODE :	DH5	NOTE :	Low Ch

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.361	41.38		28.17	V	74.00	54.00
3.112	47.09	35.73	V	74.00	54.00	26.91	18.27
5.895	50.70	38.78	V	74.00	54.00	23.30	15.22
1.863	45.92	33.39	H	74.00	54.00	28.08	20.61
2.138	46.20	32.81	H	74.00	54.00	27.80	21.19
4.814	56.96	41.32	H	74.00	54.00	17.04	12.68
5.711	50.58	38.61	H	74.00	54.00	23.42	15.39

**Restricted Band Edge Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.379	42.99		31.20	V	74.00	54.00
2.389	46.83	31.92	H	74.00	54.00	27.17	22.08

EUT :	ITQ700	PROBE :	Above 1 GHz
MODE :	DH5	NOTE :	Middle Ch

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.588	41.79		28.38	V	74.00	54.00
1.859	44.77	32.00	V	74.00	54.00	29.23	22.00
3.182	47.02	35.73	V	74.00	54.00	26.98	18.27
5.821	49.70	38.66	V	74.00	54.00	24.30	15.34
1.423	41.88	29.38	H	74.00	54.00	32.12	24.62
2.131	45.63	33.16	H	74.00	54.00	28.37	20.84
4.894	58.41	39.85	H	74.00	54.00	15.59	14.15

EUT :	ITQ700	PROBE :	Above 1 GHz
MODE :	DH5	NOTE :	High Ch

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.861	45.49		32.07	V	74.00	54.00
3.203	48.14	35.88	V	74.00	54.00	25.86	18.12
5.761	50.65	38.77	V	74.00	54.00	23.35	15.23
1.423	41.68	28.93	H	74.00	54.00	32.32	25.07
2.133	46.72	34.09	H	74.00	54.00	27.28	19.91
4.193	49.12	36.17	H	74.00	54.00	24.88	17.83
4.963	59.52	43.05	H	74.00	54.00	14.48	10.95

**Restricted Band Edge Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.484	45.67		34.50	V	74.00	54.00
2.484	56.22	47.46	H	74.00	54.00	17.78	6.54

*Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain*



EUT :	ITQ700	PROBE :	Above 1 GHz
MODE :	3DH5	NOTE :	Low Ch

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.860	43.61		32.18	V	74.00	54.00
3.150	47.00	35.59	V	74.00	54.00	27.00	18.41
5.190	49.91	37.55	V	74.00	54.00	24.09	16.45
5.710	50.22	38.43	V	74.00	54.00	23.78	15.57
1.420	42.96	29.41	H	74.00	54.00	31.04	24.59
1.860	44.02	31.98	H	74.00	54.00	29.98	22.02
3.260	47.64	35.32	H	74.00	54.00	26.36	18.68
4.810	56.38	40.10	H	74.00	54.00	17.62	13.90

**Restricted Band Edge Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.388	43.94		31.11	V	74.00	54.00
2.388	55.75	36.54	H	74.00	54.00	18.25	17.46

EUT :	ITQ700	PROBE :	Above 1 GHz
MODE :	3DH5	NOTE :	Middle Ch

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.859	43.98		31.67	V	74.00	54.00
3.219	47.26	35.94	V	74.00	54.00	26.74	18.06
5.219	50.44	37.80	V	74.00	54.00	23.56	16.20
1.420	43.27	29.58	H	74.00	54.00	30.73	24.42
1.860	45.32	32.63	H	74.00	54.00	28.68	21.37
4.400	49.57	37.18	H	74.00	54.00	24.43	16.82
4.890	54.25	38.38	H	74.00	54.00	19.75	15.62

EUT :	ITQ700	PROBE :	Above 1 GHz
MODE :	3DH5	NOTE :	High Ch

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.860	45.68		32.39	V	74.00	54.00
3.200	47.86	36.02	V	74.00	54.00	26.14	17.98
4.400	48.63	37.01	V	74.00	54.00	25.37	16.99
5.590	50.28	38.68	V	74.00	54.00	23.72	15.32
1.434	43.30	28.44	H	74.00	54.00	30.70	25.56
1.864	46.29	34.15	H	74.00	54.00	27.71	19.85
4.274	48.84	36.63	H	74.00	54.00	25.16	17.37
4.964	57.12	41.19	H	74.00	54.00	16.88	12.81

**Restricted Band Edge Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.484	47.86		35.93	H	74.00	54.00
2.484	61.44	47.69	V	74.00	54.00	12.56	6.31

*Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain*

## Peak Power Output

### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct. 10, 2012
2	RF ROOM			


*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

### ◆ Limits

The maximum peak output power of the intentional radiator shall not exceed the following :

1. According to § 15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz : 1Watt.
2. According to § 15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, is transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs(b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### ◆ Test Setup

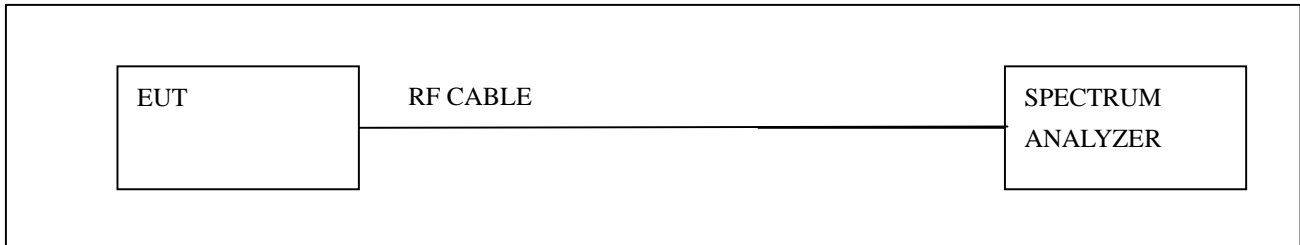

### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

### Peak Power Test result



Product	ITQ700
Test Item	Peak Power Output
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
0	2402	7.91	1Watt=30dBm	Pass
39	2441	7.85	1Watt=30dBm	Pass
78	2480	7.63	1Watt=30dBm	Pass

Channel 0

Channel 39

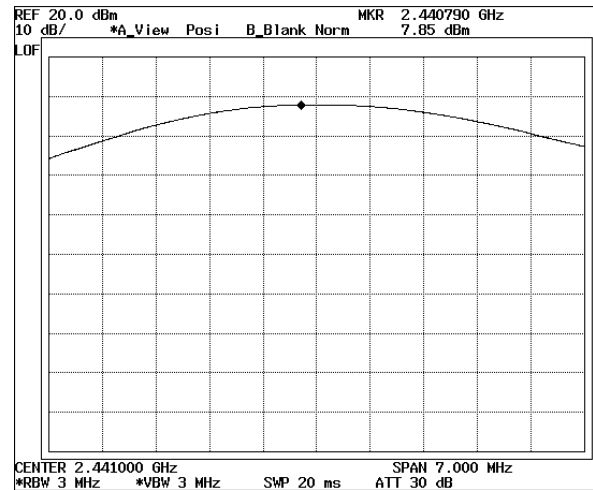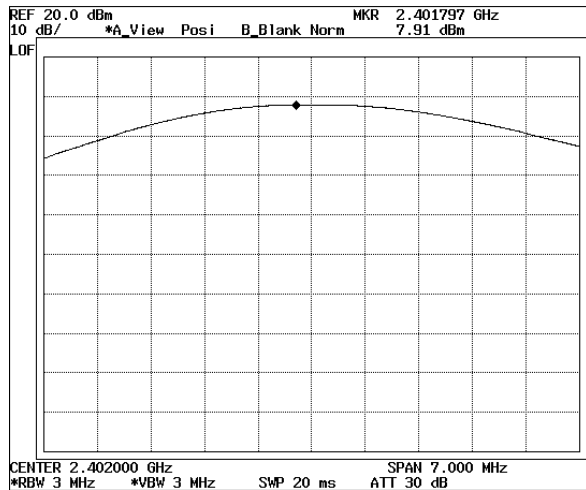

Channel 78

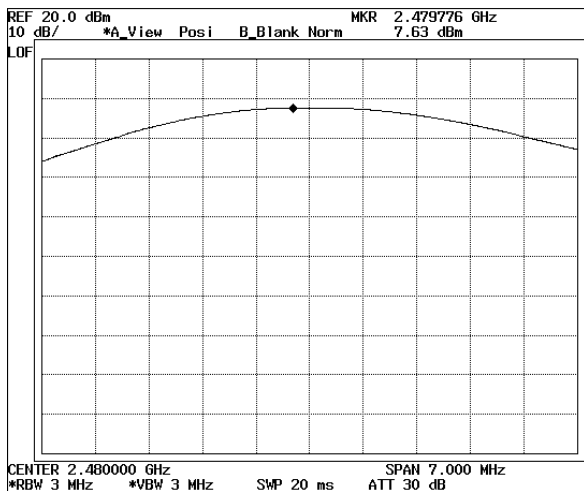

### Peak Power Test result



Product	ITQ700
Test Item	Peak Power Output
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
0	2402	8.50	1Watt=30dBm	Pass
39	2441	8.52	1Watt=30dBm	Pass
78	2480	8.36	1Watt=30dBm	Pass

Channel 0

Channel 39

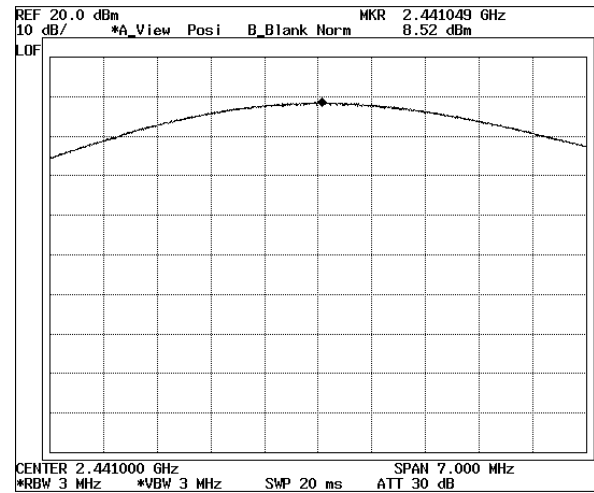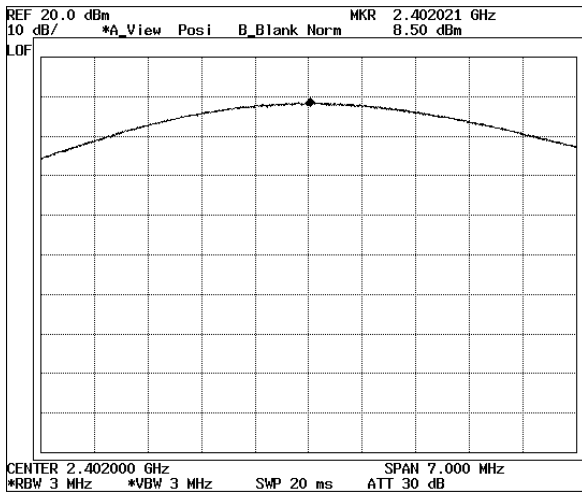

Channel 78

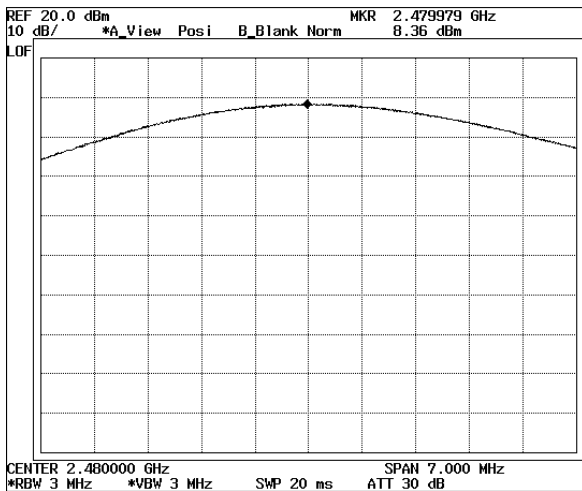

Note : Measurement level = reading level + correct factor

## Conducted Spurious Emissions &

### Band Edge

◆ **TEST Equipment**

The following test equipment are used during the test:

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESCS30	EMI Receiver	Rohde & Schwarz	May 10, 2012	100171
SPECTRUM ANALYZER	R3273	ADVANTEST	Oct. 10, 2012	95095431
HORN-Antenna	3115	EMCO	Nov. 21, 2011	9012-3602
HORN-Antenna	HF906	Rohde & Schwarz	Nov. 21, 2011	100530
PRE AMPLIFIER	8449B OPT H02	HP	Oct. 11, 2012	3008A0530

*Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRL, KRISS, KTL and HCT.*


*2. The calibration interval of horn ant. and loop ant. is 24 months*

◆ **Limits**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a)(see Section 15.205(c)).

◆ **Test Setup**

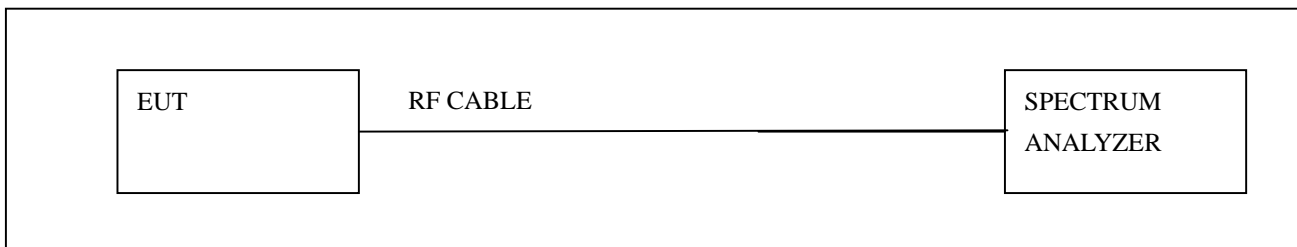

◆ **Test Procedure**

The transmitter output is connected to the Spectrum analyzer.


According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conducted Spurious Emissions Test result


Product	ITQ700
Test Item	Spurious Emissions
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel 0 (2402 MHz)

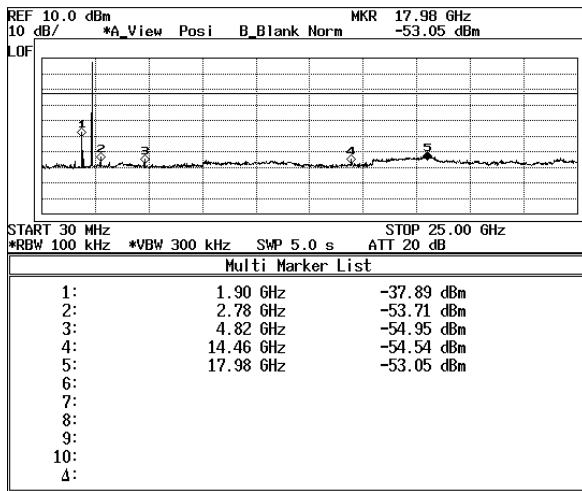


Channel 39 (2441 MHz)

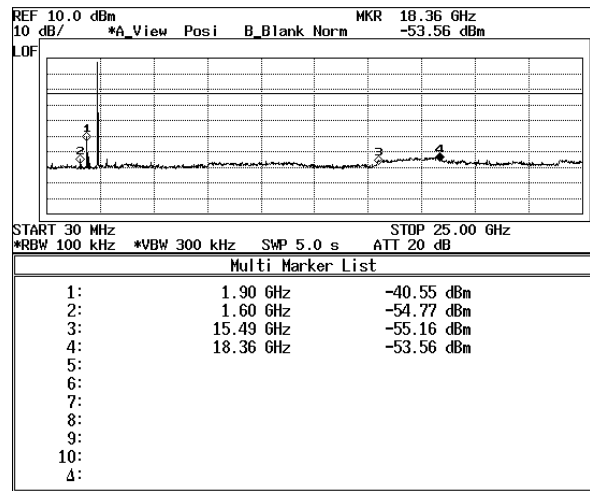

Channel 78 (2480 MHz)

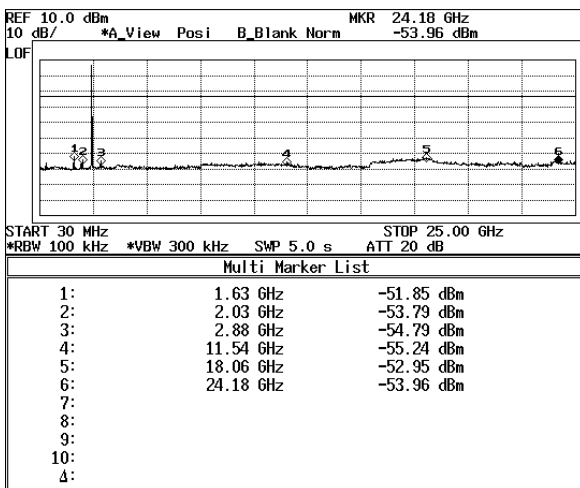

Hopping mode

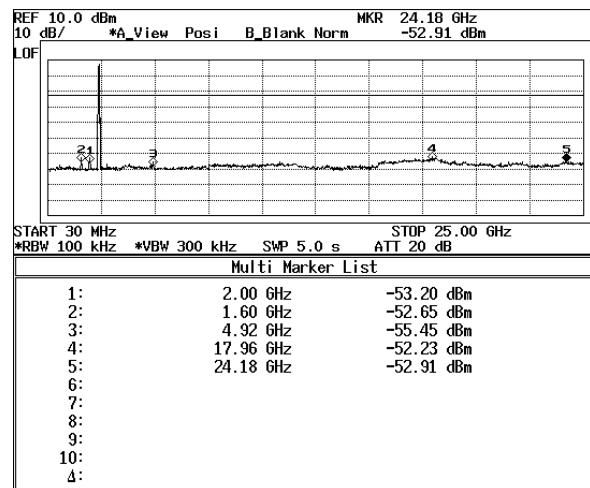


Conducted Spurious Emissions Test result


Product	ITQ700
Test Item	Spurious Emissions
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel 0 (2402 MHz)

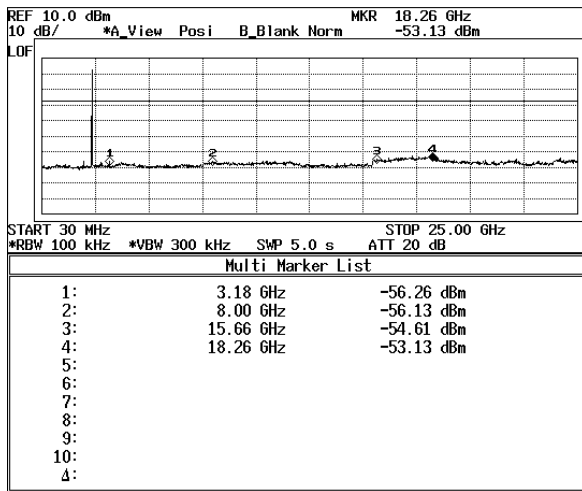


Channel 39 (2441 MHz)

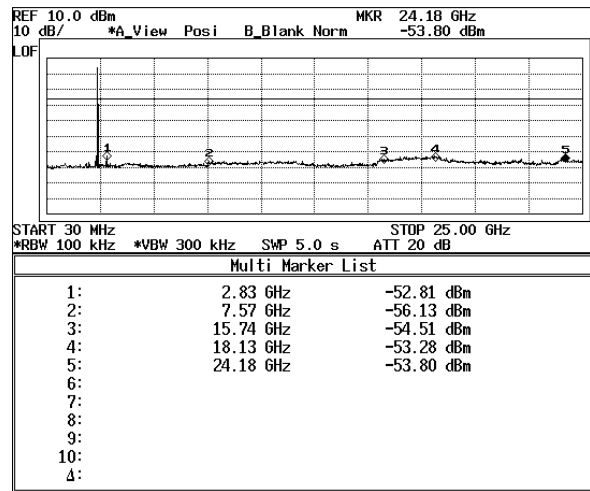

Channel 78 (2480 MHz)

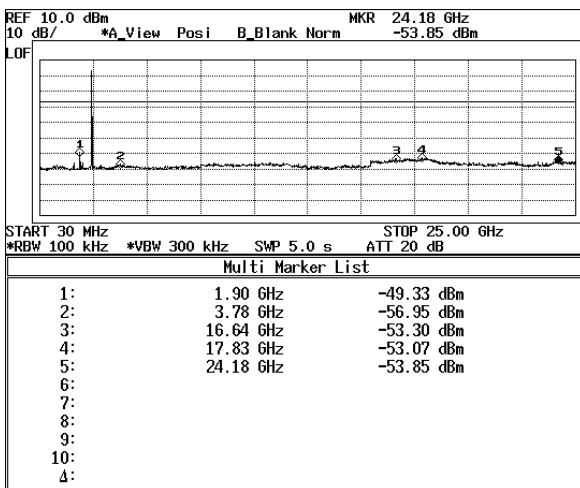

Hopping mode

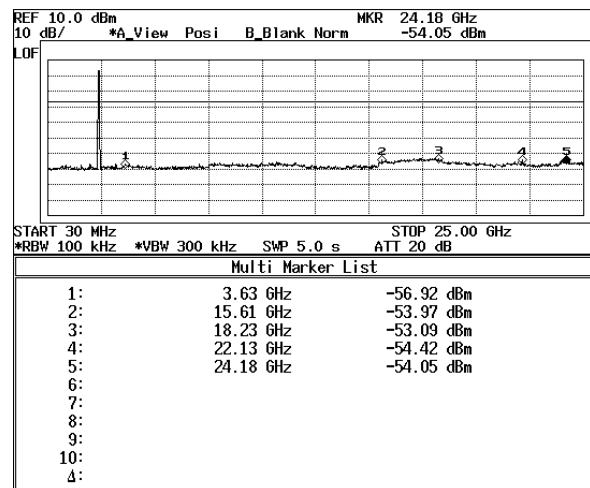





Band Edge Test result

Product	ITQ700
Test Item	Band Edge
Test Mode	Tx / Channel 0, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

DH5



Channel : 0 CH(2402 MHz)

Hopping mode

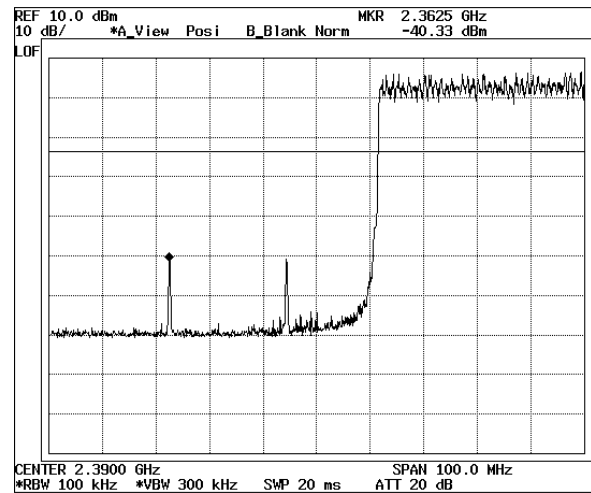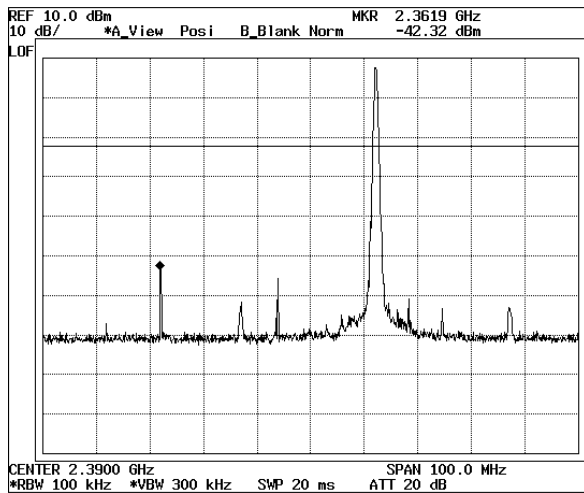

Channel : 78 CH(2480 MHz)

Hopping mode

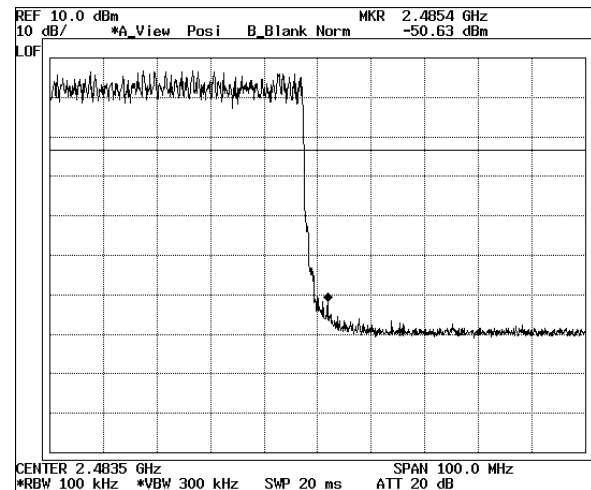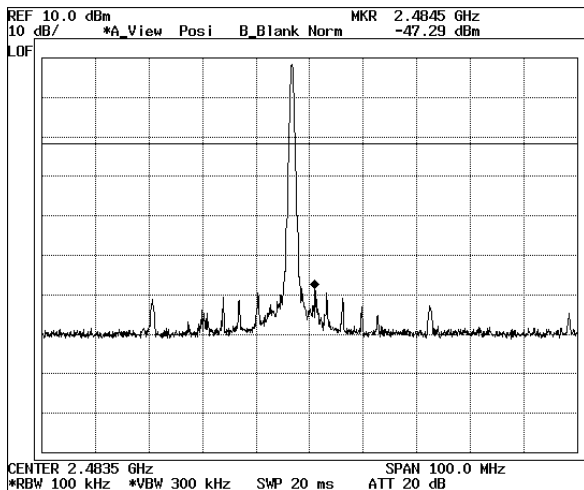



Band Edge Test result

Product	ITQ700
Test Item	Band Edge
Test Mode	Tx / Channel 0, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

3DH5



Channel : 0 CH(2402 MHz)

Hopping mode

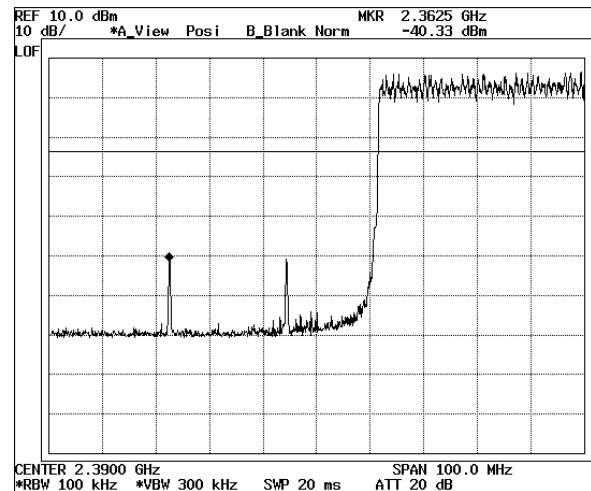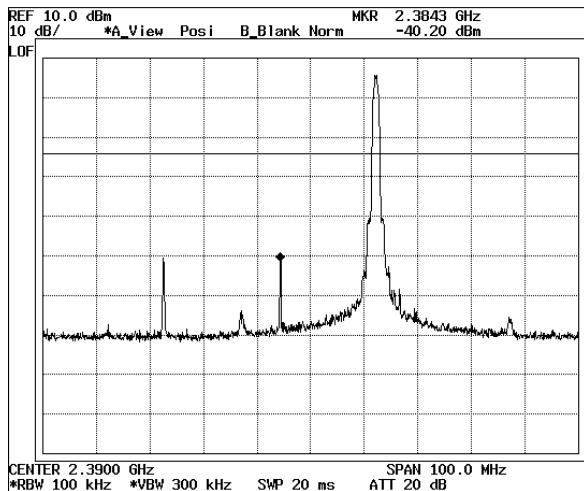

Channel : 78 CH(2480 MHz)

Hopping mode

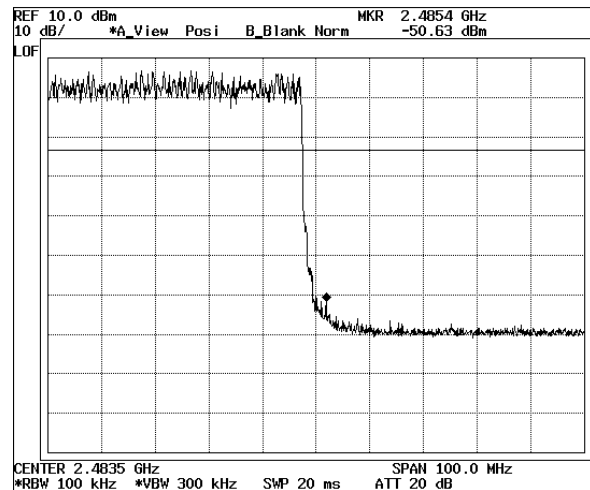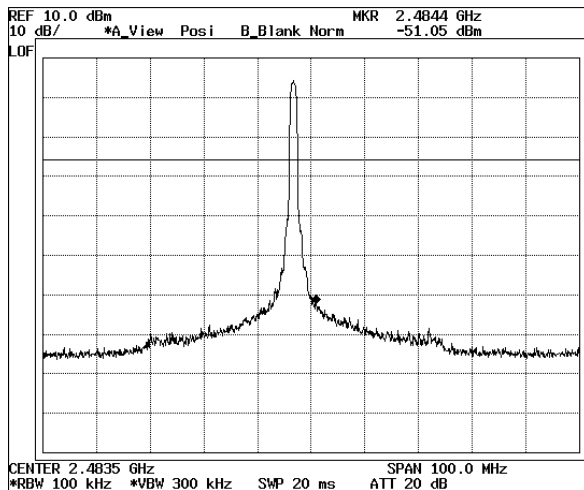

## Frequency Separation & Occupied Bandwidth


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct.10, 2012
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

### ◆ Test Setup

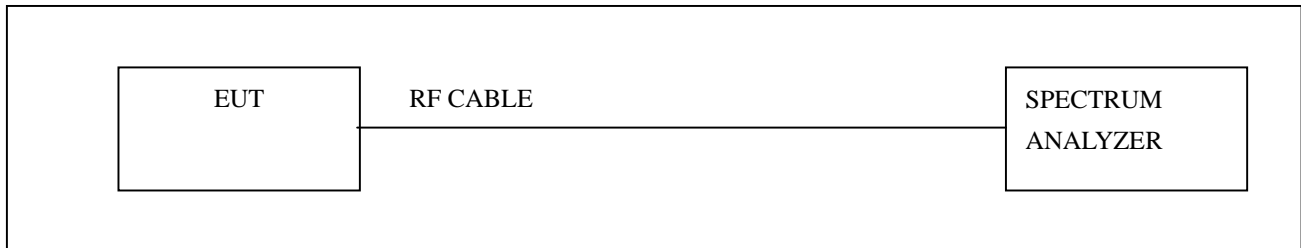

### ◆ Limits

According to 15.247(a)(1), Frequency hopping systems operation in the 2400-2483.5 MHz band may have hopping carrier frequencies that are separated by 25 KHz or two-third of 20 dB band width of hopping channel, is greater.

### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

20dB BandWidth Test result


Product	ITQ700
Test Item	20dB Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

**20dB Band width**


DH5

Channel	20dB Band width (KHz)	Result
Low CH	953	Pass
Middle CH	953	
High CH	955	


Low Channel

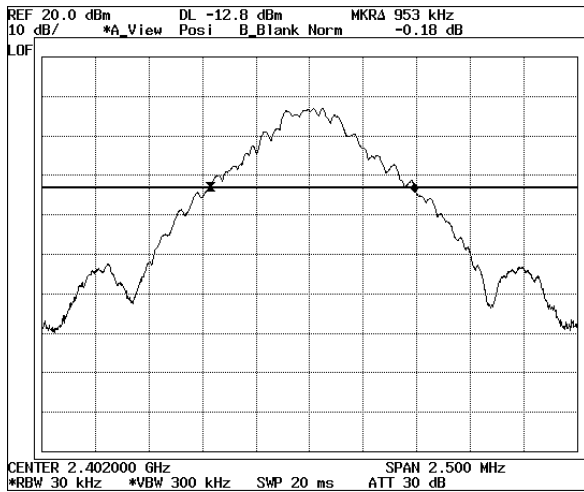

Mid Channel

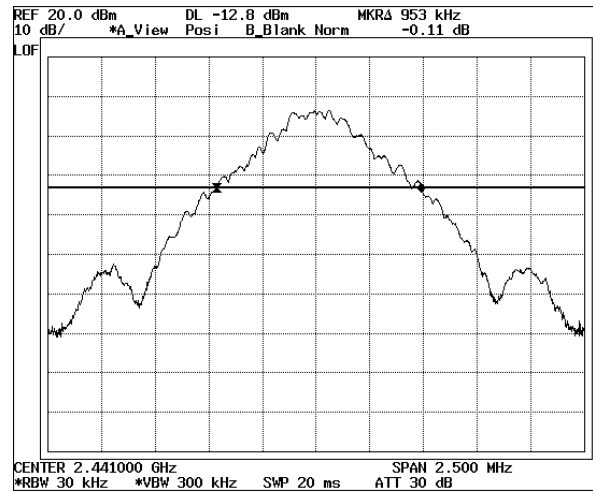

High Channel

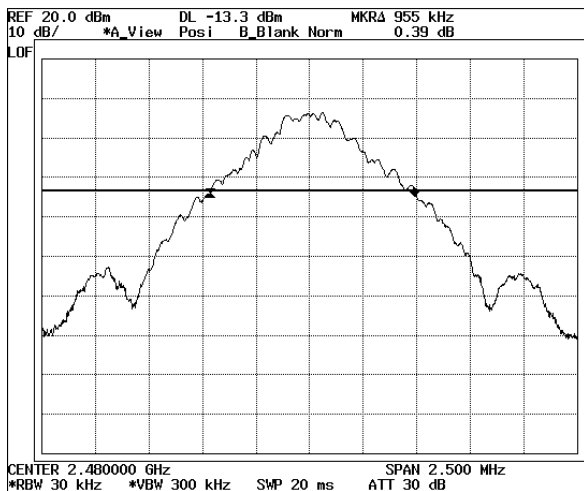

20dB BandWidth Test result

Product	ITQ700
Test Item	20dB Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

**20dB Band width**


3DH5

Channel	20dB Band width (KHz)	Result
Low CH	1375	Pass
Middle CH	1375	
High CH	1367	


Low Channel



Mid Channel

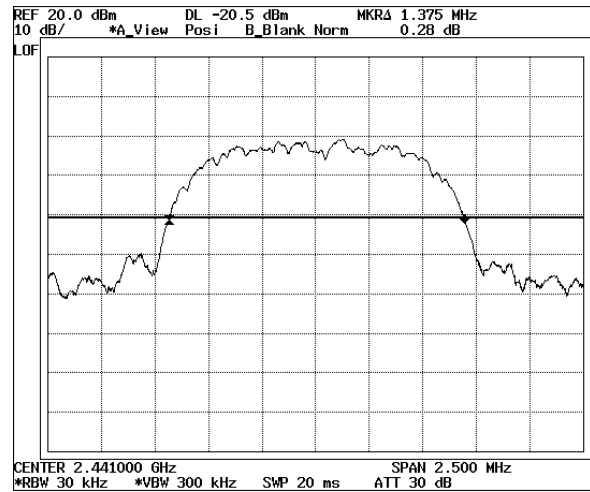

High Channel

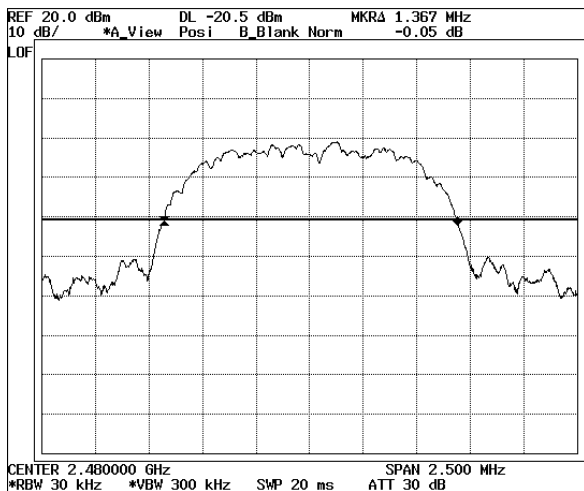

Channel Separation Test result

Product	ITQ700
Test Item	Channel Separation
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted



**Channel Separation**

DH5


Channel	Channel Separation (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
Low CH	1000	953	>25 or >2/3 of the 20dB BW	Pass
Middle CH	1000	953		
High CH	1000	955		

Low Channel

Mid Channel

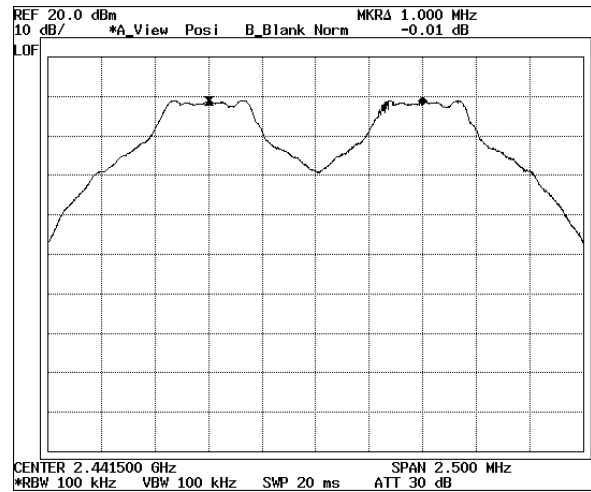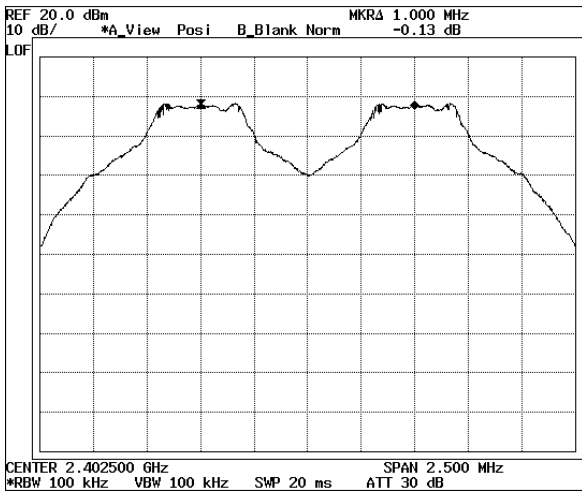

High Channel

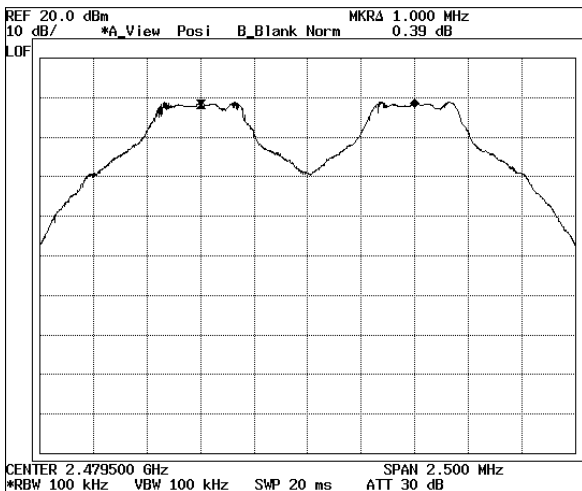

Channel Separation Test result

Product	ITQ700
Test Item	Channel Separation
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted



**Channel Separation**

3DH5


Channel	Channel Separation (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
Low CH	999	1375	>25 or >2/3 of the 20dB BW	Pass
Middle CH	1008	1375		
High CH	1008	1367		

Low Channel

Mid Channel

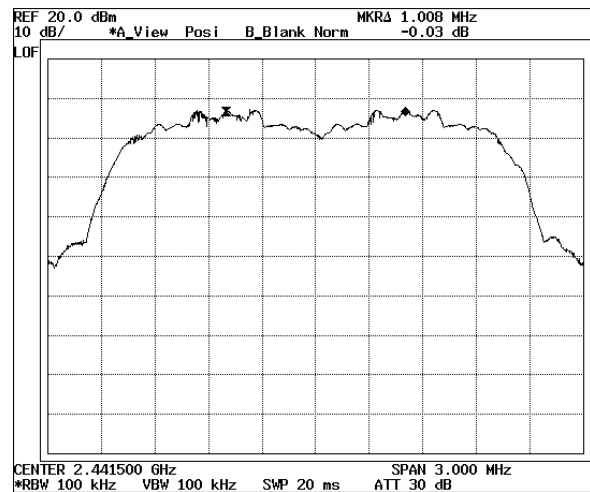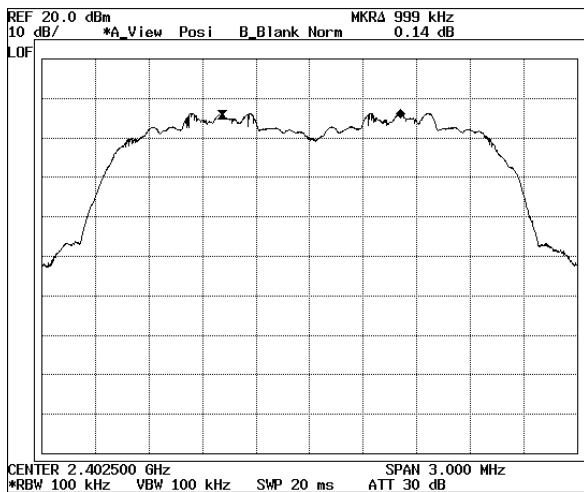

High Channel

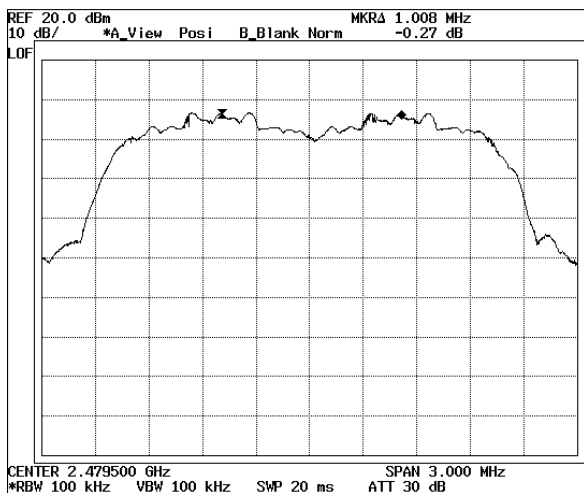

Channel Separation Test result


Product	ITQ700
Test Item	Occupied Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

**Occupied BandWidth(99%)**


DH5

Channel	99% BW(KHz)	Result
Low CH	888	Pass
Middle CH	885	
High CH	867	


Low Channel

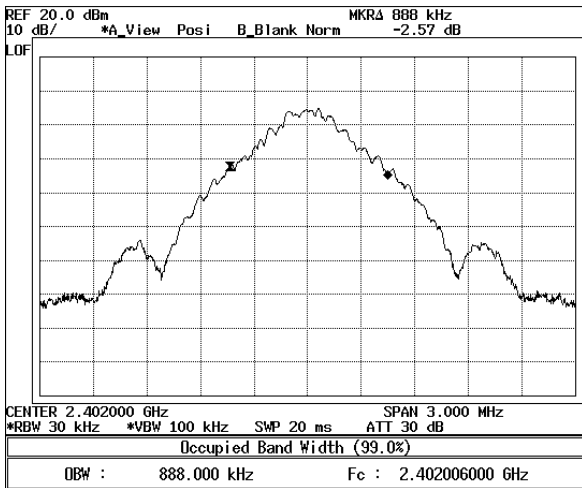

Mid Channel

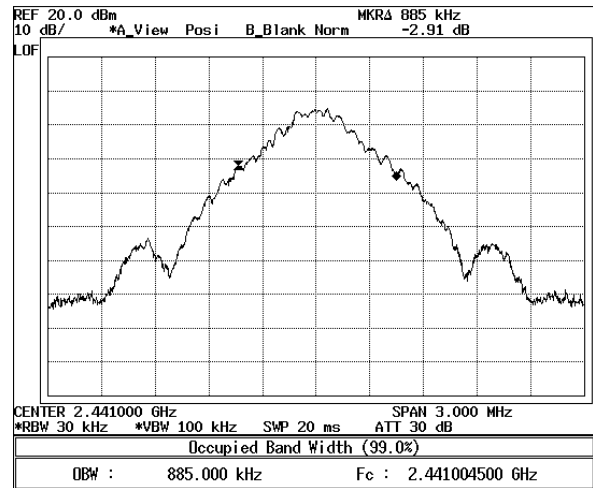

High Channel

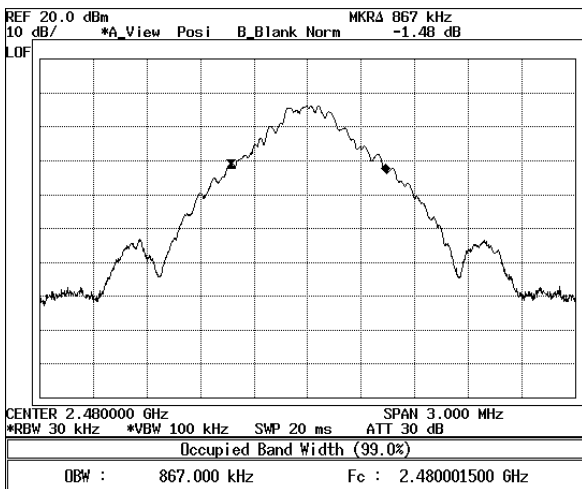



Channel Separation Test result


Product	ITQ700
Test Item	Occupied Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

**Occupied BandWidth(99%)**


3DH5

Channel	99% BW(KHz)	Result
Low CH	1239	Pass
Middle CH	1233	
High CH	1233	


Low Channel

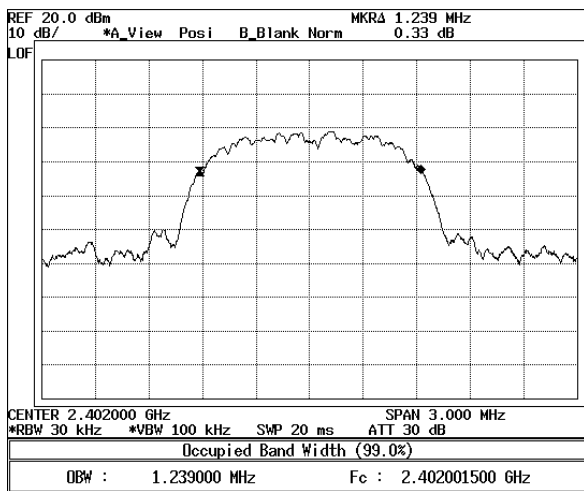

Mid Channel

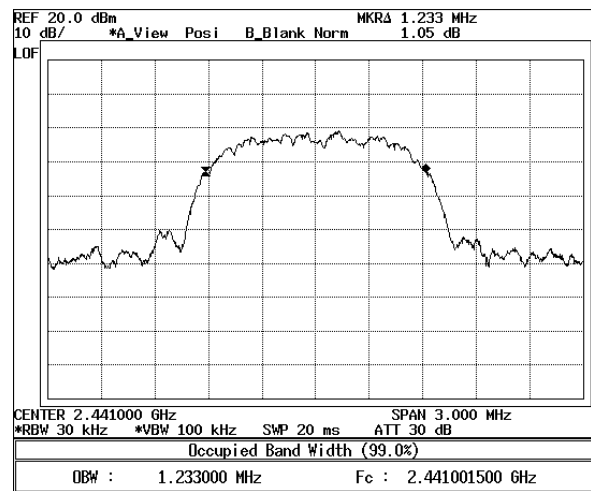

High Channel

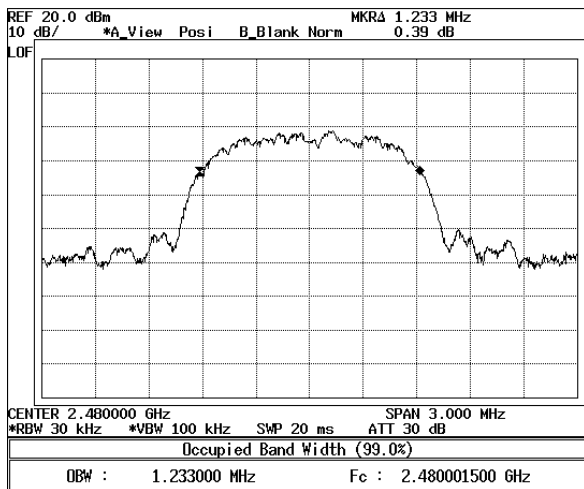

## Number of Hopping Frequency


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct.10, 2012
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

### ◆ Test Setup

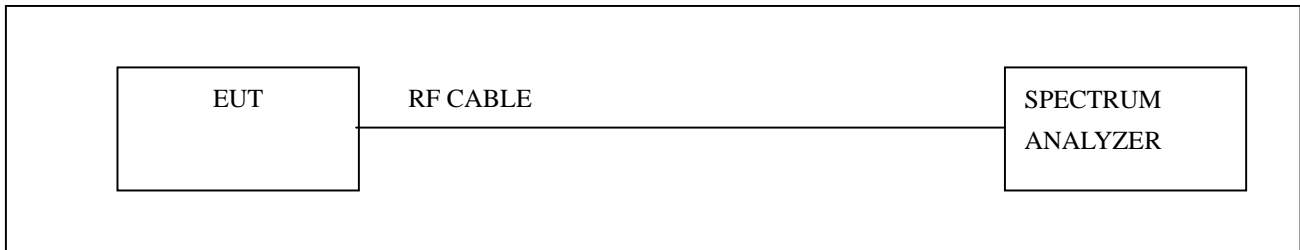

### ◆ Limits

According to 15.247(a)(1)(ii), Frequency hopping systems operation in the 2400-2483.5 MHz bands shall use at least 15 hopping frequencies.

### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer.



According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test result



Product	ITQ700
Test Item	Number of hopping frequency
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

Channel (No. of channel)	Limit (No. of channel)	Result
79	>15	Pass

DH5

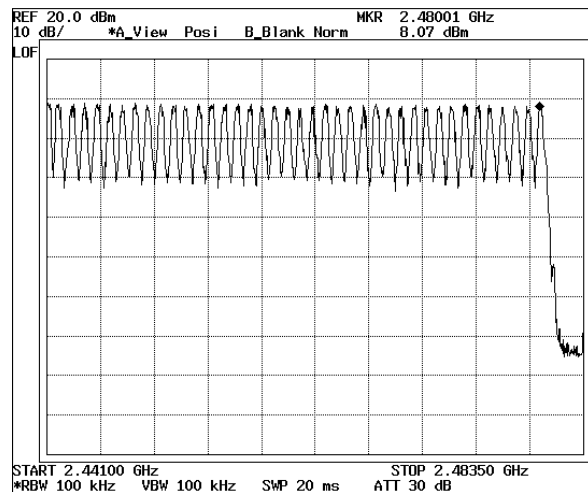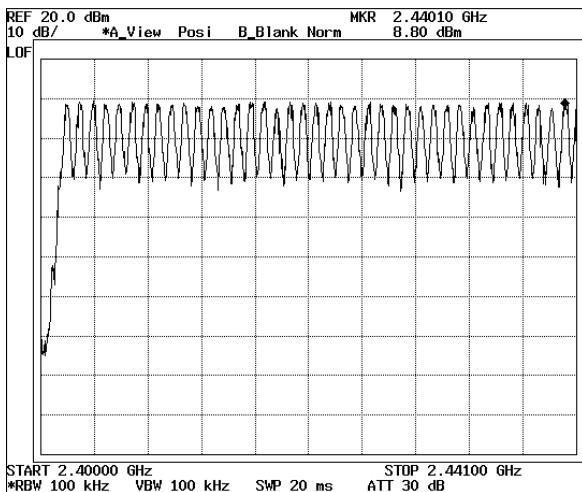

3DH5

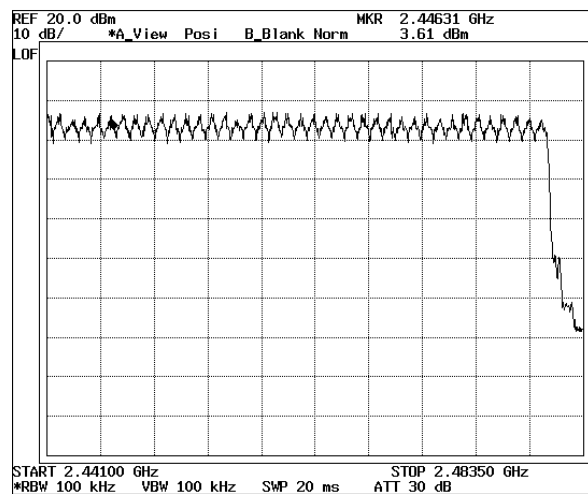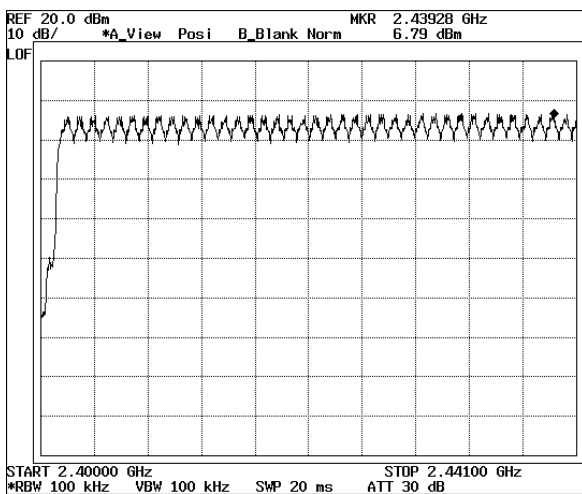

### Time of Occupancy(Dwell Time)


◆ **Test Equipment**

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct. 10, 2012
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

◆ **Test Setup**

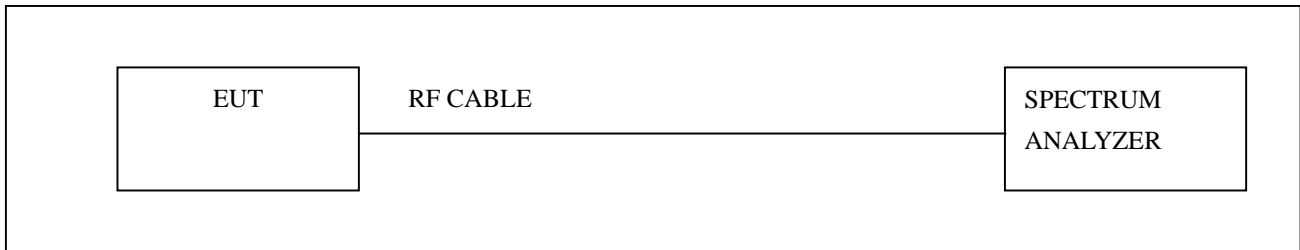

◆ **Limits**

According to 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4s within a period 0.4s multiplied by the number of hopping channels employed.

◆ **Test Procedure**

The transmitter output is connected to the Spectrum analyzer.



According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Dwell time Test result



Test Item	Dwell Time
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

Mode	Number of transmission in a 31.6	Length of transmission time(ms)	Result (ms)	Limit (ms)	Result
DH5	19(times/5s) *6.32 = 120.08times	2.882	346.070	400	Pass
3DH5	20(times/5s) *6.32 = 126.40times	2.886	364.790		Pass

DH5

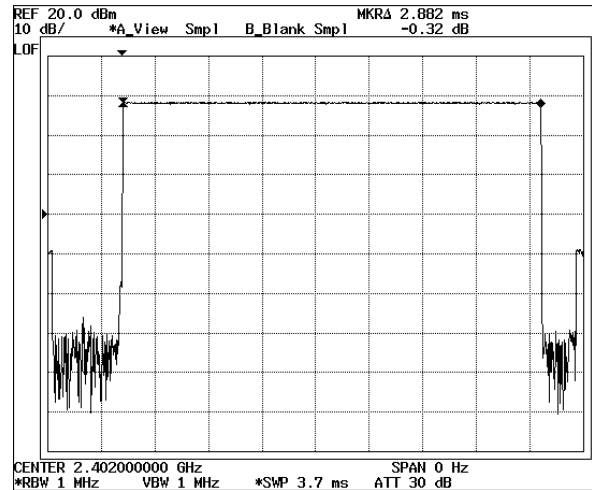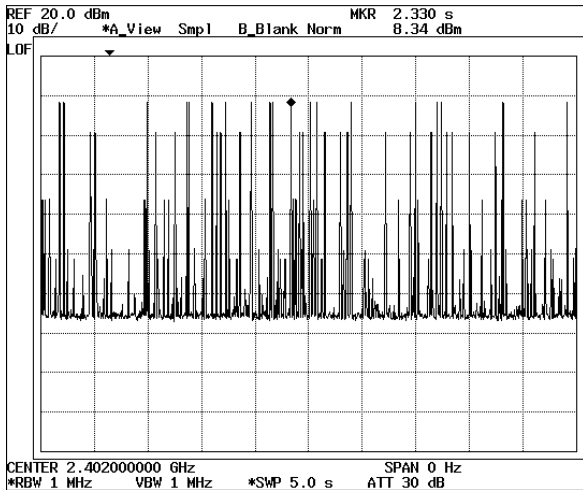

3DH5

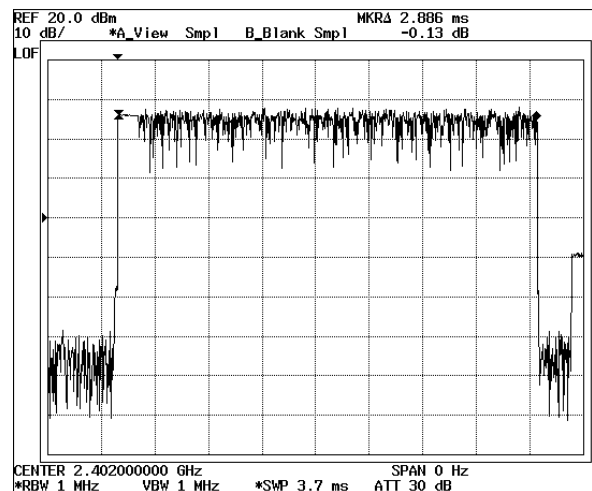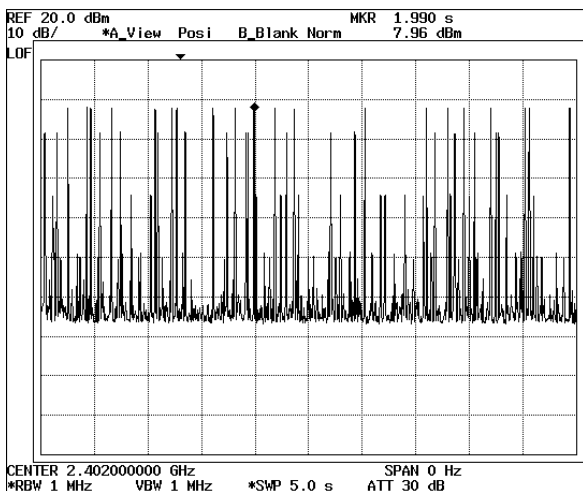

Note : High, Low and mid channels have same length of transmission time.

### Antenna requirements

#### **According to FCC 47 CFR 15.203**

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

- \* the antenna of this EUT are permanently attached.
  
- \* the EUT complies with the requirement of 15.203