

Comparing the data of 10 m Chamber_3 m and Opensite 3 m


Measure Frequency

F1 : 5 MHz

F2 : 15 MHz

F3 : 25 MHz

9 kHz ~ 30 MHz

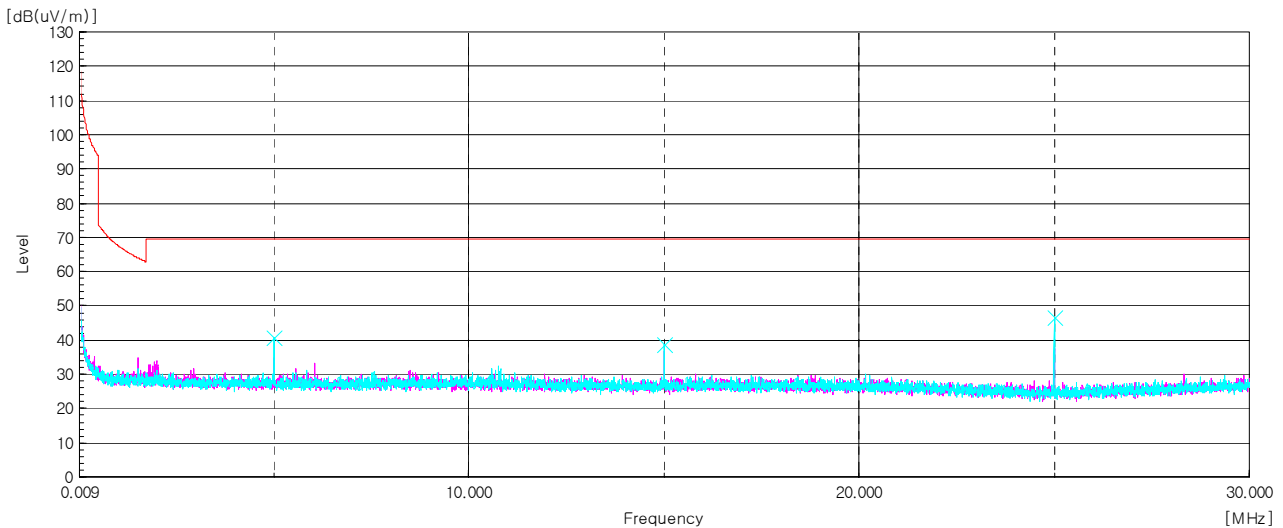

KCTL_2F 10 m Test Date : 2016.09.09

Chamber Address : 65 Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea

Frequency [MHz]	(P)	Reading [dB(uV)]	Cable Loss	Amp. Gain	Ant. Factor	Total Factor	Level PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
4.999	V	53.000	1.100	-33.200	19.700	-12.400	40.600	-	-	100.000	76.800
15.001	V	50.900	1.500	-33.200	19.500	-12.200	38.700	-	-	100.000	127.600
25.003	V	59.300	1.200	-33.200	19.200	-12.800	46.500	-	-	100.000	9.800

RAPA Test Date : 2016.09.12

Opensite Address : 103, Anseok-dong, 138beon-gil, Hwaseong-si, Gyeonggi-do, Korea(FCC OATS Registration Number : 931589)

Frequency [MHz]	(P)	Reading [dB(uV)]	Cable Loss	Amp. Gain	Ant. Factor	Total Factor	Level PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
5.001	V	53.900	0.900	-	10.900	10.900	42.100	-	-	100.000	72.200
15.000	V	50.900	1.100	-	9.900	9.900	39.900	-	-	100.000	115.000
25.001	V	55.200	1.500	-	8.500	8.500	45.200	-	-	100.000	10.100