

CERTIFICATION TEST REPORT

FCC CFR47 Part 15 Subpart C

Test Report File No.	15-IST-0145	<input checked="" type="checkbox"/> Basic	<input type="checkbox"/> Alternate
Date of Receipt	February 26, 2015	Begin of test date	March 09, 2015
Date of Issue	March 27, 2015	End of test date	March 13, 2014
Kind of Product	Portable Music Player		
Model(s)	PPE11		
FCC ID	QDMPPE11		
Applicant	IRIVER LIMITED.		
Address	Iriverhouse, 5, Bangbae-ro 18-gil, Seocho-gu, Seoul, Korea		
Manufacturer	IRIVER LIMITED.		
Address	Iriverhouse, 5, Bangbae-ro 18-gil, Seocho-gu, Seoul, Korea		

Test Result

Positive

Negative

Tested By

Reviewed By




B.O. KO.

S.J. CHO

Comment (s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart C.
- The test report is consists of 47 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST Co., Ltd.

- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4
 I assume full responsibility for accuracy and completeness of these data.

TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Measurement Uncertainty	3
Product information	4~5
Summary	6
- Conducted Emissions	7~11
- Peak Output power	12~14
- Conducted Spurious Emissions & Band edge	15
- Conducted Spurious Emissions	16~17
- Conducted Band Edge	18~19
- 20dB BandWidth & Channel Separation & Occupied Bandwidth	20
- 20dB BandWidth	21~22
- Channel Separation	23~24
- Occupied BandWidth	25~26
- Number of hopping frequency	27~28
- Time of occupancy(Dwell time)	29~30
- Radiated Emissions	31~33
- Radiated Emissions, 9KHz to 30MHz(Magnetic Field Test)	34
- Radiated Spurious Emissions	35~38
- Radiated Restricted Bands Emissions	39~46
- Antenna requirements	47

Note:

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd.
 52-20, Sinjeong-ro 41beon-gil, Giheung-gu,
 Yongin-si, Gyeonggi-do, Korea
 TEL: +82 31 326 6700 FAX: +82 31 326 6797



VCCI Registration No. : 1739
 FCC Registration No. : 400603
 KCC Registration No. : KR0018
 KOLAS Registration No. : KT118

Measurement Uncertainty

Conducted Emissions (#1)	$U = 2.59$ [dB] (Confidence level approximately 95 %, $k = 2$)
Conducted Emissions (#2)	$U = 2.59$ [dB] (Confidence level approximately 95 %, $k = 2$)
Radiated Emissions 30 MHz - 1000 MHz (Antenna - Horizontal)	$U = 3.02$ [dB] (Confidence level approximately 95 %, $k = 2$)
Radiated Emissions 30 MHz - 1000 MHz (Antenna - Vertical)	$U = 3.68$ [dB] (Confidence level approximately 95 %, $k = 2$)
Radiated Emissions Above 1GHz	$U = 4.20$ [dB] (Confidence level approximately 95 %, $k = 2$)

PRODUCT INFORMATION

Portable Music Player(PPE11)

General Specifications	
Product Name	AK Jr (Portable Music Player)
Model	PPE11
Body Color	Silver
Body Material	Aluminum
Display	3.1inch WQVGA (240x400)/Touch Screen
Supported Audio Formats	WAV,FLAC,WMA,MP3,OGG,APE (Normal, High, Fast) AAC,ALAC,AIFF,DFP,DSF
Sample rate	FLAC,WAV,ALAC,AIFF:8kHz~192kHz (8/16/24bits per sample) DSD:DSD64(1bit 2.8MHz),Stereo(DSD to PCM)
Output Level	2.0Vrms
DAC	Wolfson WM8740 x 1(Single DAC)
Decoding	Support up to 24bit/ 192kHz Bit to Bit Decoding
Input	USB Micro-B input (for charging & data transfer (PC&MAC))/ Connection Mode: UMS (USB Mass Storage)
Outputs	PHONES (3.5mm)
Bluetooth	V4.0 (Basic+EDR) (A2DP, AVRCP)
Dimensions	2.08" (52.9mm) [W]x4.60" (117mm) [H]x0.35" (8.9mm) [D]
Weight	3.28oz (93g)
Feature Enhancements	Firmware upgrade supported(UMS-Firmware File Copy Type)
Memory	Built-in Memory: 32GB [NAND] External Memory: microSD(Max. 32GB) x1
Battery	1450mAh 3.7V Li-Polymer Battery
Supported OS	Windows XP, Windows 7, 8 (32/64bit) MAC OS X 10.7. and up

RF Specifications	
Frequency Range	2402 MHz ~ 2480 MHz
Modulation Technologies	GFSK, pi/4DQPSK, 8DPSK
Number of Channels	79ch (1MHz span)
Antenna Gain	2.39 dBi
Operation temperature	-10°C ~ 50°C
Power Supply	DC 3.7 V

Test Mode :

Mode 1: Transmit (DH5)

Mode 2: Transmit (3DH5)

1. DH5 is for GFSK modulation, and 3DH5 is for Pi/4 DQPSK
2. Regards to the frequency band operation; the highest that was included the lowest, middle and highest frequency of channel were selected to perform the test, and then shown on this report.

- Please refer to user's manual.

SUMMARY


Description of Test	FCC Rule Parts	Results
AC Conducted Emission	15.207	Compliant
Carrier Frequency Separation	15.247(a)(1)	Compliant
20 dB Bandwidth	15.247(a)(1)(ii) or (iii)	Compliant
Time of Occupancy	15.247(a)(1)(ii) or (iii)	Compliant
Number of Hopping Frequencies	15.247(a)(1)(ii) or (iii)	Compliant
Conducted Maximum Peak Output Power	15.247(b)(1)	Compliant
Spurious RF Conducted Emission	15.247(d)	Compliant
Spurious Radiated Emission	15.247(d), 15.209	Compliant
Out-of- Band Emission	15.247(d)	Compliant
Occupied Bandwidth		Compliant

Conducted Emissions:

The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" & "Average" within a bandwidth of 9 KHz.

-Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1 m X 1.5 m wooden table 80 cm height is placed 40 cm away from the vertical wall and 1.5 m away from the other wall of the shielded room. The R/S ESCI and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80 cm from the LISN and powered from the EMCO LISN .The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30 MHz. The bandwidth of the receiver was set to 10 kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

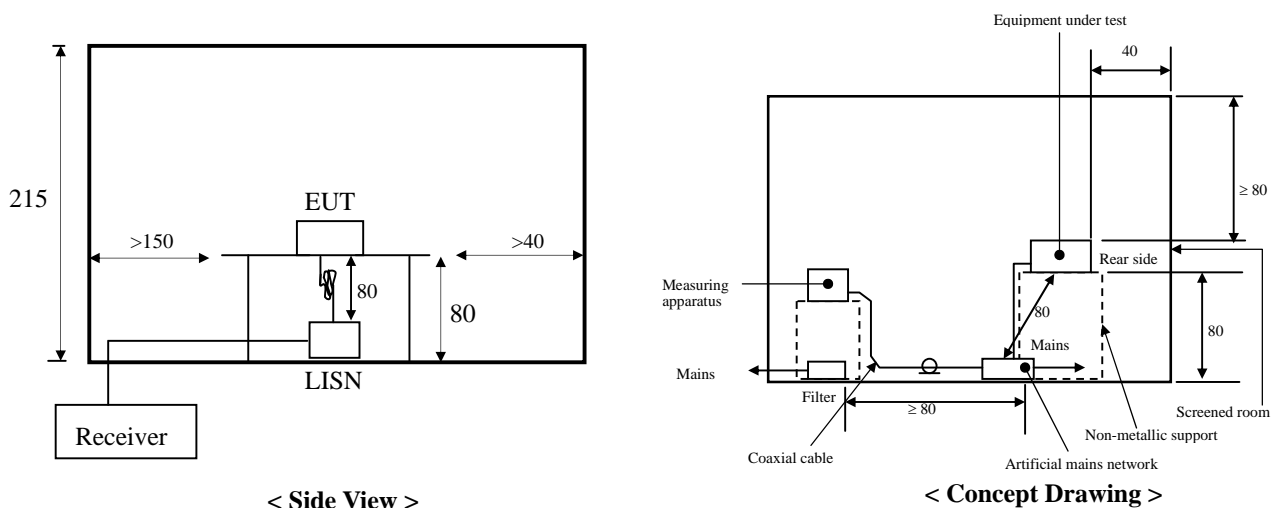

Limits

According to §15.207(a) except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207

Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacturer	Due for Cal	Serial No.
ESCI	Test Receiver	Rohde & Schwarz	Jul. 09, 2015	100373
ENV216	LISN	Rohde & Schwarz	Dec. 05, 2015	101718

Note :The equipment used is calibrated in regular for every year.

◆ Test Accessories Used

Equipment	Type	Brand	Serial No.
EUT	PPE11	IRIVER LIMITED.	N/A
Laptop	LG15N53	LG Electronics	4040CPY560240
Adapter (Laptop)	ADP-65JH BB	Delta Electronics, Inc.	69IW43403WP
Bluetooth Speaker	XAM11	X-mini	X0035744

Connecting Interface Cables :

Unshielded Adapter Power Cable : 1.8 m

◆ Test Conditions

Temperature (18.2 ± 0.3) °C
 Humidity (32.7 ± 0.2) % R.H.
 Atmosphere (1010) mbar

◆ Test Area Conducted Room #1

◆ Test Date March 09, 2015

Note :


Conducted Emissions result

Live



RBW 9 kHz
MT 160 ms
PREAMP OFF

Att 10 dB

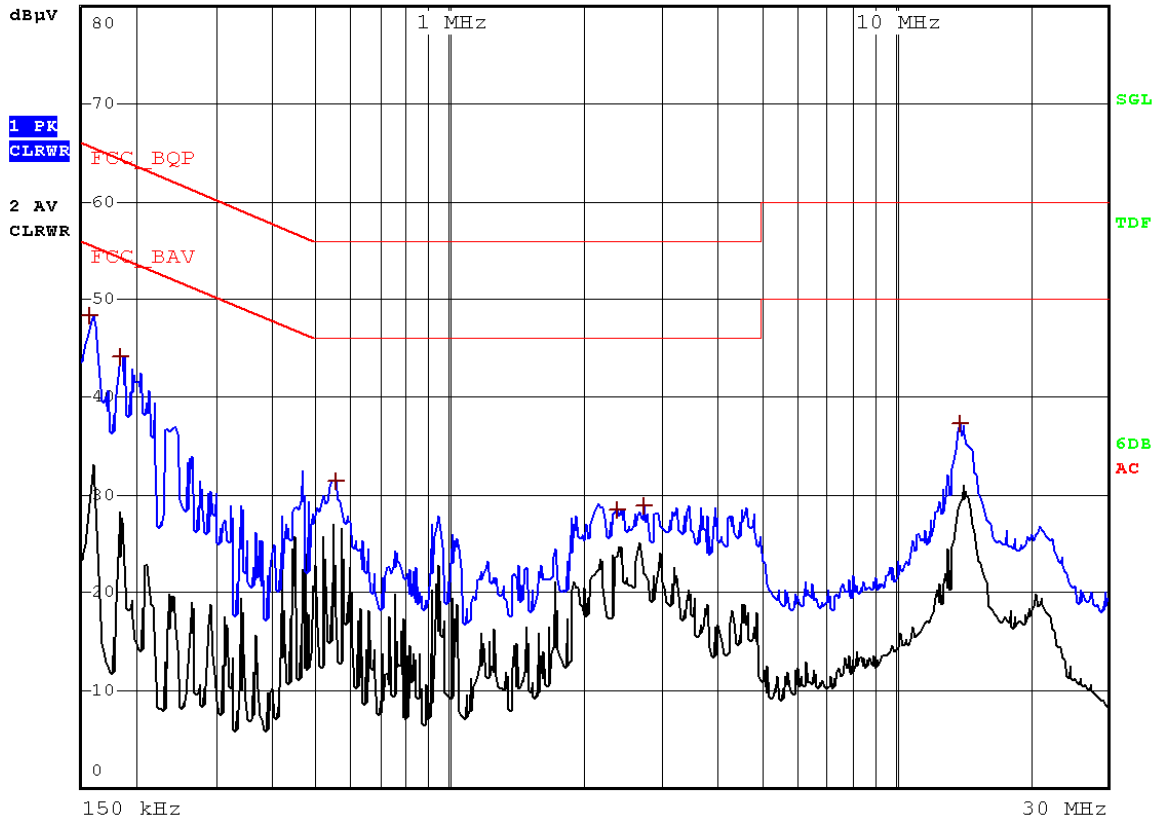

Model Name : PPE11 120 Vac 60 Hz Phase : Live

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.157	37.75	23.53	65.62	55.62	9.55	0.05	47.35	33.13	18.27	22.49
0.183	35.87	21.90	64.35	54.35	9.55	0.04	45.46	31.49	18.89	22.86
0.548	20.96	20.62	56.00	46.00	9.56	0.04	30.56	30.22	25.44	15.78
2.374	17.37	15.61	56.00	46.00	9.57	0.10	27.04	25.28	28.96	20.72
2.741	14.98	12.74	56.00	46.00	9.57	0.10	24.65	22.41	31.35	23.59
14.218	24.76	20.43	60.00	50.00	9.63	0.19	34.58	30.25	25.42	19.75


Conducted Emissions result

Neutral



RBW 9 kHz
MT 160 ms
PREAMP OFF

Att 10 dB

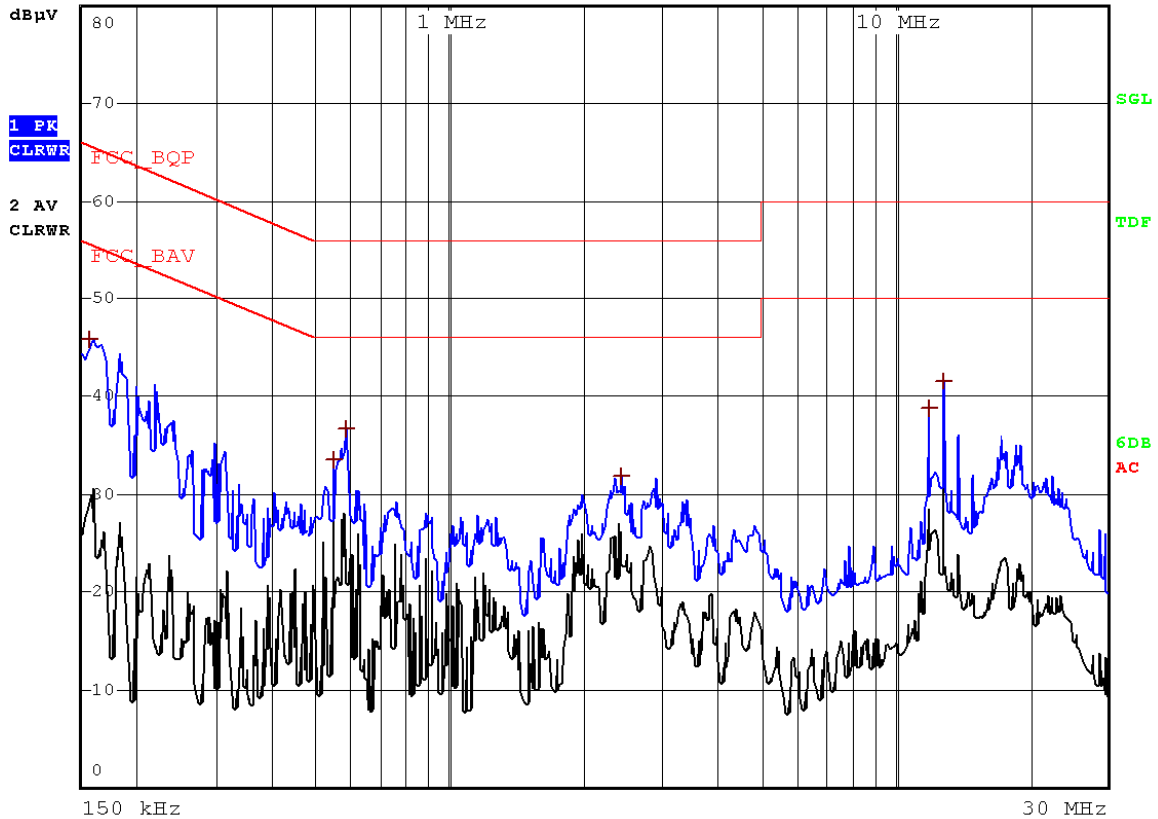

Model Name : PPE11 120 Vac 60 Hz Phase : Neutral

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.157	37.38	22.41	65.62	55.62	9.55	0.05	46.98	32.01	18.64	23.61
0.548	20.64	20.35	56.00	46.00	9.56	0.04	30.24	29.95	25.76	16.05
2.191	17.04	15.90	56.00	46.00	9.57	0.10	26.71	25.57	29.29	20.43
2.425	16.57	14.96	56.00	46.00	9.57	0.10	26.24	24.63	29.76	21.37
4.747	17.41	9.54	56.00	46.00	9.58	0.13	27.12	19.25	28.88	26.75
13.887	25.49	19.68	60.00	50.00	9.64	0.18	35.30	29.49	24.70	20.51

Peak Output Power

◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			


Note : All equipment upon which need to calibrated are with calibration period of 1 year.

◆ Limits

The maximum peak output power of the intentional radiator shall not exceed the following :

1. According to § 15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz : 1Watt.
2. According to § 15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, is transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs(b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

◆ Test Setup

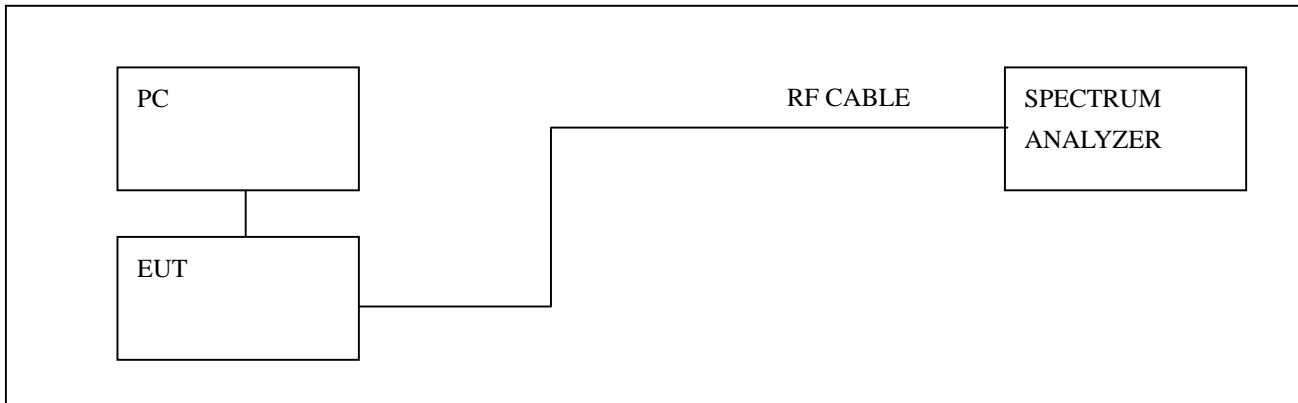

◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer .

The Spectrum analyzer is set to the peak power detection.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Peak Output Power Test result



Product	PPE11
Test Item	Peak Power Output
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
0	2402	5.66	1Watt=30dBm	Pass
39	2441	7.26	1Watt=30dBm	Pass
78	2480	8.06	1Watt=30dBm	Pass

Channel 0

Channel 39

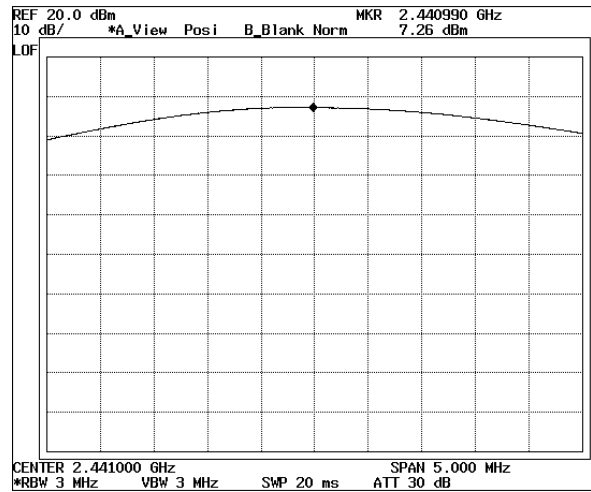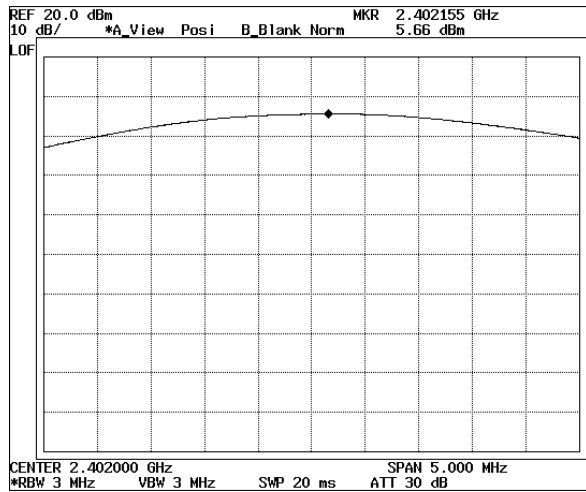

Channel 78

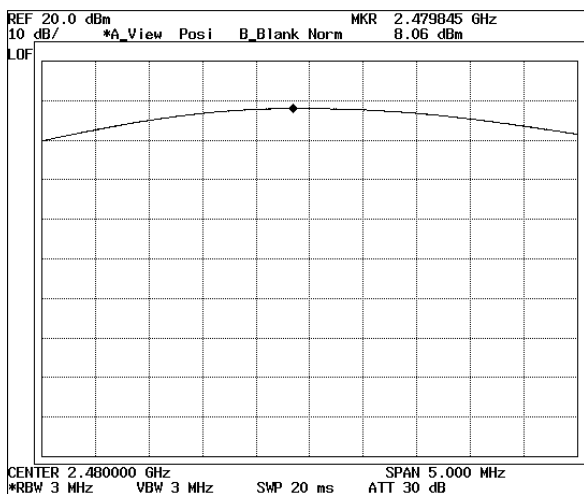

Note : Measurement level = reading level + correct factor

Peak Output Power Test result



Product	PPE11
Test Item	Peak Power Output
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
0	2402	3.60	1Watt=30dBm	Pass
39	2441	5.45	1Watt=30dBm	Pass
78	2480	6.46	1Watt=30dBm	Pass

Channel 0

Channel 39

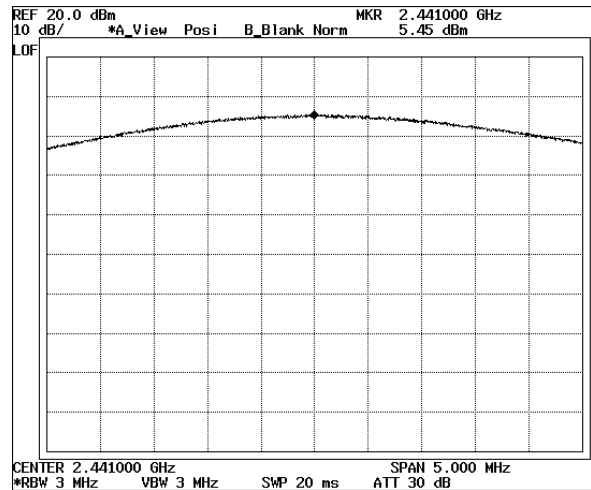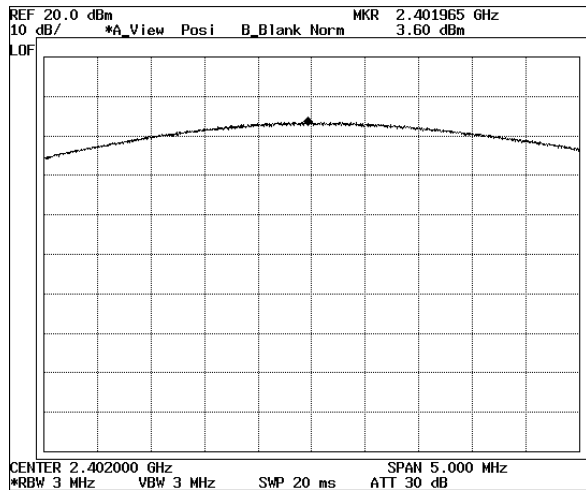

Channel 78

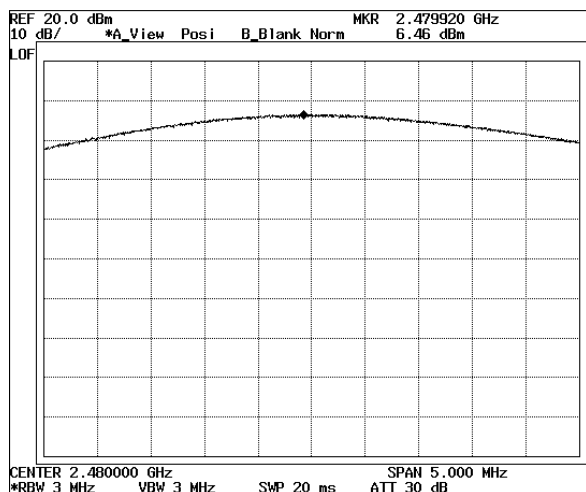

Note : Measurement level = reading level + correct factor

Conducted Spurious Emissions

& Band Edge

◆ **TEST Equipment**

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRL, KRISS, KTL and HCT.


2. The calibration interval of horn ant. and loop ant. is 24 months

◆ **Limits**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a)(see Section 15.205(c)).

◆ **Test Setup**

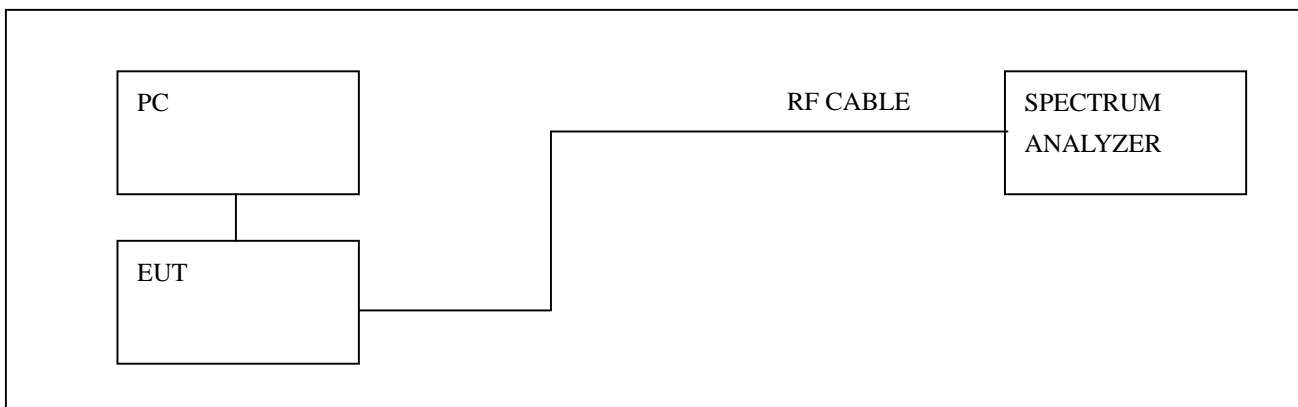

◆ **Test Procedure**

The transmitter output is connected to the Spectrum analyzer .


According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conducted Spurious Emissions Test result


Product	PPE11
Test Item	Spurious Emissions
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel 0 (2402 MHz)

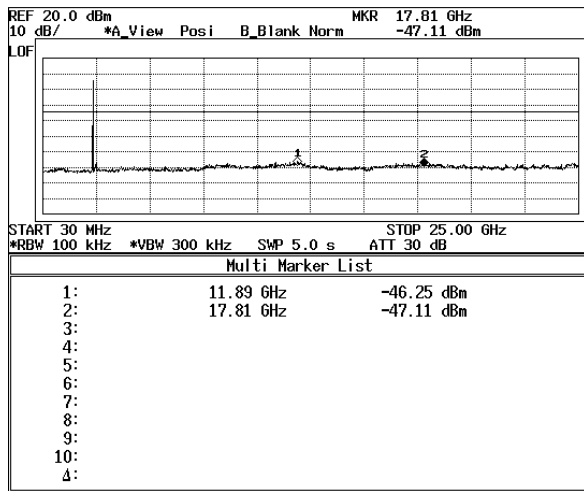


Channel 39 (2441 MHz)

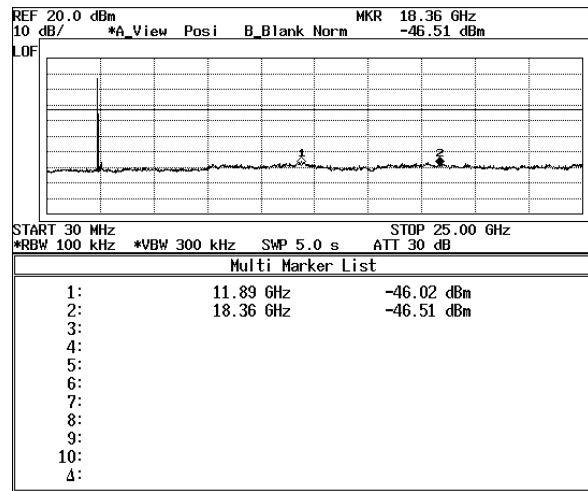

Channel 78 (2480 MHz)

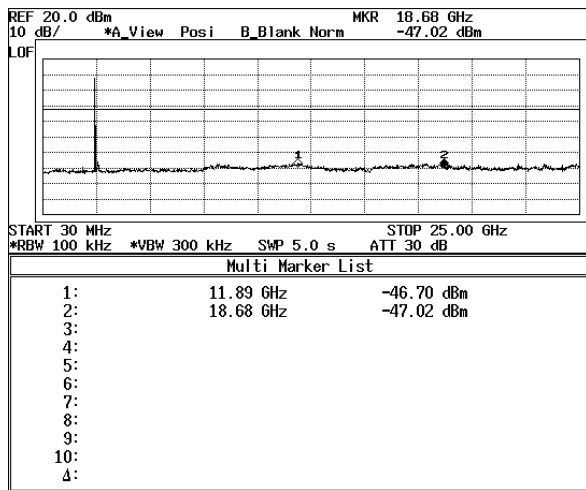

Hopping mode

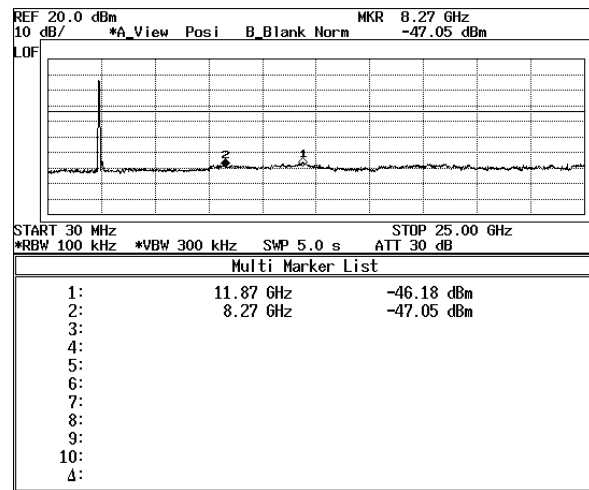


Note : Measurement level = reading level + correct factor

Conducted Spurious Emissions Test result


Product	PPE11
Test Item	Spurious Emissions
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel 0 (2402 MHz)

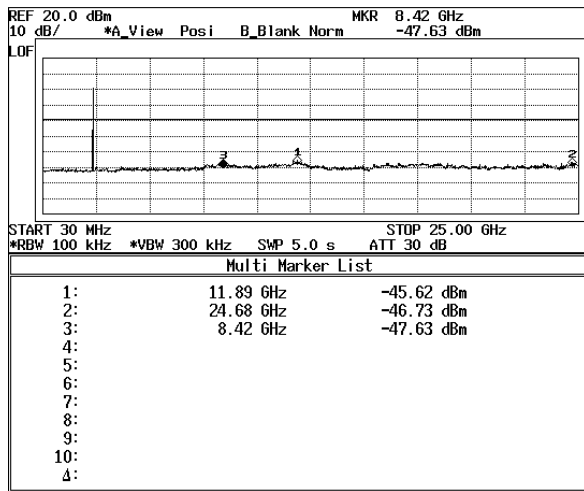


Channel 39 (2441 MHz)

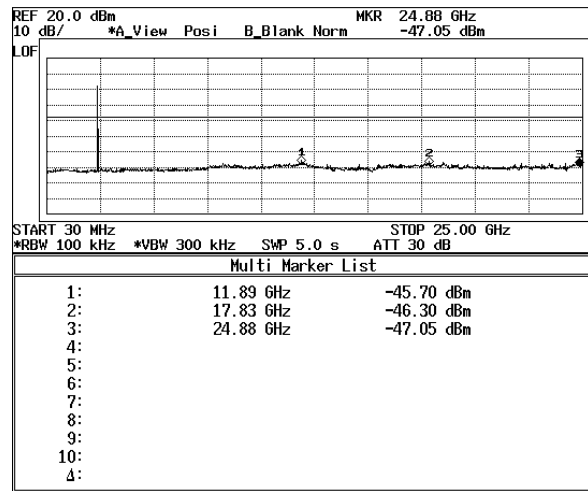

Channel 78 (2480 MHz)

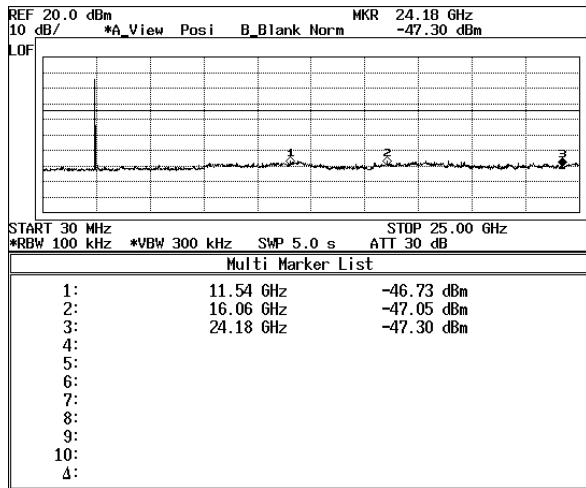

Hopping mode

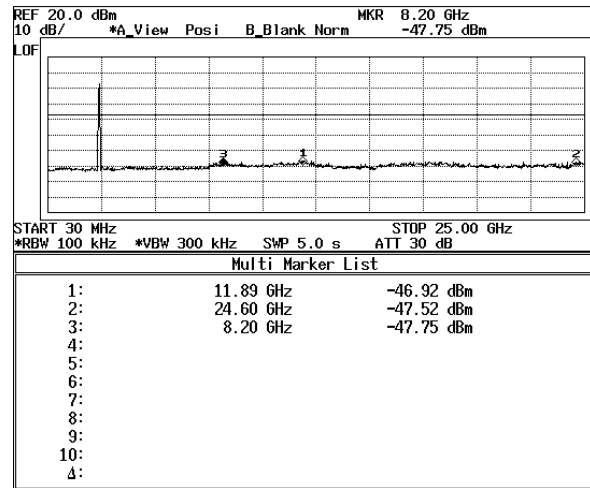


Note : Measurement level = reading level + correct factor

Band Edge Test result


Product	PPE11
Test Item	Band Edge
Test Mode	Tx / Channel 0, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel : 0 CH(2402 MHz)

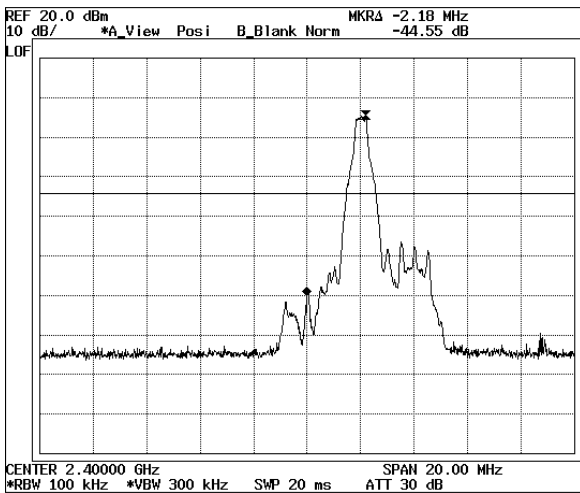


Hopping mode

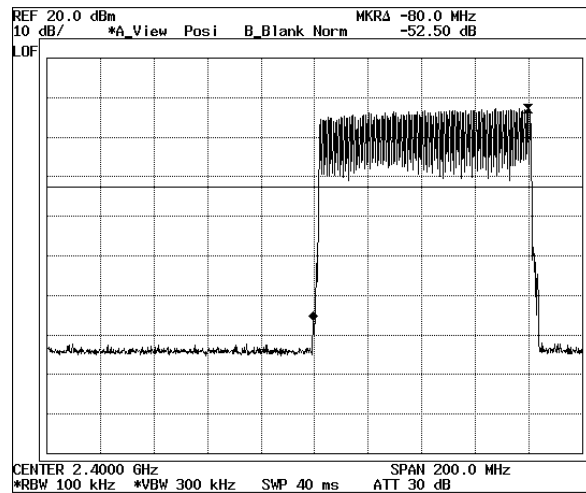

Channel : 78 CH(2480 MHz)

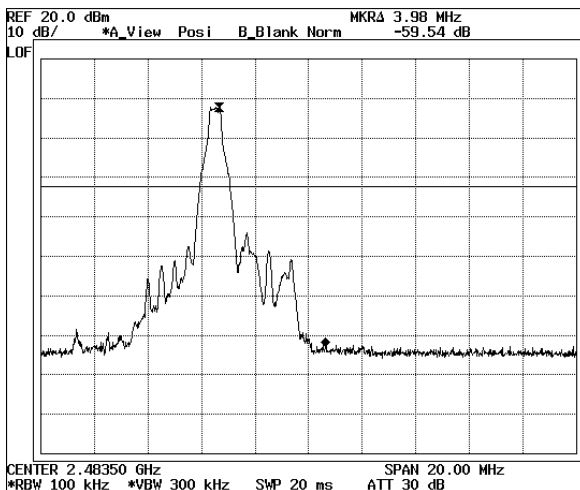

Hopping mode

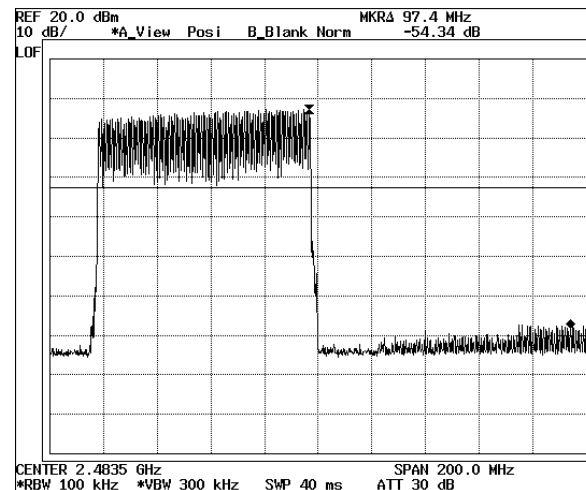


Note : Measurement level = reading level + correct factor

Band Edge Test result


Product	PPE11
Test Item	Band Edge
Test Mode	Tx / Channel 0, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel : 0 CH(2402 MHz)

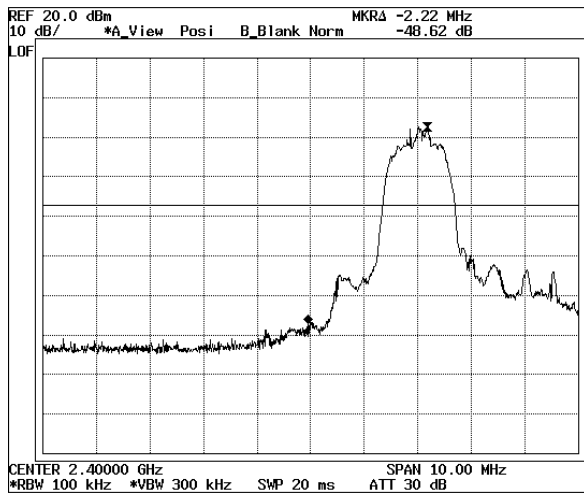


Hopping mode

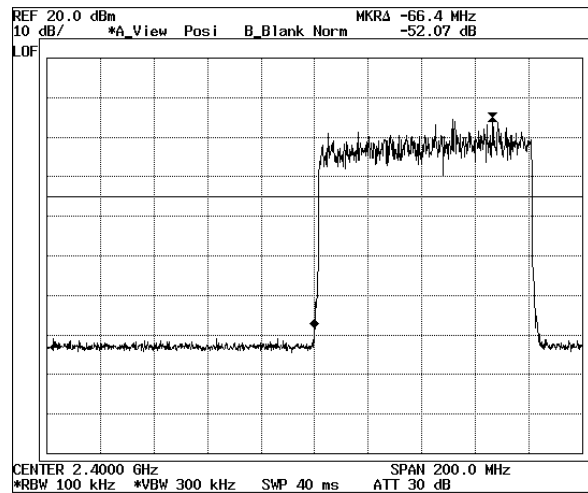

Channel : 78 CH(2480 MHz)

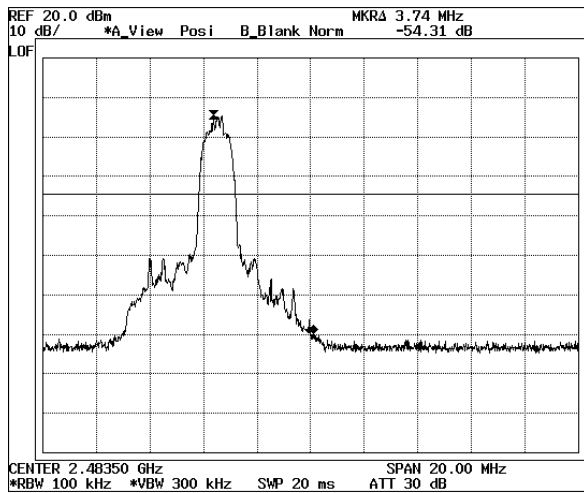

Hopping mode

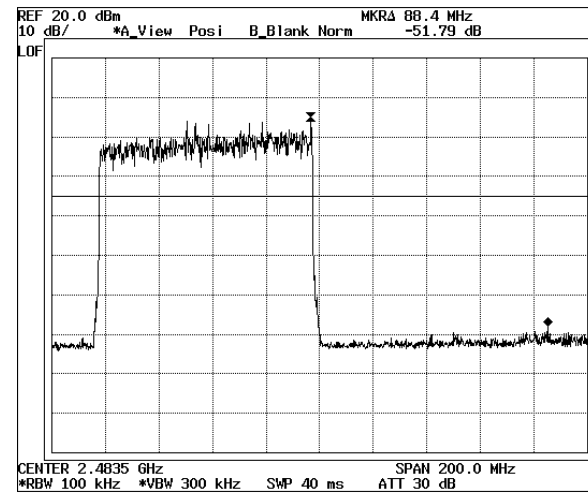

Note : Measurement level = reading level + correct factor

20dB BandWidth &

Channel Separation & Occupied Bandwidth


◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

◆ Test Setup

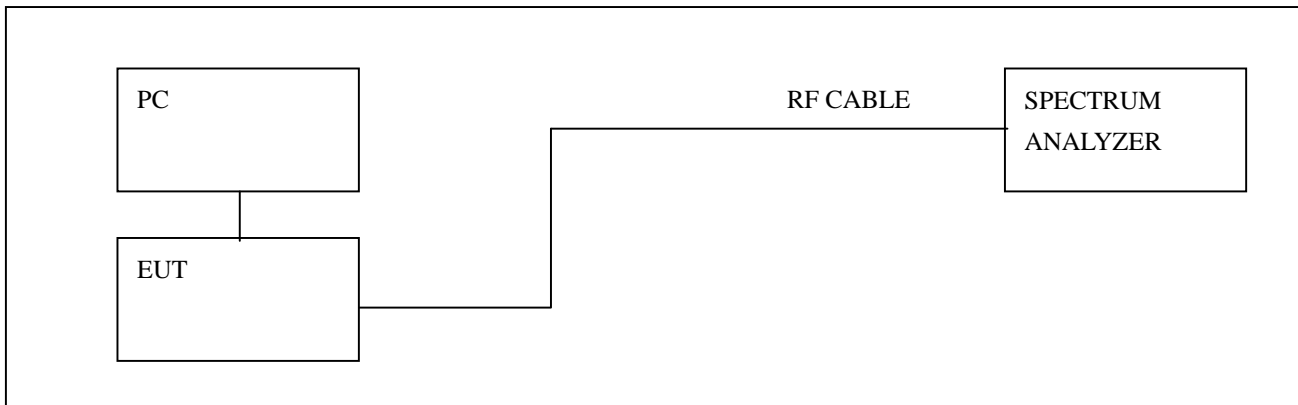

◆ Limits

According to 15.247(a)(1), Frequency hopping systems operation in the 2400-2483.5 MHz band may have hopping carrier frequencies that are separated by 25 KHz or two-third of 20 dB band width of hopping channel, is greater.

◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer .

According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

20dB BandWidth Test result



Product	PPE11
Test Item	20dB Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel	20dB Band width (KHz)
Low CH	960
Middle CH	1012
High CH	1020

Low Channel

Mid Channel

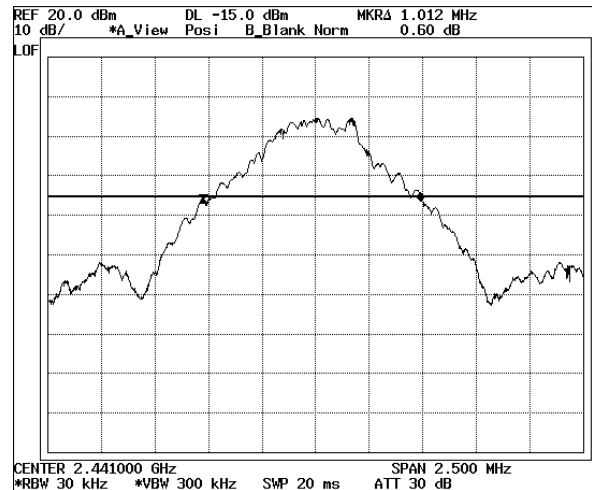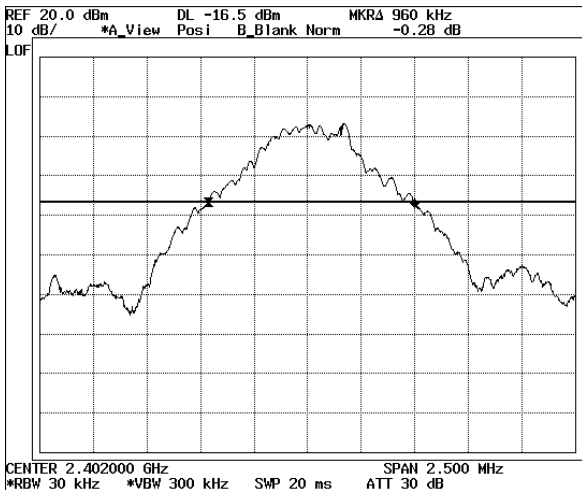

High Channel

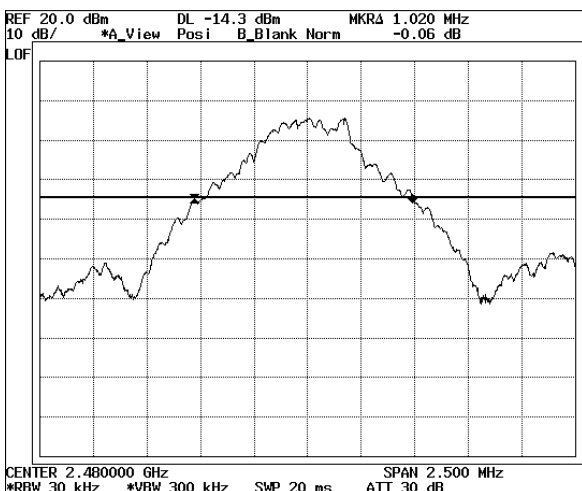

Note : Measurement level = reading level + correct factor

20dB BandWidth Test result


Product	PPE11
Test Item	20dB Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel	20dB Band width (KHz)
Low CH	1.280
Middle CH	1.285
High CH	1.285

Low Channel

Mid Channel

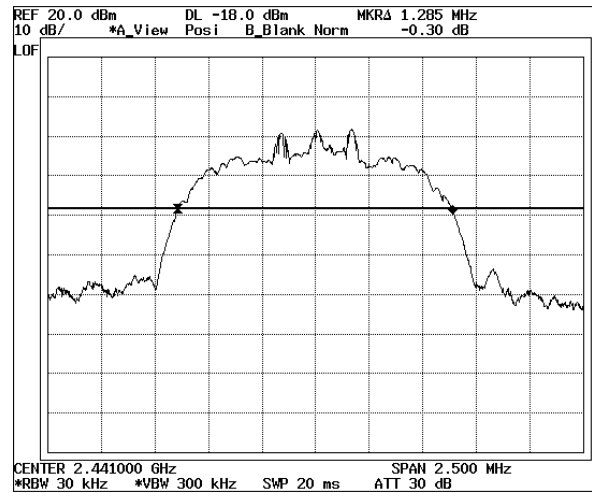

High Channel

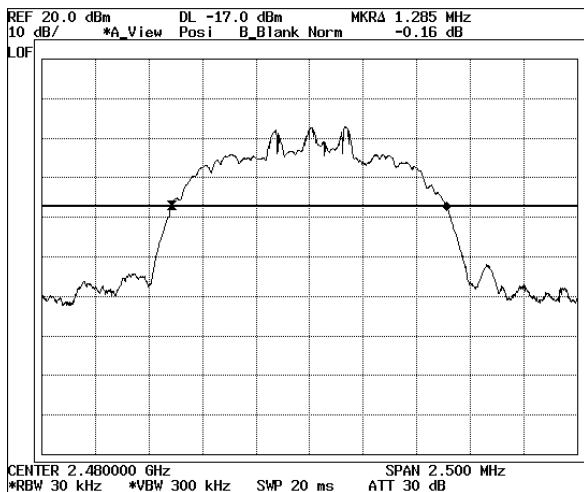

Note : Measurement level = reading level + correct factor

Channel Separation Test result



Product	PPE11
Test Item	Channel Separation
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel	Channel Separation (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
Low CH	1.008	960	>25 or >2/3 of the 20dB BW	Pass
Middle CH	1.008	1012		
High CH	1.008	1020		

Low Channel

Mid Channel

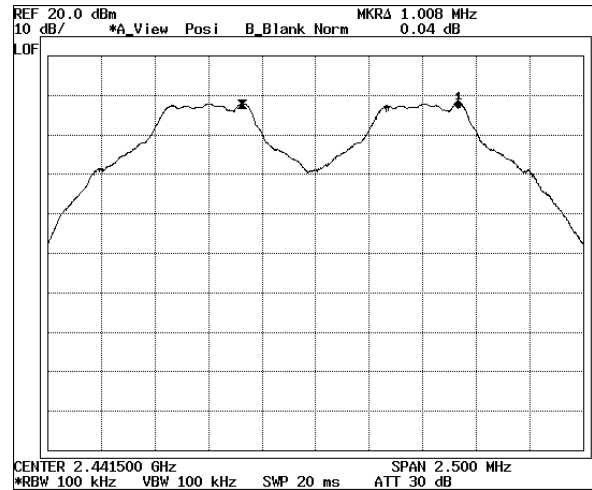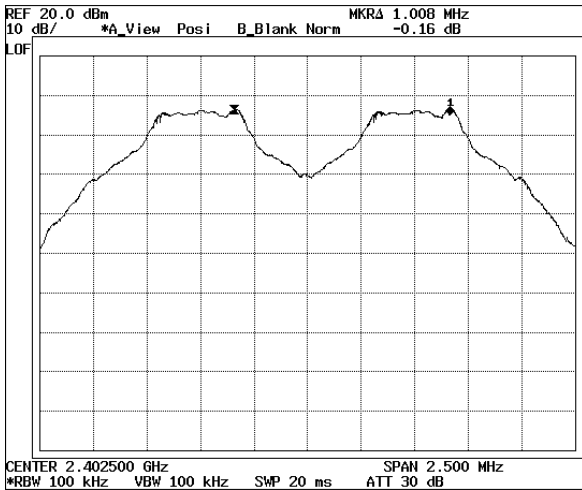

High Channel

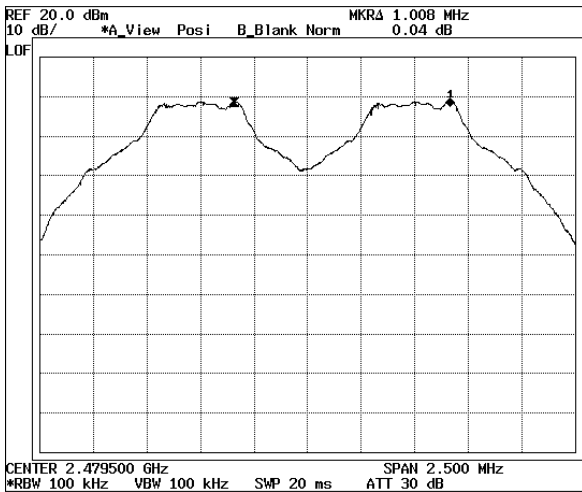

Note : Measurement level = reading level + correct factor

Channel Separation Test result



Product	PPE11
Test Item	Channel Separation
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel	Channel Separation (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
Low CH	1.005	1.280	>25 or >2/3 of the 20dB BW	Pass
Middle CH	1.005	1.285		
High CH	1.005	1.285		

Low Channel

Mid Channel

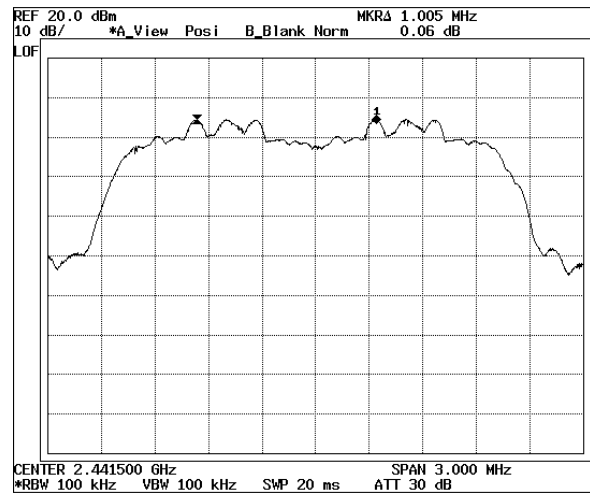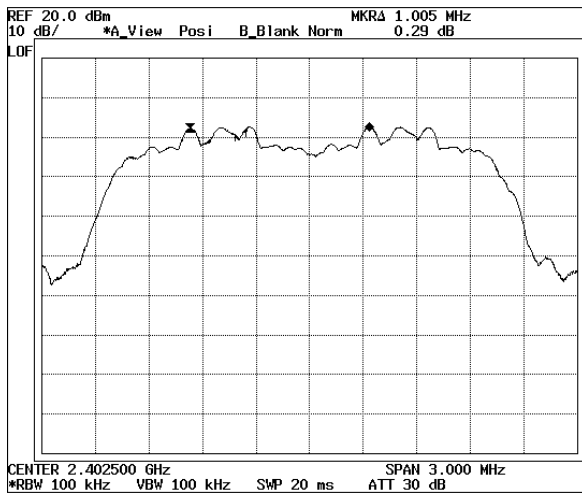

High Channel

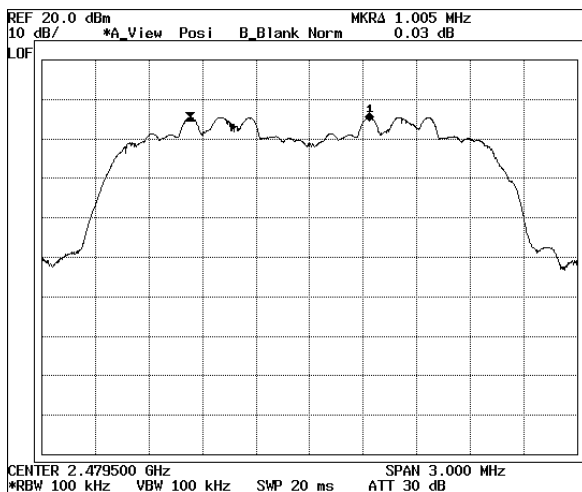

Note : Measurement level = reading level + correct factor

Occupied BandWidth Test result



Product	PPE11
Test Item	Occupied Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel	99% BW(KHz)
Low CH	885
Middle CH	882
High CH	885

Low Channel

Mid Channel

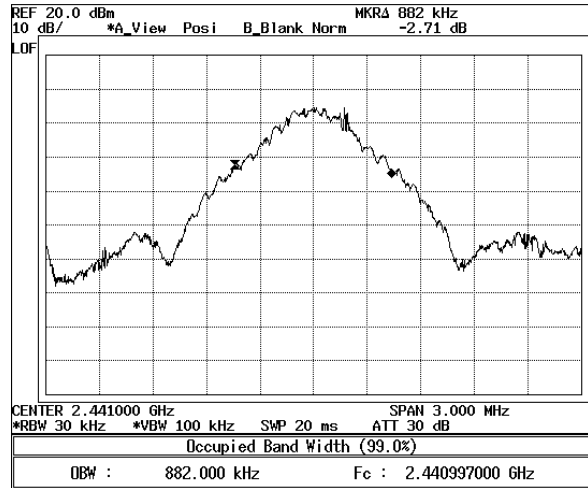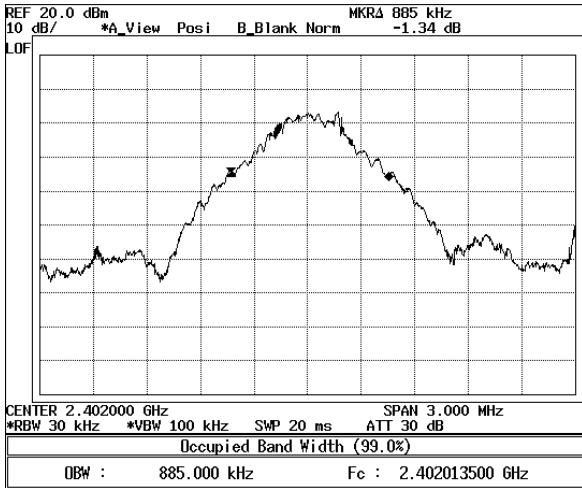

High Channel

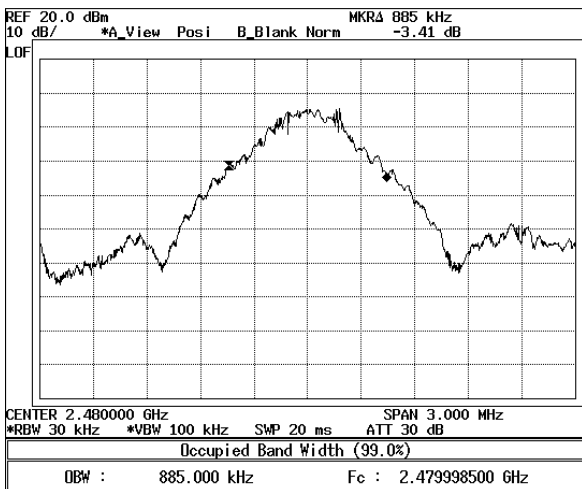

Note : Measurement level = reading level + correct factor

Occupied BandWidth Test result



Product	PPE11
Test Item	Occupied Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel	99% BW(KHz)	Result
Low CH	1.170	Pass
Middle CH	1.170	
High CH	1.170	

Low Channel

Mid Channel

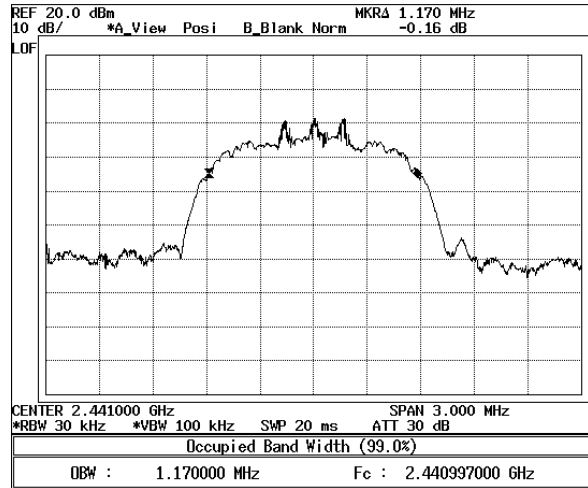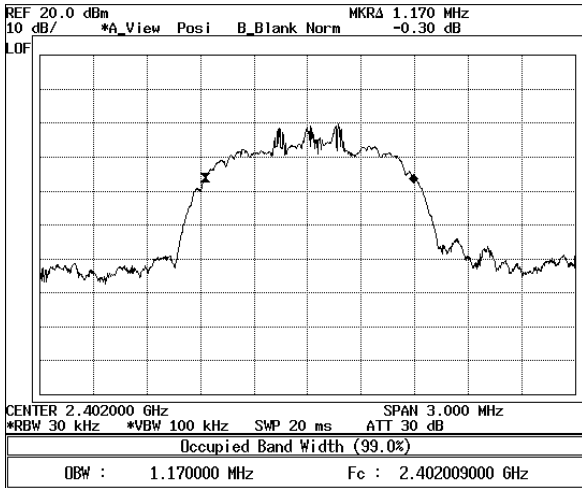

High Channel

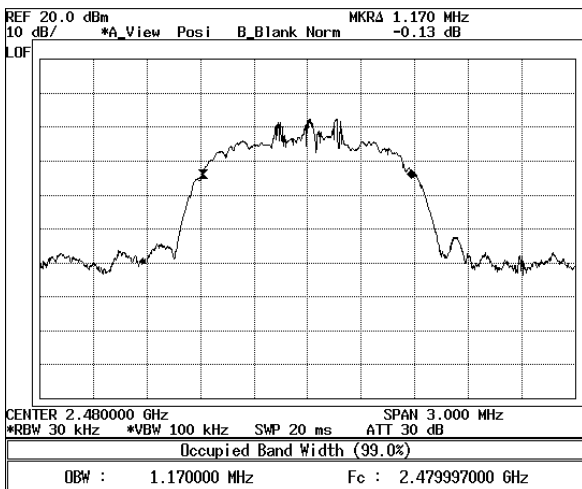

Note : Measurement level = reading level + correct factor

Number of Hopping Frequency


◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

◆ Test Setup

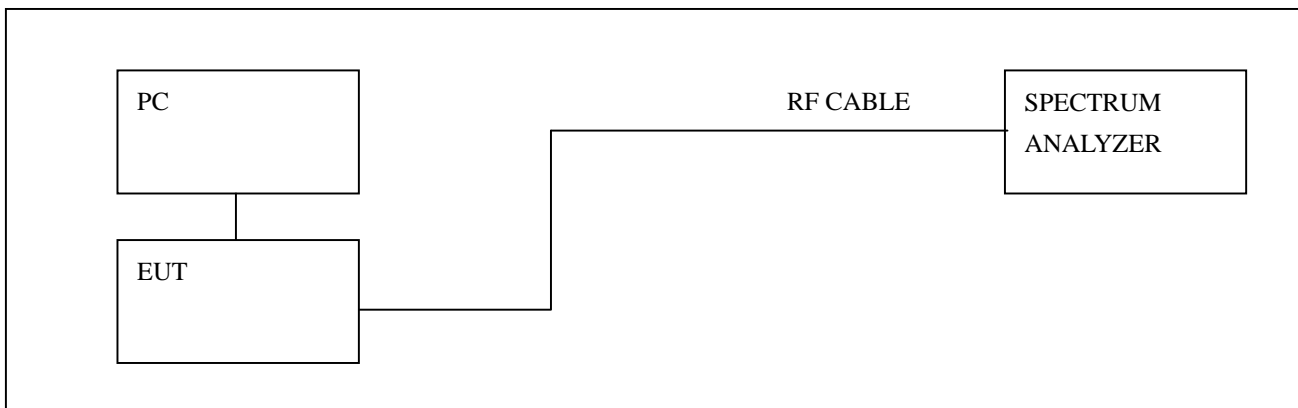

◆ Limits

According to 15.247(a)(1)(ii), Frequency hopping systems operation in the 2400-2483.5 MHz bands shall use at least 15 hopping frequencies.

◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer .



According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test result



Product	PPE11
Test Item	Number of hopping frequency
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

Channel (No. of channel)	Limit (No. of channel)	Result
79	>15	Pass

DH5

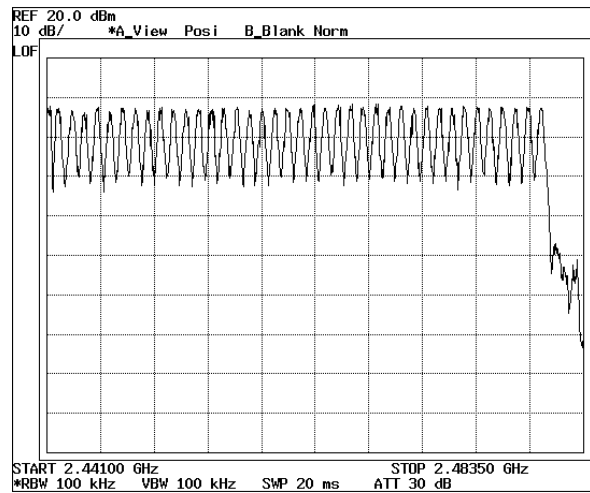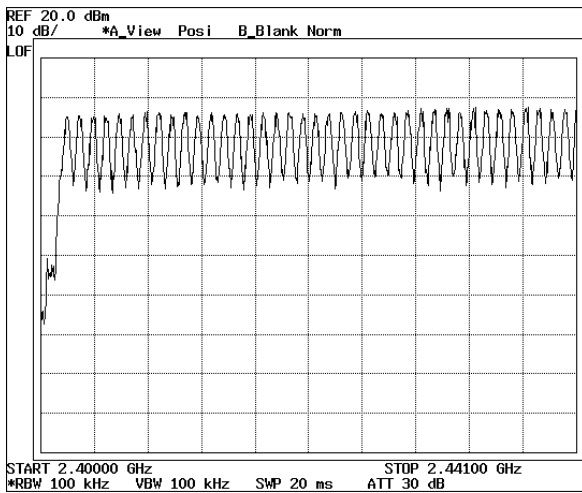

3DH5

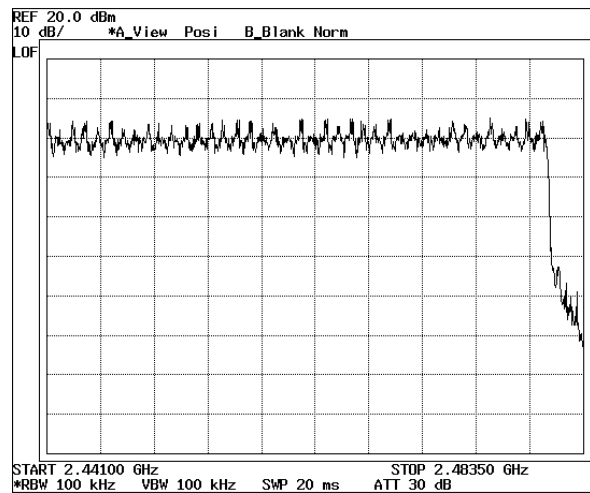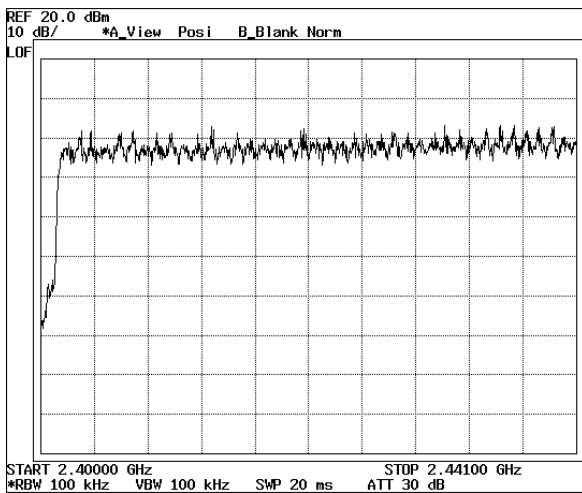

Note : Measurement level = reading level + correct factor

Time of Occupancy (Dwell Time)


◆ **Test Equipment**

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

◆ **Test Setup**

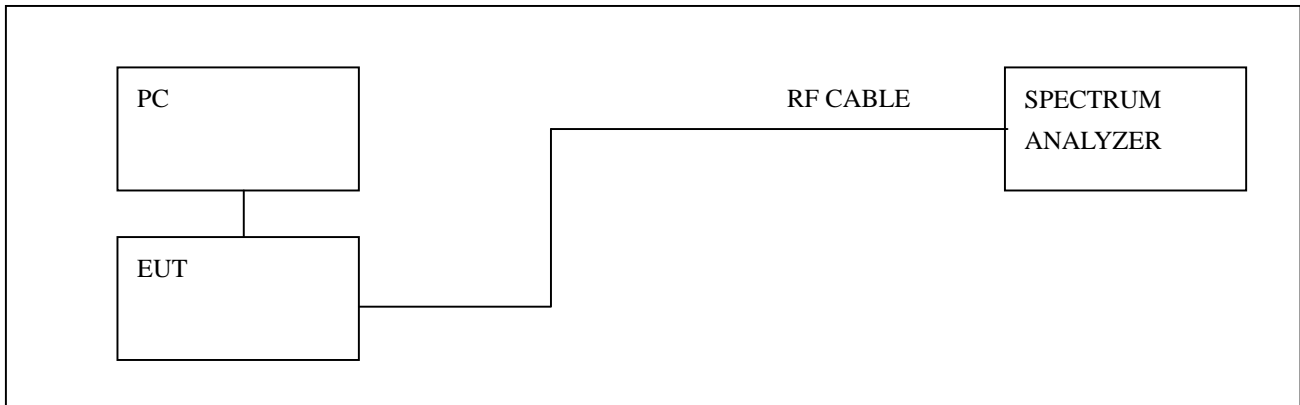

◆ **Limits**

According to 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4s within a period 0.4s multiplied by the number of hopping channels employed.

◆ **Test Procedure**

The transmitter output is connected to the Spectrum analyzer.



According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

Dwell time Test result



Test Item	Dwell Time
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

Mode	Number of transmission in a 31.6	Length of transmission time(ms)	Result (ms)	Limit (ms)	Result
DH5	34(times/10s) *3.16 = 107.44times	2.950	316.95	400	Pass
3DH5	34(times/10s) *3.16 = 107.44times	2.940	315.87		Pass

DH5

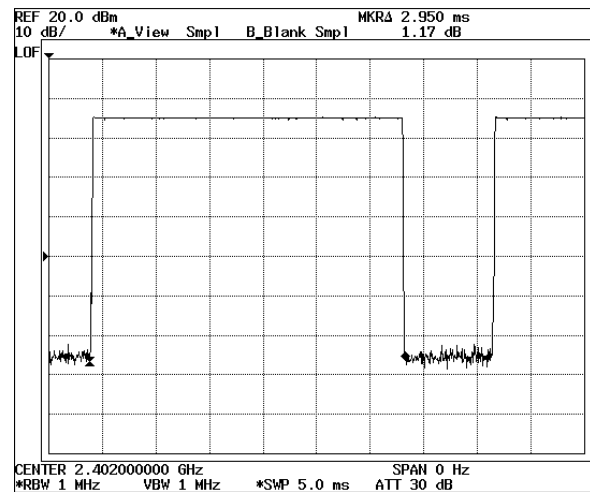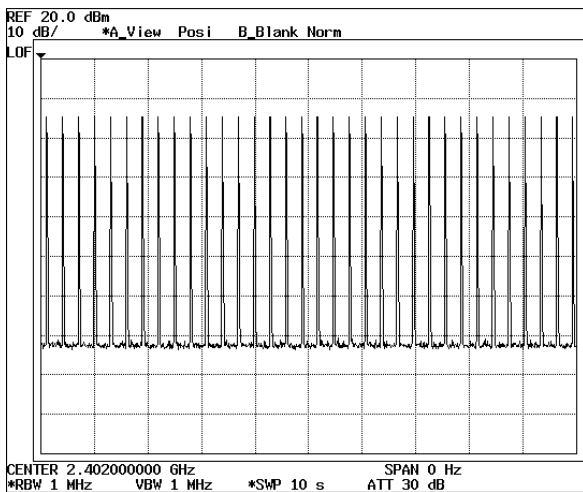

3DH5

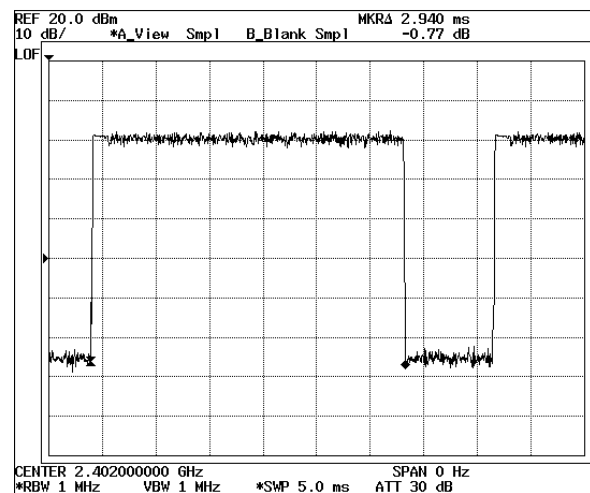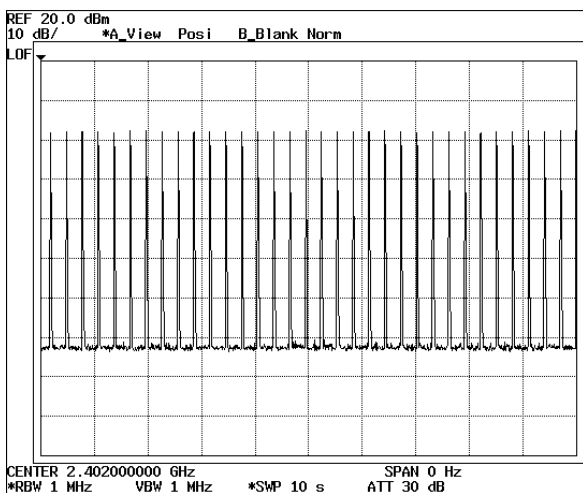


Note : Measurement level = reading level + correct factor

Radiated Emissions:


The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120kHz. Procedure of Test

Preliminary measurements were made at 3 meter using bi-log antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using bi-log antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission. (The bandwidth below 1GHz setting on the field strength meter is 120KHz and above 1GHz is 1MHz.)


Under 1GHz Test Setup:

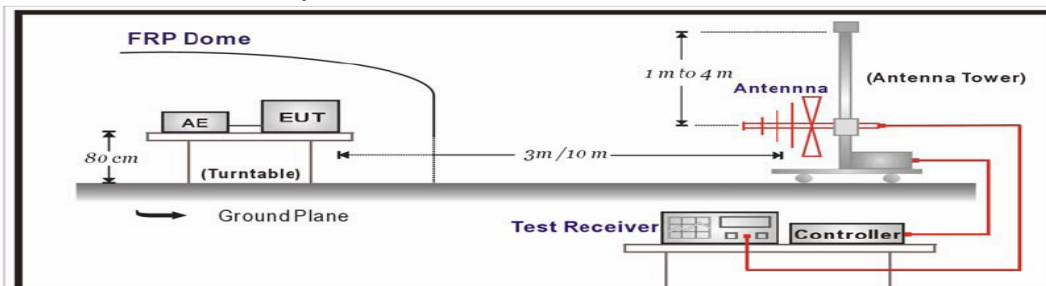

Above 1GHz Test Setup:

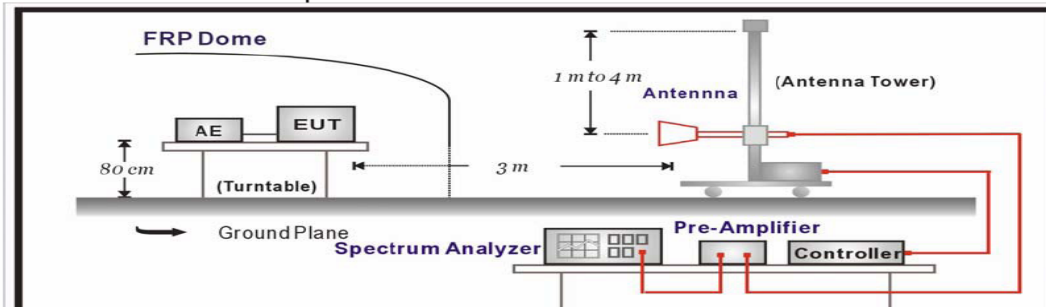

Below 30 MHz

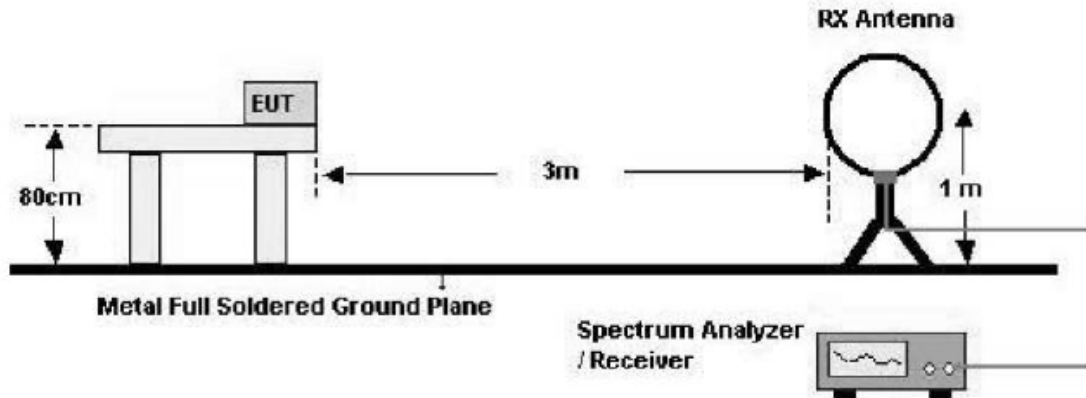

Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the General radiated emission limits in paragraph 15.209, whichever is the lesser attenuation:

FCC Part 15 Subpart C Section 15.209 Limits		
Frequency (MHz)	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter} (3\text{m})$
0.009-0.490	$2400/F(\text{KHz})$ at 300 m	$20\log 2400/F(\text{KHz})+80$
0.490-1.705	$24000/F(\text{KHz})$ at 30m	$20\log 24000/F(\text{KHz})+40$
1.705-30	30 at 30 m	49.5
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBuV) = $20\log$ RF Voltage (μV)
2. $\text{dB}\mu\text{V}/\text{m} = \text{ERP}(\text{dBm}) + 106.92 \text{ dB} + 20\log(10\text{m}/3\text{m}) + 2.15\text{dB}$ (conversion Factor for E.I.R.P)
3. In the Above Table, the tighter limit applies at the band edges.
4. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.209.

Radiated Spurious Emissions

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Due for Cal	Serial Number
EMI Receiver	ESCS30	Rohde & Schwarz	May. 08, 2015	100171
EMI Receiver	ESCI7	Rohde & Schwarz	Jul. 21, 2015	100872
SPECTRUM ANALYZER	R3273	ADVANTEST	May. 08, 2015	110600587
Bluetooth Tester	TC-3000B	TESCOM	May. 09, 2015	3000B640056
Loop Antenna	HFH2-Z2	Rohde & Schwarz	Oct. 15, 2016	8620771017
Log-bicon Antenna	VULB9160	Schwarz beck	Jun. 03, 2015	3071
HORN-Antenna	3115	EMCO	Dec. 04, 2015	9012-3602
SHF-EHF Horn	BBHA 9170	Schwarzbeck	Sep. 06, 2015	BBHA9170318
PRE AMPLIFIER	8449B OPT H02	HP	Oct. 06, 2015	3008A0530

Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRA, KRISS, KTL and HCT.

2. The calibration interval of horn ant. and loop ant. is 24 months

◆ Test Conditions

Temperature (21.7 ± 0.3) °C
 Humidity (32.8 ± 0.2) % R.H.
 Atmosphere (1011) mbar

◆ Test Area Full-Anechoic Room (3m)

◆ Test Date March 12, 2015

Note :

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

Where Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 3 meters according to Section 15.31(f) (2).
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector with specified bandwidth.
5. The result was 20dB lower than the limit line 15.31(o) was not reported.

Radiated Emissions Result

Frequency	Reading	P	Ant. Factor	Cable Loss	Limit	Total	Margin
MHz	dBuV	(H, V)	dB	dB	dBuV/m	dBuV/m	dB

Note : The measured value have enough margin over 20dB than the limit, therefore they are not reported.

Radiated Emissions Result

[Applicable]

Spurious Emissions Test (Below 1GHz) :

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types and antenna ports (if EUT with antenna diversity architecture), and X, Y, Z Axis.

EUT	PPE11	PROBE	Below 1 GHz
POWER	DC 3.7 V	NOTE	Bluetooth mode

DH5

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV/m	Total dBuV/m	Margin dB
43.582	15.40	V	11.77	1.07	40.00	28.24	-11.76
143.495	15.20	H	12.42	1.98	43.50	29.60	-13.90
191.993	19.10	H	9.89	2.33	43.50	31.32	-12.18
*527.614	19.30	H	18.50	3.88	46.00	41.68	-4.32

3DH5

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV/m	Total dBuV/m	Margin dB
41.642	15.70	V	11.73	1.04	40.00	28.47	-11.53
159.985	15.60	H	12.84	2.08	43.50	30.52	-12.98
527.611	17.40	H	18.50	3.88	46.00	39.78	-6.22
*534.408	17.90	V	18.61	3.91	46.00	40.42	-5.58
553.799	14.80	V	18.91	4.01	46.00	37.72	-8.28

- Note: 1. Remark "*" means that the data is the worst emission level.
 2. All reading levels are Quasi-peak value.
 3. Measurement level = reading level + correct factor

Spurious Emissions Test (Above 1GHz) :

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types and antenna ports (if EUT with antenna diversity architecture), and X, Y, Z Axis.

● **BDR**

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	0 Channel (2402 MHz)
MODE	DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.593	42.80	27.14	V	74.00	54.00	31.20	26.86
3.005	45.37	31.24	V	74.00	54.00	28.63	22.76
4.810	56.91	40.34	V	74.00	54.00	17.09	13.66
1.594	38.58	24.70	H	74.00	54.00	35.42	29.30
3.005	46.98	33.19	H	74.00	54.00	27.02	20.81
4.812	57.26	40.82	H	74.00	54.00	16.74	13.18

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	39 Channel (2441 MHz)
MODE	DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.998	46.97	29.04	V	74.00	54.00	27.03	24.96
4.884	58.39	37.80	V	74.00	54.00	15.61	16.20
1.593	37.99	24.75	H	74.00	54.00	36.01	29.25
3.001	47.63	33.17	H	74.00	54.00	26.37	20.83
4.883	60.95	39.97	H	74.00	54.00	13.05	14.03

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	78 Channel (2480 MHz)
MODE	DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
3.003	45.27	31.53	V	74.00	54.00	28.73	22.47
4.965	56.43	40.22	V	74.00	54.00	17.57	13.78
1.592	37.46	24.03	H	74.00	54.00	36.54	29.97
3.002	46.68	32.23	H	74.00	54.00	27.32	21.77
4.965	54.38	38.29	H	74.00	54.00	19.62	15.71

Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

The measured value from 6GHz to 25GHz have enough margin over 20dB than the limit, therefore they are not reported.

● **EDR**

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	0 Channel (2402 MHz)
MODE	3DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
3.004	46.11	31.60	V	74.00	54.00	27.89	22.40
4.811	49.85	34.86	V	74.00	54.00	24.15	19.14
1.592	37.42	24.31	H	74.00	54.00	36.58	29.69
3.004	45.79	31.51	H	74.00	54.00	28.21	22.49
4.812	50.91	36.02	H	74.00	54.00	23.09	17.98

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	39 Channel (2441 MHz)
MODE	3DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.593	43.93		27.70	V	74.00	54.00
4.884	54.03	35.79	V	74.00	54.00	19.97	18.21
1.593	37.40	24.52	H	74.00	54.00	36.60	29.48
4.885	52.31	35.79	H	74.00	54.00	21.69	18.21

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	78 Channel (2480 MHz)
MODE	3DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.592	41.39		26.27	V	74.00	54.00
4.964	50.14	35.85	V	74.00	54.00	23.86	18.15
1.593	37.44	24.17	H	74.00	54.00	36.56	29.83
4.965	50.91	35.58	H	74.00	54.00	23.09	18.42

Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

The measured value from 6GHz to 25GHz have enough margin over 20dB than the limit, therefore they are not reported.


Radiated Restricted Bands Emissions Result

● BDR

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	0 Channel (2402 MHz)
MODE	DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.376	38.86		27.56	H	74.00	54.00
2.372	37.09	27.22	V	74.00	54.00	36.91	26.78

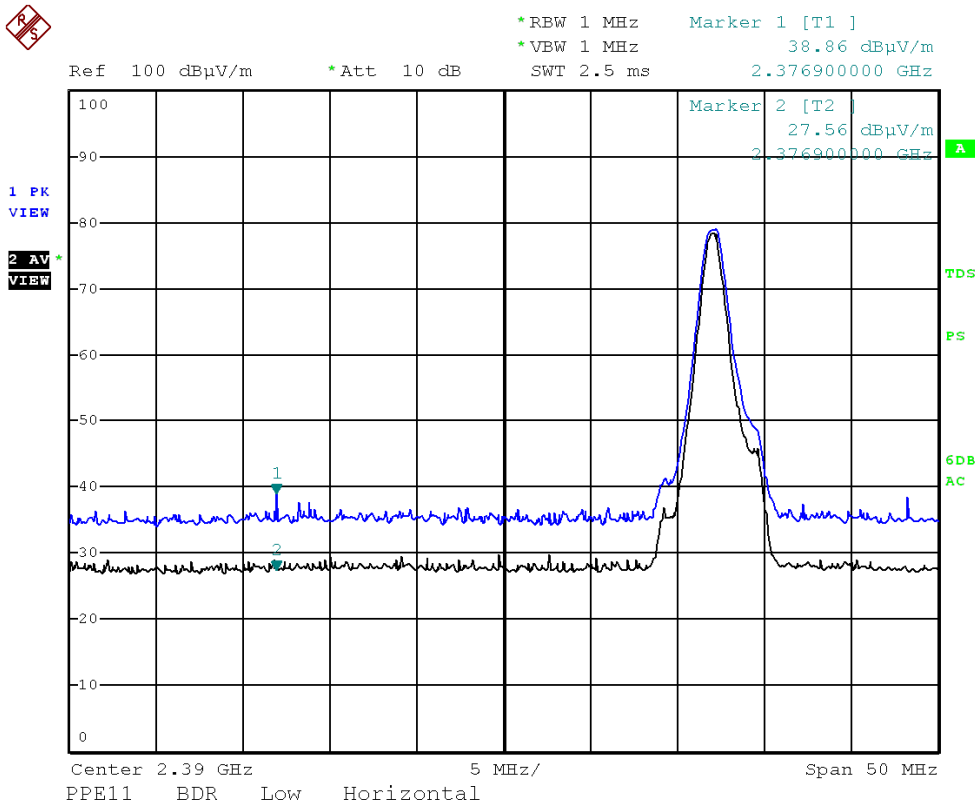

BDR(DH5) Low(Horizontal)




*RBW 1 MHz Marker 1 [T1]
 *VBW 1 MHz 37.09 dBµV/m
 SWT 2.5 ms 2.372500000 GHz

Ref 100 dBµV/m *Att 10 dB

1 PK
 VIEW

2 AV
 VIEW

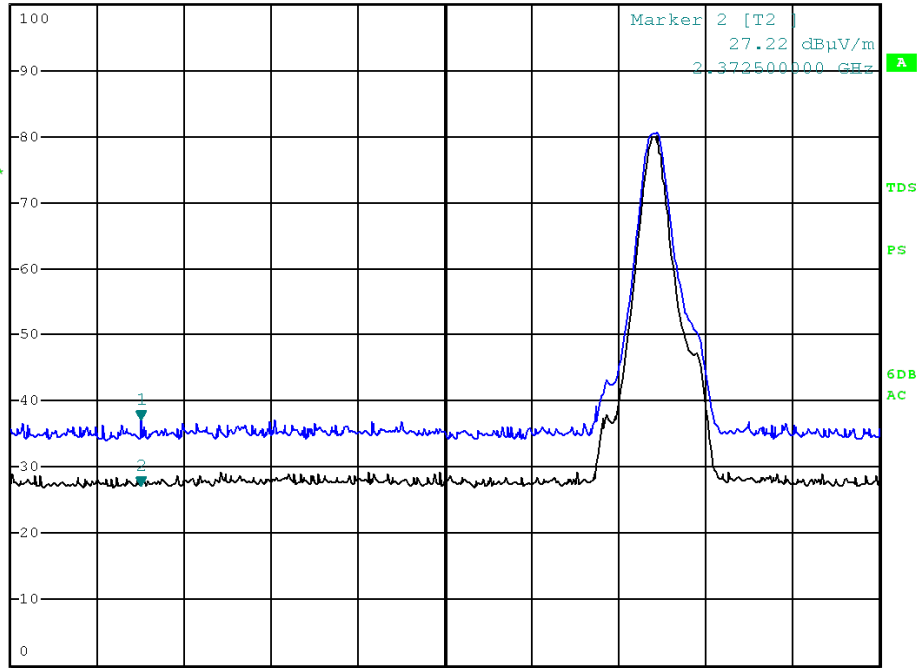


Center 2.39 GHz 5 MHz/ Span 50 MHz
 PPE11 BDR Low Vertical

BDR(DH5) Low(Vertical)


EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	78 Channel (2480 MHz)
MODE	DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.498	40.95	31.95	H	74.00	54.00	33.05	22.05
2.495	40.12	29.37	V	74.00	54.00	33.88	24.63

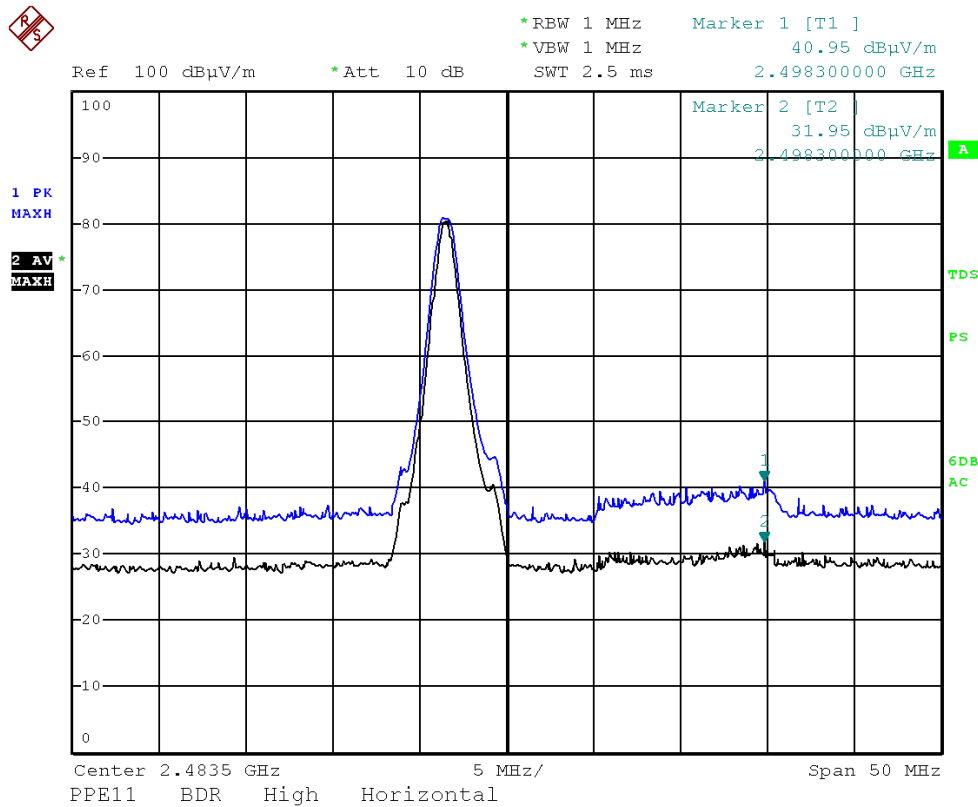

BDR(DH5) High(Horizontal)

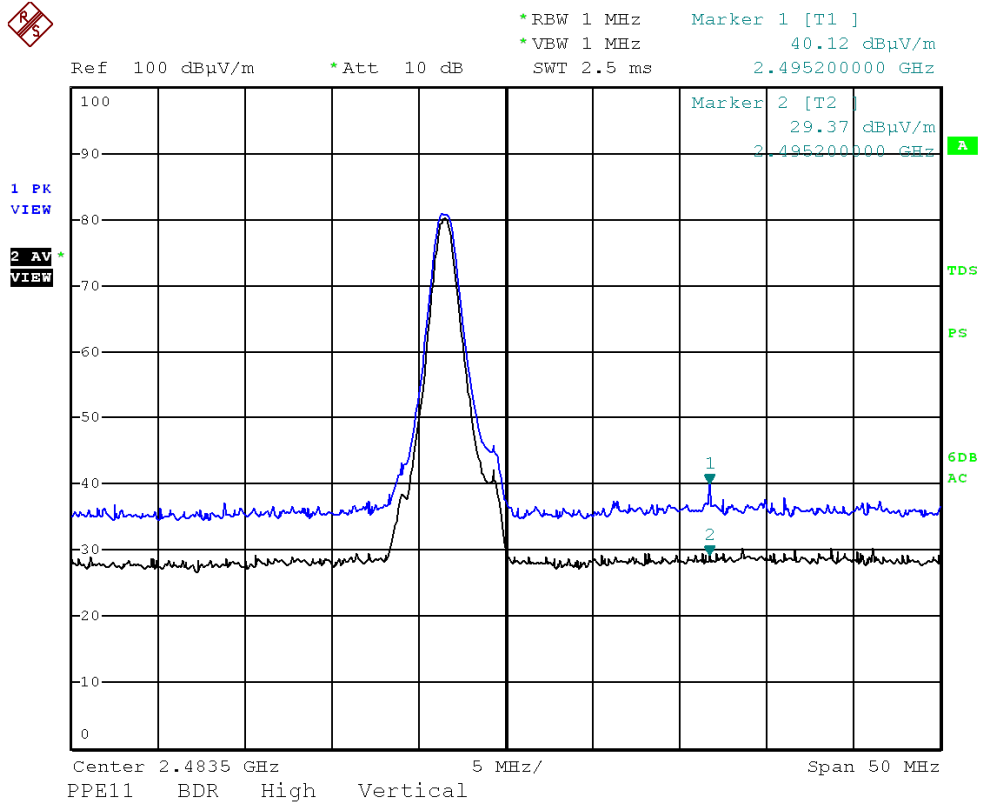

BDR(DH5) High(Vertical)


Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

● EDR

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	0 Channel (2402 MHz)
MODE	3DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.379	37.04	27.55	H	74.00	54.00	36.96	26.45
2.375	37.70	27.58	V	74.00	54.00	36.30	26.42

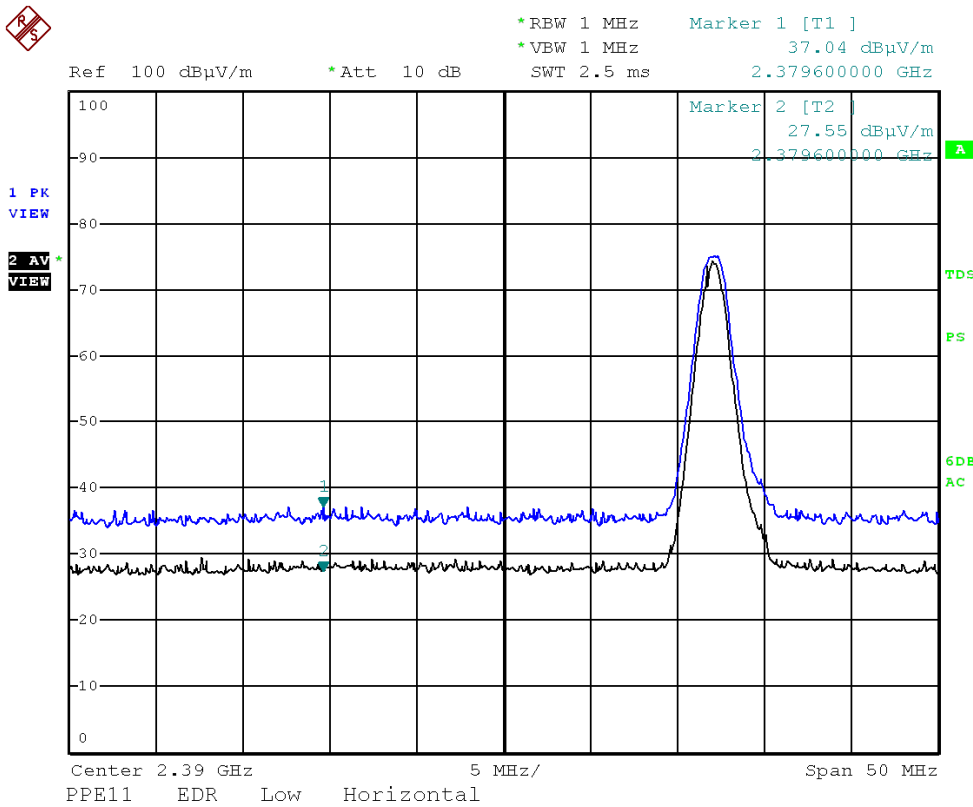

EDR(3DH5) Low(Horizontal)




*RBW 1 MHz Marker 1 [T1]
 *VBW 1 MHz 37.70 dBμV/m
 SWT 2.5 ms 2.375100000 GHz

Ref 100 dBμV/m *Att 10 dB

1 PK
 VIEW

2 AV
 VIEW

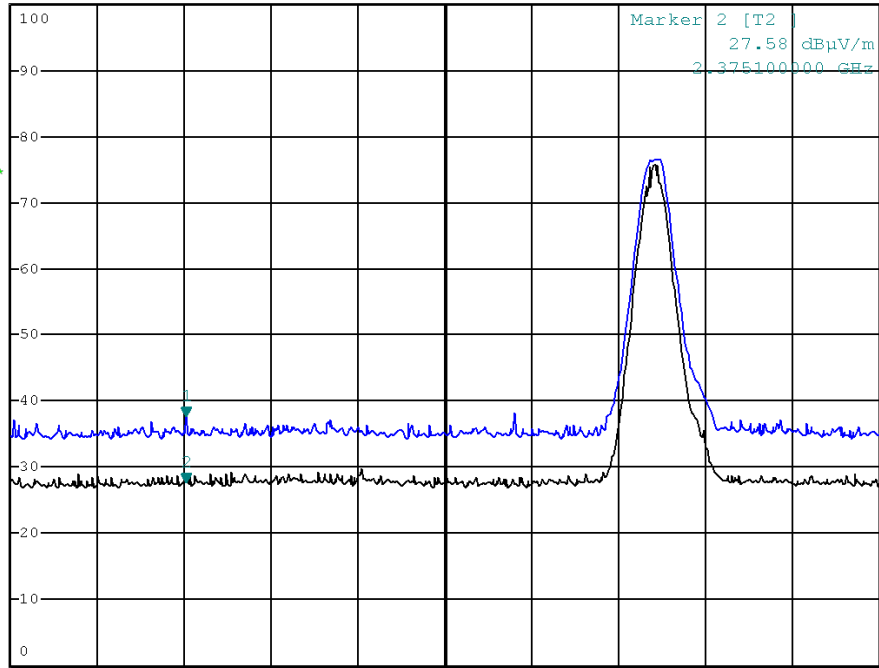


Center 2.39 GHz 5 MHz/ Span 50 MHz
 PPE11 EDR Low Vertical

EDR(3DH5) Low(Vertical)

EUT	PPE11	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	78 Channel (2480 MHz)
MODE	3DH5		

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV/m		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
2.497	42.35	32.29	H	74.00	54.00	31.65	21.71
2.490	40.46	30.68	V	74.00	54.00	33.54	23.32

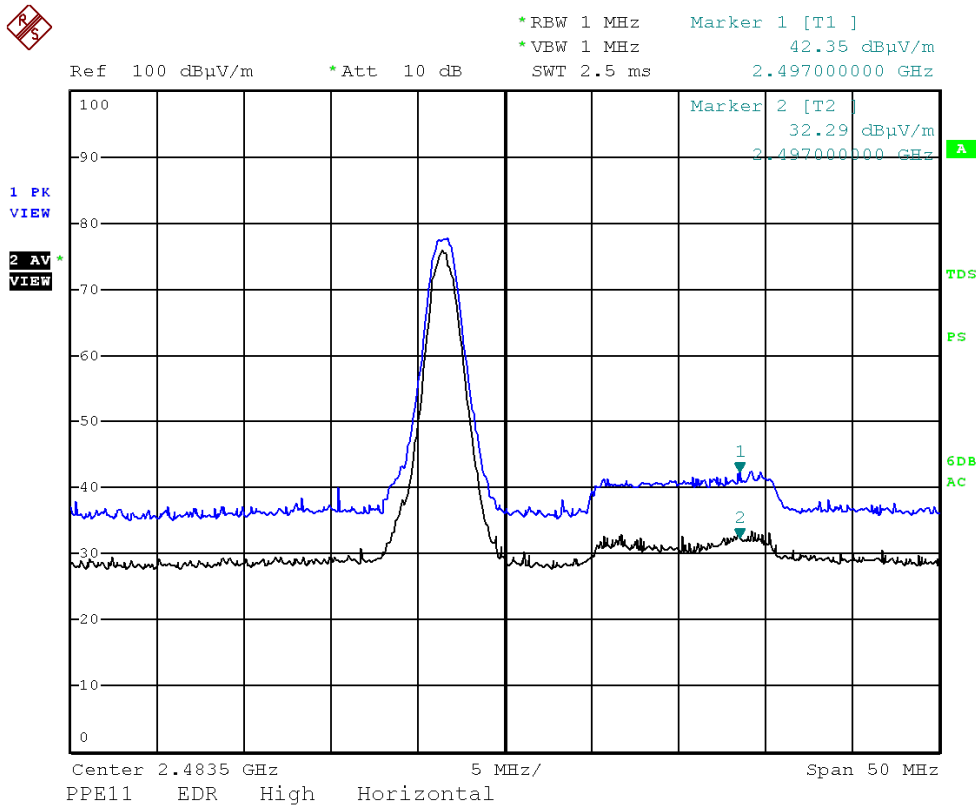

EDR(3DH5) High(Horizontal)

Antenna requirements

According to FCC 47 CFR 15.203

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

- * the antenna of this EUT are permanently attached.
- * The EUT complies with the requirement of 15.203

