

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (33) of (109)



## Appendix A. Calibration certificate

### Appendix A.1 Probe Calibration certificate

EX3DV4 (SN: 3928)

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client KCTL (Dymstec)

Certificate No: EX3-3928\_Jan19

## CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3928

Calibration procedure(s)

QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7  
Calibration procedure for dosimetric E-field probes

Calibration date:

January 31, 2019

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
DAE4	SN: 660	19-Dec-18 (No. DAE4-660_Dec18)	Dec-19
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-18 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-18 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by:

Name

Jelton Kastrell

Function

Laboratory Technician

Signature

Approved by:

Name

Katja Pokovic

Function

Technical Manager

Issued: February 2, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3928\_Jan19

Page 1 of 10

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (34) of (109)



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary:

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\beta$	$\beta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\beta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (35) of (109)



EX3DV4 - SN:3928

January 31, 2019

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3928****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V/m})^2$ ) <sup>A</sup>	0.48	0.22	0.55	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	94.9	94.8	96.3	

**Calibration Results for Modulation Response**

UID	Communication System Name	A dB	B dB/ $\mu\text{V}$	C	D dB	VR mV	Max dev.	Unc <sup>C</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	135.8	$\pm 3.0 \%$
		Y	0.0	0.0	1.0		135.4	$\pm 4.7 \%$
		Y	0.0	0.0	1.0		143.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (36) of (109)



EX3DV4- SN:3928

January 31, 2019

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3928****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle ("')	70.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Certificate No: EX3-3928\_Jan19

Page 4 of 10

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (37) of (109)



EX3DV4- SN:3928

January 31, 2019

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3928****Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) <sup>c</sup>	Relative Permittivity <sup>d</sup>	Conductivity (S/m) <sup>e</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>g</sup>	Depth <sup>h</sup> (mm)	Unc (k=2)
750	41.9	0.89	9.34	9.34	9.34	0.55	0.90	± 12.0 %
850	41.5	0.92	9.27	9.27	9.27	0.60	0.85	± 12.0 %
900	41.5	0.97	9.02	9.02	9.02	0.47	0.89	± 12.0 %
1750	40.1	1.37	7.97	7.97	7.97	0.38	0.84	± 12.0 %
1900	40.0	1.40	7.79	7.79	7.79	0.25	0.85	± 12.0 %
2300	39.5	1.67	7.51	7.51	7.51	0.28	0.84	± 12.0 %
2450	39.2	1.80	7.21	7.21	7.21	0.31	0.85	± 12.0 %
2600	39.0	1.96	6.92	6.92	6.92	0.35	0.89	± 12.0 %
3500	37.9	2.91	6.86	6.86	6.86	0.25	1.20	± 13.1 %
3700	37.7	3.12	6.70	6.70	6.70	0.25	1.20	± 13.1 %
5200	36.0	4.66	5.16	5.16	5.16	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.95	4.95	4.95	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.86	4.86	4.86	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.78	4.78	4.78	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.70	4.70	4.70	0.40	1.80	± 13.1 %

<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 8 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>d</sup> At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>e</sup> AlphaDepth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (38) of (109)



EX3DV4- SN:3928

January 31, 2019

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3928****Calibration Parameter Determined in Body Tissue Simulating Media**

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>H</sup> (mm)	Unc (k=2)
750	55.5	0.96	9.55	9.55	9.55	0.51	0.80	± 12.0 %
850	55.2	0.99	9.32	9.32	9.32	0.39	0.84	± 12.0 %
900	55.0	1.05	9.28	9.28	9.28	0.46	0.86	± 12.0 %
1750	53.4	1.49	7.70	7.70	7.70	0.37	0.84	± 12.0 %
1900	53.3	1.52	7.46	7.46	7.46	0.37	0.84	± 12.0 %
2300	52.9	1.81	7.25	7.25	7.25	0.38	0.86	± 12.0 %
2450	52.7	1.95	7.22	7.22	7.22	0.24	0.93	± 12.0 %
2600	52.5	2.16	6.95	6.95	6.95	0.25	0.94	± 12.0 %
3500	51.3	3.31	6.66	6.66	6.66	0.25	1.20	± 13.1 %
3700	51.0	3.55	6.64	6.64	6.64	0.25	1.25	± 13.1 %
5200	49.0	5.30	4.43	4.43	4.43	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.30	4.30	4.30	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.03	4.03	4.03	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.91	3.91	3.91	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.00	4.00	4.00	0.50	1.90	± 13.1 %

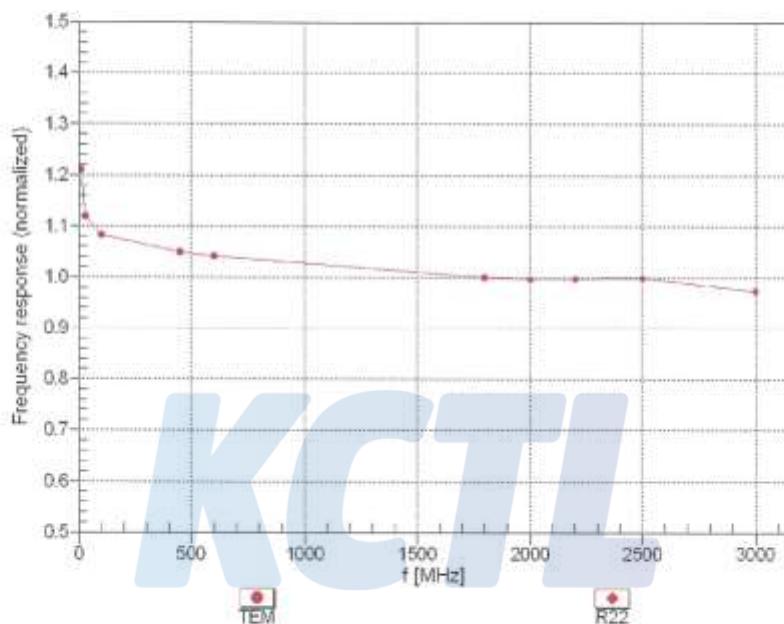
<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4— SN:3928

January 31, 2019

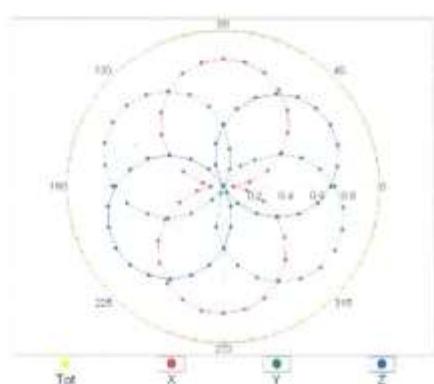
**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

EX3DV4- SN:3928

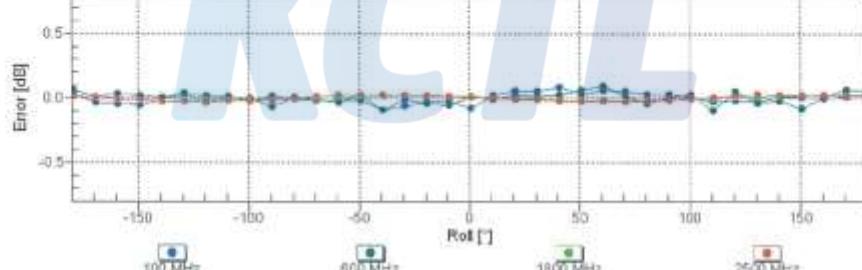
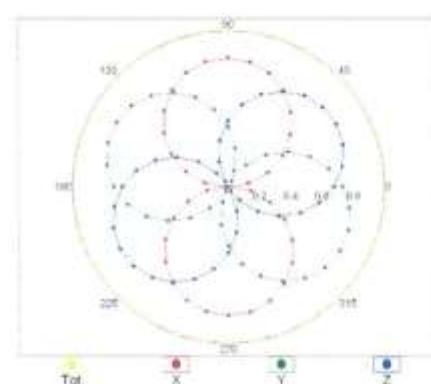
January 31, 2019

**Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$** 

f=600 MHz, TEM

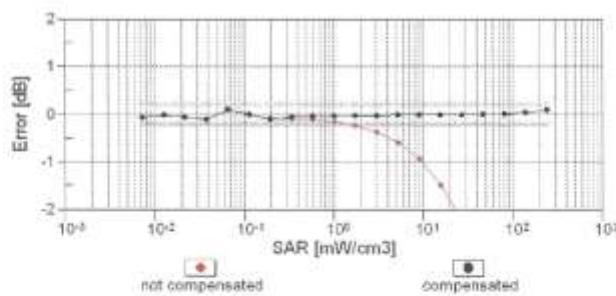
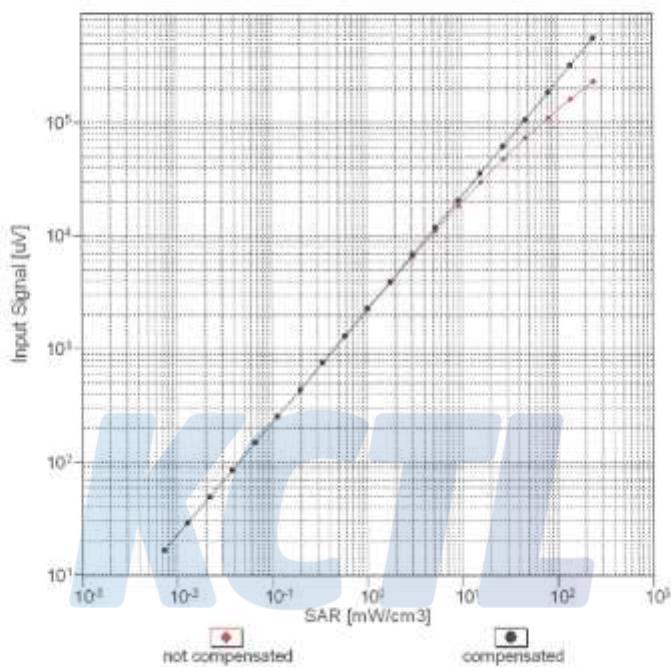


f=1800 MHz, R22

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

EX3DV4- SN:3928

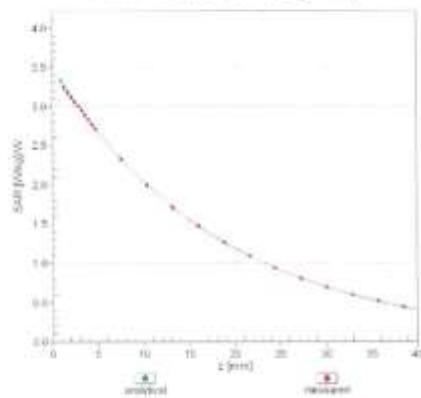
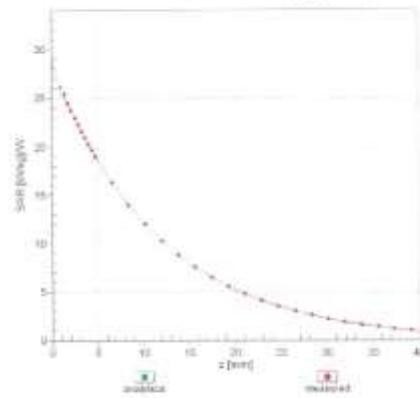
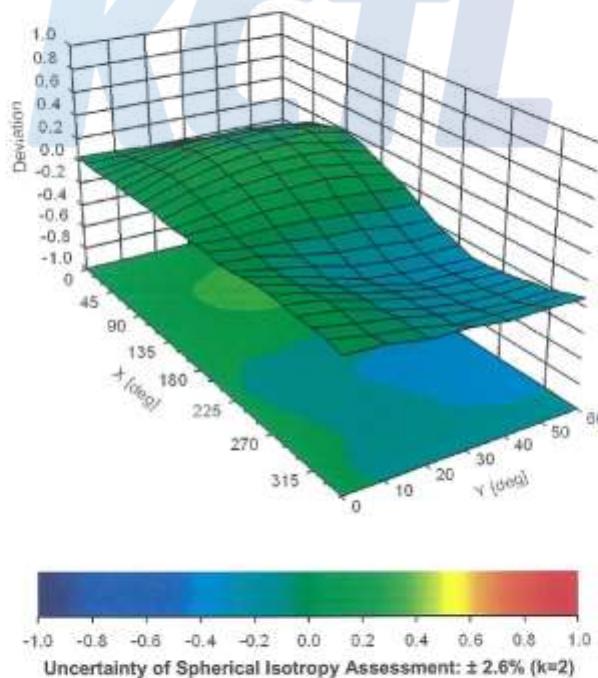
January 31, 2019

**Dynamic Range f(SAR<sub>head</sub>)**  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4- SN:3928

January 31, 2019

**Conversion Factor Assessment** $f = 850 \text{ MHz}, \text{WGLS R9 (H\_convF)}$  $f = 1900 \text{ MHz}, \text{WGLS R22 (H\_convF)}$ **Deviation from Isotropy in Liquid**Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$ Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\% (k=2)$

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (43) of (109)



EX3DV4 (SN: 3865)

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client KCTL (Dymstec)

Certificate No: EX3-3865\_Aug18

## CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3865

Calibration procedure(s) QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes

Calibration date August 29, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of this certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Data (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660 Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-18 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-18 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-89 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name: Jeton Kastrati	Function: Laboratory Technician	Signature:
Approved by:	Name: Katica Polovic	Function: Technical Manager	Signature:

Issued: August 30, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3865\_Aug18

Page 1 of 39

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (44) of (109)



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary:

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not affect the E-field uncertainty inside TSL (see below ConvF).
- $NORM/\theta x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $PAR$ : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required,
- Connector Angle:** The angle is assessed using the information gained by determining the  $NORMx$  (no uncertainty required).

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (45) of (109)



EX3DV4 – SN:3865

August 29, 2018

# Probe EX3DV4

SN:3865



Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (46) of (109)



EX3DV4- SN:3865

August 29, 2018

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3865****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.41	0.36	0.40	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	100.8	97.4	98.1	

**Modulation Calibration Parameters**

UID	Communication System Name	X	A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	138.3	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		131.3	
		Z	0.0	0.0	1.0		137.9	

Note: For details on UID parameters see Appendix.

**Sensor Model Parameters**

	C1 ff	C2 ff	$\alpha$ $\text{V}^{-1}$	T1 $\text{ms.V}^{-2}$	T2 $\text{ms.V}^{-1}$	T3 ms	T4 $\text{V}^{-3}$	T5 $\text{V}^{-1}$	T6
X	45.38	352.3	38.07	9.178	0.776	5.054	0.000	0.600	1.012
Y	43.18	317.8	34.80	8.571	0.514	5.019	1.427	0.254	1.007
Z	43.06	335.7	38.39	9.204	0.755	5.074	0.000	0.541	1.011

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not effect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parametric uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3865

August 29, 2018

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3865

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>g</sup>	Depth <sup>g</sup> (mm)	Unc (k=2)
750	41.9	0.89	10.45	10.45	10.45	0.64	0.82	± 12.0 %
850	41.5	0.92	10.01	10.01	10.01	0.55	0.90	± 12.0 %
900	41.5	0.97	9.94	9.94	9.94	0.57	0.80	± 12.0 %
1750	40.1	1.37	9.05	9.05	9.05	0.37	0.80	± 12.0 %
1900	40.0	1.40	8.61	8.61	8.61	0.27	0.86	± 12.0 %
2300	39.5	1.67	8.26	8.26	8.26	0.39	0.84	± 12.0 %
2450	39.2	1.80	7.72	7.72	7.72	0.30	1.00	± 12.0 %
2600	39.0	1.96	7.50	7.50	7.50	0.29	1.02	± 12.0 %
3500	37.9	2.91	7.23	7.23	7.23	0.24	1.20	± 13.1 %
3700	37.7	3.12	7.17	7.17	7.17	0.23	1.20	± 13.1 %
5200	36.0	4.66	4.88	4.88	4.88	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.71	4.71	4.71	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.61	4.61	4.61	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.41	4.41	4.41	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.60	4.60	4.60	0.40	1.80	± 13.1 %

<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters (c and ε) can be relaxed to ± 10% if liquid compensation formula is applied to measure SAR values. At frequencies above 3 GHz, the validity of tissue parameters (c and ε) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>g</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (48) of (109)



EX3DV4- SN:3865

August 29, 2018

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3865****Calibration Parameter Determined in Body Tissue Simulating Media**

F (MHz) <sup>c</sup>	Relative Permittivity <sup>e</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>g</sup>	Depth <sup>h</sup> (mm)	Unc. (k=2)
750	55.5	0.96	10.46	10.46	10.46	0.45	0.80	± 12.0 %
850	55.2	0.99	10.39	10.39	10.39	0.32	0.99	± 12.0 %
900	55.0	1.05	10.37	10.37	10.37	0.40	0.80	± 12.0 %
1750	53.4	1.49	8.51	8.51	8.51	0.36	0.80	± 12.0 %
1900	53.3	1.52	8.21	8.21	8.21	0.34	0.84	± 12.0 %
2300	52.9	1.81	8.03	8.03	8.03	0.38	0.85	± 12.0 %
2450	52.7	1.95	7.84	7.84	7.84	0.27	0.95	± 12.0 %
2600	52.5	2.16	7.74	7.74	7.74	0.26	0.98	± 12.0 %
5200	49.0	5.30	4.49	4.49	4.49	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.30	4.30	4.30	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.10	4.10	4.10	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.92	3.92	3.92	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.28	4.28	4.28	0.50	1.90	± 13.1 %

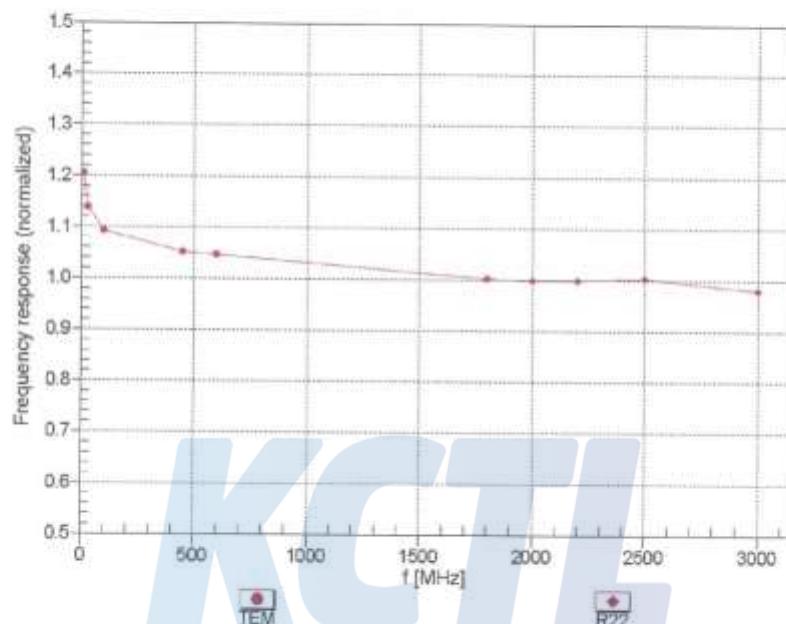
<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 160 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>e</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>f</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-8 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3865

August 29, 2018

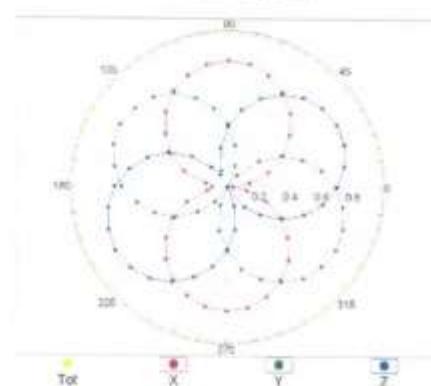
**Frequency Response of E-Field**  
(TEM-Cell:ifl110 EXX, Waveguide: R22)Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

EX3DV4- SN:3865

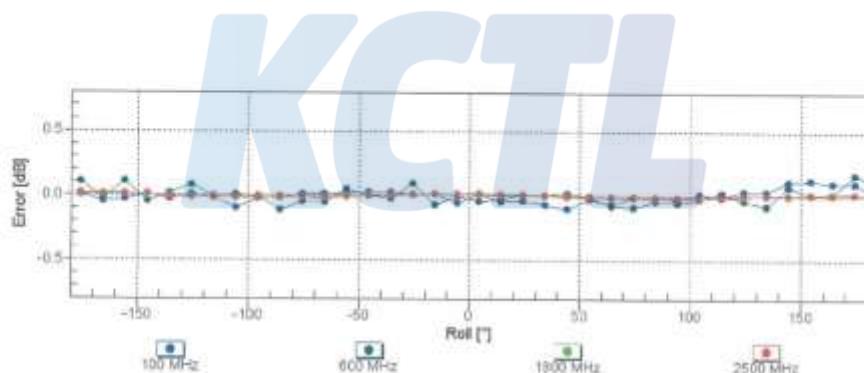
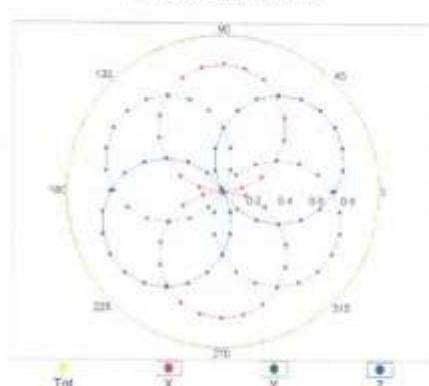
August 29, 2018

**Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$** 

f=600 MHz, TEM

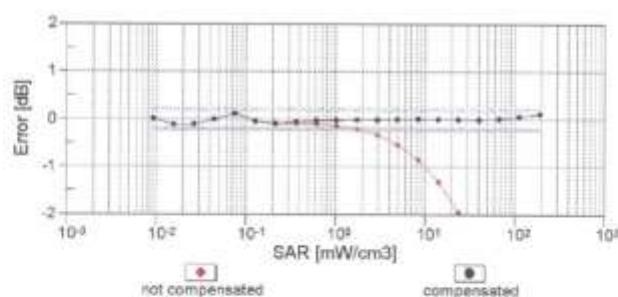
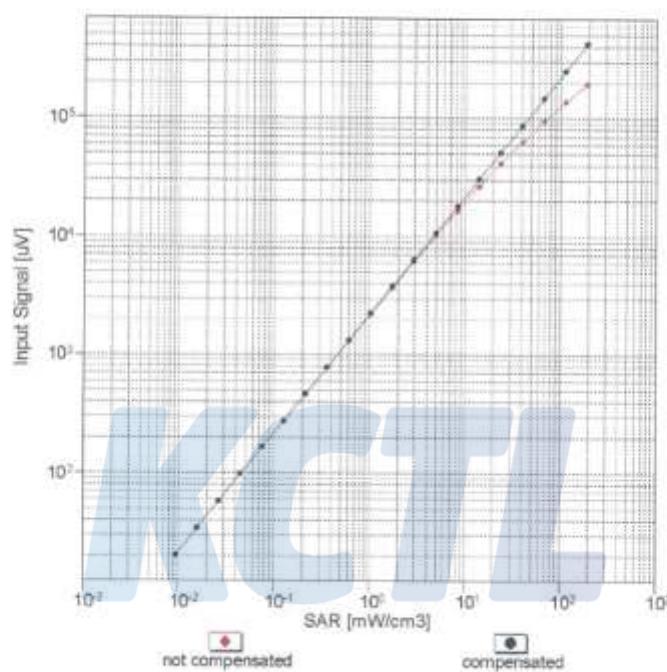


f=1800 MHz, R22

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

EX3DV4—SN:3865

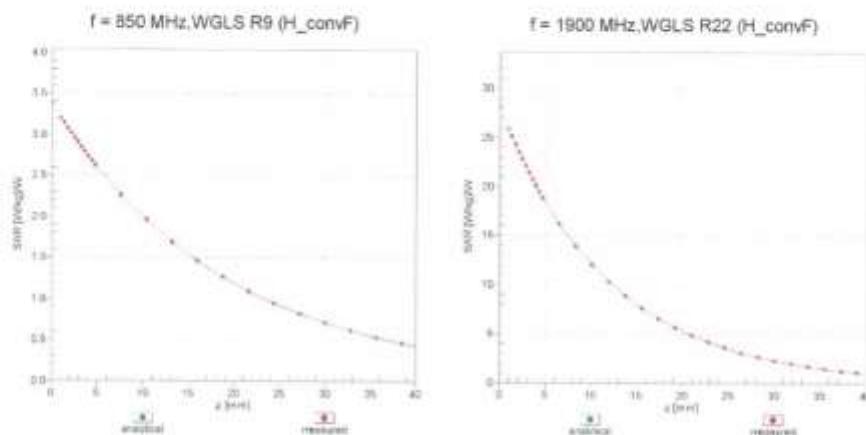
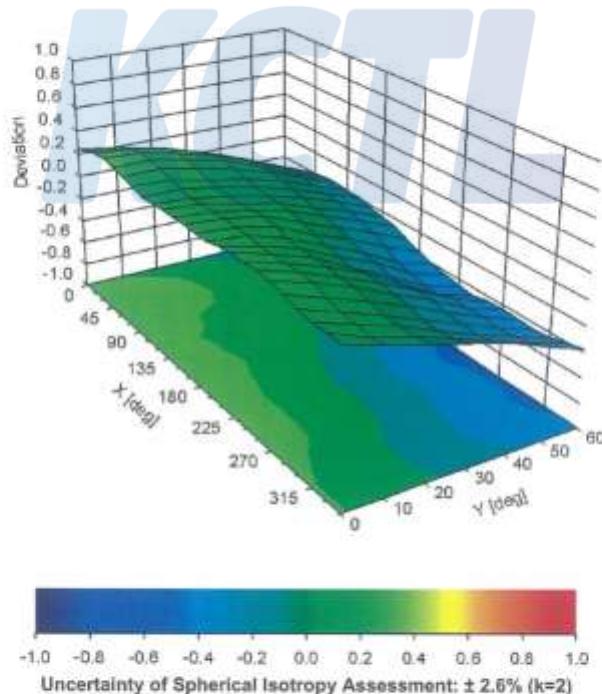
August 29, 2018

**Dynamic Range f(SAR<sub>head</sub>)**  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4– SN:3865

August 29, 2018

**Conversion Factor Assessment****Deviation from Isotropy in Liquid**  
Error ( $\phi, \eta$ ),  $f = 900 \text{ MHz}$ 

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (53) of (109)



EX3DV4- SN:3865

August 29, 2018

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3865****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (")	24.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (54) of (109)



EX3DV4~ SN:3865

August 29, 2018

**Appendix: Modulation Calibration Parameters**

UID	Communication System Name	X	A dB	B dB/ $\mu$ V	C	D dB	VR mV	Max Unc. (k=2)
0	CW	X	0.00	0.00	1.00	0.00	138.3	$\pm 3.3\%$
		Y	0.00	0.00	1.00		131.3	
		Z	0.00	0.00	1.00		137.9	
10010-CAA	SAR Validation (Square, 100ms, 10ms)	X	1.93	63.40	8.76	10.00	20.0	$\pm 9.6\%$
		Y	1.92	63.77	8.82		20.0	
		Z	1.98	63.82	9.05		20.0	
10011-CAB	UMTS-FDD (WCDMA)	X	0.85	65.74	13.88	0.00	150.0	$\pm 9.6\%$
		Y	1.07	69.27	16.20		150.0	
		Z	0.86	66.28	13.96		150.0	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.03	62.95	14.50	0.41	150.0	$\pm 9.6\%$
		Y	1.12	64.16	15.49		150.0	
		Z	1.03	63.23	14.76		150.0	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.74	66.40	16.94	1.46	150.0	$\pm 9.6\%$
		Y	4.74	66.67	16.98		150.0	
		Z	4.73	66.54	17.07		150.0	
10021-DAC	GSM-FDD (TDMA, GMSK)	X	99.98	109.64	25.23	9.39	50.0	$\pm 9.6\%$
		Y	100.00	108.18	24.35		50.0	
		Z	100.00	111.15	25.95		50.0	
10023-DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	28.37	94.80	21.59	9.57	50.0	$\pm 9.6\%$
		Y	53.19	100.89	22.83		50.0	
		Z	100.00	110.81	25.85		50.0	
10024-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	106.63	22.68	6.56	60.0	$\pm 9.6\%$
		Y	100.00	106.65	22.54		60.0	
		Z	100.00	108.78	23.66		60.0	
10025-DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	3.67	66.07	23.36	12.57	50.0	$\pm 9.6\%$
		Y	4.53	73.21	27.38		50.0	
		Z	3.64	65.89	23.45		50.0	
10026-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	7.82	88.25	31.02	9.56	60.0	$\pm 9.6\%$
		Y	7.93	89.41	31.56		60.0	
		Z	7.90	89.05	31.62		60.0	
10027-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	104.26	20.82	4.80	80.0	$\pm 9.6\%$
		Y	100.00	106.63	21.76		80.0	
		Z	100.00	106.93	22.00		80.0	
10028-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	101.22	18.84	3.55	100.0	$\pm 9.6\%$
		Y	100.00	107.45	21.45		100.0	
		Z	100.00	104.12	20.08		100.0	
10029-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	5.06	78.88	26.20	7.80	80.0	$\pm 9.6\%$
		Y	4.94	78.86	26.23		80.0	
		Z	5.08	79.37	26.67		80.0	
10030-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	103.82	20.94	5.30	70.0	$\pm 9.6\%$
		Y	100.00	104.77	21.25		70.0	
		Z	100.00	105.98	21.91		70.0	
10031-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	0.28	60.00	4.39	1.88	100.0	$\pm 9.6\%$
		Y	100.00	99.88	17.14		100.0	
		Z	0.27	60.00	4.43		100.0	

Certificate No: EX3-3865\_Aug18

Page 12 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (55) of (109)



EX3DV4- SN 3865

August 29, 2018

10032-CAA	IEEE 802.15.1 Bluetooth (GF5K, DH5)	X	44.30	61.01	1.56	1.17	100.0	$\pm 9.6\%$
		Y	100.00	96.76	15.19		100.0	
		Z	45.40	307.65	12.65		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	8.72	89.29	23.04	5.30	70.0	$\pm 9.6\%$
		Y	10.60	92.78	24.14		70.0	
		Z	17.83	100.37	26.46		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	2.07	72.30	15.39	1.88	100.0	$\pm 9.6\%$
		Y	3.10	78.40	18.13		100.0	
		Z	2.58	75.27	16.46		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.41	68.63	13.50	1.17	100.0	$\pm 9.6\%$
		Y	2.10	74.39	16.43		100.0	
		Z	1.55	69.95	13.93		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	12.85	95.26	24.93	5.30	70.0	$\pm 9.6\%$
		Y	16.62	99.71	26.24		70.0	
		Z	36.31	111.27	29.42		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	1.93	71.57	15.06	1.88	100.0	$\pm 9.6\%$
		Y	2.77	77.01	17.60		100.0	
		Z	2.34	74.15	16.01		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.43	69.03	13.80	1.17	100.0	$\pm 9.6\%$
		Y	2.14	74.94	16.78		100.0	
		Z	1.59	70.48	14.28		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.21	67.06	12.80	0.00	150.0	$\pm 9.6\%$
		Y	2.34	76.08	16.81		150.0	
		Z	1.15	66.71	11.85		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	6.46	77.55	14.93	7.78	50.0	$\pm 9.6\%$
		Y	46.48	96.86	20.09		50.0	
		Z	100.00	105.79	22.64		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.31	129.06	0.58	0.00	150.0	$\pm 9.6\%$
		Y	0.02	120.51	7.51		150.0	
		Z	0.40	133.19	7.10		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	7.64	75.78	17.08	13.80	25.0	$\pm 9.6\%$
		Y	7.50	75.17	16.35		25.0	
		Z	12.45	82.46	19.53		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	8.04	78.84	17.01	10.79	40.0	$\pm 9.6\%$
		Y	8.51	79.16	16.67		40.0	
		Z	18.48	88.18	20.23		40.0	
10050-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	14.06	90.75	23.61	9.03	50.0	$\pm 9.6\%$
		Y	19.38	95.62	24.86		50.0	
		Z	22.88	96.68	26.15		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	3.97	74.43	23.56	6.55	100.0	$\pm 9.6\%$
		Y	3.88	74.27	23.50		100.0	
		Z	3.99	74.84	23.98		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.05	69.93	15.06	0.81	110.0	$\pm 9.6\%$
		Y	1.14	65.15	16.03		110.0	
		Z	1.06	64.36	15.42		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	10.10	101.82	25.67	1.30	110.0	$\pm 9.6\%$
		Y	79.65	136.69	35.40		110.0	
		Z	100.00	134.84	33.67		110.0	

Certificate No: EX3-3865\_Aug18

Page 13 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (56) of (109)



EX3DV4- SN:3865

August 29, 2018

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	2.39	78.39	21.09	2.04	110.0	$\pm 9.6\%$
		Y	2.54	80.05	22.12		110.0	
		Z	2.94	82.60	22.98		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.53	68.36	16.35	0.49	100.0	$\pm 9.6\%$
		Y	4.57	66.75	16.49		100.0	
		Z	4.52	66.46	16.44		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.55	66.46	16.44	0.72	100.0	$\pm 9.6\%$
		Y	4.58	66.82	16.57		100.0	
		Z	4.53	66.57	16.55		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.83	66.73	16.69	0.86	100.0	$\pm 9.6\%$
		Y	4.85	67.05	16.77		100.0	
		Z	4.81	66.83	16.78		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.70	66.61	16.77	1.21	100.0	$\pm 9.6\%$
		Y	4.71	66.91	16.84		100.0	
		Z	4.68	66.72	16.88		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.72	66.64	16.94	1.46	100.0	$\pm 9.6\%$
		Y	4.72	66.89	16.98		100.0	
		Z	4.70	66.76	17.06		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	5.01	66.84	17.40	2.04	100.0	$\pm 9.6\%$
		Y	5.00	67.05	17.39		100.0	
		Z	5.00	67.00	17.55		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.05	66.87	17.61	2.55	100.0	$\pm 9.6\%$
		Y	5.02	67.01	17.56		100.0	
		Z	5.04	67.01	17.76		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.13	66.89	17.81	2.67	100.0	$\pm 9.6\%$
		Y	5.10	67.02	17.75		100.0	
		Z	5.12	67.03	17.96		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.83	66.49	17.24	1.99	100.0	$\pm 9.6\%$
		Y	4.83	66.72	17.25		100.0	
		Z	4.83	66.64	17.38		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.80	66.79	17.44	2.30	100.0	$\pm 9.6\%$
		Y	4.79	66.99	17.43		100.0	
		Z	4.80	66.95	17.60		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.86	66.95	17.76	2.83	100.0	$\pm 9.6\%$
		Y	4.84	67.10	17.72		100.0	
		Z	4.86	67.14	17.94		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.85	66.84	17.90	3.30	100.0	$\pm 9.6\%$
		Y	4.82	66.98	17.84		100.0	
		Z	4.86	67.05	18.10		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.88	66.94	18.20	3.82	90.0	$\pm 9.6\%$
		Y	4.84	67.04	18.11		90.0	
		Z	4.89	67.14	18.38		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.90	66.74	18.32	4.15	90.0	$\pm 9.6\%$
		Y	4.86	66.84	18.23		90.0	
		Z	4.91	66.95	18.53		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.93	66.81	18.42	4.30	90.0	$\pm 9.6\%$
		Y	4.89	66.90	18.32		90.0	
		Z	4.94	67.03	18.63		90.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
**KR19-SPF0011-B**  
 Page (57) of (109)



EX3DV4- SN:3865

August 29, 2018

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.57	62.43	9.22	0.00	150.0	± 9.6 %
		Y	0.84	67.25	12.63		150.0	
		Z	0.53	62.05	8.69		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	7.61	68.25	6.38	4.77	80.0	± 9.6 %
		Y	0.45	58.59	3.15		80.0	
		Z	4.05	66.41	5.98		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	106.75	22.75	6.56	60.0	± 9.6 %
		Y	100.00	106.70	22.58		60.0	
		Z	100.00	106.92	23.75		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.64	68.67	14.75	0.00	150.0	± 9.6 %
		Y	1.88	69.06	16.28		150.0	
		Z	1.66	67.07	14.92		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.60	68.61	14.71	0.00	150.0	± 9.6 %
		Y	1.84	69.02	16.25		150.0	
		Z	1.62	67.01	14.88		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	7.87	88.36	31.06	9.56	60.0	± 9.6 %
		Y	7.99	89.55	31.60		60.0	
		Z	7.95	89.18	31.57		60.0	
10100-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.88	69.27	16.01	0.00	150.0	± 9.6 %
		Y	3.18	71.22	17.14		150.0	
		Z	2.89	69.49	16.18		150.0	
10101-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.07	68.89	15.52	0.00	150.0	± 9.6 %
		Y	3.20	67.88	16.12		150.0	
		Z	3.05	66.96	15.61		150.0	
10102-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.18	66.91	15.65	0.00	150.0	± 9.6 %
		Y	3.30	67.85	16.21		150.0	
		Z	3.16	67.00	15.73		150.0	
10103-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	5.61	74.24	19.85	3.98	65.0	± 9.6 %
		Y	5.64	74.68	19.96		65.0	
		Z	5.76	75.04	20.36		65.0	
10104-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	5.62	72.22	19.78	3.98	65.0	± 9.6 %
		Y	5.63	72.53	19.82		65.0	
		Z	5.66	72.60	20.09		65.0	
10105-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.36	71.11	19.60	3.98	65.0	± 9.6 %
		Y	5.30	71.18	19.51		65.0	
		Z	5.36	71.36	19.84		65.0	
10108-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.50	68.58	15.85	0.00	150.0	± 9.6 %
		Y	2.75	70.48	16.98		150.0	
		Z	2.50	68.84	16.02		150.0	
10109-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.72	66.72	15.36	0.00	150.0	± 9.6 %
		Y	2.86	67.85	16.06		150.0	
		Z	2.70	66.85	15.45		150.0	
10110-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.00	67.65	15.33	0.00	150.0	± 9.6 %
		Y	2.22	69.69	16.61		150.0	
		Z	1.99	67.95	15.49		150.0	
10111-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.41	67.48	15.50	0.00	150.0	± 9.6 %
		Y	2.63	69.20	16.54		150.0	
		Z	2.41	67.74	15.61		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (58) of (109)



EX3DV4--SN:3865

August 29, 2016

10112-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.84	66.77	15.45	0.00	150.0	$\pm 9.6\%$
		Y	2.98	67.85	16.12		150.0	
		Z	2.83	66.90	15.54		150.0	
10113-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.57	67.89	15.69	0.00	150.0	$\pm 9.6\%$
		Y	2.79	69.34	16.67		150.0	
		Z	2.56	67.95	15.79		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.01	66.94	16.33	0.00	150.0	$\pm 9.6\%$
		Y	5.04	67.32	16.48		150.0	
		Z	4.99	66.97	16.38		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.29	67.05	16.40	0.00	150.0	$\pm 9.6\%$
		Y	5.30	67.36	16.51		150.0	
		Z	5.25	67.07	16.44		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.10	67.11	16.34	0.00	150.0	$\pm 9.6\%$
		Y	5.13	67.49	16.50		150.0	
		Z	5.07	67.15	16.40		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.97	66.76	16.26	0.00	150.0	$\pm 9.6\%$
		Y	5.01	67.18	16.43		150.0	
		Z	4.95	66.81	16.32		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.38	67.28	16.52	0.00	150.0	$\pm 9.6\%$
		Y	5.37	67.54	16.61		150.0	
		Z	5.34	67.30	16.57		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.09	67.09	16.34	0.00	150.0	$\pm 9.6\%$
		Y	5.11	67.44	16.48		150.0	
		Z	5.06	67.13	16.40		150.0	
10140-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.21	66.90	15.56	0.00	150.0	$\pm 9.6\%$
		Y	3.33	67.85	16.12		150.0	
		Z	3.19	66.99	15.64		150.0	
10141-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.33	67.05	15.76	0.00	150.0	$\pm 9.6\%$
		Y	3.46	67.97	16.30		150.0	
		Z	3.32	67.14	15.85		150.0	
10142-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.75	67.38	14.70	0.00	150.0	$\pm 9.6\%$
		Y	2.02	69.98	16.32		150.0	
		Z	1.74	67.68	14.80		150.0	
10143-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.21	67.76	14.81	0.00	150.0	$\pm 9.6\%$
		Y	2.56	70.37	16.31		150.0	
		Z	2.20	67.98	14.81		150.0	
10144-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.99	65.45	13.14	0.00	150.0	$\pm 9.6\%$
		Y	2.19	67.13	14.23		150.0	
		Z	1.95	65.46	13.03		150.0	
10145-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.89	62.06	9.07	0.00	150.0	$\pm 9.6\%$
		Y	1.09	64.74	11.02		150.0	
		Z	0.81	61.48	8.42		150.0	
10146-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.66	64.73	10.54	0.00	150.0	$\pm 9.6\%$
		Y	1.69	65.01	10.30		150.0	
		Z	1.40	63.18	9.33		150.0	
10147-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.92	66.43	11.51	0.00	150.0	$\pm 9.6\%$
		Y	2.00	66.86	11.31		150.0	
		Z	1.55	64.26	10.01		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (59) of (109)



EX3DV4- SN:3865

August 29, 2018

10149-CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.72	66.79	15.41	0.00	150.0	$\pm 9.6\%$
		Y	2.87	67.93	16.11		150.0	
		Z	2.71	66.92	15.50		150.0	
10150-CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.85	66.82	15.50	0.00	150.0	$\pm 9.6\%$
		Y	2.99	67.92	16.16		150.0	
		Z	2.84	66.96	15.59		150.0	
10151-CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	5.83	76.59	20.88	3.98	65.0	$\pm 9.6\%$
		Y	5.96	77.32	21.12		65.0	
		Z	6.09	77.82	21.56		65.0	
10152-CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.14	72.09	19.39	3.98	65.0	$\pm 9.6\%$
		Y	5.15	72.42	19.44		65.0	
		Z	5.19	72.57	19.73		65.0	
10153-CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	5.51	73.16	20.26	3.98	65.0	$\pm 9.6\%$
		Y	5.53	73.48	20.29		65.0	
		Z	5.58	73.71	20.62		65.0	
10154-CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.04	68.07	15.59	0.00	150.0	$\pm 9.6\%$
		Y	2.29	70.22	16.92		150.0	
		Z	2.04	68.38	15.76		150.0	
10155-CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.42	67.50	15.52	0.00	150.0	$\pm 9.6\%$
		Y	2.64	69.23	16.56		150.0	
		Z	2.41	67.76	15.63		150.0	
10156-CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.57	67.14	14.21	0.00	150.0	$\pm 9.6\%$
		Y	1.89	70.27	16.13		150.0	
		Z	1.55	67.38	14.23		150.0	
10157-CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.79	65.63	12.87	0.00	150.0	$\pm 9.6\%$
		Y	2.05	67.81	14.30		150.0	
		Z	1.75	65.59	12.69		150.0	
10158-CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.58	67.76	15.74	0.00	150.0	$\pm 9.6\%$
		Y	2.80	69.42	16.73		150.0	
		Z	2.57	68.03	15.85		150.0	
10159-CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.88	66.01	13.13	0.00	150.0	$\pm 9.6\%$
		Y	2.18	68.49	14.64		150.0	
		Z	1.83	65.95	12.93		150.0	
10160-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.57	68.04	15.81	0.00	150.0	$\pm 9.6\%$
		Y	2.73	69.38	16.66		150.0	
		Z	2.58	68.34	15.98		150.0	
10161-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.74	66.76	15.40	0.00	150.0	$\pm 9.6\%$
		Y	2.89	67.91	16.10		150.0	
		Z	2.73	66.90	15.48		150.0	
10162-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.86	66.94	15.53	0.00	150.0	$\pm 9.6\%$
		Y	3.00	68.08	16.22		150.0	
		Z	2.84	67.10	15.62		150.0	
10166-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.54	69.90	19.51	3.01	150.0	$\pm 9.6\%$
		Y	3.59	70.60	19.81		150.0	
		Z	3.44	69.85	19.50		150.0	
10167-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	4.36	72.78	19.86	3.01	150.0	$\pm 9.6\%$
		Y	4.66	74.61	20.42		150.0	
		Z	4.18	72.64	19.83		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (60) of (109)



EX3DV4- SN:3865

August 29, 2018

10168-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.98	75.74	21.54	3.01	150.0	$\pm 9.6\%$
		Y	5.50	76.06	22.24		150.0	
		Z	4.81	75.73	21.58		150.0	
10169-CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.93	69.06	19.13	3.01	150.0	$\pm 9.6\%$
		Y	3.04	70.44	19.57		150.0	
		Z	2.79	68.60	18.97		150.0	
10170-CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	4.10	75.37	21.65	3.01	150.0	$\pm 9.6\%$
		Y	4.99	79.86	23.19		150.0	
		Z	3.83	74.80	21.50		150.0	
10171-AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	3.27	70.50	18.48	3.01	150.0	$\pm 9.6\%$
		Y	3.65	73.31	19.42		150.0	
		Z	3.06	69.98	18.29		150.0	
10172-CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	7.15	89.06	28.05	6.02	65.0	$\pm 9.6\%$
		Y	6.43	87.84	27.26		65.0	
		Z	6.94	89.62	28.59		65.0	
10173-CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	14.00	97.64	28.88	6.02	65.0	$\pm 9.6\%$
		Y	19.92	103.83	30.00		65.0	
		Z	16.11	101.66	30.43		65.0	
10174-CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	8.98	88.70	25.46	6.02	65.0	$\pm 9.6\%$
		Y	11.62	93.33	26.26		65.0	
		Z	9.98	91.82	26.78		65.0	
10175-CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.89	68.70	18.84	3.01	150.0	$\pm 9.6\%$
		Y	2.99	70.03	19.27		150.0	
		Z	2.75	68.25	18.68		150.0	
10176-CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	4.11	75.39	21.66	3.01	150.0	$\pm 9.6\%$
		Y	5.00	79.89	23.20		150.0	
		Z	3.84	74.83	21.51		150.0	
10177-CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.92	68.87	18.95	3.01	150.0	$\pm 9.6\%$
		Y	3.02	70.22	19.38		150.0	
		Z	2.78	68.41	18.79		150.0	
10178-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	4.06	75.13	21.52	3.01	150.0	$\pm 9.6\%$
		Y	4.92	79.56	23.05		150.0	
		Z	3.80	74.59	21.38		150.0	
10179-CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.63	72.74	19.90	3.01	150.0	$\pm 9.6\%$
		Y	4.23	76.30	21.11		150.0	
		Z	3.40	72.20	19.73		150.0	
10180-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	3.26	70.43	18.42	3.01	150.0	$\pm 9.6\%$
		Y	3.64	73.21	19.36		150.0	
		Z	3.05	69.91	18.24		150.0	
10181-CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.91	68.85	18.94	3.01	150.0	$\pm 9.6\%$
		Y	3.02	70.20	19.37		150.0	
		Z	2.77	68.39	18.78		150.0	
10182-CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	4.06	75.11	21.51	3.01	150.0	$\pm 9.6\%$
		Y	4.91	79.52	23.03		150.0	
		Z	3.79	74.56	21.37		150.0	
10183-AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	3.25	70.40	18.41	3.01	150.0	$\pm 9.6\%$
		Y	3.63	73.16	19.35		150.0	
		Z	3.05	69.89	18.23		150.0	

Certificate No: EX3-3865\_Aug18

Page 18 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
**KR19-SPF0011-B**  
 Page (61) of (109)



EX3DV4- SN:3865

August 29, 2018

10184-CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.92	68.90	18.96	3.01	150.0	± 9.6 %
		Y	3.03	70.25	19.40		150.0	
		Z	2.78	68.44	18.80		150.0	
10185-CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	4.07	75.19	21.55	3.01	150.0	± 9.6 %
		Y	4.94	79.63	23.08		150.0	
		Z	3.81	74.64	21.41		150.0	
10186-AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	3.27	70.47	18.45	3.01	150.0	± 9.6 %
		Y	3.65	73.26	19.39		150.0	
		Z	3.06	69.95	18.27		150.0	
10187-CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.93	68.96	19.04	3.01	150.0	± 9.6 %
		Y	3.04	70.33	19.48		150.0	
		Z	2.79	68.50	18.88		150.0	
10188-CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	4.23	75.99	22.00	3.01	150.0	± 9.6 %
		Y	5.20	80.71	23.61		150.0	
		Z	3.95	75.42	21.86		150.0	
10189-AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	3.35	70.94	18.75	3.01	150.0	± 9.6 %
		Y	3.77	73.87	19.75		150.0	
		Z	3.14	70.41	18.57		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.38	66.30	15.96	0.00	150.0	± 9.6 %
		Y	4.44	66.82	16.20		150.0	
		Z	4.35	66.36	16.01		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.54	66.60	16.09	0.00	150.0	± 9.6 %
		Y	4.60	67.11	16.33		150.0	
		Z	4.51	66.65	16.15		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.59	66.63	16.11	0.00	150.0	± 9.6 %
		Y	4.64	67.14	16.35		150.0	
		Z	4.55	66.69	16.17		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.38	66.35	15.97	0.00	150.0	± 9.6 %
		Y	4.44	66.87	16.21		150.0	
		Z	4.35	66.40	16.02		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.56	66.62	16.10	0.00	150.0	± 9.6 %
		Y	4.61	67.13	16.34		150.0	
		Z	4.52	66.67	16.16		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.59	66.65	16.12	0.00	150.0	± 9.6 %
		Y	4.64	67.15	16.36		150.0	
		Z	4.55	66.70	16.18		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.33	66.36	15.93	0.00	150.0	± 9.6 %
		Y	4.39	66.89	16.18		150.0	
		Z	4.30	66.42	15.98		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.55	66.59	16.09	0.00	150.0	± 9.6 %
		Y	4.61	67.09	16.33		150.0	
		Z	4.52	66.54	16.14		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.60	66.58	16.11	0.00	150.0	± 9.6 %
		Y	4.65	67.08	16.34		150.0	
		Z	4.56	66.63	16.16		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.94	66.76	16.25	0.00	150.0	± 9.6 %
		Y	4.98	67.19	16.43		150.0	
		Z	4.92	66.81	16.31		150.0	

Certificate No: EX3-3865\_Aug18

Page 19 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (62) of (109)



EX3DV4—SN:3865

August 29, 2018

10223-CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.26	67.08	16.43	0.00	150.0	$\pm 9.6\%$
		Y	5.28	67.40	16.55		150.0	
		Z	5.23	67.08	16.47		150.0	
10224-CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.98	66.87	16.23	0.00	150.0	$\pm 9.6\%$
		Y	5.03	67.31	16.41		150.0	
		Z	4.96	66.91	16.29		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.63	65.58	14.82	0.00	150.0	$\pm 9.6\%$
		Y	2.75	66.58	15.43		150.0	
		Z	2.60	65.70	14.83		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	15.34	99.45	29.54	6.02	65.0	$\pm 9.6\%$
		Y	22.70	106.31	30.81		65.0	
		Z	17.95	103.84	31.19		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	14.75	97.16	28.17	6.02	65.0	$\pm 9.6\%$
		Y	20.27	102.31	28.91		65.0	
		Z	17.83	101.93	29.91		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	8.75	93.65	29.76	6.02	65.0	$\pm 9.6\%$
		Y	8.56	93.70	29.33		65.0	
		Z	8.83	95.07	30.59		65.0	
10229-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	14.12	97.76	28.93	6.02	65.0	$\pm 9.6\%$
		Y	20.15	104.01	30.06		65.0	
		Z	16.25	101.79	30.48		65.0	
10230-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	13.53	95.55	27.60	6.02	65.0	$\pm 9.6\%$
		Y	17.99	100.19	28.22		65.0	
		Z	16.02	99.91	29.23		65.0	
10231-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	8.27	92.42	29.26	6.02	65.0	$\pm 9.6\%$
		Y	8.08	92.46	28.83		65.0	
		Z	8.31	93.72	30.05		65.0	
10232-CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	14.09	97.74	28.92	6.02	65.0	$\pm 9.6\%$
		Y	20.11	103.99	30.05		65.0	
		Z	16.22	101.77	30.48		65.0	
10233-CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	13.49	95.51	27.59	6.02	65.0	$\pm 9.6\%$
		Y	17.92	100.15	28.21		65.0	
		Z	15.97	99.86	29.21		65.0	
10234-CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	7.90	91.36	28.77	6.02	65.0	$\pm 9.6\%$
		Y	7.70	91.36	28.33		65.0	
		Z	7.93	92.60	29.54		65.0	
10235-CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	14.12	97.79	28.94	6.02	65.0	$\pm 9.6\%$
		Y	20.16	104.05	30.07		65.0	
		Z	16.26	101.84	30.50		65.0	
10236-CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	13.67	95.70	27.64	6.02	65.0	$\pm 9.6\%$
		Y	18.23	100.38	28.27		65.0	
		Z	16.22	100.10	29.27		65.0	
10237-CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	8.28	92.49	29.28	6.02	65.0	$\pm 9.6\%$
		Y	8.09	92.52	28.86		65.0	
		Z	8.33	93.80	30.08		65.0	
10238-CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	14.06	97.72	28.92	6.02	65.0	$\pm 9.6\%$
		Y	20.05	103.96	30.04		65.0	
		Z	16.18	101.75	30.47		65.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
**KR19-SPF0011-B**  
 Page (63) of (109)



EX3DV4- SN:3865

August 29, 2018

10239-CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	13.45	95.48	27.58	6.02	65.0	± 9.6 %
		Y	17.85	100.10	28.19		65.0	
		Z	15.91	99.82	29.20		65.0	
10240-CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	8.25	92.44	29.27	6.02	65.0	± 9.6 %
		Y	8.07	92.48	28.84		65.0	
		Z	8.30	93.74	30.06		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	7.58	80.26	25.15	6.98	65.0	± 9.6 %
		Y	7.68	81.29	25.26		65.0	
		Z	7.56	80.99	25.59		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.99	78.56	24.34	6.98	65.0	± 9.6 %
		Y	6.79	78.77	24.15		65.0	
		Z	6.97	79.17	24.73		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.66	75.17	23.79	6.98	65.0	± 9.6 %
		Y	5.40	74.83	23.38		65.0	
		Z	5.59	75.46	24.05		65.0	
10244-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	5.38	74.92	16.03	3.98	65.0	± 9.6 %
		Y	4.91	73.48	16.88		65.0	
		Z	5.42	75.29	16.05		65.0	
10245-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	5.19	74.09	17.62	3.98	65.0	± 9.6 %
		Y	4.74	72.72	16.50		65.0	
		Z	5.17	74.30	17.57		65.0	
10246-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	4.26	74.83	17.88	3.98	65.0	± 9.6 %
		Y	4.50	76.01	18.33		65.0	
		Z	4.63	76.41	18.50		65.0	
10247-CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	4.22	71.61	17.28	3.98	65.0	± 9.6 %
		Y	4.28	72.14	17.44		65.0	
		Z	4.32	72.27	17.66		65.0	
10248-CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	4.22	71.08	17.03	3.98	65.0	± 9.6 %
		Y	4.25	71.53	17.14		65.0	
		Z	4.28	71.60	17.24		65.0	
10249-CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	5.55	79.15	20.68	3.98	65.0	± 9.6 %
		Y	5.83	80.34	21.12		65.0	
		Z	6.27	81.60	21.69		65.0	
10250-CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	5.17	74.56	20.42	3.98	65.0	± 9.6 %
		Y	5.21	74.96	20.50		65.0	
		Z	5.32	75.45	20.90		65.0	
10251-CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	4.92	72.37	19.06	3.98	65.0	± 9.6 %
		Y	4.94	72.73	19.13		65.0	
		Z	4.99	72.96	19.40		65.0	
10252-CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	5.91	79.28	21.88	3.98	65.0	± 9.6 %
		Y	6.09	80.14	22.17		65.0	
		Z	6.40	81.23	22.80		65.0	
10253-CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.05	71.61	19.14	3.98	65.0	± 9.6 %
		Y	5.06	71.95	19.20		65.0	
		Z	5.10	72.10	19.46		65.0	
10254-CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	5.39	72.59	19.91	3.98	65.0	± 9.6 %
		Y	5.40	72.91	19.95		65.0	
		Z	5.45	73.12	20.25		65.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (64) of (109)



EX3DV4- SN:3865

August 29, 2018

10255-CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	5.55	75.91	20.82	3.98	65.0	$\pm 9.6\%$
		Y	5.65	76.55	21.01		65.0	
		Z	5.78	77.06	21.46		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	3.83	69.71	14.58	3.98	65.0	$\pm 9.6\%$
		Y	3.42	68.27	13.38		65.0	
		Z	3.67	69.31	14.21		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	3.70	68.85	14.08	3.98	65.0	$\pm 9.6\%$
		Y	3.32	67.55	12.94		65.0	
		Z	3.52	68.37	13.68		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.99	69.37	14.53	3.98	65.0	$\pm 9.6\%$
		Y	3.08	70.13	14.83		65.0	
		Z	3.02	69.74	14.60		65.0	
10259-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	4.61	72.79	18.46	3.98	65.0	$\pm 9.6\%$
		Y	4.66	73.29	18.59		65.0	
		Z	4.74	73.59	18.83		65.0	
10260-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	4.84	72.53	18.35	3.98	65.0	$\pm 9.6\%$
		Y	4.68	72.99	18.46		65.0	
		Z	4.75	73.25	18.68		65.0	
10261-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	5.40	78.33	20.85	3.98	65.0	$\pm 9.6\%$
		Y	5.60	79.31	21.20		65.0	
		Z	5.93	80.40	21.76		65.0	
10262-CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	5.16	74.49	20.37	3.98	65.0	$\pm 9.6\%$
		Y	5.19	74.89	20.45		65.0	
		Z	5.31	75.38	20.85		65.0	
10263-CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	4.91	72.34	19.06	3.98	65.0	$\pm 9.6\%$
		Y	4.93	72.70	19.12		65.0	
		Z	4.98	72.93	19.39		65.0	
10264-CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	5.84	79.06	21.77	3.98	65.0	$\pm 9.6\%$
		Y	6.02	79.92	22.08		65.0	
		Z	6.32	80.97	22.67		65.0	
10265-CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.14	72.09	19.40	3.98	65.0	$\pm 9.6\%$
		Y	5.15	72.42	19.45		65.0	
		Z	5.19	72.58	19.73		65.0	
10266-CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	5.51	73.15	20.25	3.98	65.0	$\pm 9.6\%$
		Y	5.52	73.47	20.28		65.0	
		Z	5.58	73.69	20.51		65.0	
10267-CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	5.82	76.55	20.86	3.98	65.0	$\pm 9.6\%$
		Y	5.96	77.27	21.10		65.0	
		Z	6.08	77.77	21.54		65.0	
10268-CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	5.78	72.13	19.86	3.98	65.0	$\pm 9.6\%$
		Y	5.79	72.43	19.88		65.0	
		Z	5.81	72.50	20.15		65.0	
10269-CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	5.78	71.74	19.74	3.98	65.0	$\pm 9.6\%$
		Y	5.78	72.04	19.75		65.0	
		Z	5.80	72.09	20.01		65.0	
10270-CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	5.78	74.06	20.00	3.98	65.0	$\pm 9.6\%$
		Y	5.86	74.61	20.15		65.0	
		Z	5.91	74.79	20.46		65.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
 KR19-SPF0011-B  
 Page (65) of (109)



EX3DV4- SN:3865

August 29, 2018

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.42	65.88	14.66	0.00	150.0	$\pm 9.6\%$
		Y	2.57	67.12	15.44		150.0	
		Z	2.41	66.07	14.72		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.41	66.60	14.42	0.00	150.0	$\pm 9.6\%$
		Y	1.65	69.29	16.18		150.0	
		Z	1.41	66.99	14.61		150.0	
10277-CAA	PHS (QPSK)	X	2.03	60.87	6.55	9.03	50.0	$\pm 9.6\%$
		Y	1.87	60.57	6.11		50.0	
		Z	1.99	60.82	6.48		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	3.70	68.56	13.26	9.03	50.0	$\pm 9.6\%$
		Y	3.56	68.41	12.93		50.0	
		Z	3.73	68.77	13.35		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	3.81	68.86	13.46	9.03	50.0	$\pm 9.6\%$
		Y	3.68	68.73	13.13		50.0	
		Z	3.85	69.08	13.53		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	1.01	64.79	10.91	0.00	150.0	$\pm 9.6\%$
		Y	1.49	70.09	14.06		150.0	
		Z	0.94	64.36	10.41		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.56	62.29	9.12	0.00	150.0	$\pm 9.6\%$
		Y	0.82	66.92	12.45		150.0	
		Z	0.52	61.91	8.60		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	0.65	64.64	10.69	0.00	150.0	$\pm 9.6\%$
		Y	1.56	76.14	16.79		150.0	
		Z	0.61	64.29	10.18		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	0.96	69.14	13.32	0.00	150.0	$\pm 9.6\%$
		Y	10.83	102.57	25.57		150.0	
		Z	0.96	69.38	13.07		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	9.46	84.21	22.72	9.03	50.0	$\pm 9.6\%$
		Y	8.86	83.67	22.43		50.0	
		Z	12.74	89.22	24.42		50.0	
10297-AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.52	66.69	15.92	0.00	150.0	$\pm 9.6\%$
		Y	2.77	70.61	17.06		150.0	
		Z	2.52	68.95	16.09		150.0	
10298-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.22	65.00	11.88	0.00	150.0	$\pm 9.6\%$
		Y	1.55	68.58	14.13		150.0	
		Z	1.16	64.75	11.53		150.0	
10299-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	2.54	69.59	14.01	0.00	150.0	$\pm 9.6\%$
		Y	2.78	70.61	14.06		150.0	
		Z	2.21	68.08	13.00		150.0	
10300-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.77	64.32	10.71	0.00	150.0	$\pm 9.6\%$
		Y	1.80	64.62	10.53		150.0	
		Z	1.59	63.43	9.93		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.67	65.51	17.36	4.17	50.0	$\pm 9.6\%$
		Y	4.59	65.58	17.43		50.0	
		Z	4.73	66.06	17.65		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	5.07	65.75	17.87	4.96	50.0	$\pm 9.6\%$
		Y	5.00	65.86	17.95		50.0	
		Z	5.08	65.96	17.94		50.0	

Certificate No: EX3-3865\_Aug18

Page 23 of 39

---

 This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/1

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (66) of (109)



EX3DV4-SN:3865

August 29, 2018

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.82	65.39	17.69	4.98	50.0	$\pm 9.6\%$
		Y	4.75	65.46	17.76		50.0	
		Z	4.83	65.62	17.76		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.62	65.24	17.18	4.17	50.0	$\pm 9.6\%$
		Y	4.57	65.42	17.31		50.0	
		Z	4.63	65.46	17.25		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.41	67.96	19.48	6.02	35.0	$\pm 9.6\%$
		Y	4.17	67.05	19.10		35.0	
		Z	4.53	68.70	19.72		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.67	66.70	19.03	6.02	35.0	$\pm 9.6\%$
		Y	4.50	66.15	18.77		35.0	
		Z	4.73	67.23	19.22		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.57	66.89	19.00	6.02	35.0	$\pm 9.6\%$
		Y	4.39	66.27	18.71		35.0	
		Z	4.64	67.43	19.19		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.56	67.12	19.15	6.02	35.0	$\pm 9.6\%$
		Y	4.37	66.47	18.86		35.0	
		Z	4.63	67.69	19.36		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.72	66.90	19.17	6.02	35.0	$\pm 9.6\%$
		Y	4.54	66.32	18.90		35.0	
		Z	4.77	67.41	19.36		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.62	66.78	19.01	6.02	35.0	$\pm 9.6\%$
		Y	4.45	66.21	18.75		35.0	
		Z	4.69	67.33	19.22		35.0	
10311-AAD	LTE-FDD (SC-FDMA, 100% RB, 15-MHz, QPSK)	X	2.86	67.96	15.62	0.00	150.0	$\pm 9.6\%$
		Y	3.14	69.80	16.67		150.0	
		Z	2.87	68.17	15.78		150.0	
10313-AAA	IDEN 1:3	X	2.47	68.09	13.87	6.99	70.0	$\pm 9.6\%$
		Y	2.75	70.86	14.88		70.0	
		Z	2.77	70.66	14.81		70.0	
10314-AAA	IDEN 1:6	X	4.03	76.58	19.71	10.00	30.0	$\pm 9.6\%$
		Y	4.99	80.78	21.48		30.0	
		Z	5.61	82.12	21.92		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1-Mbps, 96pc duty cycle)	X	0.94	62.83	14.38	0.17	150.0	$\pm 9.6\%$
		Y	1.04	64.24	15.54		150.0	
		Z	0.94	63.11	14.63		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.43	66.34	16.10	0.17	150.0	$\pm 9.6\%$
		Y	4.47	66.78	16.28		150.0	
		Z	4.41	66.43	16.18		150.0	
10317-AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6-Mbps, 96pc duty cycle)	X	4.43	66.34	16.10	0.17	150.0	$\pm 9.6\%$
		Y	4.47	66.78	16.28		150.0	
		Z	4.41	66.43	16.18		150.0	
10400-AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.53	66.65	16.08	0.00	150.0	$\pm 9.6\%$
		Y	4.58	67.14	16.31		150.0	
		Z	4.49	66.70	16.13		150.0	
10401-AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.30	67.03	16.38	0.00	150.0	$\pm 9.6\%$
		Y	5.27	67.17	16.40		150.0	
		Z	5.29	67.10	16.45		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (67) of (109)



EX3DV4- SN:3865

August 29, 2018

10402-AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.50	67.13	16.29	0.00	150.0	$\pm 9.6\%$
		Y	5.54	67.54	16.45		150.0	
		Z	5.48	67.14	16.34		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	1.01	64.79	10.91	0.00	115.0	$\pm 9.6\%$
		Y	1.49	70.09	14.06		115.0	
		Z	0.94	64.36	10.41		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	1.01	64.79	10.91	0.00	115.0	$\pm 9.6\%$
		Y	1.49	70.09	14.06		115.0	
		Z	0.94	64.36	10.41		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	100.00	124.02	31.38	0.00	100.0	$\pm 9.6\%$
		Y	100.00	117.21	27.99		100.0	
		Z	100.00	123.84	31.03		100.0	
10410-AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	100.00	125.34	31.57	3.23	80.0	$\pm 9.6\%$
		Y	100.00	120.85	29.19		80.0	
		Z	100.00	127.12	32.22		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	0.88	62.13	13.85	0.00	150.0	$\pm 9.6\%$
		Y	0.98	63.60	15.08		150.0	
		Z	0.88	62.33	14.04		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.38	66.34	16.04	0.00	150.0	$\pm 9.6\%$
		Y	4.44	66.85	16.27		150.0	
		Z	4.35	66.40	16.09		150.0	
10417-AAB	IEEE 802.11ai WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.38	66.34	16.04	0.00	150.0	$\pm 9.6\%$
		Y	4.44	66.85	16.27		150.0	
		Z	4.35	66.40	16.09		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.37	66.50	16.06	0.00	150.0	$\pm 9.6\%$
		Y	4.44	67.04	16.31		150.0	
		Z	4.35	66.57	16.12		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.39	66.45	16.06	0.00	150.0	$\pm 9.6\%$
		Y	4.45	66.97	16.31		150.0	
		Z	4.37	66.52	16.12		150.0	
10422-AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.51	66.45	16.08	0.00	150.0	$\pm 9.6\%$
		Y	4.57	66.95	16.31		150.0	
		Z	4.48	66.51	16.13		150.0	
10423-AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.66	66.75	16.19	0.00	150.0	$\pm 9.6\%$
		Y	4.72	67.24	16.41		150.0	
		Z	4.63	66.80	16.24		150.0	
10424-AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.58	66.70	16.16	0.00	150.0	$\pm 9.6\%$
		Y	4.64	67.20	16.39		150.0	
		Z	4.55	66.75	16.21		150.0	
10425-AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.21	67.04	16.39	0.00	150.0	$\pm 9.6\%$
		Y	5.23	67.38	16.52		150.0	
		Z	5.19	67.08	16.45		150.0	
10426-AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.25	67.17	16.45	0.00	150.0	$\pm 9.6\%$
		Y	5.24	67.44	16.54		150.0	
		Z	5.22	67.22	16.51		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (68) of (109)



EX3DV4– SN:3865

August 29, 2018

10427-AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.24	67.08	16.40	0.00	150.0	$\pm 9.6\%$
		Y	5.25	67.39	16.51		150.0	
		Z	5.21	67.09	16.45		150.0	
10430-AAC	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.15	71.00	18.09	0.00	150.0	$\pm 9.6\%$
		Y	4.41	72.42	18.81		150.0	
		Z	4.16	71.40	18.23		150.0	
10431-AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.03	66.85	15.94	0.00	150.0	$\pm 9.6\%$
		Y	4.11	67.49	16.28		150.0	
		Z	4.00	66.94	15.98		150.0	
10432-AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.35	66.74	16.08	0.00	150.0	$\pm 9.6\%$
		Y	4.41	67.30	16.35		150.0	
		Z	4.31	66.81	16.13		150.0	
10433-AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.60	66.73	16.18	0.00	150.0	$\pm 9.6\%$
		Y	4.66	67.24	16.41		150.0	
		Z	4.57	66.78	16.23		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.24	71.78	17.94	0.00	150.0	$\pm 9.6\%$
		Y	4.61	73.85	18.87		150.0	
		Z	4.26	72.22	18.05		150.0	
10435-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	125.08	31.45	3.23	80.0	$\pm 9.6\%$
		Y	100.00	120.56	29.05		80.0	
		Z	100.00	126.85	32.09		80.0	
10447-AAC	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.28	66.64	14.99	0.00	150.0	$\pm 9.6\%$
		Y	3.41	67.59	15.54		150.0	
		Z	3.24	66.72	14.95		150.0	
10448-AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.88	66.62	15.79	0.00	150.0	$\pm 9.6\%$
		Y	3.96	67.28	16.15		150.0	
		Z	3.85	66.71	15.84		150.0	
10449-AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.16	66.56	15.97	0.00	150.0	$\pm 9.6\%$
		Y	4.24	67.14	16.26		150.0	
		Z	4.14	66.63	16.02		150.0	
10450-AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.37	66.49	16.02	0.00	150.0	$\pm 9.6\%$
		Y	4.43	67.02	16.28		150.0	
		Z	4.34	66.54	16.07		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.14	66.61	14.42	0.00	150.0	$\pm 9.6\%$
		Y	3.26	67.70	15.06		150.0	
		Z	3.06	66.63	14.32		150.0	
10456-AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.12	67.65	16.59	0.00	150.0	$\pm 9.6\%$
		Y	6.12	67.94	16.67		150.0	
		Z	6.12	67.74	16.67		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.66	64.98	15.74	0.00	150.0	$\pm 9.6\%$
		Y	3.73	65.51	15.99		150.0	
		Z	3.65	65.05	15.79		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.80	70.65	17.03	0.00	150.0	$\pm 9.6\%$
		Y	4.17	72.63	18.04		150.0	
		Z	3.78	70.90	17.00		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	5.01	68.76	18.23	0.00	150.0	$\pm 9.6\%$
		Y	5.14	69.51	18.53		150.0	
		Z	4.99	69.01	18.28		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
 KR19-SPF0011-B  
 Page (69) of (109)



EX3DV4- SN:3865

August 26, 2018

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	0.72	66.37	14.33	0.00	150.0	$\pm 9.6\%$
		Y	0.97	71.04	17.55		150.0	
		Z	0.74	67.17	14.75		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	130.02	33.79	3.29	80.0	$\pm 9.6\%$
		Y	100.00	126.26	31.72		80.0	
		Z	100.00	132.88	34.90		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.20	72.59	14.03	3.23	80.0	$\pm 9.6\%$
		Y	0.96	61.38	8.38		80.0	
		Z	7.06	80.73	16.49		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.24	62.74	9.52	3.23	80.0	$\pm 9.6\%$
		Y	0.84	60.00	7.12		80.0	
		Z	1.15	62.63	9.36		80.0	
10464-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,6,9)	X	100.00	126.88	32.16	3.23	80.0	$\pm 9.6\%$
		Y	100.00	122.54	29.85		80.0	
		Z	100.00	129.59	33.20		80.0	
10465-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.19	68.78	12.57	3.23	80.0	$\pm 9.6\%$
		Y	0.89	60.72	7.98		80.0	
		Z	2.83	71.80	13.58		80.0	
10466-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.14	61.96	9.10	3.23	80.0	$\pm 9.6\%$
		Y	0.84	60.00	7.07		80.0	
		Z	1.05	61.76	8.90		80.0	
10467-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	127.23	32.32	3.23	80.0	$\pm 9.6\%$
		Y	100.00	122.93	30.02		80.0	
		Z	100.00	130.01	33.39		80.0	
10468-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.39	69.68	12.93	3.23	80.0	$\pm 9.6\%$
		Y	0.90	60.90	8.09		80.0	
		Z	3.41	73.63	14.23		80.0	
10469-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.14	61.98	9.11	3.23	80.0	$\pm 9.6\%$
		Y	0.84	60.00	7.07		80.0	
		Z	1.05	61.78	8.91		80.0	
10470-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	127.26	32.32	3.23	80.0	$\pm 9.6\%$
		Y	100.00	122.94	30.02		80.0	
		Z	100.00	130.06	33.39		80.0	
10471-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.35	69.51	12.85	3.23	80.0	$\pm 9.6\%$
		Y	0.90	60.84	8.04		80.0	
		Z	3.30	73.31	14.11		80.0	
10472-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.13	61.92	9.06	3.23	80.0	$\pm 9.6\%$
		Y	0.84	60.00	7.05		80.0	
		Z	1.04	61.72	8.86		80.0	
10473-AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	127.22	32.30	3.23	80.0	$\pm 9.6\%$
		Y	100.00	122.90	30.00		80.0	
		Z	100.00	130.01	33.37		80.0	
10474-AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.33	69.43	12.82	3.23	80.0	$\pm 9.6\%$
		Y	0.89	60.81	8.03		80.0	
		Z	3.24	73.15	14.05		80.0	
10475-AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.13	61.90	9.06	3.23	80.0	$\pm 9.6\%$
		Y	0.84	60.00	7.05		80.0	
		Z	1.04	61.70	8.85		80.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (70) of (109)



EX3DV4- SN:3865

August 29, 2018

10477-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.17	68.71	12.52	3.23	80.0	$\pm 9.6\%$
		Y	0.88	60.65	7.93		80.0	
		Z	2.80	71.70	13.52		80.0	
10478-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.12	61.85	9.02	3.23	80.0	$\pm 9.6\%$
		Y	0.84	60.00	7.04		80.0	
		Z	1.03	61.84	8.82		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	27.67	107.07	29.16	3.23	80.0	$\pm 9.6\%$
		Y	12.16	94.06	25.01		80.0	
		Z	100.00	127.23	33.99		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	15.18	90.54	22.25	3.23	80.0	$\pm 9.6\%$
		Y	8.14	82.02	18.95		80.0	
		Z	42.41	103.75	25.57		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.67	82.39	19.33	3.23	80.0	$\pm 9.6\%$
		Y	5.00	75.39	16.31		80.0	
		Z	15.01	89.30	21.22		80.0	
10482-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.05	67.56	14.25	2.23	80.0	$\pm 9.6\%$
		Y	2.43	70.23	15.56		80.0	
		Z	2.29	69.32	14.95		80.0	
10483-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.97	75.56	17.39	2.23	80.0	$\pm 9.6\%$
		Y	3.49	71.00	15.18		80.0	
		Z	5.48	76.88	17.65		80.0	
10484-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.35	73.59	16.66	2.23	80.0	$\pm 9.6\%$
		Y	3.22	69.76	14.69		80.0	
		Z	4.56	74.31	16.72		80.0	
10485-AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.62	70.65	16.77	2.23	80.0	$\pm 9.6\%$
		Y	2.94	72.79	17.80		80.0	
		Z	3.03	73.24	17.89		80.0	
10486-AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.56	66.84	14.54	2.23	80.0	$\pm 9.6\%$
		Y	2.77	68.38	15.29		80.0	
		Z	2.69	67.89	14.97		80.0	
10487-AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.56	66.51	14.38	2.23	80.0	$\pm 9.6\%$
		Y	2.76	67.94	15.06		80.0	
		Z	2.68	67.43	14.75		80.0	
10488-AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.03	70.69	17.73	2.23	80.0	$\pm 9.6\%$
		Y	3.20	71.92	16.33		80.0	
		Z	3.28	72.41	16.61		80.0	
10489-AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.05	67.66	16.44	2.23	80.0	$\pm 9.6\%$
		Y	3.16	68.52	16.84		80.0	
		Z	3.17	66.61	16.95		80.0	
10490-AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.14	67.55	16.40	2.23	80.0	$\pm 9.6\%$
		Y	3.24	68.36	16.78		80.0	
		Z	3.25	68.43	16.88		80.0	
10491-AAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.32	69.50	17.43	2.23	80.0	$\pm 9.6\%$
		Y	3.43	70.41	17.87		80.0	
		Z	3.47	70.62	18.07		80.0	
10492-AAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.43	67.15	16.61	2.23	80.0	$\pm 9.6\%$
		Y	3.50	67.77	16.87		80.0	
		Z	3.50	67.80	17.01		80.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (71) of (109)



EX3DV4- SN:3865

August 29, 2018

10493-AAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.50	67.06	16.58	2.23	80.0	$\pm 9.6\%$
		Y	3.56	67.65	16.82		80.0	
		Z	3.57	67.66	16.95		80.0	
10494-AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.56	70.81	17.83	2.23	80.0	$\pm 9.6\%$
		Y	3.72	71.91	18.35		80.0	
		Z	3.77	72.13	18.55		80.0	
10495-AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.45	67.48	16.80	2.23	80.0	$\pm 9.6\%$
		Y	3.52	68.10	17.07		80.0	
		Z	3.53	68.14	17.22		80.0	
10496-AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.54	67.28	16.75	2.23	80.0	$\pm 9.6\%$
		Y	3.60	67.86	17.00		80.0	
		Z	3.61	67.88	17.14		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.31	62.34	10.60	2.23	80.0	$\pm 9.6\%$
		Y	1.50	64.28	11.70		80.0	
		Z	1.30	62.50	10.51		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.28	60.00	8.31	2.23	80.0	$\pm 9.6\%$
		Y	1.24	60.00	8.37		80.0	
		Z	1.24	60.00	8.09		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.29	60.00	8.17	2.23	80.0	$\pm 9.6\%$
		Y	1.25	60.00	8.22		80.0	
		Z	1.26	60.00	7.94		80.0	
10500-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.76	70.51	17.12	2.23	80.0	$\pm 9.6\%$
		Y	3.00	72.18	17.93		80.0	
		Z	3.09	72.69	18.11		80.0	
10501-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.80	67.38	15.37	2.23	80.0	$\pm 9.6\%$
		Y	2.97	68.64	15.98		80.0	
		Z	2.94	68.48	15.87		80.0	
10502-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.85	67.25	15.25	2.23	80.0	$\pm 9.6\%$
		Y	3.02	68.47	15.84		80.0	
		Z	2.98	68.27	15.70		80.0	
10503-AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.99	70.48	17.62	2.23	80.0	$\pm 9.6\%$
		Y	3.15	71.70	18.23		80.0	
		Z	3.23	72.17	18.49		80.0	
10504-AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.03	67.56	16.37	2.23	80.0	$\pm 9.6\%$
		Y	3.14	68.42	16.78		80.0	
		Z	3.15	68.50	16.88		80.0	
10505-AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.13	67.45	16.34	2.23	80.0	$\pm 9.6\%$
		Y	3.22	68.26	16.72		80.0	
		Z	3.23	68.32	16.81		80.0	
10506-AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.53	70.66	17.75	2.23	80.0	$\pm 9.6\%$
		Y	3.69	71.76	18.27		80.0	
		Z	3.74	71.97	18.47		80.0	
10507-AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.44	67.42	16.76	2.23	80.0	$\pm 9.6\%$
		Y	3.51	68.04	17.03		80.0	
		Z	3.52	68.07	17.18		80.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (72) of (109)



EX3DV4—SN:3865

August 29, 2018

10508-AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.53	67.21	16.70	2.23	80.0	$\pm 9.6\%$
		Y	3.59	67.79	16.95		80.0	
		Z	3.60	67.80	17.09		80.0	
10509-AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.91	69.66	17.38	2.23	80.0	$\pm 9.6\%$
		Y	4.05	70.59	17.79		80.0	
		Z	4.06	70.55	17.92		80.0	
10510-AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.93	67.26	16.84	2.23	80.0	$\pm 9.6\%$
		Y	3.98	67.78	17.04		80.0	
		Z	3.99	67.72	17.17		80.0	
10511-AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.00	67.06	16.79	2.23	80.0	$\pm 9.6\%$
		Y	4.04	67.56	16.98		80.0	
		Z	4.04	67.49	17.11		80.0	
10512-AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.02	70.95	17.75	2.23	80.0	$\pm 9.6\%$
		Y	4.22	72.10	18.27		80.0	
		Z	4.23	72.07	18.38		80.0	
10513-AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.81	67.45	16.91	2.23	80.0	$\pm 9.6\%$
		Y	3.87	68.00	17.13		80.0	
		Z	3.87	67.95	17.28		80.0	
10514-AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.85	67.10	16.82	2.23	80.0	$\pm 9.6\%$
		Y	3.90	67.61	17.01		80.0	
		Z	3.90	67.55	17.15		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.84	62.27	13.86	0.00	150.0	$\pm 9.6\%$
		Y	0.95	63.84	15.18		150.0	
		Z	0.84	62.49	14.06		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.45	68.47	14.59	0.00	150.0	$\pm 9.6\%$
		Y	0.77	77.06	20.42		150.0	
		Z	0.50	70.44	15.52		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.68	63.82	14.07	0.00	150.0	$\pm 9.6\%$
		Y	0.81	66.38	16.16		150.0	
		Z	0.68	64.26	14.39		150.0	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.37	66.41	16.01	0.00	150.0	$\pm 9.6\%$
		Y	4.43	66.94	16.26		150.0	
		Z	4.35	66.48	16.07		150.0	
10519-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.55	66.64	16.13	0.00	150.0	$\pm 9.6\%$
		Y	4.60	67.13	16.36		150.0	
		Z	4.51	66.69	16.16		150.0	
10520-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.40	66.58	16.04	0.00	150.0	$\pm 9.6\%$
		Y	4.48	67.10	16.29		150.0	
		Z	4.36	66.63	16.09		150.0	
10521-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.33	66.56	16.02	0.00	150.0	$\pm 9.6\%$
		Y	4.39	67.09	16.28		150.0	
		Z	4.30	66.61	16.07		150.0	
10522-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.39	66.69	16.12	0.00	150.0	$\pm 9.6\%$
		Y	4.45	67.21	16.37		150.0	
		Z	4.36	66.75	16.18		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
 KR19-SPF0011-B  
 Page (73) of (109)



EX3DV4- SN:3865

August 29, 2018

10523-AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.28	66.55	15.96	0.00	150.0	$\pm 9.6\%$
		Y	4.35	67.12	16.25		150.0	
		Z	4.25	66.63	16.03		150.0	
10524-AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.33	66.60	16.08	0.00	150.0	$\pm 9.6\%$
		Y	4.40	67.13	16.34		150.0	
		Z	4.30	66.86	16.14		150.0	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.34	65.64	15.68	0.00	150.0	$\pm 9.6\%$
		Y	4.40	66.21	15.95		150.0	
		Z	4.31	65.72	15.75		150.0	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.49	65.99	15.82	0.00	150.0	$\pm 9.6\%$
		Y	4.56	66.55	16.09		150.0	
		Z	4.46	66.05	15.88		150.0	
10527-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.41	65.94	15.75	0.00	150.0	$\pm 9.6\%$
		Y	4.48	66.52	16.03		150.0	
		Z	4.38	66.00	15.81		150.0	
10528-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.43	65.96	15.79	0.00	150.0	$\pm 9.6\%$
		Y	4.50	66.53	16.06		150.0	
		Z	4.40	66.02	15.85		150.0	
10529-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.43	65.96	15.79	0.00	150.0	$\pm 9.6\%$
		Y	4.50	66.53	16.06		150.0	
		Z	4.40	66.02	15.85		150.0	
10531-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.41	66.04	15.79	0.00	150.0	$\pm 9.6\%$
		Y	4.48	66.61	16.06		150.0	
		Z	4.37	66.09	15.84		150.0	
10532-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.28	65.88	15.71	0.00	150.0	$\pm 9.6\%$
		Y	4.35	66.47	16.00		150.0	
		Z	4.25	65.94	15.77		150.0	
10533-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.43	66.02	15.78	0.00	150.0	$\pm 9.6\%$
		Y	4.51	66.60	16.06		150.0	
		Z	4.40	66.09	15.84		150.0	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.98	66.08	15.89	0.00	150.0	$\pm 9.6\%$
		Y	5.03	66.55	16.09		150.0	
		Z	4.96	66.11	15.94		150.0	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.05	66.29	15.99	0.00	150.0	$\pm 9.6\%$
		Y	5.09	66.71	16.16		150.0	
		Z	5.03	66.32	16.04		150.0	
10536-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.92	66.22	15.93	0.00	150.0	$\pm 9.6\%$
		Y	4.97	66.69	16.13		150.0	
		Z	4.90	66.27	15.99		150.0	
10537-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.98	66.18	15.92	0.00	150.0	$\pm 9.6\%$
		Y	5.02	66.64	16.11		150.0	
		Z	4.95	66.22	15.98		150.0	
10538-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.06	66.20	15.97	0.00	150.0	$\pm 9.6\%$
		Y	5.10	66.63	16.15		150.0	
		Z	5.03	66.23	16.02		150.0	
10540-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.00	66.22	15.99	0.00	150.0	$\pm 9.6\%$
		Y	5.03	66.63	16.16		150.0	
		Z	4.96	66.22	16.03		150.0	

Certificate No: EX3-3865\_Aug18

Page 31 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
 KR19-SPF0011-B  
 Page (74) of (109)



EX3DV4- SN:3865

August 29, 2018

10541-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.97	66.07	15.91	0.00	150.0	$\pm 9.6\%$
		Y	5.01	66.53	16.10		150.0	
		Z	4.94	66.09	15.95		150.0	
10542-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.13	66.17	15.97	0.00	150.0	$\pm 9.6\%$
		Y	5.17	66.60	16.15		150.0	
		Z	5.10	66.20	16.03		150.0	
10543-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.19	66.19	16.01	0.00	150.0	$\pm 9.6\%$
		Y	5.23	66.61	16.18		150.0	
		Z	5.16	66.22	16.06		150.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.31	66.19	15.89	0.00	150.0	$\pm 9.6\%$
		Y	5.35	66.64	16.07		150.0	
		Z	5.29	66.21	15.94		150.0	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.51	66.67	16.08	0.00	150.0	$\pm 9.6\%$
		Y	5.53	67.02	16.21		150.0	
		Z	5.50	66.71	16.15		150.0	
10546-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.36	66.37	15.95	0.00	150.0	$\pm 9.6\%$
		Y	5.40	66.80	16.12		150.0	
		Z	5.34	66.38	15.99		150.0	
10547-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.44	66.44	15.98	0.00	150.0	$\pm 9.6\%$
		Y	5.47	66.85	16.14		150.0	
		Z	5.42	66.46	16.03		150.0	
10548-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.71	67.44	16.45	0.00	150.0	$\pm 9.6\%$
		Y	5.65	67.57	16.47		150.0	
		Z	5.68	67.44	16.49		150.0	
10550-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.41	66.47	16.01	0.00	150.0	$\pm 9.6\%$
		Y	5.43	66.86	16.16		150.0	
		Z	5.40	66.53	16.08		150.0	
10551-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.39	66.44	15.96	0.00	150.0	$\pm 9.6\%$
		Y	5.43	66.85	16.12		150.0	
		Z	5.37	66.44	16.00		150.0	
10552-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.31	66.25	15.87	0.00	150.0	$\pm 9.6\%$
		Y	5.37	66.73	16.06		150.0	
		Z	5.29	66.27	15.92		150.0	
10553-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.39	66.27	15.91	0.00	150.0	$\pm 9.6\%$
		Y	5.43	66.72	16.09		150.0	
		Z	5.36	66.28	15.95		150.0	
10554-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.73	66.57	15.99	0.00	150.0	$\pm 9.6\%$
		Y	5.76	66.97	16.14		150.0	
		Z	5.71	66.58	16.04		150.0	
10555-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.86	66.89	16.13	0.00	150.0	$\pm 9.6\%$
		Y	5.87	67.23	16.25		150.0	
		Z	5.84	66.90	16.18		150.0	
10556-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.88	66.93	16.15	0.00	150.0	$\pm 9.6\%$
		Y	5.90	67.29	16.28		150.0	
		Z	5.86	66.95	16.20		150.0	
10557-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.83	66.80	16.10	0.00	150.0	$\pm 9.6\%$
		Y	5.86	67.19	16.25		150.0	
		Z	5.81	66.81	16.15		150.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (75) of (109)



EX3DV4- SN:3865

August 29, 2018

10558-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.88	66.96	16.20	0.00	150.0	$\pm 9.6\%$
		Y	5.90	67.34	16.33		150.0	
		Z	5.86	66.96	16.24		150.0	
10560-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.87	66.80	16.16	0.00	150.0	$\pm 9.6\%$
		Y	5.90	67.20	16.30		150.0	
		Z	5.85	66.81	16.20		150.0	
10561-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.80	66.81	16.19	0.00	150.0	$\pm 9.6\%$
		Y	5.82	67.17	16.32		150.0	
		Z	5.79	66.82	16.24		150.0	
10562-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.90	67.12	16.35	0.00	150.0	$\pm 9.6\%$
		Y	5.92	67.46	16.47		150.0	
		Z	5.87	67.09	16.37		150.0	
10563-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.03	67.13	16.32	0.00	150.0	$\pm 9.6\%$
		Y	6.00	67.34	16.37		150.0	
		Z	5.98	67.06	16.33		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.70	66.48	16.16	0.46	150.0	$\pm 9.6\%$
		Y	4.75	66.94	16.36		150.0	
		Z	4.67	66.54	16.22		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.92	66.94	16.50	0.46	150.0	$\pm 9.6\%$
		Y	4.96	67.38	16.69		150.0	
		Z	4.88	66.99	16.56		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.75	66.76	16.30	0.46	150.0	$\pm 9.6\%$
		Y	4.80	67.21	16.50		150.0	
		Z	4.72	66.81	16.35		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.78	67.18	16.68	0.46	150.0	$\pm 9.6\%$
		Y	4.84	67.65	16.89		150.0	
		Z	4.75	67.23	16.74		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.66	66.52	16.05	0.46	150.0	$\pm 9.6\%$
		Y	4.70	66.95	16.24		150.0	
		Z	4.62	66.56	16.10		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.75	67.31	16.77	0.46	150.0	$\pm 9.6\%$
		Y	4.81	67.81	16.99		150.0	
		Z	4.72	67.40	16.85		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.77	67.13	16.68	0.46	150.0	$\pm 9.6\%$
		Y	4.83	67.62	16.90		150.0	
		Z	4.74	67.21	16.75		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.01	63.28	14.65	0.46	130.0	$\pm 9.6\%$
		Y	1.10	64.52	15.66		130.0	
		Z	1.01	63.63	14.96		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.01	63.80	14.99	0.46	130.0	$\pm 9.6\%$
		Y	1.11	65.15	16.06		130.0	
		Z	1.02	64.21	15.34		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	1.31	79.50	19.67	0.46	130.0	$\pm 9.6\%$
		Y	3.02	94.95	26.52		130.0	
		Z	2.08	86.95	22.32		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.07	69.10	17.66	0.46	130.0	$\pm 9.6\%$
		Y	1.26	72.00	19.80		130.0	
		Z	1.12	70.36	18.42		130.0	

Certificate No: EX3-3865\_Aug18

Page 33 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (76) of (109)



EX3DV4- SN:3865

August 29, 2018

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.48	66.26	16.20	0.46	130.0	$\pm 9.6\%$
		Y	4.52	66.67	16.36		130.0	
		Z	4.46	66.34	16.28		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.51	66.44	16.28	0.46	130.0	$\pm 9.6\%$
		Y	4.55	66.86	16.45		130.0	
		Z	4.48	66.53	16.36		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.70	66.73	16.45	0.46	130.0	$\pm 9.6\%$
		Y	4.73	67.13	16.60		130.0	
		Z	4.67	66.81	16.53		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.60	66.88	16.55	0.46	130.0	$\pm 9.6\%$
		Y	4.64	67.31	16.73		130.0	
		Z	4.57	66.97	16.64		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.35	66.08	15.80	0.46	130.0	$\pm 9.6\%$
		Y	4.38	66.48	15.96		130.0	
		Z	4.32	66.14	15.87		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.40	66.14	15.83	0.46	130.0	$\pm 9.6\%$
		Y	4.43	66.53	15.99		130.0	
		Z	4.37	66.22	15.90		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.49	66.90	16.49	0.46	130.0	$\pm 9.6\%$
		Y	4.54	67.36	16.68		130.0	
		Z	4.47	67.01	16.58		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.29	65.84	15.57	0.46	130.0	$\pm 9.6\%$
		Y	4.32	66.21	15.73		130.0	
		Z	4.26	65.90	15.64		130.0	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.48	66.26	16.20	0.46	130.0	$\pm 9.6\%$
		Y	4.52	66.67	16.36		130.0	
		Z	4.46	66.34	16.28		130.0	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.51	66.44	16.28	0.46	130.0	$\pm 9.6\%$
		Y	4.55	66.86	16.45		130.0	
		Z	4.48	66.53	16.36		130.0	
10585-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.70	66.73	16.45	0.46	130.0	$\pm 9.6\%$
		Y	4.73	67.13	16.60		130.0	
		Z	4.67	66.81	16.53		130.0	
10586-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.60	66.88	16.55	0.46	130.0	$\pm 9.6\%$
		Y	4.64	67.31	16.73		130.0	
		Z	4.57	66.97	16.64		130.0	
10587-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.35	66.08	15.80	0.46	130.0	$\pm 9.6\%$
		Y	4.38	66.48	15.96		130.0	
		Z	4.32	66.14	15.87		130.0	
10588-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.40	66.14	15.83	0.46	130.0	$\pm 9.6\%$
		Y	4.43	66.53	15.99		130.0	
		Z	4.37	66.22	15.90		130.0	
10589-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.49	66.90	16.49	0.46	130.0	$\pm 9.6\%$
		Y	4.54	67.36	16.68		130.0	
		Z	4.47	67.01	16.58		130.0	
10590-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.29	65.84	15.57	0.46	130.0	$\pm 9.6\%$
		Y	4.32	66.21	15.73		130.0	
		Z	4.26	65.90	15.64		130.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
**KR19-SPF0011-B**  
 Page (77) of (109)



EX3DV4- SN:3865

August 29, 2018

10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.64	66.34	16.33	0.46	130.0	± 9.6 %
		Y	4.67	66.74	16.48		130.0	
		Z	4.61	66.43	16.40		130.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.78	66.67	16.46	0.46	130.0	± 9.6 %
		Y	4.81	67.07	16.61		130.0	
		Z	4.75	66.75	16.54		130.0	
10593-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.69	66.55	16.32	0.46	130.0	± 9.6 %
		Y	4.73	66.95	16.47		130.0	
		Z	4.67	66.63	16.39		130.0	
10594-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.76	66.74	16.49	0.46	130.0	± 9.6 %
		Y	4.79	67.14	16.64		130.0	
		Z	4.72	66.81	16.57		130.0	
10595-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.72	66.68	16.38	0.46	130.0	± 9.6 %
		Y	4.75	67.09	16.53		130.0	
		Z	4.69	66.77	16.46		130.0	
10596-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.65	66.67	16.37	0.46	130.0	± 9.6 %
		Y	4.68	67.07	16.53		130.0	
		Z	4.62	66.75	16.45		130.0	
10597-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.60	66.55	16.24	0.46	130.0	± 9.6 %
		Y	4.63	66.98	16.40		130.0	
		Z	4.57	66.62	16.31		130.0	
10598-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.58	66.79	16.51	0.46	130.0	± 9.6 %
		Y	4.62	67.22	16.68		130.0	
		Z	4.56	66.87	16.59		130.0	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.32	66.92	16.59	0.46	130.0	± 9.6 %
		Y	5.32	67.17	16.64		130.0	
		Z	5.31	67.01	16.68		130.0	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.48	67.44	16.82	0.46	130.0	± 9.6 %
		Y	5.43	67.51	16.78		130.0	
		Z	5.47	67.54	16.92		130.0	
10601-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.35	67.12	16.68	0.46	130.0	± 9.6 %
		Y	5.34	67.33	16.71		130.0	
		Z	5.34	67.20	16.76		130.0	
10602-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.47	67.24	16.85	0.46	130.0	± 9.6 %
		Y	5.46	67.46	16.89		130.0	
		Z	5.47	67.35	16.76		130.0	
10603-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.54	67.51	16.93	0.46	130.0	± 9.6 %
		Y	5.52	67.72	16.96		130.0	
		Z	5.53	67.62	17.03		130.0	
10604-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.38	67.07	16.69	0.46	130.0	± 9.6 %
		Y	5.39	67.36	16.77		130.0	
		Z	5.40	67.26	16.84		130.0	
10605-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.47	67.33	16.82	0.46	130.0	± 9.6 %
		Y	5.43	67.46	16.81		130.0	
		Z	5.46	67.41	16.91		130.0	
10606-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.17	66.49	16.25	0.46	130.0	± 9.6 %
		Y	5.18	66.78	16.32		130.0	
		Z	5.17	66.60	16.35		130.0	

Certificate No: EX3-3865\_Aug18

Page 35 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (78) of (109)



EX3DV4- SN:3865

August 29, 2018

10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.47	65.64	15.94	0.46	130.0	$\pm 9.6\%$
		Y	4.52	66.11	16.13		130.0	
		Z	4.46	65.75	16.03		130.0	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.64	66.03	16.11	0.46	130.0	$\pm 9.6\%$
		Y	4.69	66.48	16.29		130.0	
		Z	4.62	66.12	16.19		130.0	
10609-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.53	65.86	15.92	0.46	130.0	$\pm 9.6\%$
		Y	4.58	66.32	16.11		130.0	
		Z	4.51	65.95	16.01		130.0	
10610-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.58	66.03	16.10	0.46	130.0	$\pm 9.6\%$
		Y	4.63	66.49	16.28		130.0	
		Z	4.56	66.12	16.18		130.0	
10611-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.50	65.82	15.93	0.46	130.0	$\pm 9.6\%$
		Y	4.54	66.28	16.12		130.0	
		Z	4.48	65.92	16.02		130.0	
10612-AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.50	65.97	15.97	0.46	130.0	$\pm 9.6\%$
		Y	4.54	66.42	16.16		130.0	
		Z	4.48	66.06	16.06		130.0	
10613-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.50	65.82	15.84	0.46	130.0	$\pm 9.6\%$
		Y	4.54	66.26	16.02		130.0	
		Z	4.47	65.90	15.92		130.0	
10614-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.45	66.03	16.09	0.46	130.0	$\pm 9.6\%$
		Y	4.50	66.51	16.29		130.0	
		Z	4.43	66.12	16.18		130.0	
10615-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.49	65.64	15.69	0.46	130.0	$\pm 9.6\%$
		Y	4.53	66.09	15.88		130.0	
		Z	4.47	65.73	15.78		130.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.14	66.13	16.18	0.46	130.0	$\pm 9.6\%$
		Y	5.16	66.48	16.29		130.0	
		Z	5.12	66.19	16.26		130.0	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.22	66.36	16.26	0.46	130.0	$\pm 9.6\%$
		Y	5.22	66.65	16.35		130.0	
		Z	5.20	66.43	16.35		130.0	
10618-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.10	66.34	16.27	0.46	130.0	$\pm 9.6\%$
		Y	5.12	66.70	16.39		130.0	
		Z	5.08	66.43	16.36		130.0	
10619-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.11	66.12	16.09	0.46	130.0	$\pm 9.6\%$
		Y	5.12	66.46	16.20		130.0	
		Z	5.09	66.19	16.18		130.0	
10620-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.19	66.16	16.16	0.46	130.0	$\pm 9.6\%$
		Y	5.20	66.48	16.26		130.0	
		Z	5.17	66.23	16.25		130.0	
10621-AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.20	66.32	16.37	0.46	130.0	$\pm 9.6\%$
		Y	5.22	66.67	16.48		130.0	
		Z	5.18	66.38	16.45		130.0	
10622-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.21	66.48	16.44	0.46	130.0	$\pm 9.6\%$
		Y	5.23	66.81	16.55		130.0	
		Z	5.21	66.59	16.55		130.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
**KR19-SPF0011-B**  
 Page (79) of (109)



EX3DV4- SN:3865

August 29, 2018

10623-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.09	65.97	16.05	0.46	130.0	± 9.6 %
		Y	5.10	66.31	16.18		130.0	
		Z	5.06	66.01	16.12		130.0	
10624-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.28	66.20	16.23	0.46	130.0	± 9.6 %
		Y	5.29	66.52	16.33		130.0	
		Z	5.26	66.25	16.31		130.0	
10625-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.60	67.05	16.72	0.46	130.0	± 9.6 %
		Y	5.54	67.16	16.70		130.0	
		Z	5.52	66.93	16.70		130.0	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.45	66.19	16.14	0.46	130.0	± 9.6 %
		Y	5.47	66.54	16.25		130.0	
		Z	5.44	66.23	16.21		130.0	
10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.71	66.86	16.44	0.46	130.0	± 9.6 %
		Y	5.68	67.06	16.47		130.0	
		Z	5.71	66.94	16.53		130.0	
10628-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.47	66.24	16.06	0.46	130.0	± 9.6 %
		Y	5.48	66.55	16.15		130.0	
		Z	5.45	66.26	16.12		130.0	
10629-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.55	66.33	16.10	0.46	130.0	± 9.6 %
		Y	5.55	66.62	16.18		130.0	
		Z	5.54	66.39	16.18		130.0	
10630-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.02	67.95	16.90	0.46	130.0	± 9.6 %
		Y	5.86	67.74	16.74		130.0	
		Z	5.99	67.96	16.96		130.0	
10631-AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.87	67.61	16.94	0.46	130.0	± 9.6 %
		Y	5.84	67.81	16.97		130.0	
		Z	5.84	67.62	17.00		130.0	
10632-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.68	66.94	16.63	0.46	130.0	± 9.6 %
		Y	5.67	67.19	16.68		130.0	
		Z	5.68	67.05	16.73		130.0	
10633-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.52	66.40	16.18	0.46	130.0	± 9.6 %
		Y	5.55	66.77	16.29		130.0	
		Z	5.51	66.46	16.26		130.0	
10634-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.51	66.44	16.25	0.46	130.0	± 9.6 %
		Y	5.54	66.81	16.37		130.0	
		Z	5.49	66.47	16.32		130.0	
10635-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.38	65.72	15.62	0.46	130.0	± 9.6 %
		Y	5.39	66.05	15.71		130.0	
		Z	5.36	65.74	15.67		130.0	
10636-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.87	66.57	16.24	0.46	130.0	± 9.6 %
		Y	5.88	66.89	16.32		130.0	
		Z	5.87	66.62	16.32		130.0	
10637-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.04	67.00	16.44	0.46	130.0	± 9.6 %
		Y	6.02	67.23	16.48		130.0	
		Z	6.04	67.05	16.51		130.0	
10638-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.04	66.96	16.39	0.46	130.0	± 9.6 %
		Y	6.03	67.22	16.45		130.0	
		Z	6.03	67.02	16.47		130.0	

Certificate No: EX3-3865\_Aug18

Page 37 of 39

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Korea  
 TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
**KR19-SPF0011-B**  
 Page (80) of (109)



EX3DV4- SN:3865

August 29, 2018

10639-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.00	66.96	16.39	0.46	130.0	± 9.6 %
		Y	6.00	67.16	16.46		130.0	
		Z	5.99	66.89	16.46		130.0	
10640-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.00	66.86	16.33	0.46	130.0	± 9.6 %
		Y	5.99	67.14	16.39		130.0	
		Z	5.99	66.89	16.40		130.0	
10641-AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.07	66.85	16.35	0.46	130.0	± 9.6 %
		Y	6.05	67.07	16.38		130.0	
		Z	6.07	66.91	16.43		130.0	
10642-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.09	67.05	16.62	0.46	130.0	± 9.6 %
		Y	6.09	67.35	16.69		130.0	
		Z	6.08	67.09	16.69		130.0	
10643-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.94	66.75	16.36	0.46	130.0	± 9.6 %
		Y	5.93	67.01	16.41		130.0	
		Z	5.93	66.81	16.44		130.0	
10644-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.06	67.13	16.57	0.46	130.0	± 9.6 %
		Y	6.04	67.37	16.61		130.0	
		Z	6.03	67.11	16.61		130.0	
10645-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.25	67.34	16.64	0.46	130.0	± 9.6 %
		Y	6.16	67.36	16.57		130.0	
		Z	6.21	67.30	16.67		130.0	
10646-AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	13.69	103.41	35.43	9.30	60.0	± 9.6 %
		Y	13.53	103.81	35.26		60.0	
		Z	13.84	104.96	36.32		60.0	
10647-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	12.07	101.22	34.87	9.30	60.0	± 9.6 %
		Y	11.53	100.84	34.45		60.0	
		Z	12.06	102.46	35.67		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	0.47	60.74	7.67	0.00	150.0	± 9.6 %
		Y	0.61	63.50	10.12		150.0	
		Z	0.43	60.34	7.11		150.0	
10652-AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.30	65.91	15.93	2.23	80.0	± 9.6 %
		Y	3.39	66.64	16.28		80.0	
		Z	3.35	66.40	16.21		80.0	
10653-AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.86	65.43	16.25	2.23	80.0	± 9.6 %
		Y	3.91	65.93	16.44		80.0	
		Z	3.88	65.72	16.45		80.0	
10654-AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	3.86	65.10	16.28	2.23	80.0	± 9.6 %
		Y	3.90	65.57	16.45		80.0	
		Z	3.88	65.35	16.47		80.0	
10655-AAD	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	3.92	66.08	16.32	2.23	80.0	± 9.6 %
		Y	3.98	65.53	16.48		80.0	
		Z	3.95	65.30	16.51		80.0	
10658-AAA	Pulse Waveform (200Hz, 10%)	X	5.55	74.21	15.00	10.00	50.0	± 9.6 %
		Y	5.70	74.43	14.70		50.0	
		Z	6.66	79.97	17.26		50.0	
10659-AAA	Pulse Waveform (200Hz, 20%)	X	7.23	78.63	15.17	6.99	60.0	± 9.6 %
		Y	19.92	88.27	17.71		60.0	
		Z	100.00	105.57	22.48		60.0	

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (81) of (109)



EX3DV4- SN:3885

August 29, 2018

10660- AAA	Pulse Waveform (200Hz, 40%)	X	4.30	74.79	12.07	3.98	80.0	± 9.6 %
		Y	100.00	100.95	18.98		80.0	
		Z	100.00	99.92	18.60		80.0	
10661- AAA	Pulse Waveform (200Hz, 60%)	X	0.35	60.00	4.74	2.22	100.0	± 9.6 %
		Y	100.00	98.34	16.86		100.0	
		Z	0.35	60.00	4.81		100.0	
10662- AAA	Pulse Waveform (200Hz, 80%)	X	47.28	60.94	1.48	0.97	120.0	± 9.6 %
		Y	0.15	60.00	3.98		120.0	
		Z	22.36	390.58	62.83		120.0	

<sup>a</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (82) of (109)



## Appendix A.2 Dipole Calibration certificate

D2450V2

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **KCTL (Dymstec)**

Certificate No: D2450V2-895\_Jul18

### CALIBRATION CERTIFICATE

Object D2450V2 - SN:895

Calibration procedure(s) QA CAL-05.v10  
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: July 24, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z81	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-D6	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:  
Name Claudio Leubler Function Laboratory Technician

Approved by:  
Name Katja Pokovic Function Technical Manager

Issued: July 24, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (83) of (109)



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

## Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Additional Documentation:

- e) DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.8 ± 6 %	1.85 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.3 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.1 W/kg ± 16.5 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.9 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.6 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.8 W/kg ± 16.5 % (k=2)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (85) of (109)

**Appendix (Additional assessments outside the scope of SCS 0108)****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	53.8 Ω + 1.8 jΩ
Return Loss	-27.9 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	49.2 Ω + 5.0 jΩ
Return Loss	-25.9 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.156 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	June 19, 2012

**DASY5 Validation Report for Head TSL**

Date: 24.07.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:895**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.85 \text{ S/m}$ ;  $\epsilon_r = 37.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52.52.10.1(1476); SEMCAD X 14.6.11(7439)

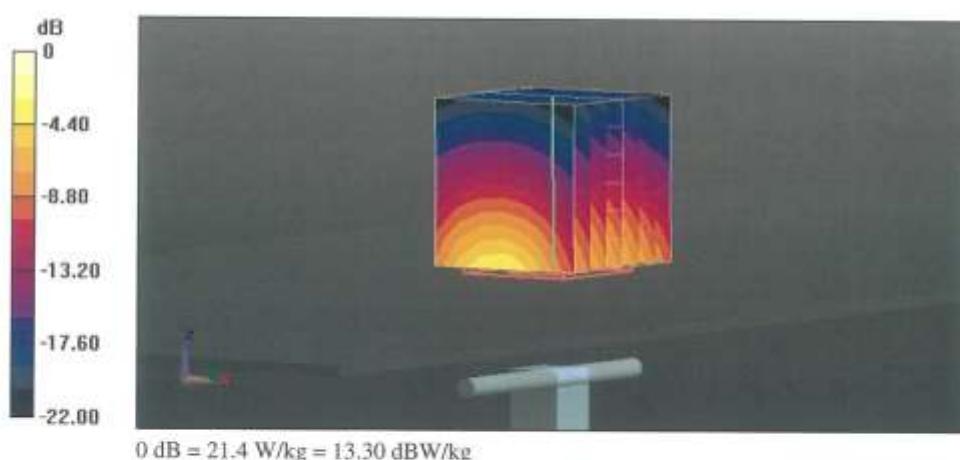
**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

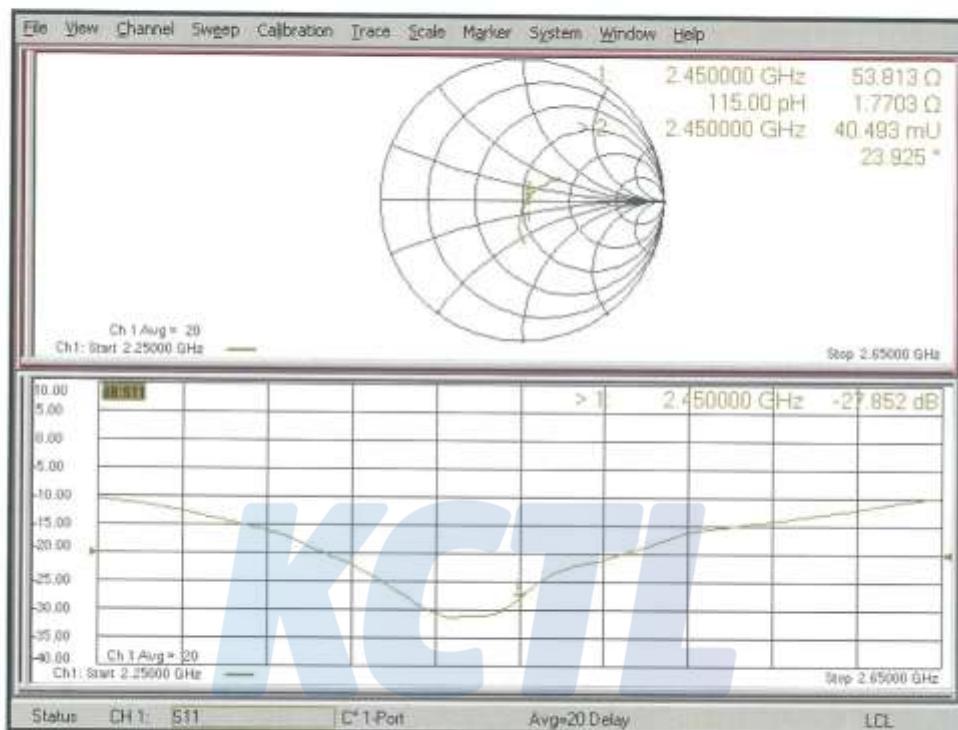
Reference Value = 115.0 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 26.1 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.1 W/kg

Maximum value of SAR (measured) = 21.4 W/kg



**Impedance Measurement Plot for Head TSL**

**DASY5 Validation Report for Body TSL**

Date: 24.07.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:895**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 2.02 \text{ S/m}$ ;  $\epsilon_r = 51.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

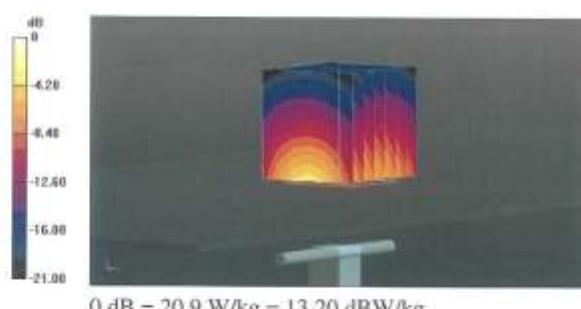
**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 108.0 V/m; Power Drift = -0.04 dB

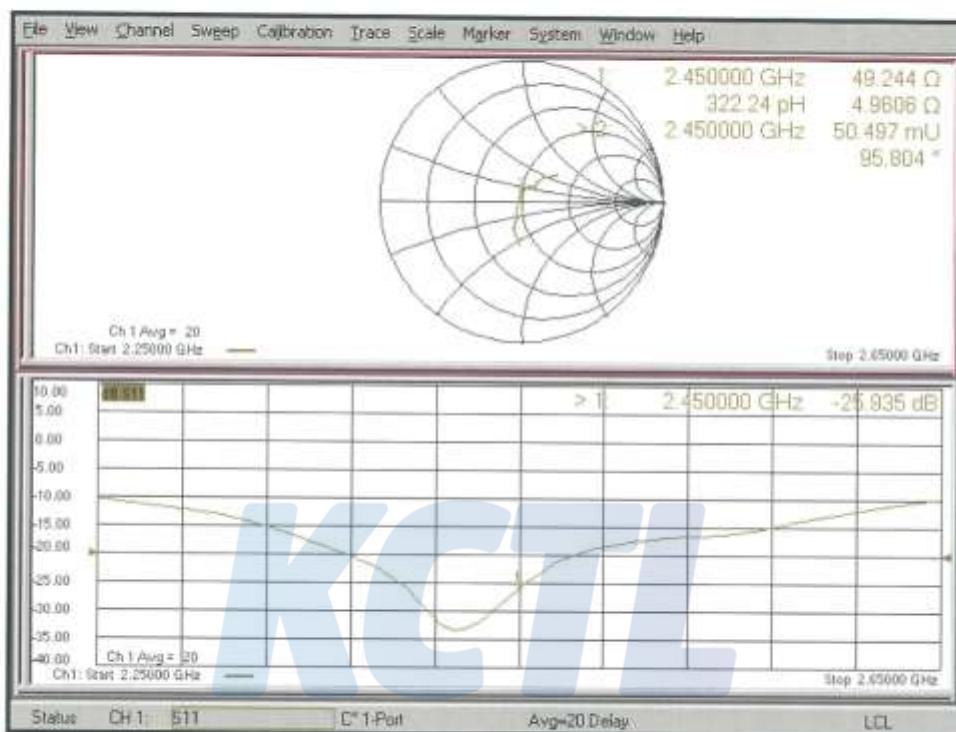
Peak SAR (extrapolated) = 25.1 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.03 W/kg

Maximum value of SAR (measured) = 20.9 W/kg



0 dB = 20.9 W/kg = 13.20 dBW/kg

**Impedance Measurement Plot for Body TSL**

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (90) of (109)

# KCTL

D5GHzV2

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio avvistato di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 010B

Client SGS Korea (Dymatec)

Certificate No.: D5GHzV2-1130\_May18

## CALIBRATION CERTIFICATE

Object	D5GHzV2 - SN:1130		
Calibration procedure(s)	QA CAL-22.v3 Calibration procedure for dipole validation kits between 3-6 GHz		
Calibration date	May 25, 2018		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the class A laboratory facility; environment temperature (22 ± 3)°C and humidity < 75%.			
Calibration Equipment used (M&TF critical for calibration)			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-0267205673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 9258 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DVi4	SN: 3003	30-Dec-17 (No. EDQ-3503, Dec17)	Dec-18
DAEA	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: 0837489704	07-Oct-18 (in house check Oct-18)	In house check: Oct-18
Power sensor HP 8481A	SN: U53799783	07-Oct-18 (in house check Oct-18)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41093317	07-Oct-18 (in house check Oct-18)	In house check: Oct-18
RF generator R&S BMT-06	SN: 100977	15-Jun-19 (in house check Oct-18)	In house check: Oct-18
Network Analyzer HP 8750E	SN: US37395585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18
Calibrated by	Name: Manu Seitz	Function: Laboratory Technician	Signature:
Approved by:	Katja Pokorní	Technical Manager	Signature:
Issued: May 25, 2018			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: D5GHzV2-1130\_May18

Page 1 of 14

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (91) of (109)



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: SCS 0108

## Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

## Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Additional Documentation:

- e) DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- **SAR measured:** SAR measured at the stated antenna input power.
- **SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (92) of (109)

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm; dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

**Head TSL parameters at 5200 MHz**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.2 ± 6 %	4.52 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Head TSL at 5200 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.5 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

**Head TSL parameters at 5300 MHz**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.1 ± 6 %	4.63 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Head TSL at 5300 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.1 W / kg ± 19.9 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 19.5 % (k=2)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (93) of (109)

**Head TSL parameters at 5600 MHz**

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.7 ± 6 %	4.94 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

**SAR result with Head TSL at 5600 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 19.5 % (k=2)

**Head TSL parameters at 5800 MHz**

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	5.15 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

**SAR result with Head TSL at 5800 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.5 % (k=2)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (94) of (109)

**Body TSL parameters at 5200 MHz**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.41 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Body TSL at 5200 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.9 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

**Body TSL parameters at 5300 MHz**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.54 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Body TSL at 5300 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.66 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.0 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 19.5 % (k=2)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (95) of (109)

**Body TSL parameters at 5600 MHz**

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.95 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Body TSL at 5600 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.1 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

**Body TSL parameters at 5800 MHz**

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	45.9 ± 6 %	6.22 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Body TSL at 5800 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.63 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.7 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 19.5 % (k=2)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (96) of (109)

**Appendix (Additional assessments outside the scope of SCS 0108)****Antenna Parameters with Head TSL at 5200 MHz**

Impedance, transformed to feed point	53.4 Ω - 9.7 jΩ
Return Loss	-20.0 dB

**Antenna Parameters with Head TSL at 5300 MHz**

Impedance, transformed to feed point	52.1 Ω - 4.3 jΩ
Return Loss	-26.6 dB

**Antenna Parameters with Head TSL at 5600 MHz**

Impedance, transformed to feed point	58.5 Ω - 2.9 jΩ
Return Loss	-21.6 dB

**Antenna Parameters with Head TSL at 5800 MHz**

Impedance, transformed to feed point	56.6 Ω + 0.8 jΩ
Return Loss	-23.9 dB

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (97) of (109)

**Antenna Parameters with Body TSL at 5200 MHz**

Impedance, transformed to feed point	51.6 Ω - 8.6 jΩ
Return Loss	-21.3 dB

**Antenna Parameters with Body TSL at 5300 MHz**

Impedance, transformed to feed point	51.0 Ω - 4.6 jΩ
Return Loss	-27.9 dB

**Antenna Parameters with Body TSL at 5600 MHz**

Impedance, transformed to feed point	57.9 Ω - 3.2 jΩ
Return Loss	-22.0 dB

**Antenna Parameters with Body TSL at 5800 MHz**

Impedance, transformed to feed point	55.9 Ω - 2.5 jΩ
Return Loss	-24.3 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1,206 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.  
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	September 08, 2011

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (98) of (109)



## DASY5 Validation Report for Head TSL

Date: 25.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600

MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.52 \text{ S/m}$ ;  $\epsilon_r = 36.2$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used:  $f = 5300 \text{ MHz}$ ;  $\sigma = 4.63 \text{ S/m}$ ;  $\epsilon_r = 36.1$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 4.94 \text{ S/m}$ ;  $\epsilon_r = 35.7$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.15 \text{ S/m}$ ;  $\epsilon_r = 35.4$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.75, 5.75, 5.75) @ 5200 MHz, ConvF(5.5, 5.5, 5.5) @ 5300 MHz, ConvF(5.05, 5.05, 5.05) @ 5600 MHz, ConvF(4.96, 4.96, 4.96) @ 5800 MHz;  
Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.29 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.92 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.83 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

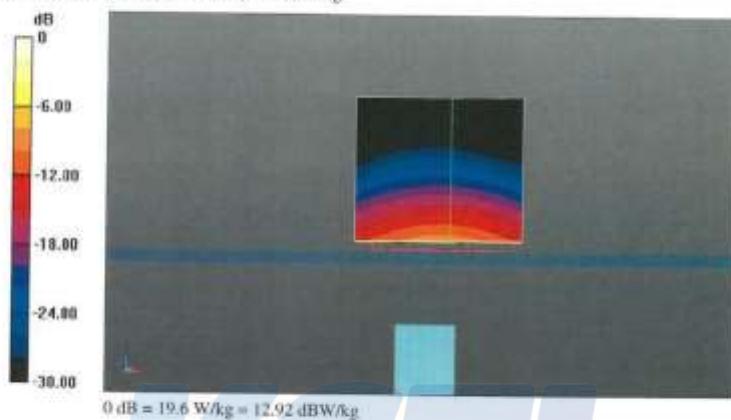
# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (99) of (109)

# KCTL

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,  
dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 73.55 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 32.8 W/kg  
SAR(1 g) = 8.3 W/kg; SAR(10 g) = 2.36 W/kg  
Maximum value of SAR (measured) = 19.6 W/kg



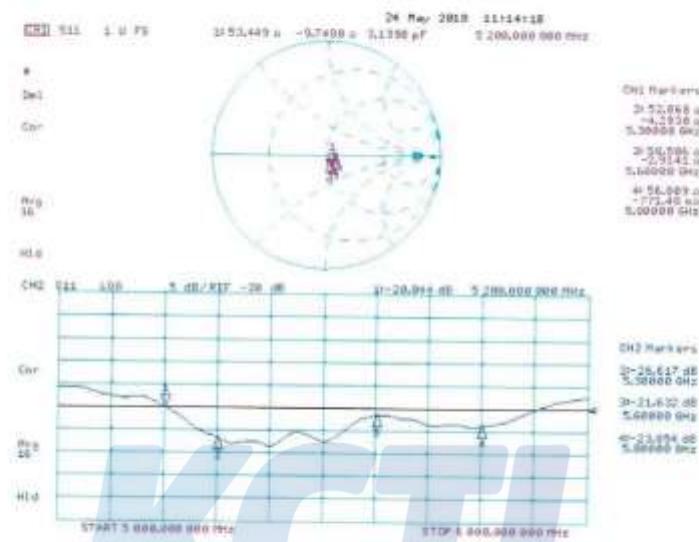
# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (100) of (109)

# KCTL

Impedance Measurement Plot for Head TSL



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (101) of (109)



## DASY5 Validation Report for Body TSL

Date: 24.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.41 \text{ S/m}$ ;  $\epsilon_r = 47$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used:  $f = 5300 \text{ MHz}$ ;  $\sigma = 5.54 \text{ S/m}$ ;  $\epsilon_r = 46.8$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.95 \text{ S/m}$ ;  $\epsilon_r = 46.3$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 6.22 \text{ S/m}$ ;  $\epsilon_r = 45.9$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.35, 5.35, 5.35) @ 5200 MHz, ConvF(5.15, 5.15, 5.15) @ 5300 MHz, ConvF(4.65, 4.65, 4.65) @ 5600 MHz, ConvF(4.53, 4.53, 4.53) @ 5800 MHz;  
Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.61 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.45 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.51 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.63 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

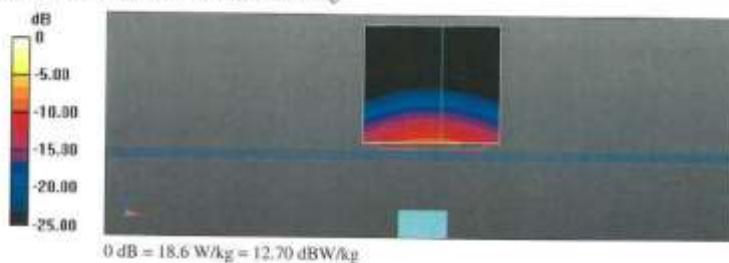
# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (102) of (109)

# KCTL

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,  
dist=1.4mm (8x8x7)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 66.70 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 33.0 W/kg  
SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.11 W/kg  
Maximum value of SAR (measured) = 18.6 W/kg



# KCTL

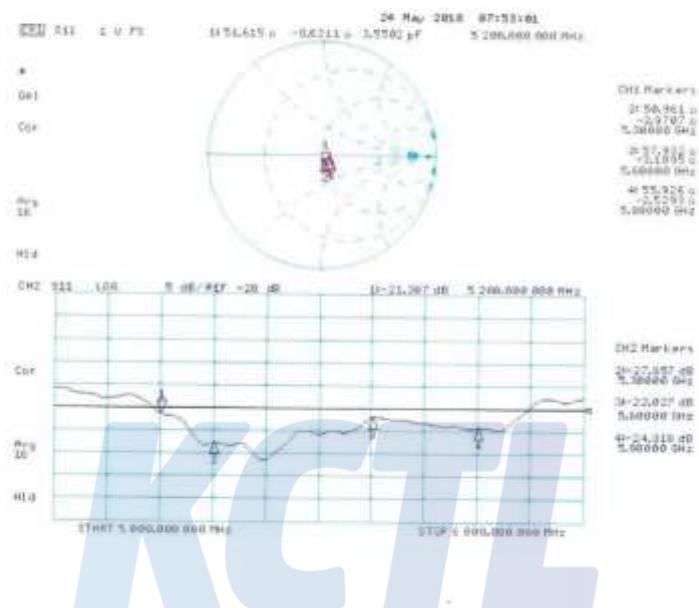
# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (103) of (109)

# KCTL

Impedance Measurement Plot for Body TSL



Certificate No: D5GHzV2-1130\_May18

Page 14 of 14

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (104) of (109)

**KCTL****Appendix B. EUT Photo****Front****Rear**

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (105) of (109)

**KCTL****Left****Right**

**KCTL Inc.**

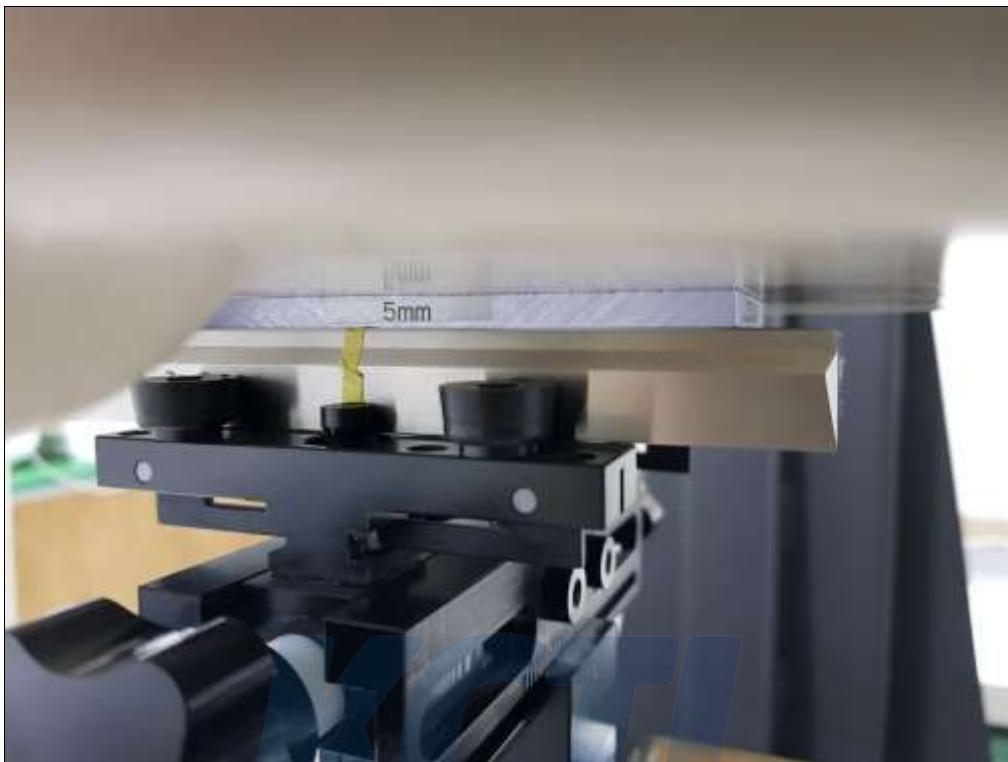
65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (106) of (109)

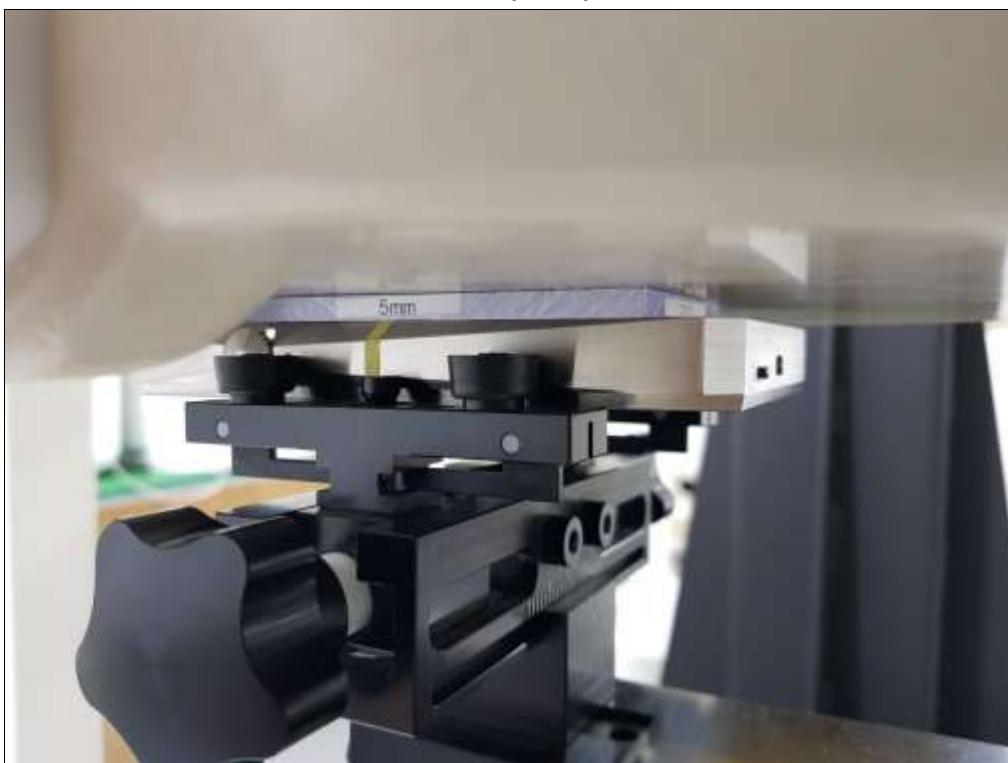
**KCTL****Top****Bottom**

## Appendix C. Test Photo

Front (5 mm)



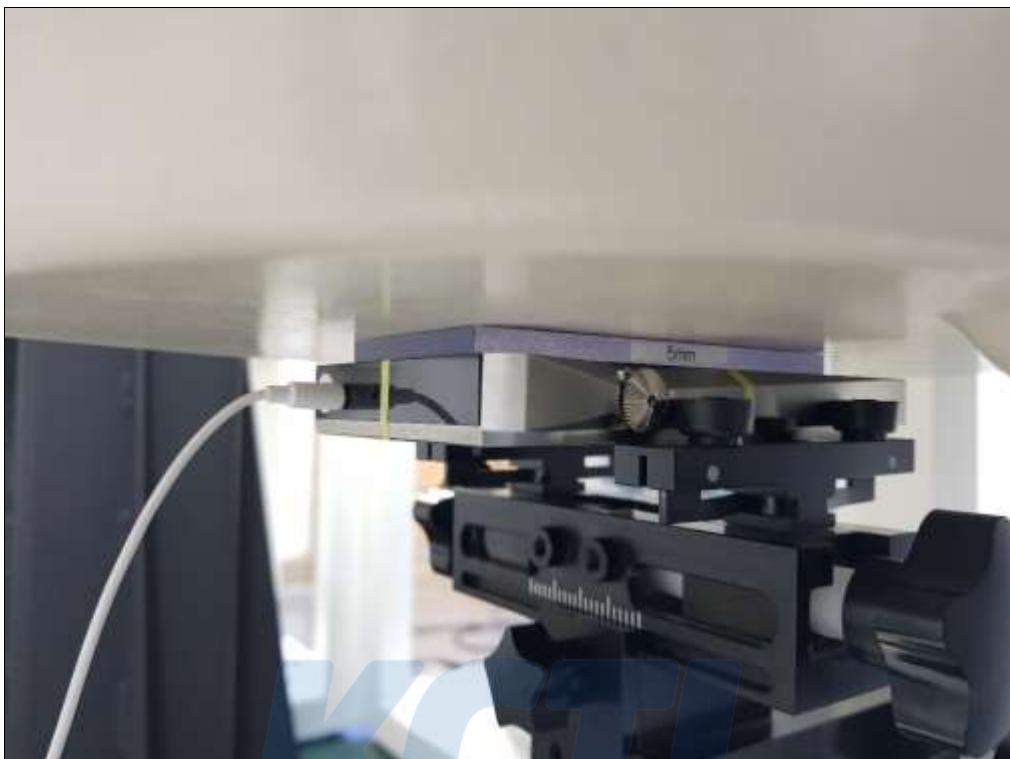
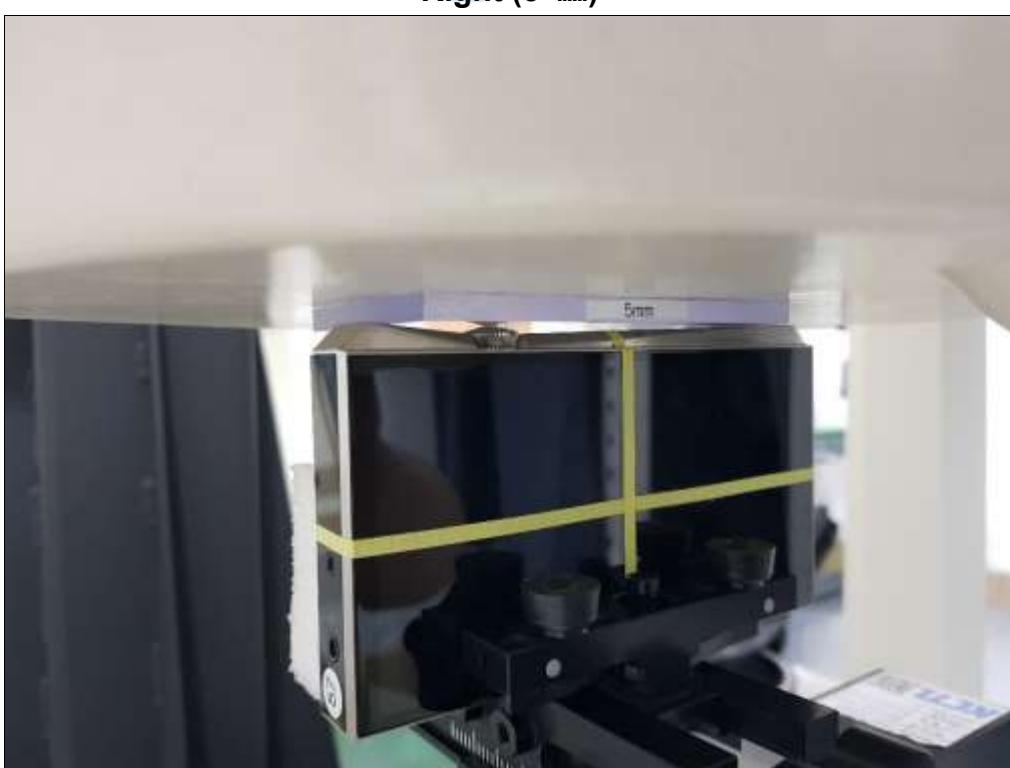
Rear (5 mm)



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

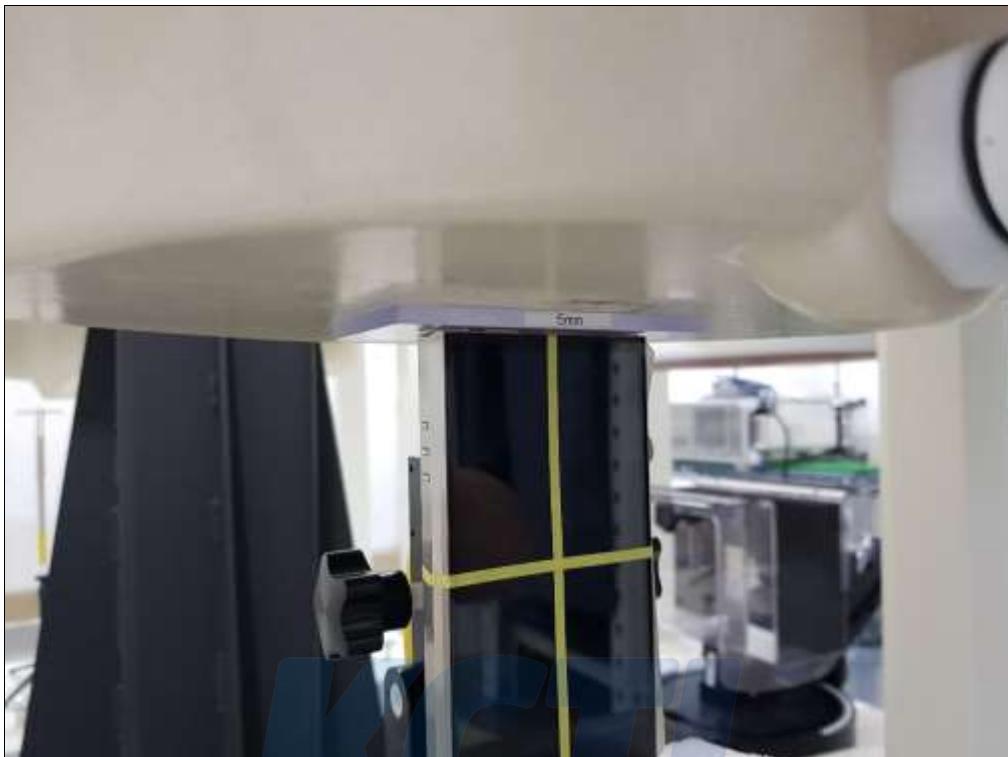
Report No.:  
KR19-SPF0011-B  
Page (108) of (109)

**KCTL****Rear-ear (5 mm)****Right (5 mm)**

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SPF0011-B  
Page (109) of (109)

**KCTL****Top (5 mm)****End of test report**