






TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR22-SRF0131-A Page (1) of (72)	 KCTL
<p>1. Client</p> <ul style="list-style-type: none"> ◦ Name : DREAMUS COMPANY ◦ Address : 311, Gangnam-daero, Seocho-gu, Seoul, Republic of Korea ◦ Date of Receipt : 2022-06-20 <p>2. Use of Report : Certification</p> <p>3. Name of Product / Model : SP3000 / PPF41</p> <p>4. Manufacturer / Country of Origin : DREAMUS COMPANY / Korea</p> <p>5. FCC ID : QDMPPF41</p> <p>6. Date of Test : 2022-06-23 to 2022-08-10</p> <p>7. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p>8. Test method used : FCC Part 15 Subpart E, 15.407</p> <p>9. Test Result : Refer to the test result in the test report</p>		
Affirmation	Tested by Name : Hyesom Shin (Signature) 	Technical Manager Name : Seungyong Kim (Signature) 
2022-08-11		
<h2>KCTL Inc.</h2>		
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.		

REPORT REVISION HISTORY

Date	Revision	Page No
2022-08-08	Originally issued	-
2022-08-11	Added 99% Bandwidth	1, 21, 24~25

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR22-SRF0131 is superseded by the report No. KR22-SRF0131-A.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Simultaneously transmission condition	5
2.2.	Accessory information	5
2.3.	Frequency/channel operations.....	5
2.4.	Duty Cycle Factor	6
3.	Antenna requirement	7
4.	Summary of tests.....	8
5.	Measurement uncertainty	9
6.	Measurement results explanation example	10
7.	Test results	11
7.1.	Maximum conducted output power	11
7.2.	Maximum Power Spectral Density.....	14
7.3.	26 dB Bandwidth & 99% Bandwidth.....	20
7.4.	6 dB Bandwidth.....	26
7.5.	Spurious Emission, Band Edge and Restricted bands.....	30
7.6.	AC Conducted emission	70
8.	Measurement equipment	72

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (4) of (72)



1. General information

Client : DREAMUS COMPANY
Address : 311, Gangnam-daero, Seocho-gu, Seoul, Republic of Korea
Manufacturer : DREAMUS COMPANY
Address : 311, Gangnam-daero, Seocho-gu, Seoul, Republic of Korea
Factory : smartelectronics
Address : (Ochang-eup), 256, Yeocheon 3-gil, Cheongwon-gu, Cheongju-si, Chungcheongbuk-do, Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040
ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : SP3000
Model : PPF41
Modulation technique : Bluetooth(BDR/EDR) : GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE) : GFSK
WIFI(802.11a/b/g/n/ac) : DSSS, OFDM
Number of channels : Bluetooth : 79 ch
BLE : 40 ch
2.4 GHz WALN : 11 ch (20 MHz), 7 ch (40 MHz)
UNII-1 : 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-3 : 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
Power source : DC 3.8 V
Antenna specification : LPS Antenna
Antenna gain : BT/BLE/2.4 GHz WALN : -0.252 dBi
UNII-1 : 0.664 dBi
UNII-3 : -3.479 dBi
Frequency range : Bluetooth : 2 402 MHz ~ 2 480 MHz (BDR/EDR/BLE)
2.4 GHz WALN : 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)
2 422 MHz ~ 2 452 MHz (802.11n_HT40)
UNII-1 : 5 180 MHz ~ 5 240 MHz (802.11a/n_HT20)
5 190 MHz ~ 5 230 MHz (802.11n_HT40)
5 210 MHz (802.11ac_VHT80)
UNII-3 : 5 745 MHz ~ 5 825 MHz (802.11a/n_HT20)
5 755 MHz ~ 5 795 MHz (802.11n_HT40)
5 775 MHz (802.11ac_VHT80)
Software version : 1.0
Hardware version : 1.0
Test device serial No. : N/A
Operation temperature : -10 °C ~ 50 °C

2.1. Simultaneously transmission condition

Case	Technology	Test Mode	Frequency (MHz)
Case 1	WLAN 5 GHz	802.11ac_VHT80	5 210
	Bluetooth	EDR(3DH1)	2 480

Notes.

The lowest margin condition among the channels and modes were selected for test.

2.2. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Li-ion Polymer Battery	Shenzhen Hypercell Co.,LTD	HPL606781	-	DC 3.8 V, 5,050mA

2.3. Frequency/channel operations

This device contains the following capabilities:

Bluetooth(BDR/EDR/BLE), WLAN 2.4 GHz(802.11b/g/n_HT20/HT40)

WLAN 5 GHz(802.11a/n_HT20/40/ac_VHT80)

UNII-1

Ch.	Frequency (MHz)
36	5 180
40	5 200
48	5 240

UNII-3

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

Table 2.3.1. 802.11a/n_HT20 mode

UNII-1

Ch.	Frequency (MHz)
38	5 190
46	5 230

UNII-3

Ch.	Frequency (MHz)
151	5 755
159	5 795

Table 2.3.2. 802.11n_HT40 mode

UNII-1

Ch.	Frequency (MHz)
42	5 210

UNII-3

Ch.	Frequency (MHz)
155	5 775

Table 2.3.3 802.11ac_VHT80 mode

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (6) of (72)




2.4. Duty Cycle Factor

Test mode	Period (ms)	T _{on} time (ms)	Duty cycle		Duty cycle factor (dB)
			(Linear)	(%)	
802.11a	2.066 4	2.026 8	0.980 8	98.08	0.08
802.11n_HT20	1.925 6	1.887 2	0.980 1	98.01	0.09
802.11n_HT40	0.964 8	0.927 6	0.961 4	96.14	0.17
802.11ac_VHT80	0.492 0	0.455 2	0.925 2	92.52	0.34

Notes.

1. Duty cycle (Linear) = T_{on} time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not compensated to average result if the duty cycle is more than 98%

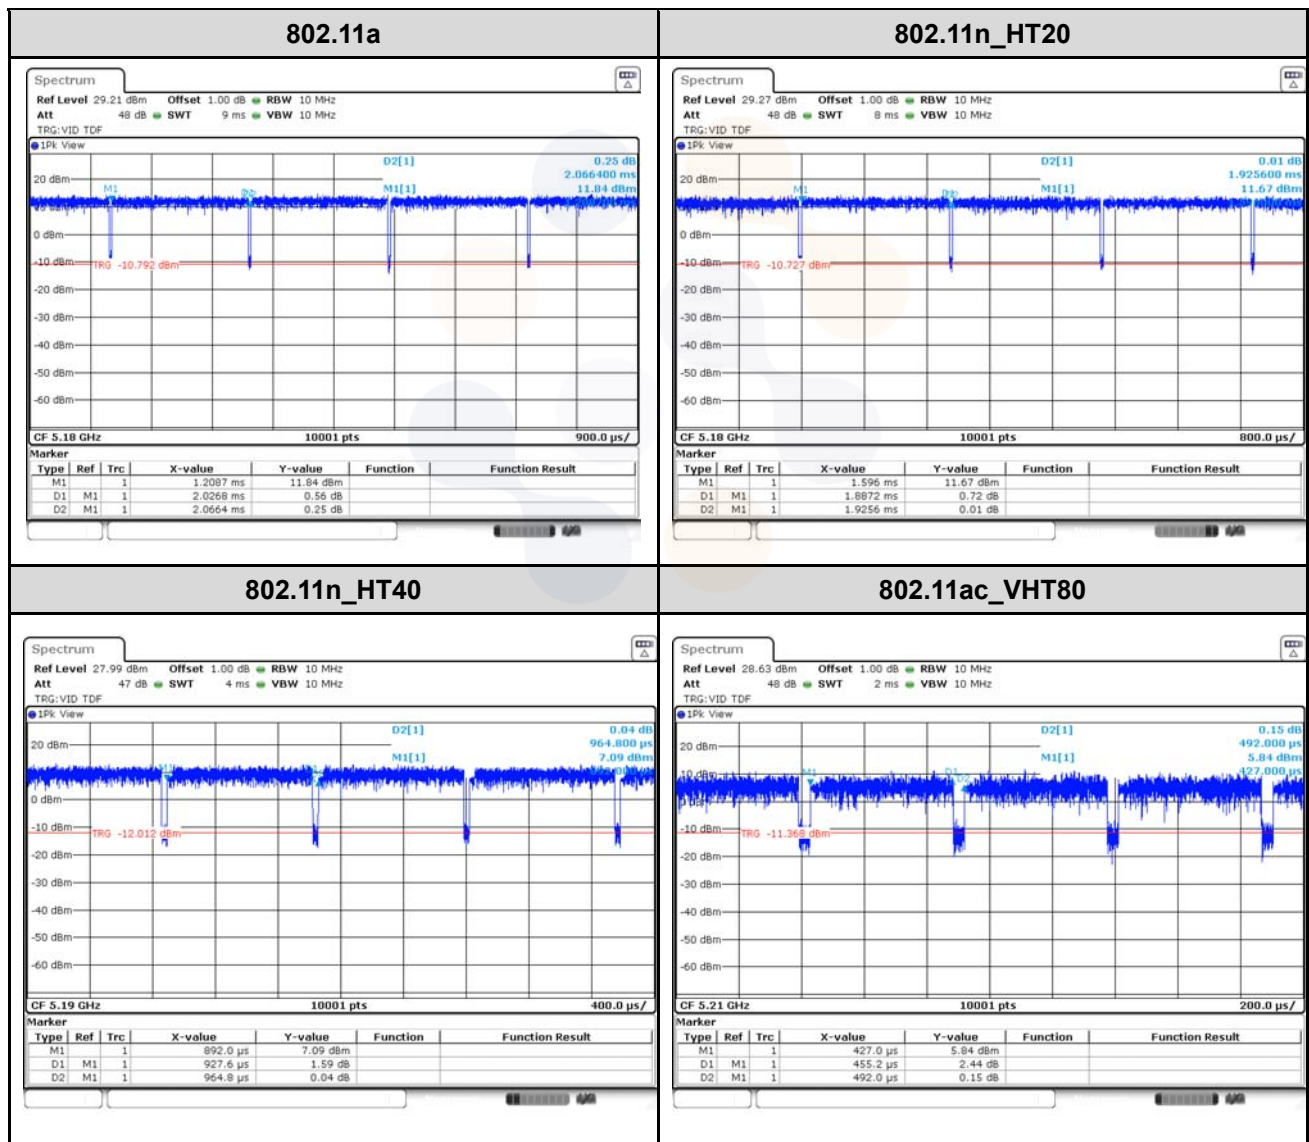

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (7) of (72)



3. Antenna requirement

According to §15.203, §15.407

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has attached LPS Antenna(internal antenna) on the board.
- The E.U.T Complies with the requirement of §15.203, §15.407



4. Summary of tests

FCC Part section(s)	Parameter	Test results
15.407(a)	Maximum conducted output power	Pass
15.407(a)	Maximum power spectral density	Pass
15.407(a)	26 dB bandwidth	Pass
15.407(e)	6 dB bandwidth	Pass
15.407(d), 15.205(a), 15.209(a)	Spurious emission	Pass
	Band-edge, restricted band	Pass
15.207(a)	AC Conducted emissions	Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
 - ◆ The worst case is stand-alone without connecting accessories.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
4. The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 789033 D02 v02r01
5. The worst-case data rates were:
 - 802.11a mode: 6Mbps
 - 802.11n_HT20 mode: MCS0
 - 802.11n_HT40 mode: MCS0
 - 802.11ac_VHT80 mode: MCS0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (9) of (72)

**5. Measurement uncertainty**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95% level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (\pm)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.4 dB
	30 MHz ~ 1 000 MHz	2.3 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 GHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	1.6 dB
	150 kHz ~ 30 MHz	1.7 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	10.31	9 000	12.85
50	10.37	10 000	13.84
100	10.47	11 000	13.72
200	10.62	12 000	13.63
300	10.69	13 000	13.39
400	10.77	14 000	13.36
500	10.85	15 000	13.45
600	10.94	16 000	13.97
700	10.99	17 000	13.90
800	11.01	18 000	13.79
900	11.05	19 000	14.01
1 000	11.03	20 000	13.90
2 000	11.45	21 000	14.33
3 000	11.76	22 000	14.13
4 000	11.75	23 000	14.40
5 000	12.16	24 000	14.70
6 000	12.20	25 000	14.62
7 000	12.60	26 000	15.22
8 000	12.98	26 500	14.98

Note.

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (11) of (72)



7. Test results

7.1. Maximum conducted output power

Test setup



Limit

According to §15.407(a)

Band	EUT category	Limit
UNII-1	Outdoor access point	1 W (30 dBm)
	Indoor access point	
	Fixed point-to-point access point	
	√ Client device	250 mW (23.98 dBm)
UNII-2A		250 mW or 11 dBm + 10logB ¹⁾
UNII-2C		250 mW or 11 dBm + 10logB ¹⁾
UNII-3	√	1 W (30 dBm)

Note:

1) Conducted output power limit B is the 26 dB emission bandwidth.

Test procedure

ANSI C63.10-2013-Section 12.3.2.4
KDB 789033 D02 v02r01 - Section E.2.d)

Test settings**Used test method is Section E.2.d)****◆ KDB 789033 D02 v02r01****Section E.2.d)****Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run.”
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0,25) = 6 \text{ dB}$ if the duty cycle is 25%.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (13) of (72)

**Test results**


Test mode	Band	Frequency (MHz)	Measured power (dBm)	DCF (dB)	Conducted output power (dBm)	Conducted Power Limit (dBm)
					Average	
802.11a	UNII-1	5 180	13.50	-	13.50	23.98
		5 200	13.55	-	13.55	
		5 240	13.60	-	13.60	
	UNII-3	5 745	11.95	-	11.95	30.00
		5 785	11.89	-	11.89	
		5 825	11.35	-	11.35	
802.11n HT20	UNII-1	5 180	12.99	-	12.99	23.98
		5 200	13.02	-	13.02	
		5 240	12.97	-	12.97	
	UNII-3	5 745	11.10	-	11.10	30.00
		5 785	10.83	-	10.83	
		5 825	10.12	-	10.12	
802.11n HT40	UNII-1	5 190	12.72	0.17	12.89	23.98
		5 230	12.76	0.17	12.93	
	UNII-3	5 755	11.26	0.17	11.43	30.00
		5 795	11.05	0.17	11.22	
802.11ac VHT80	UNII-1	5 210	12.95	0.34	13.29	23.98
	UNII-3	5 775	11.13	0.34	11.47	30.00

Note.

1. Result(dBm) = Reading Power + D.C.F

7.2. Maximum Power Spectral Density

Test setup



Limit

According to §15.407(a)

Band	EUT category		Limit
UNII-1		Outdoor access point	17 dBm/MHz
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	11 dBm/MHz
UNII-2A			11 dBm/MHz
UNII-2C			11 dBm/MHz
UNII-3		√	30 dBm/500 kHz

Notes:

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain if the antenna exceed 6 dBi

Test procedure

KDB 789033 D02 v02r01 - Section F
 ANSI C63.10-2013

Test settings

Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Search function on the instrument to find the peak of the spectrum and record its value.
3. Adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz,

the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz} / RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Notes:

1. As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since $RBW = 100 \text{ kHz}$ is available on nearly all spectrum analyzers.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (16) of (72)

**Test results**

Test mode	Band	Frequency (MHz)	Measured PSD (dB m/MHz)	DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dB m/MHz)
802.11a	UNII-1	5 180	3.16	-	3.16	11
		5 200	3.11	-	3.11	
		5 240	3.29	-	3.29	
802.11n HT20		5 180	2.26	-	2.26	
		5 200	2.41	-	2.41	
		5 240	2.36	-	2.36	
802.11n HT40		5 190	-0.97	0.17	-0.97	
		5 230	-0.77	0.17	-0.77	
802.11ac VHT80		5 210	-4.11	0.34	-4.11	

Test mode	Band	Frequency (MHz)	Measured PSD (dBm)	DCF (dB)	Maximum PSD (dBm/ 500 kHz)	Limit (dBm/ 500 kHz)
802.11a	UNII-3	5 745	-0.77	-	-0.77	30
		5 785	-1.05	-	-1.05	
		5 825	-1.44	-	-1.44	
802.11n HT20		5 745	-1.92	-	-1.92	
		5 785	-2.58	-	-2.58	
		5 825	-2.90	-	-2.90	
802.11n HT40		5 755	-5.09	0.17	-5.09	
		5 795	-5.07	0.17	-5.07	
802.11ac VHT80		5 775	-8.25	0.34	-8.25	

Notes:

- Maximum PSD calculation
- Maximum PSD = Measured PSD + DCF


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (17) of (72)




UNII-1 / 802.11a / 5 180 MHz

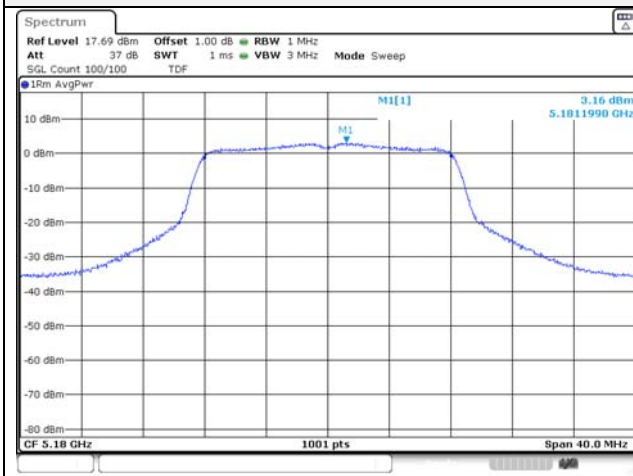


UNII-3 / 802.11a / 5 745 MHz

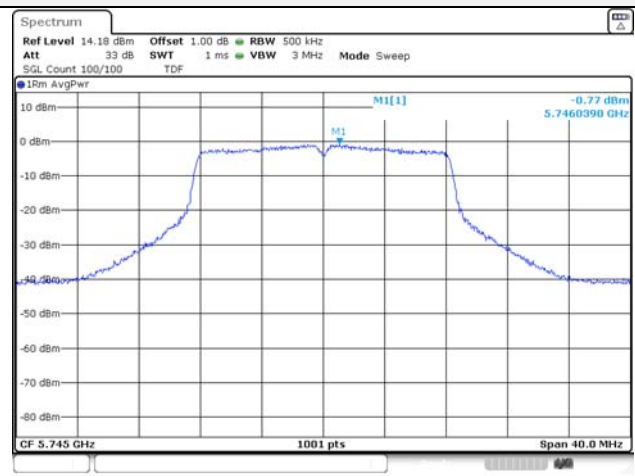


UNII-1 / 802.11a / 5 200 MHz

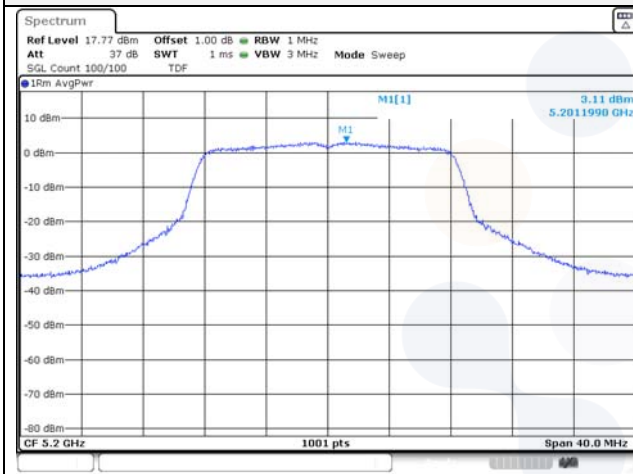


UNII-3 / 802.11a / 5 785 MHz

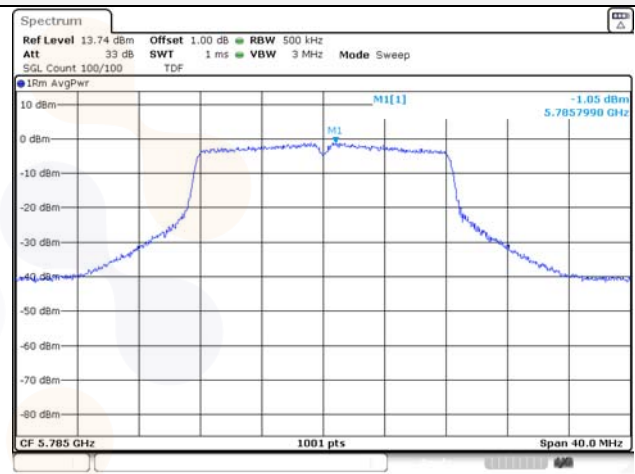

UNII-1 / 802.11a / 5 240 MHz

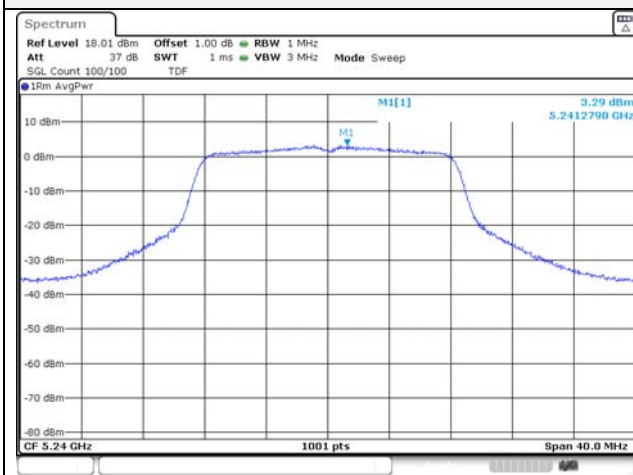


UNII-3 / 802.11a / 5 825 MHz

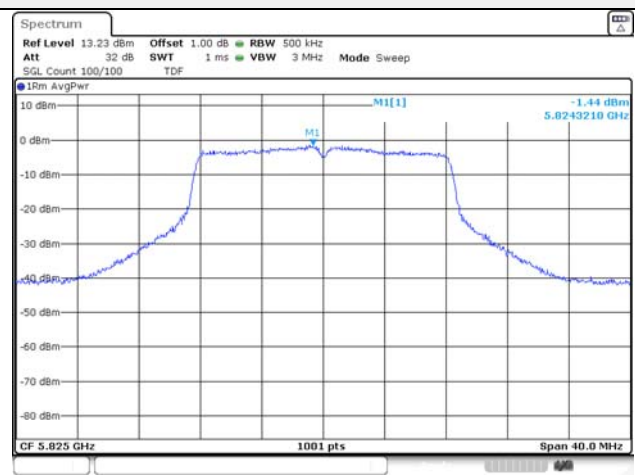

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (18) of (72)

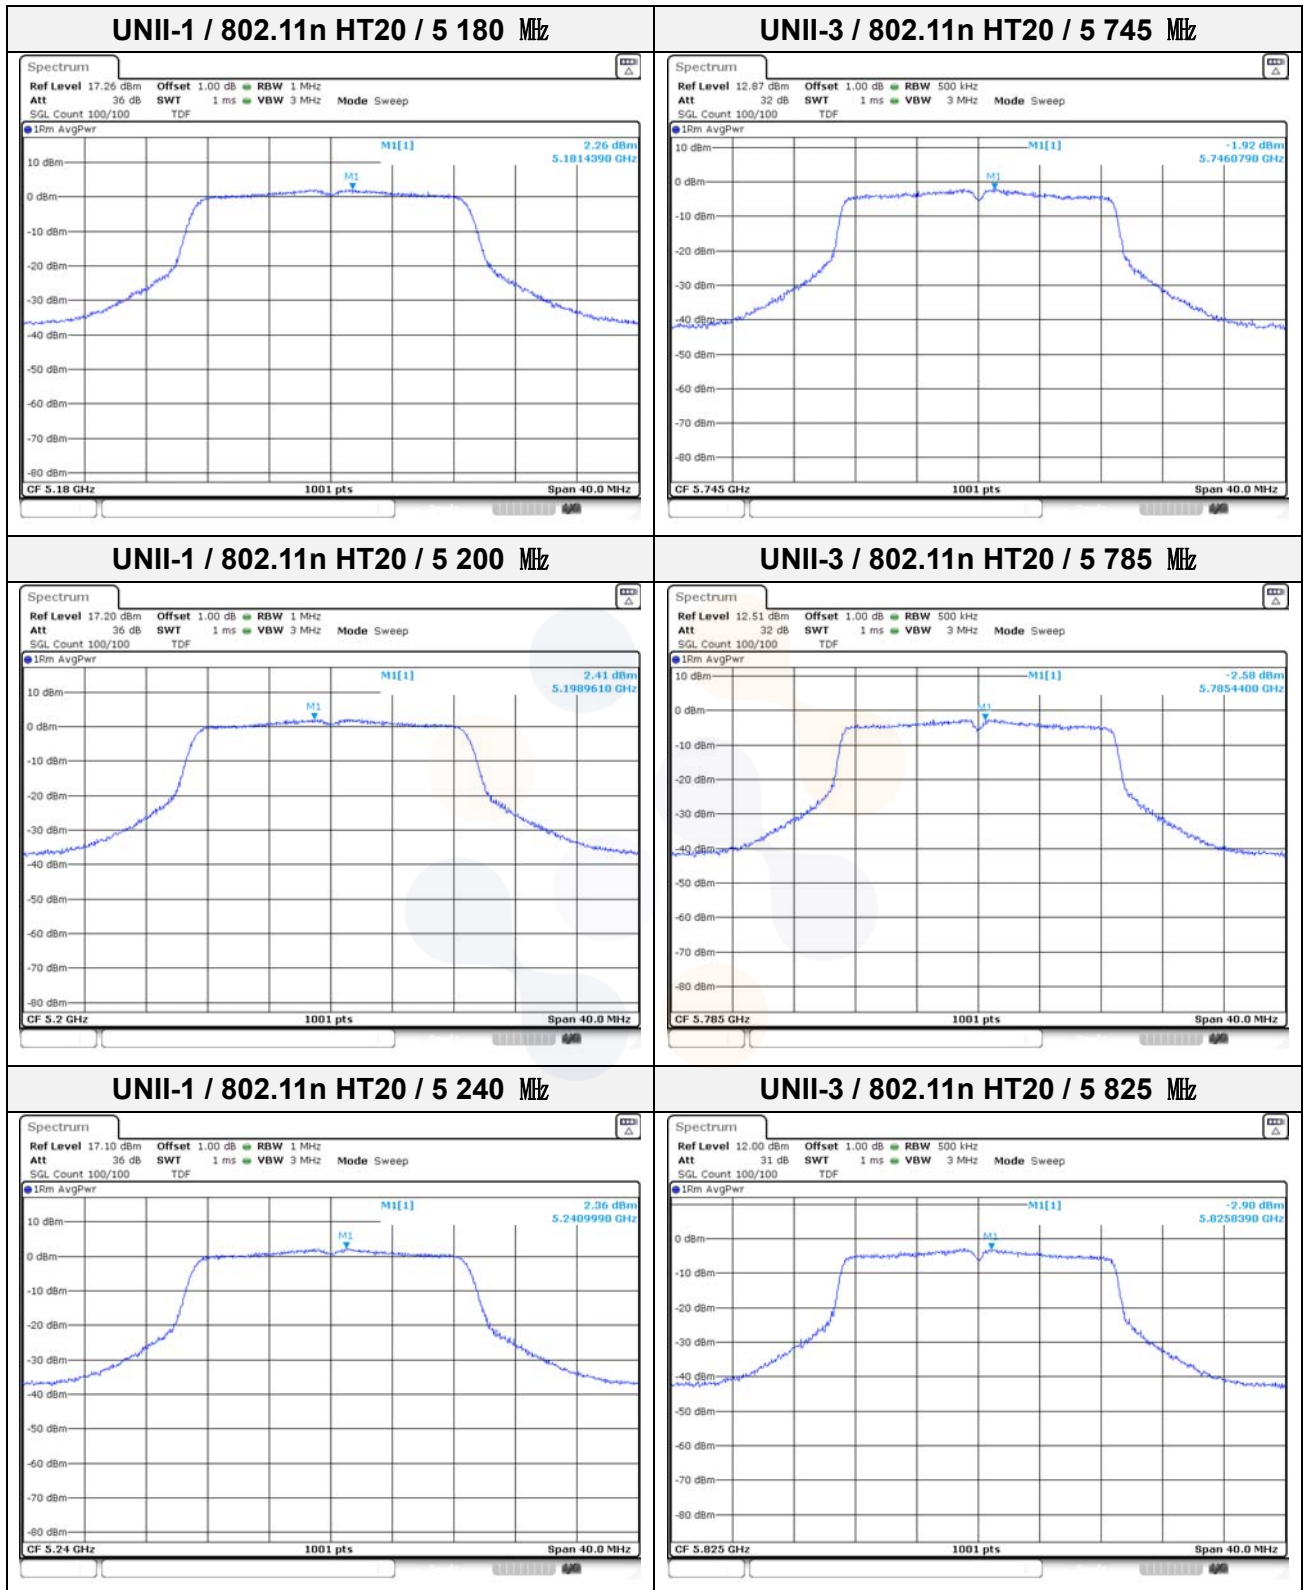

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (19) of (72)

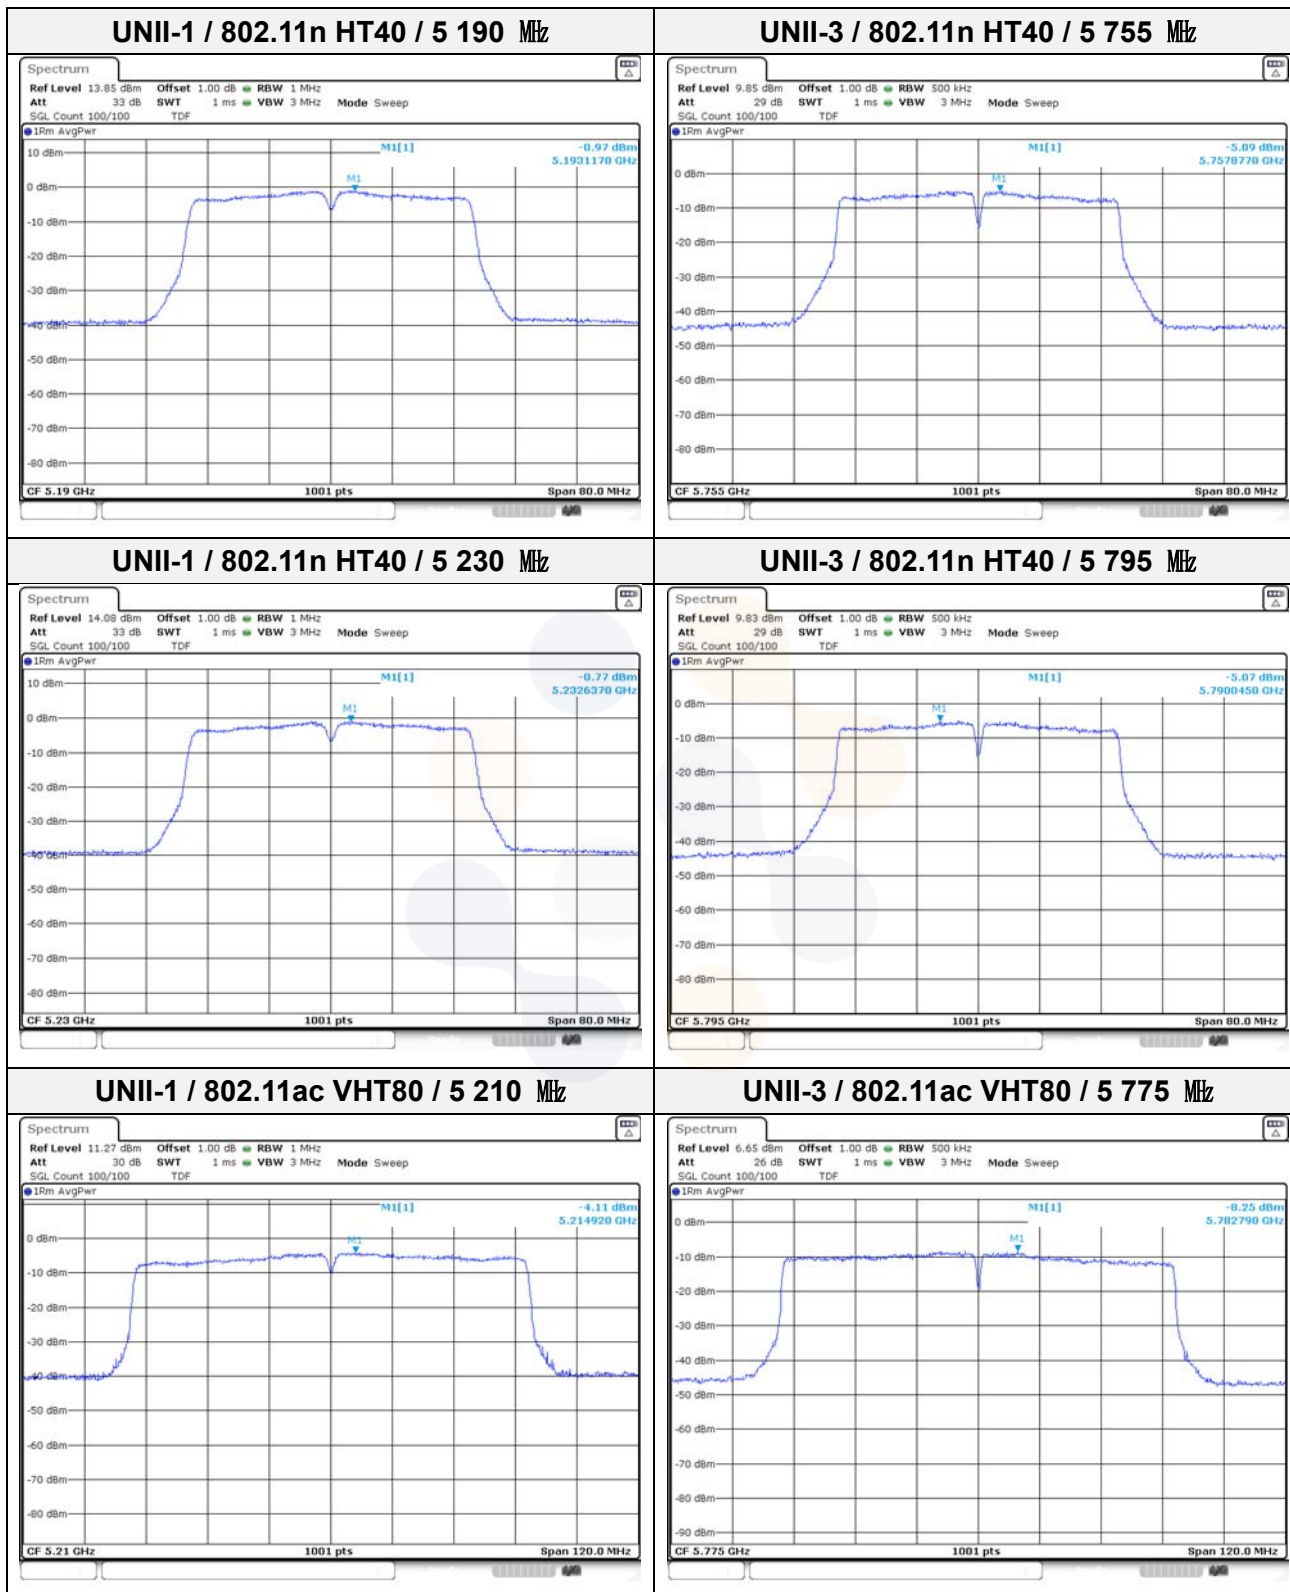

7.3. 26 dB Bandwidth & 99% Bandwidth

Test setup



Limit

N/A

Test procedure

ANSI C63.10-2013 Section 12.4

26dB bandwidth

KDB 789033 D02 v02r01 - Section C.1

99% Bandwidth

KDB 789033 D02 v02r01 – Section D

Test settings

◆ 26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

◆ 99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Test results

26dB Bandwidth

Test mode	Band	Frequency(MHz)	Measured Bandwidth (MHz)
11a	UNII-1	5 180	23.98
		5 200	23.63
		5 240	24.33
11n HT20		5 180	23.73
		5 200	24.68
		5 240	24.28
11n HT40		5 190	42.06
11ac VHT80		5 230	41.56
		5 210	95.06

99% bandwidth

Test mode	Band	Frequency(MHz)	Measured Bandwidth (MHz)
11a	UNII-1	5 180	16.83
		5 200	16.78
		5 240	16.83
11n HT20		5 180	17.98
		5 200	17.93
		5 240	17.93
11n HT40		5 190	36.46
11ac VHT80		5 230	36.36
		5 210	76.00

Note.

If 26dB Bandwidth across Band 2A or Band 1 but 99% test results are within the band no addition DFS test is needed on band 1.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (22) of (72)




26 dB bandwidth

UNII-1 / 802.11a / 5 180 MHz

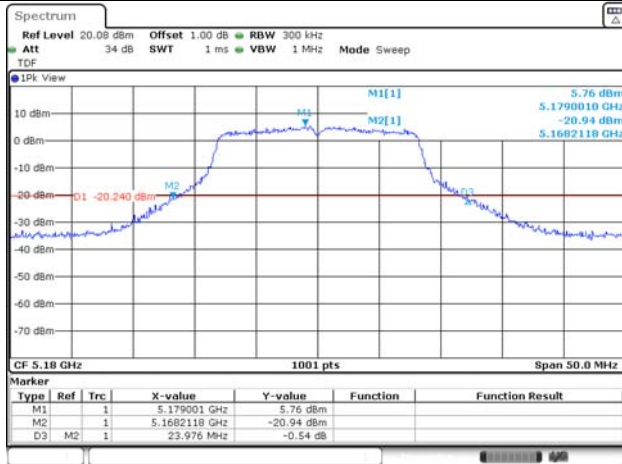


UNII-1 / 802.11n HT20 / 5 180 MHz

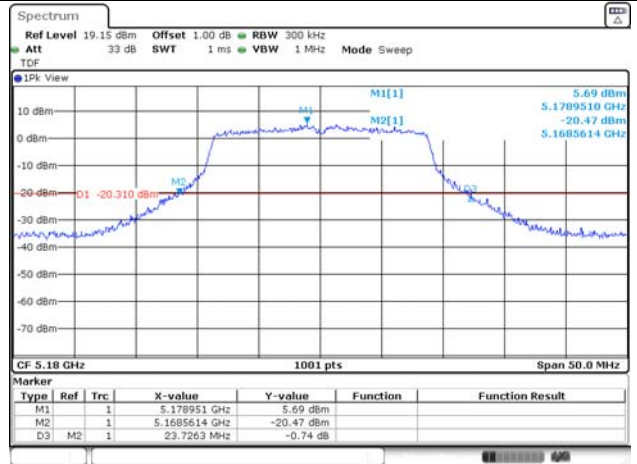


UNII-1 / 802.11a / 5 200 MHz




UNII-1 / 802.11n HT20 / 5 200 MHz

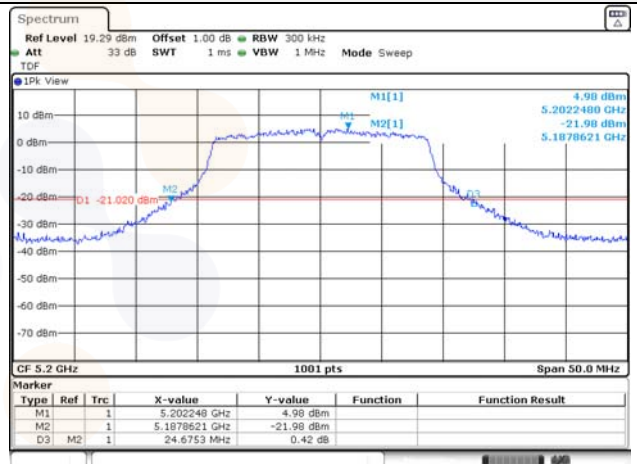

UNII-1 / 802.11a / 5 240 MHz

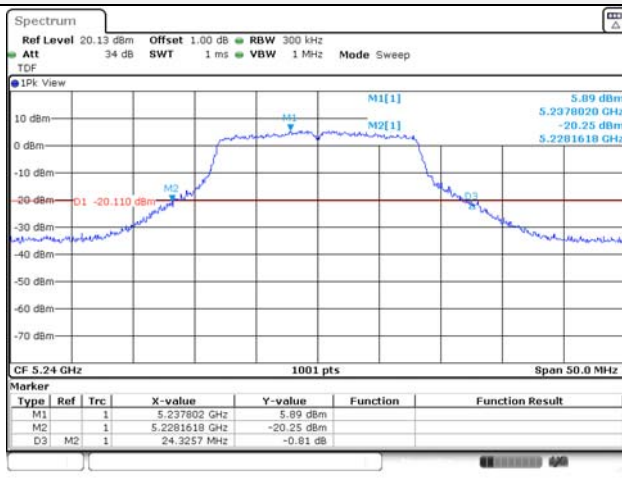

UNII-1 / 802.11n HT20 / 5 240 MHz

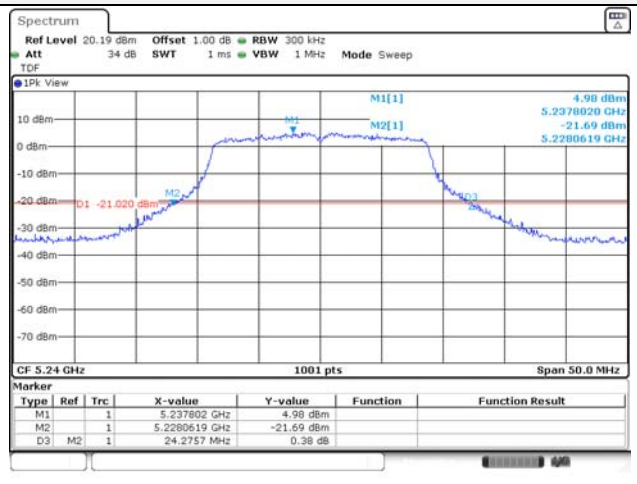


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (23) of (72)




UNII-1 / 802.11n HT40 / 5 190 MHz

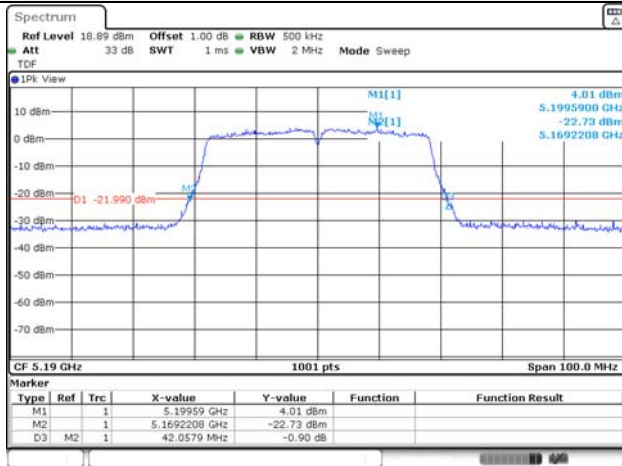

UNII-1 / 802.11ac VHT80 / 5 210 MHz

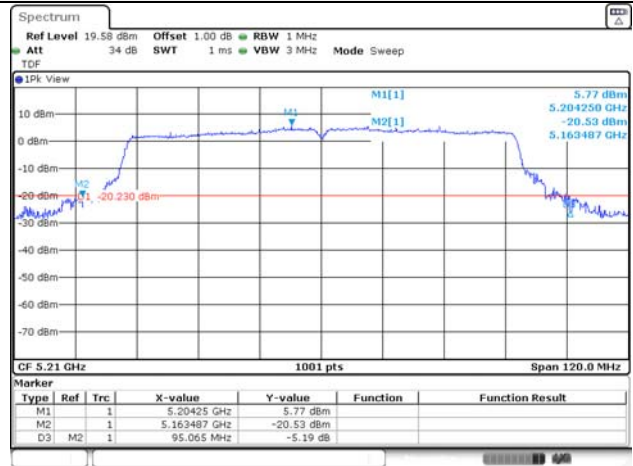

UNII-1 / 802.11n HT40 / 5 230 MHz

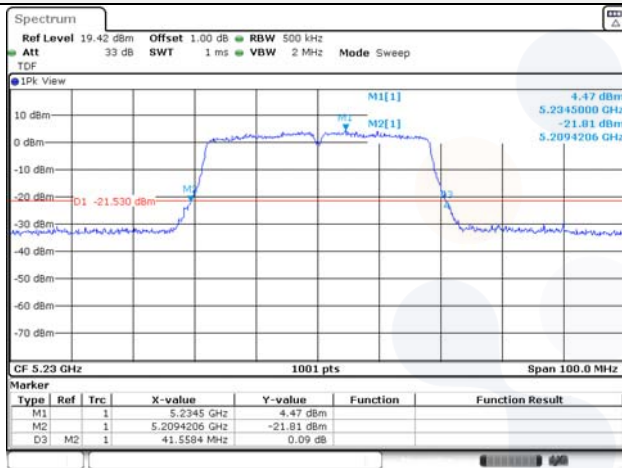

Blank


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (24) of (72)



99% bandwidth

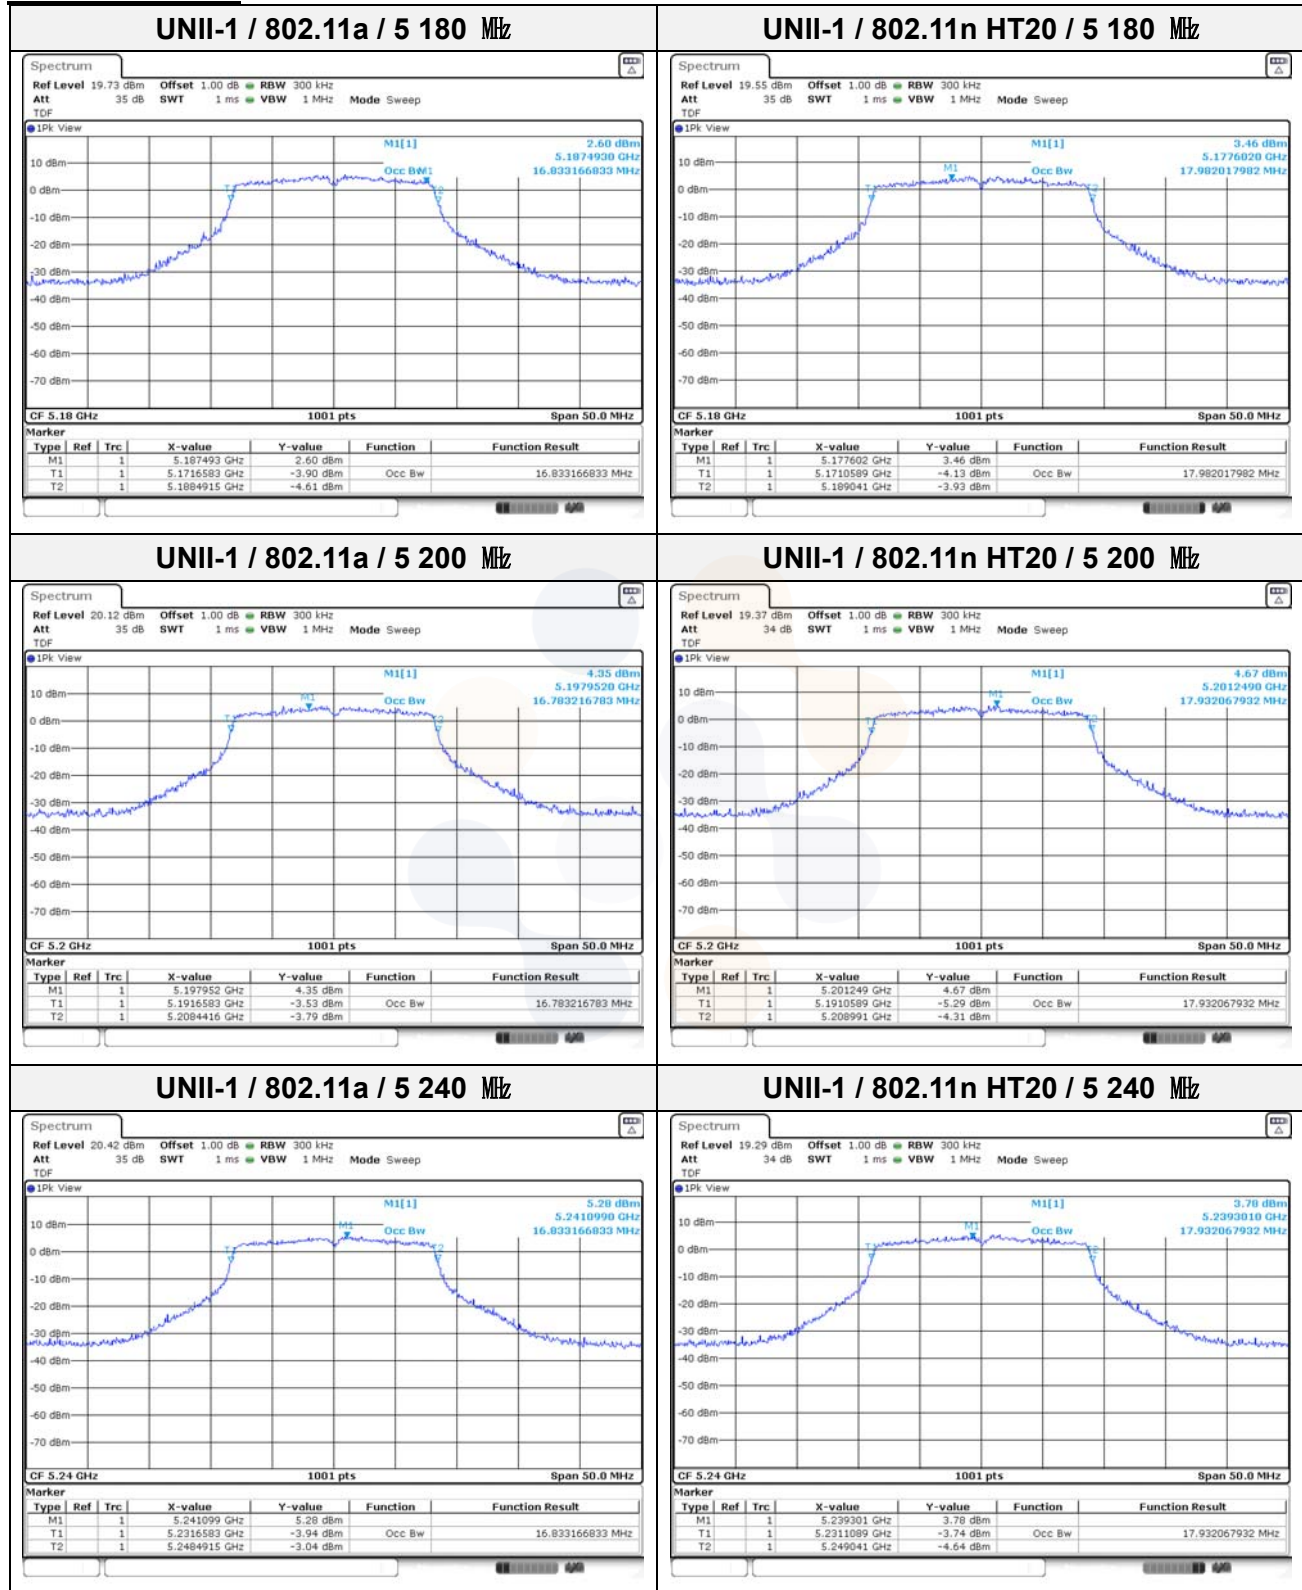


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (25) of (72)



UNII-1 / 802.11n HT40 / 5 190 MHz

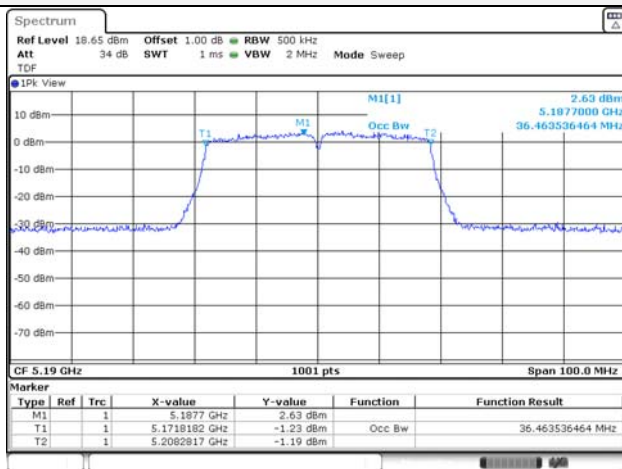

UNII-1 / 802.11ac VHT80 / 5 210 MHz

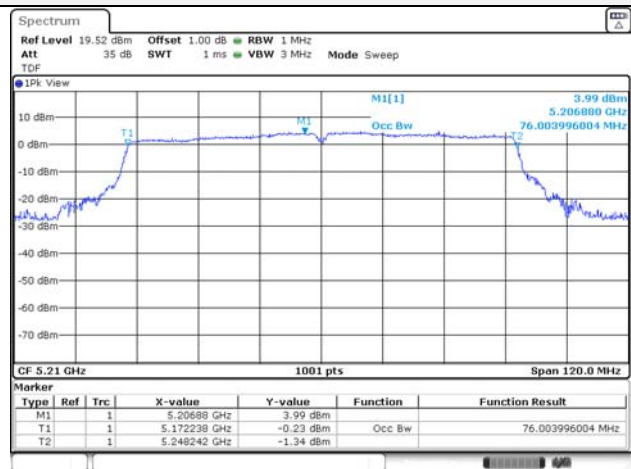


UNII-1 / 802.11n HT40 / 5 230 MHz



Blank

7.4. 6 dB Bandwidth

Test setup



Limit

According to §15.407(e), Within the 5.725-585 GHz band, the minimum 6 dB bandwidth if U-NII devices shall be at least 500kHz

Test procedure

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 - Section C.2

Test settings

◆ 6dB Bandwidth (Minimum Emission Bandwidth for the band 5.725–5.85 GHz)

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (27) of (72)

**Test results**







Test mode	Band	Frequency (MHz)	Measured Bandwidth (MHz)	Minimum Bandwidth (MHz)
11a	UNII-3	5 745	14.49	0.5
		5 785	15.53	
		5 825	15.53	
11n HT20		5 745	16.28	
		5 785	16.78	
		5 825	15.43	
11n HT40		5 755	35.46	
		5 795	35.26	
11ac VHT80		5 775	75.41	



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (28) of (72)

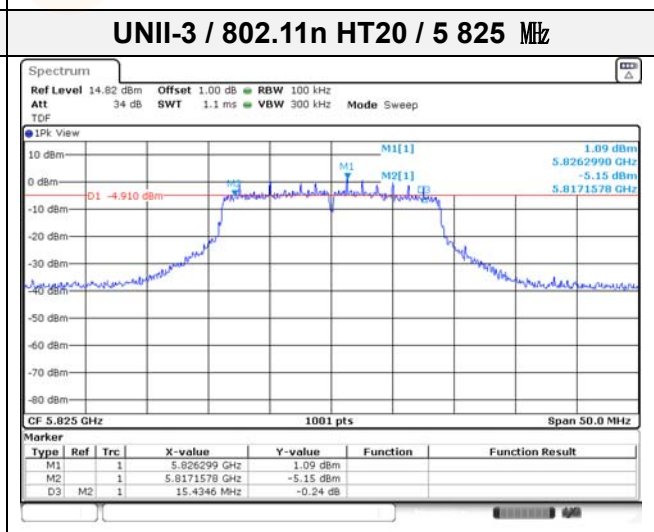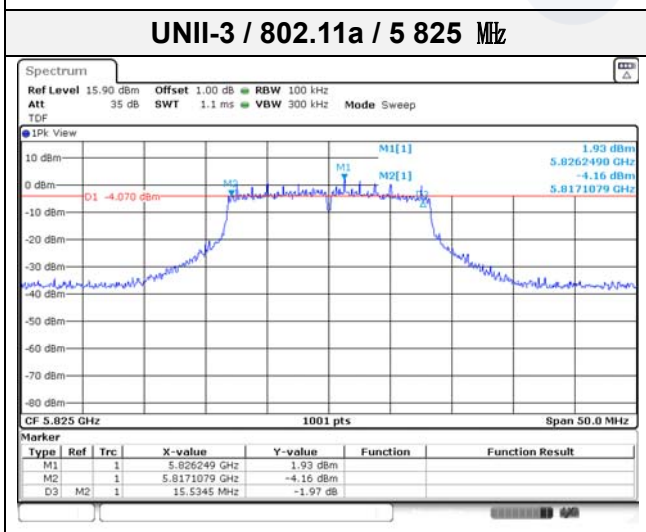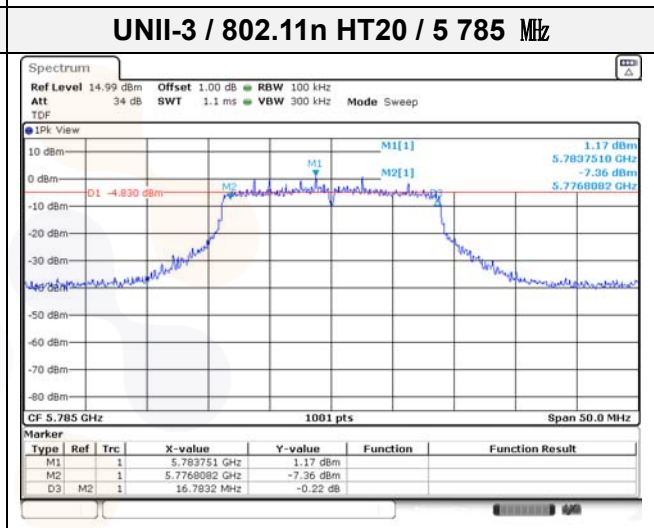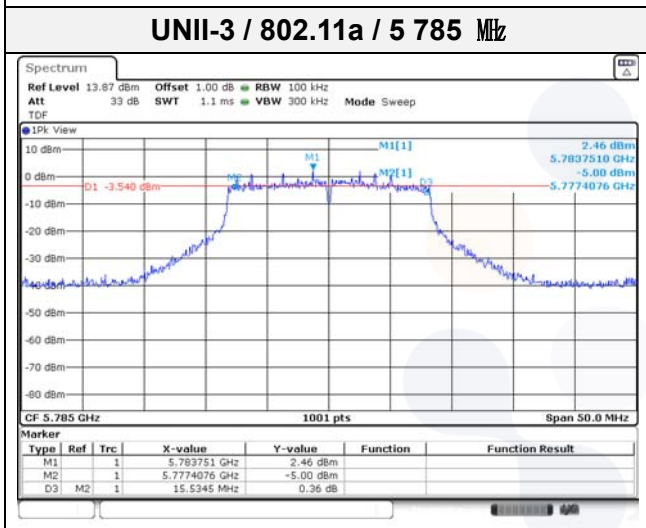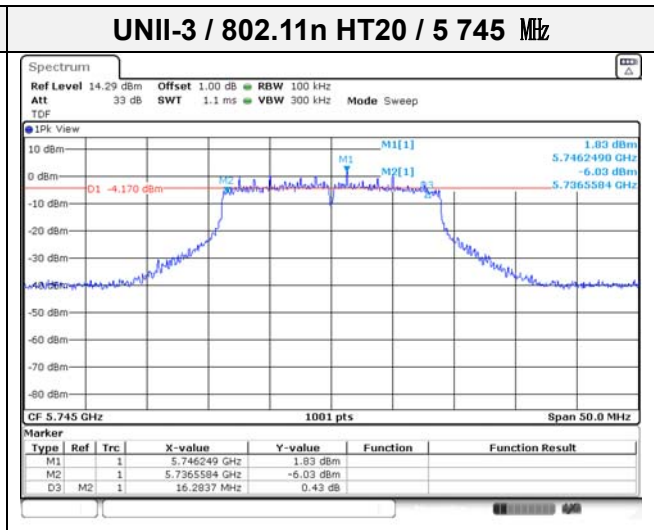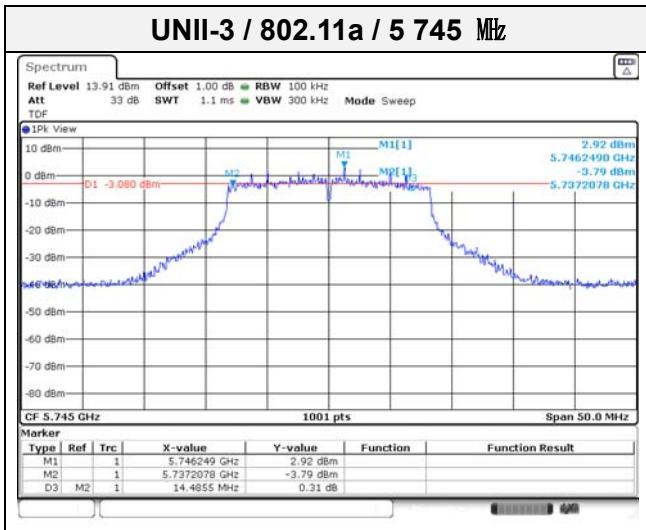


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (29) of (72)




UNII-3 / 802.11n HT40 / 5 755 MHz

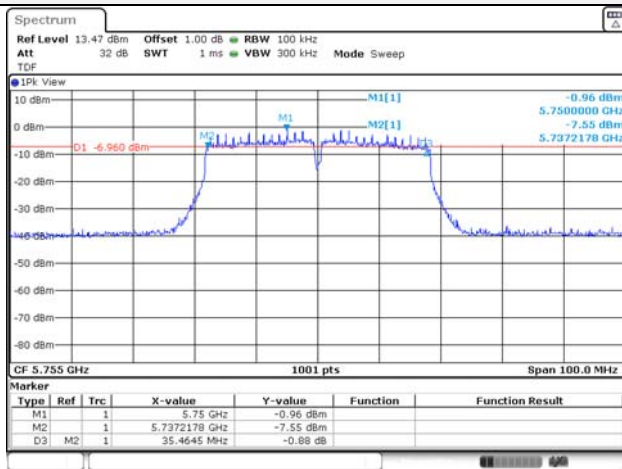

UNII-3 / 802.11ac VHT80 / 5 775 MHz

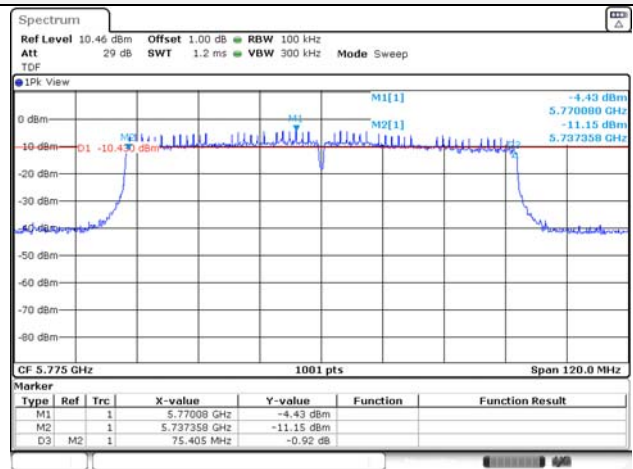

UNII-3 / 802.11n HT40 / 5 795 MHz

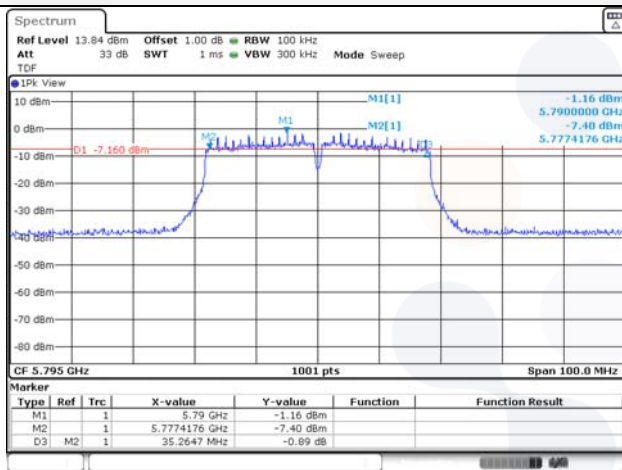


Blank


7.5. Spurious Emission, Band Edge and Restricted bands

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

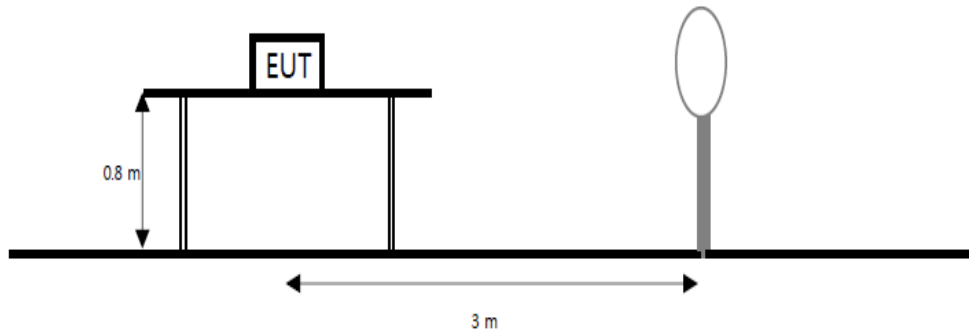

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

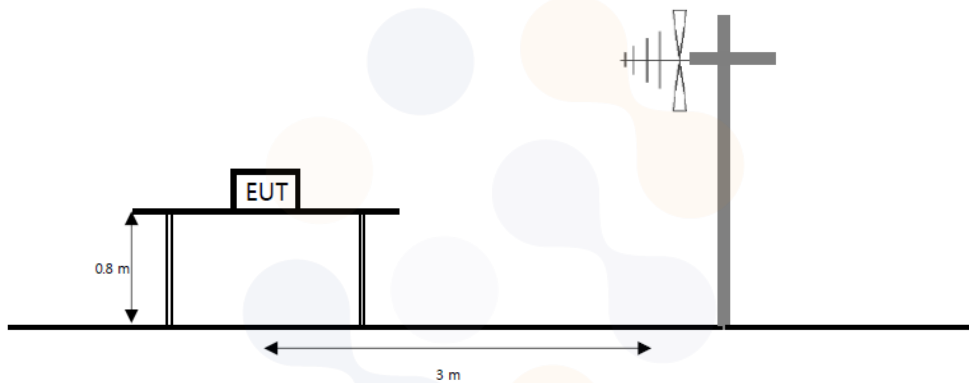

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

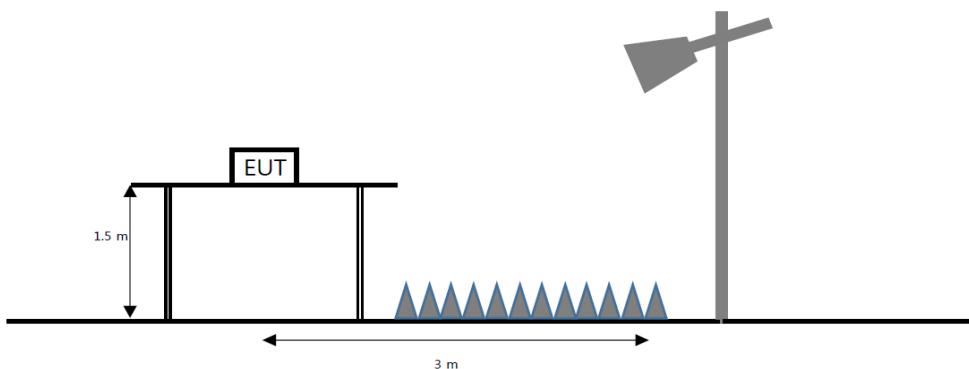

Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (32) of (72)



According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Test procedureANSI C63.10-2013 Section 12.7.5, 12.7.6, 12.7.7.2
KDB 789033 D02 V02r01 – Section G**Test settings****Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3 \times RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements**Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW \geq (3 \times RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW \geq [3 \times RBW].
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.

6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ means restricted band.
6. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3m
7. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."
8. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (35) of (72)



Test results (Below 30 MHz) – Worst case: 802.11a_UNII 1_5 240 MHz

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

Horizontal/Vertical

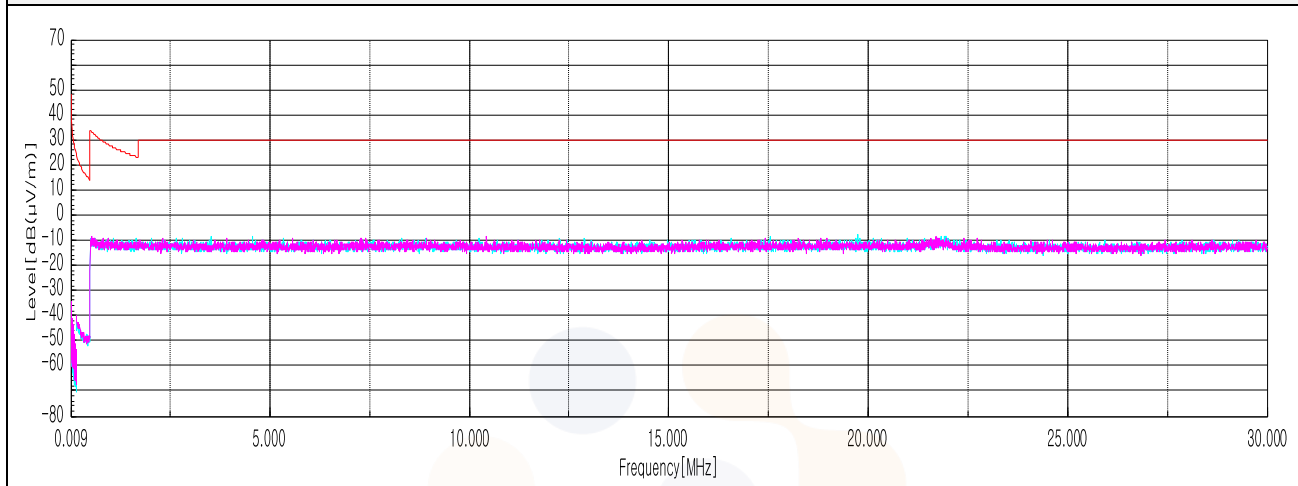

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (36) of (72)



Test results (Below 1 000 MHz) – Worst case: 802.11a_UNII 1_ 5 240 MHz

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Quasi peak data								
49.64	V	28.20	14.40	-29.88	-	12.72	40.00	27.28
73.53 ¹⁾	V	24.80	12.25	-29.42	-	7.63	40.00	32.37
168.59 ¹⁾	V	22.50	15.46	-27.50	-	10.46	43.50	33.04
272.99 ¹⁾	H	21.70	19.00	-26.08	-	14.62	46.00	31.38
355.92	V	22.70	21.99	-25.07	-	19.62	46.00	26.38
374.96	V	21.10	22.70	-24.80	-	19.00	46.00	27.00
541.07	H	22.10	25.70	-23.04	-	24.76	46.00	21.24

Horizontal/Vertical

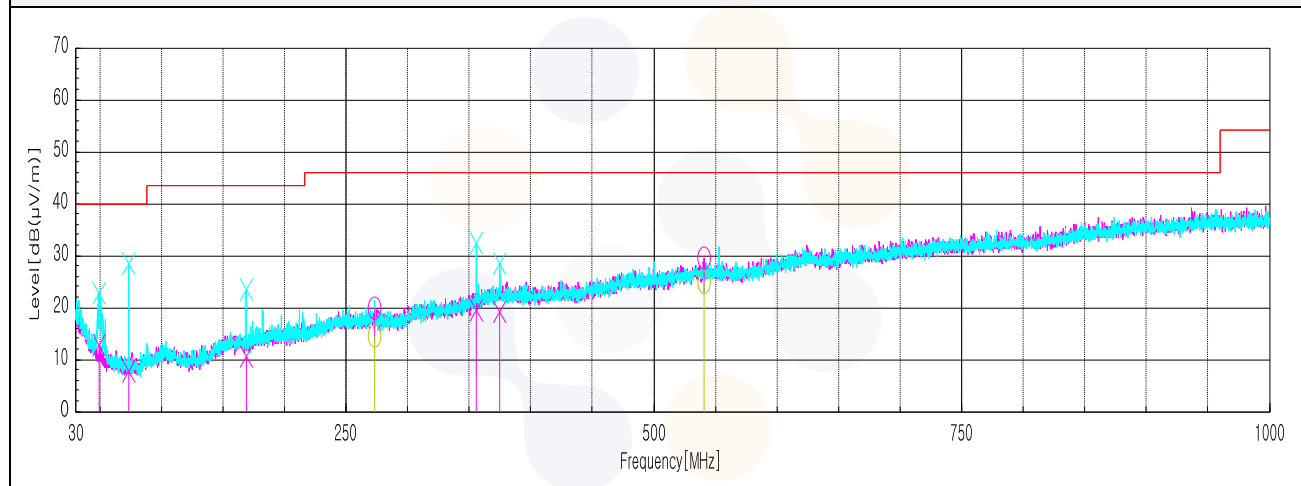

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (37) of (72)




Test results (Above 1 000 MHz)

802.11a UNII 1

Lowest Channel (5 180 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
5 148.76 ¹⁾	V	43.37	33.90	-24.60	-	52.67	74.00	21.33
10 310.09	H	60.69	37.19	-49.21	-	48.67	68.20	19.53
15 587.16 ¹⁾	V	56.47	40.57	-46.25	-	50.79	74.00	23.21
Average Data								
5 148.76 ¹⁾	V	32.23	33.90	-24.60	-	41.53	54.00	12.47

Average data (5 148.76 MHz)

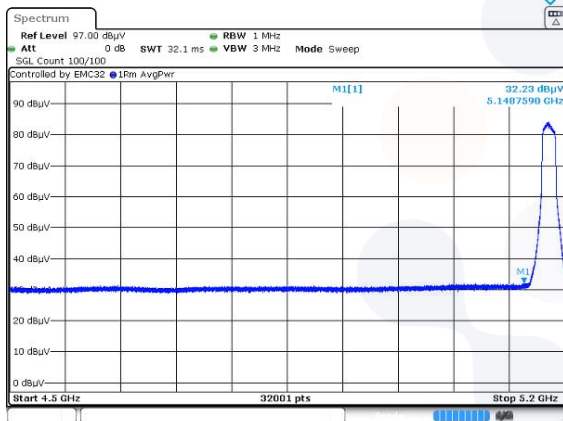

Blank

Horizontal/Vertical for Band-edge

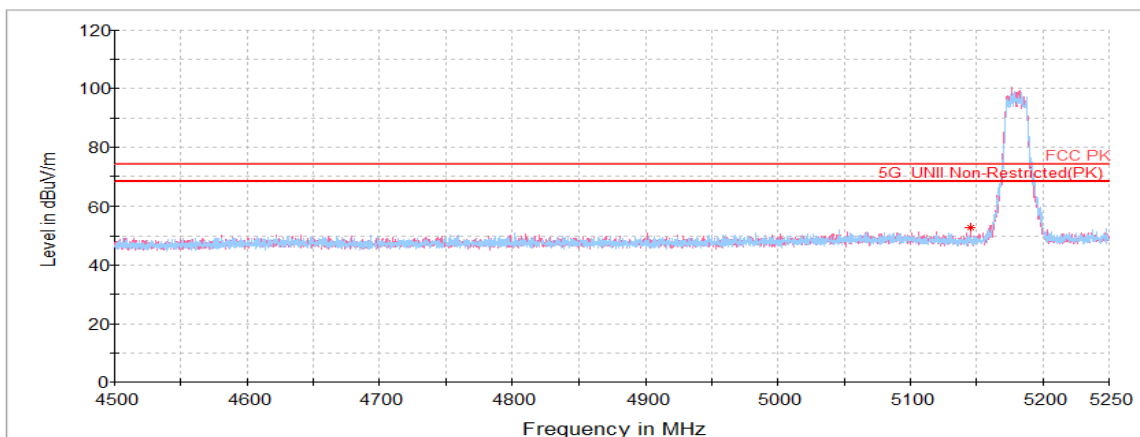


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (38) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

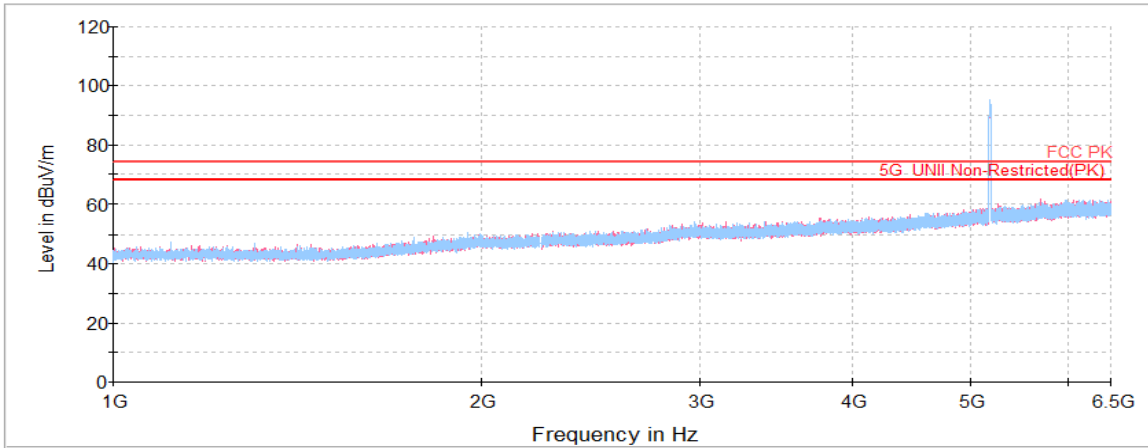

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

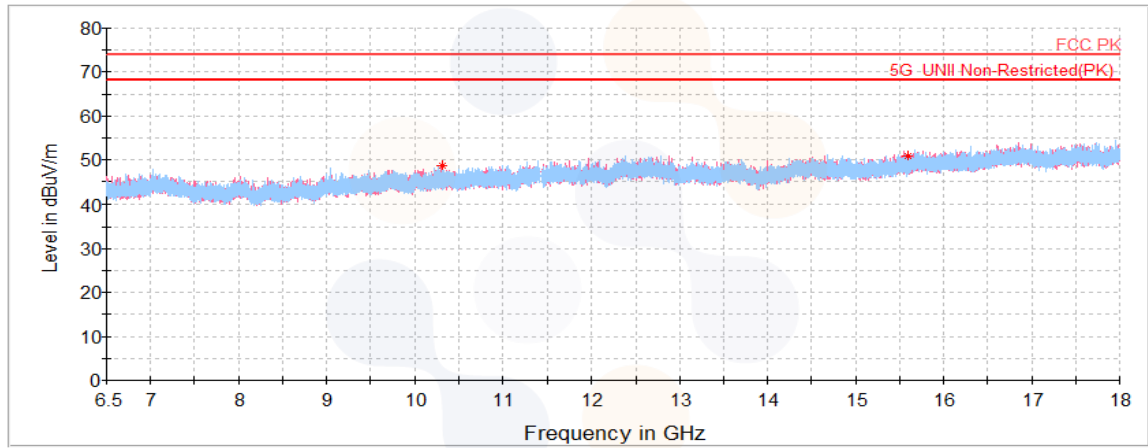

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (39) of (72)




Middle Channel (5 200 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 413.59	V	59.68	37.25	-49.00	-	47.93	68.20	20.27
15 648.61 ¹⁾	V	56.42	40.62	-46.28	-	50.76	74.00	23.24
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

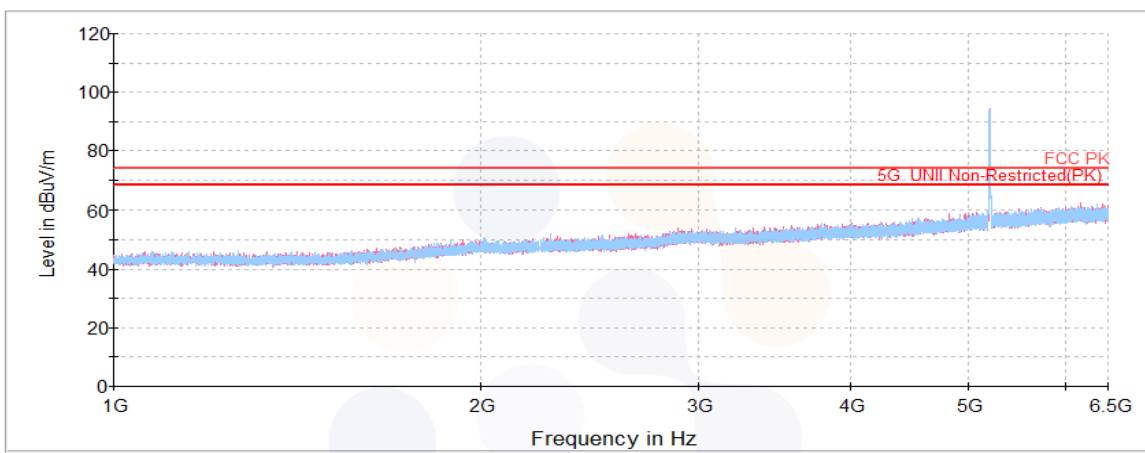

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

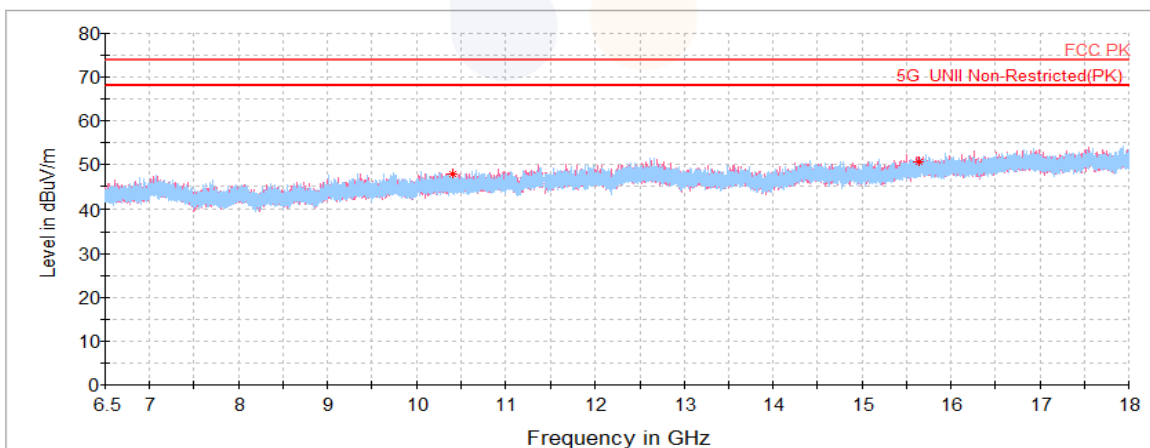

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (40) of (72)




Highest Channel (5 240 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 475.05	H	59.75	37.29	-48.87	-	48.17	68.20	20.03
15 749.59 ¹⁾	V	56.30	40.70	-46.31	-	50.69	74.00	23.31
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

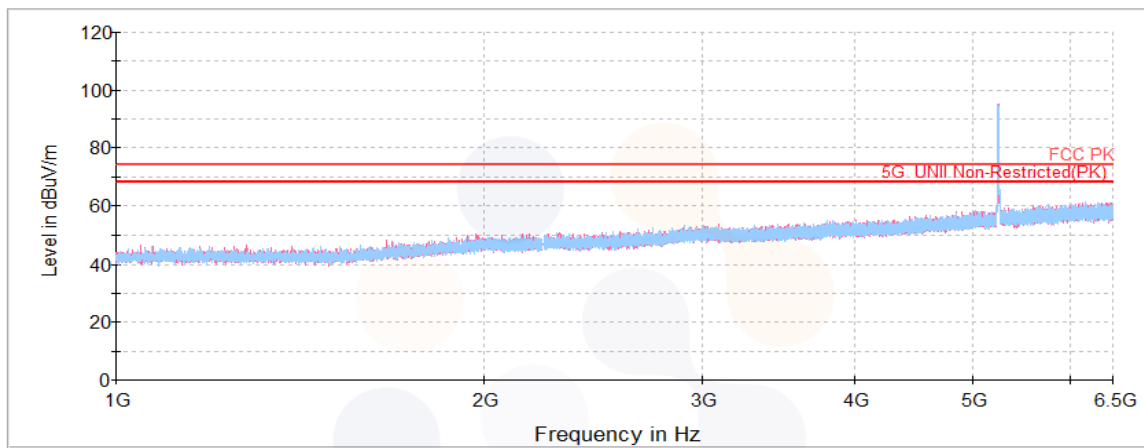

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

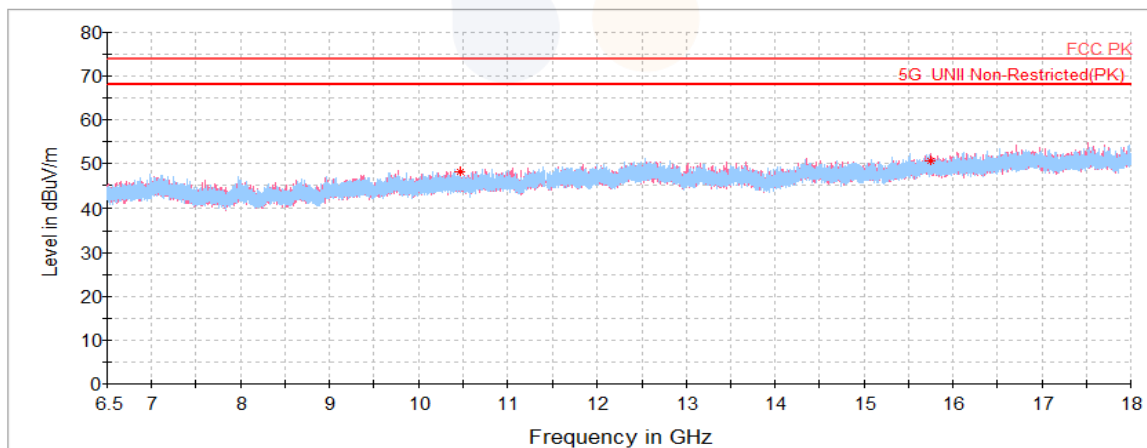

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (41) of (72)




802.11n HT20 UNII 1

Lowest Channel (5 180 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 125.69 ¹⁾	V	41.37	33.85	-24.56	-	50.66	74.00	23.34
10 352.50	V	60.89	37.21	-49.12	-	48.98	68.20	19.22
14 908.30	H	57.82	40.17	-47.17	-	50.82	68.20	17.38
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

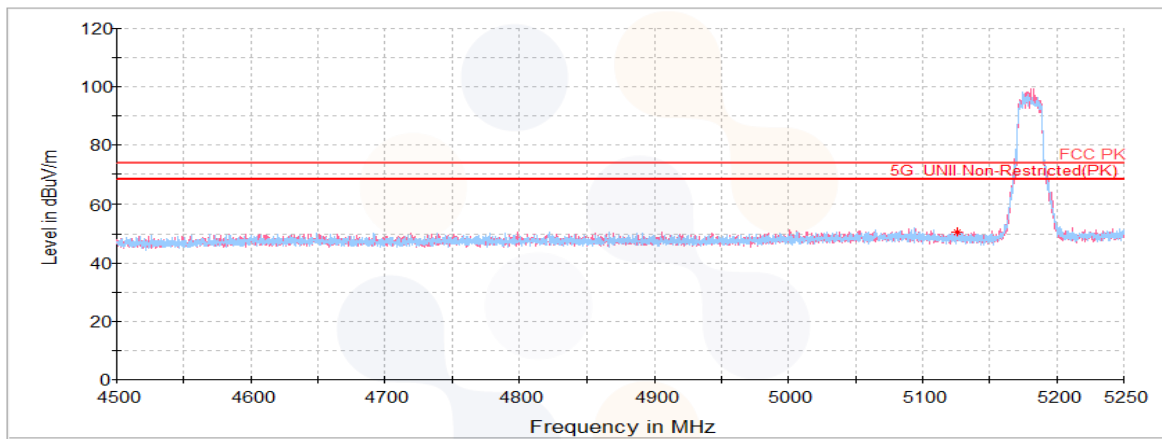


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (42) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

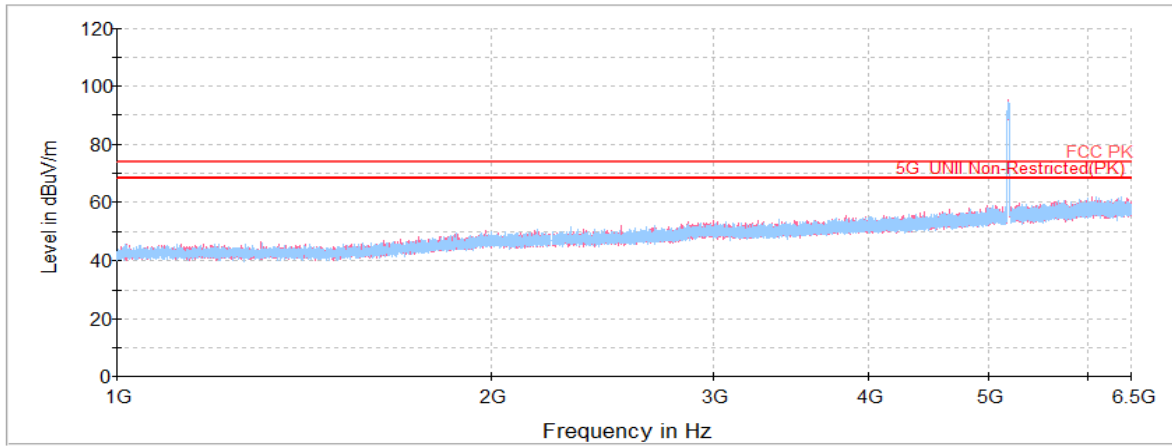

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

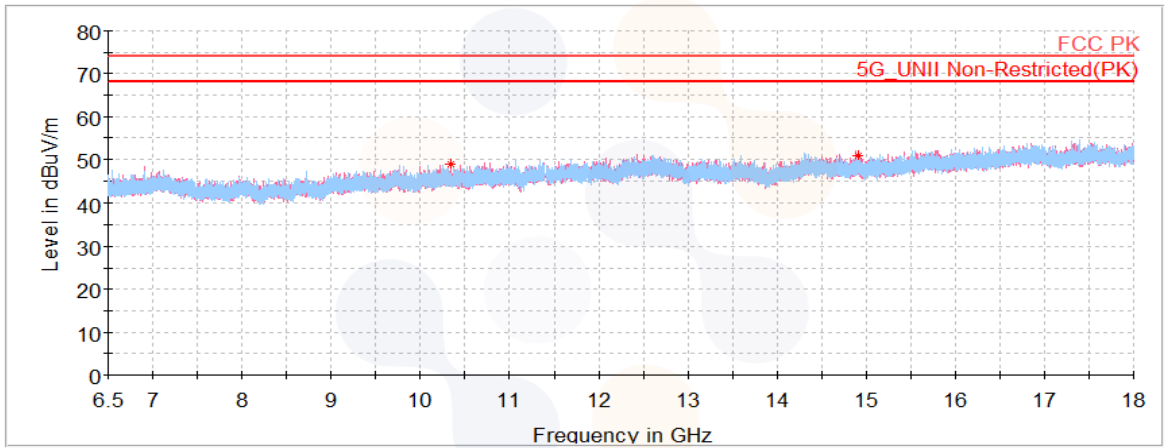

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (43) of (72)




Middle Channel (5 200 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 349.27	V	60.79	37.21	-49.13	-	48.87	68.20	19.33
15 608.36 ¹⁾	V	56.56	40.59	-46.26	-	50.89	74.00	23.11
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

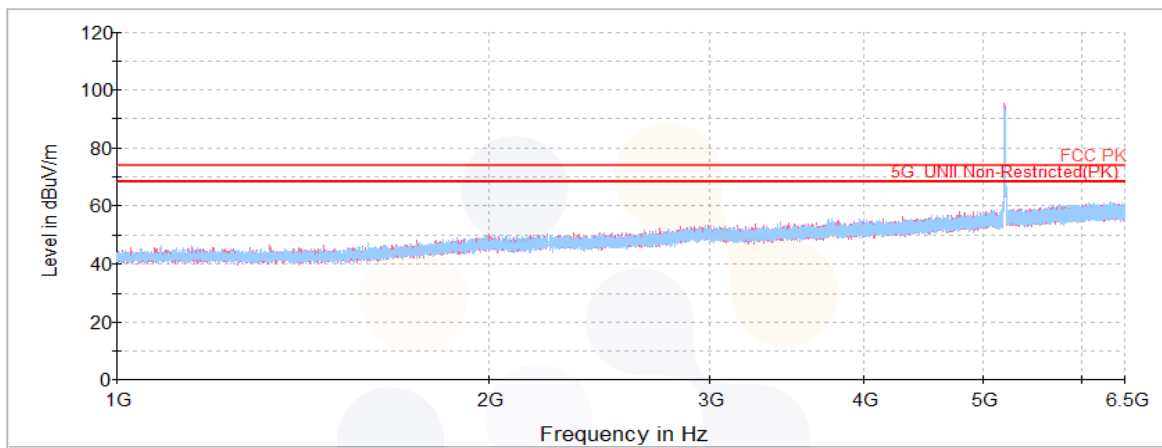

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

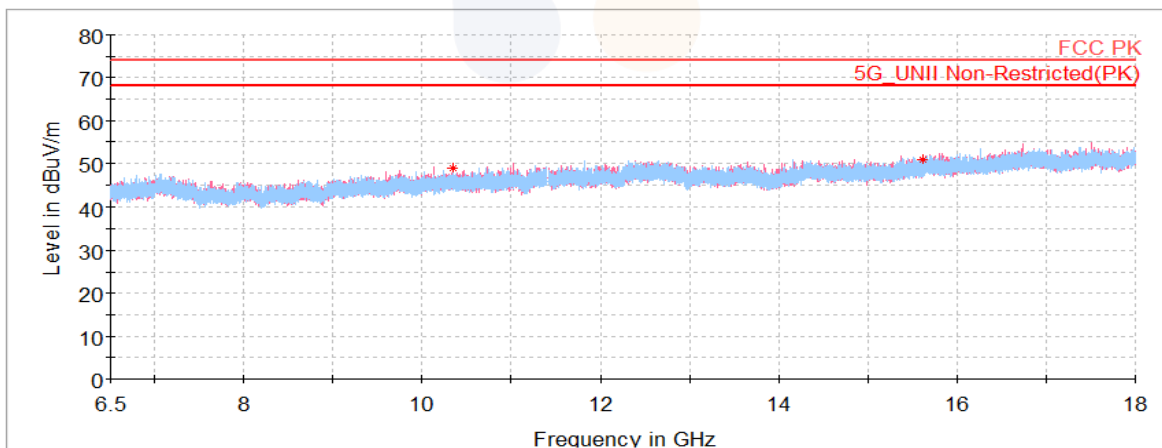

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (44) of (72)




Highest Channel (5 240 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 459.23	V	59.70	37.28	-48.91	-	48.07	68.20	20.13
15 724.08 ¹⁾	V	56.50	40.68	-46.30	-	50.88	74.00	23.12
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

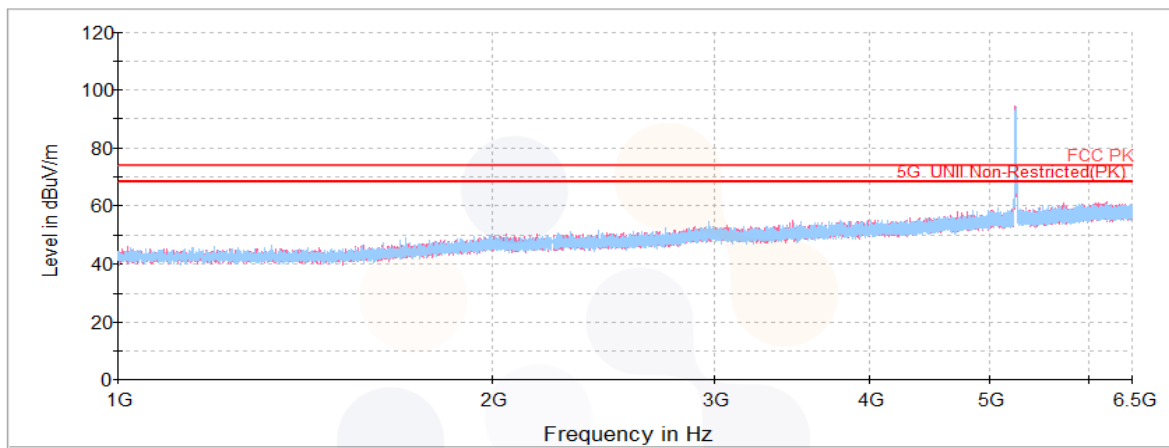

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

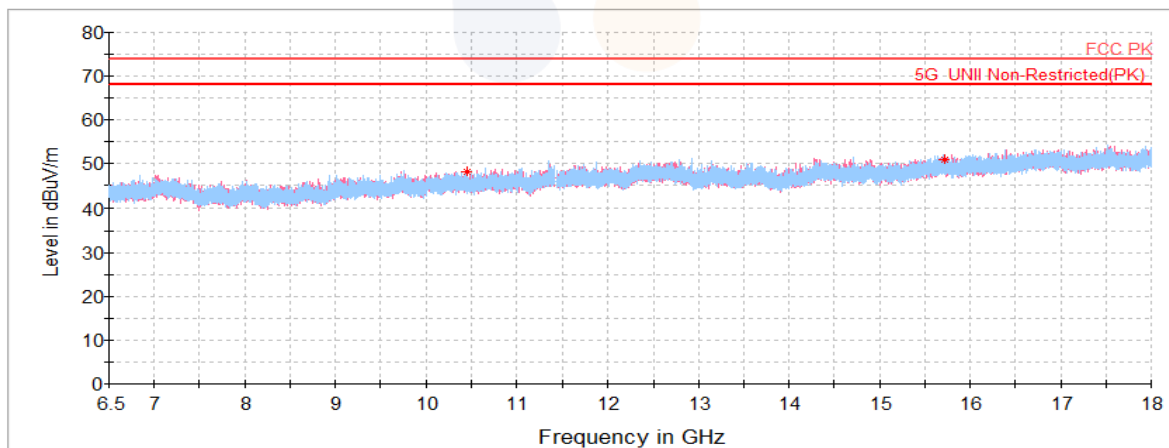

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (45) of (72)




802.11n HT40 UNII 1

Lowest Channel (5 190 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 149.42 ¹⁾	V	43.33	33.90	-24.60	-	52.63	74.00	21.37
6 919.75	V	62.97	35.47	-50.32	-	48.12	68.20	20.08
10 409.28	H	60.26	37.25	-49.01	-	48.50	68.20	19.70
15 556.61 ¹⁾	H	56.65	40.55	-46.24	-	50.96	74.00	23.04
Average Data								
5 149.42 ¹⁾	V	35.87	33.90	-24.60	0.17	45.34	54.00	8.66

Average data (5 149.42 MHz)

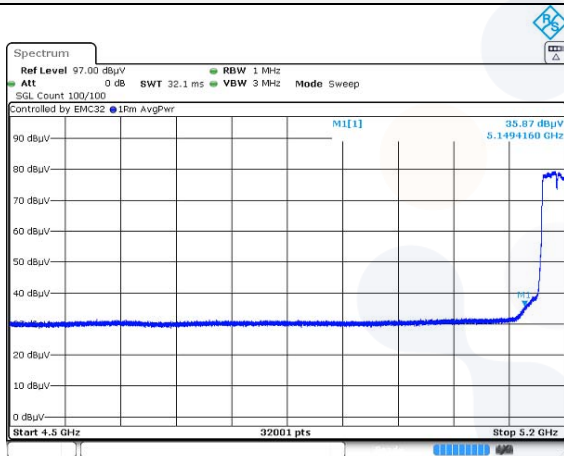

Blank

Horizontal/Vertical for Band-edge

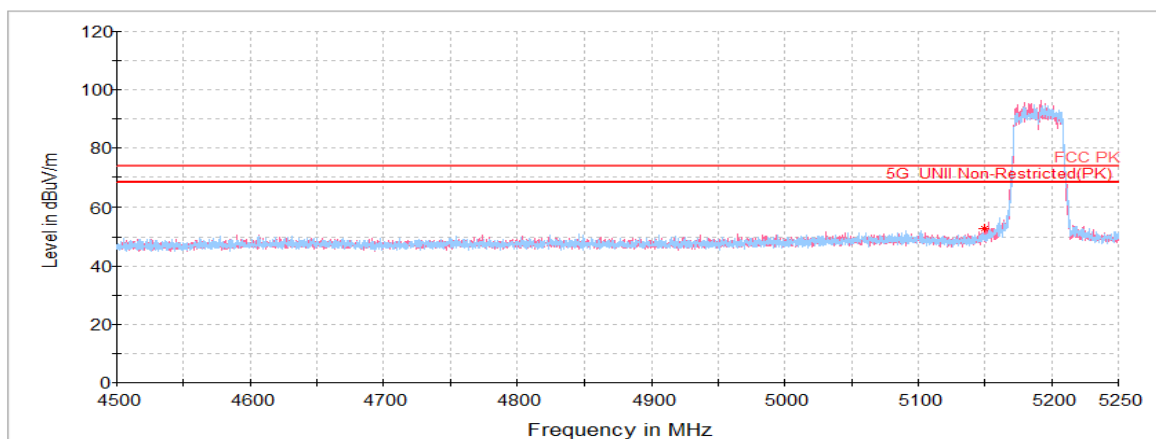


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (46) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

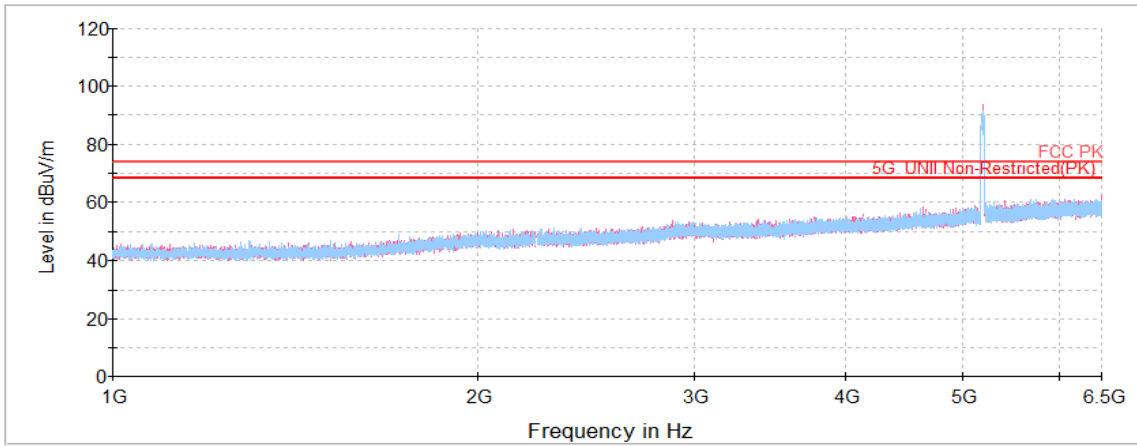

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

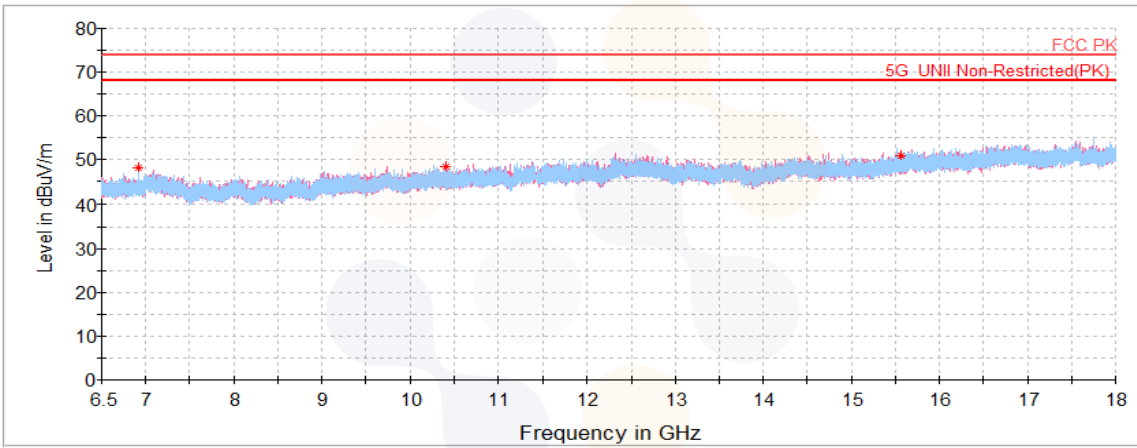

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (47) of (72)




Highest Channel (5 230 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 537.22	V	59.41	37.33	-48.86	-	47.88	68.20	20.32
15 735.94 ¹⁾	H	56.59	40.69	-46.31	-	50.97	74.00	23.03
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

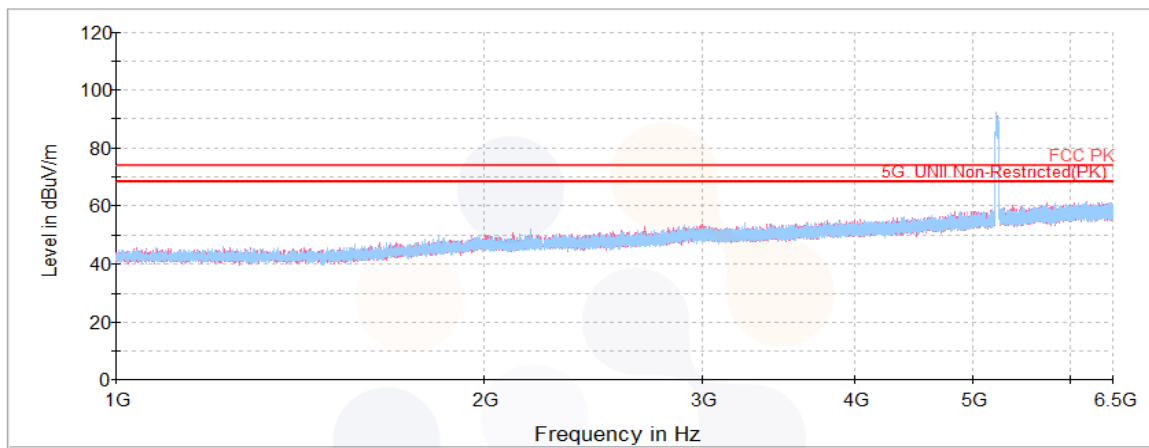

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

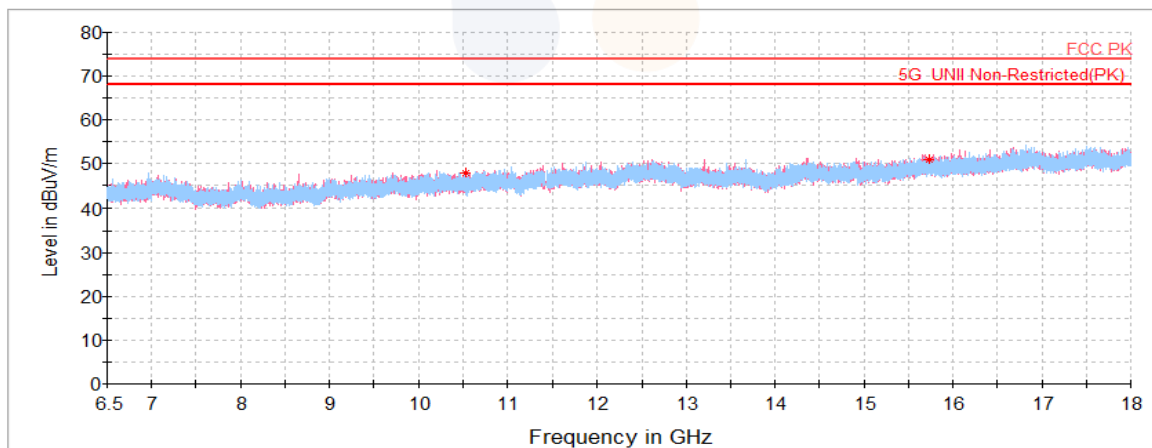

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (48) of (72)




802.11ac VHT80 UNII 1

Lowest Channel (5 210 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 149.33 ¹⁾	V	48.71	33.90	-24.60	-	58.01	74.00	15.99
10 362.92	V	60.98	37.22	-49.10	-	49.10	68.20	19.10
15 606.20 ¹⁾	H	56.40	40.58	-46.26	-	50.72	74.00	23.28
Average Data								
5 149.33 ¹⁾	V	40.18	33.90	-24.60	0.34	49.82	54.00	4.18

Average data (5 149.33 MHz)

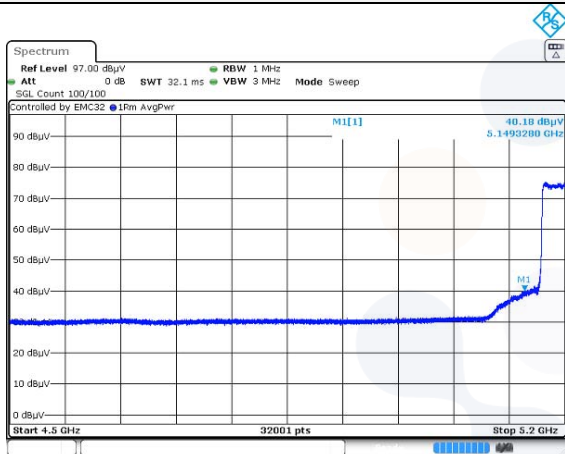

Blank

Horizontal/Vertical for Band-edge

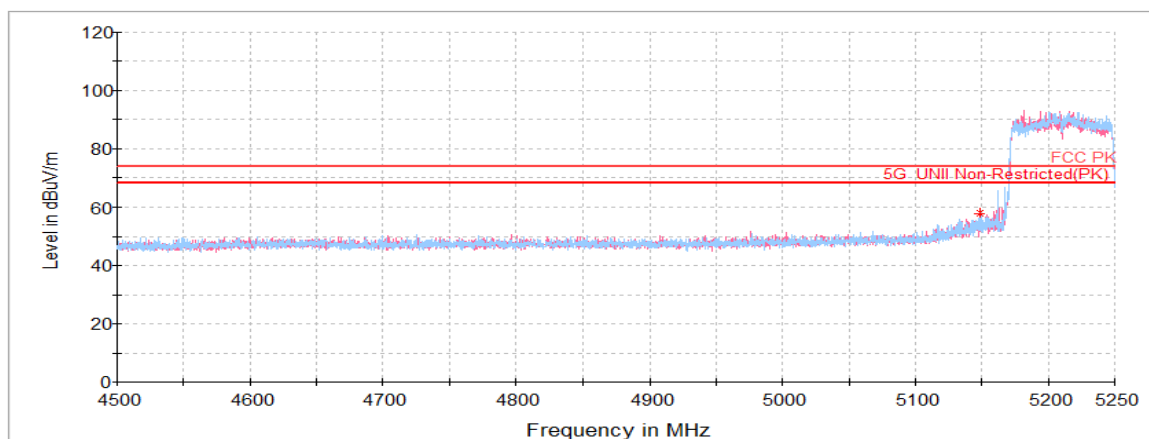


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (49) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

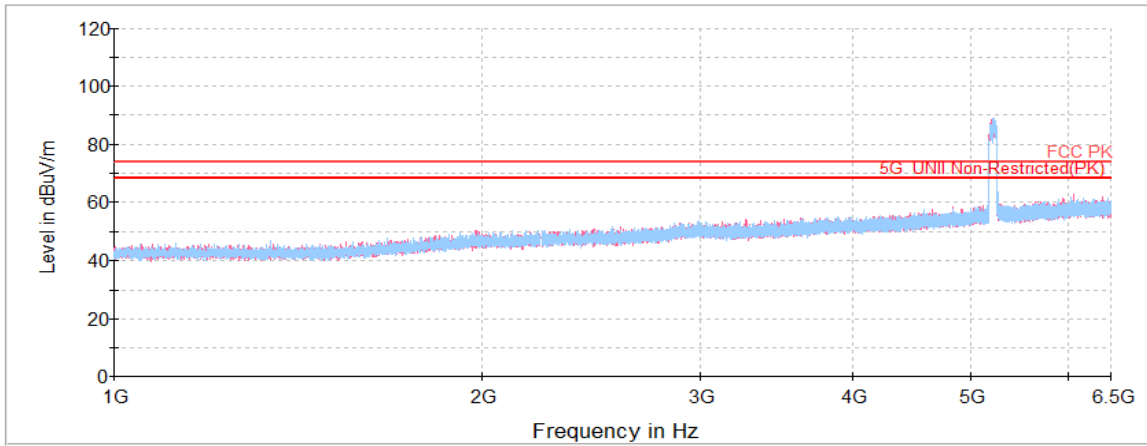

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

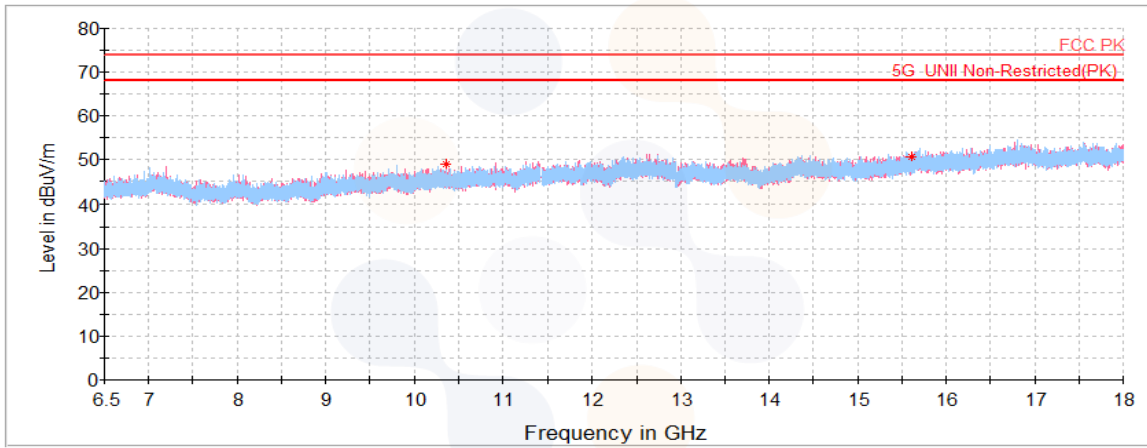

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (50) of (72)



Test results (Above 18 GHz) – Worst case: 802.11n HT20_UNII 1_5 180 MHz

Horizontal/Vertical for 18 GHz ~ 40 GHz

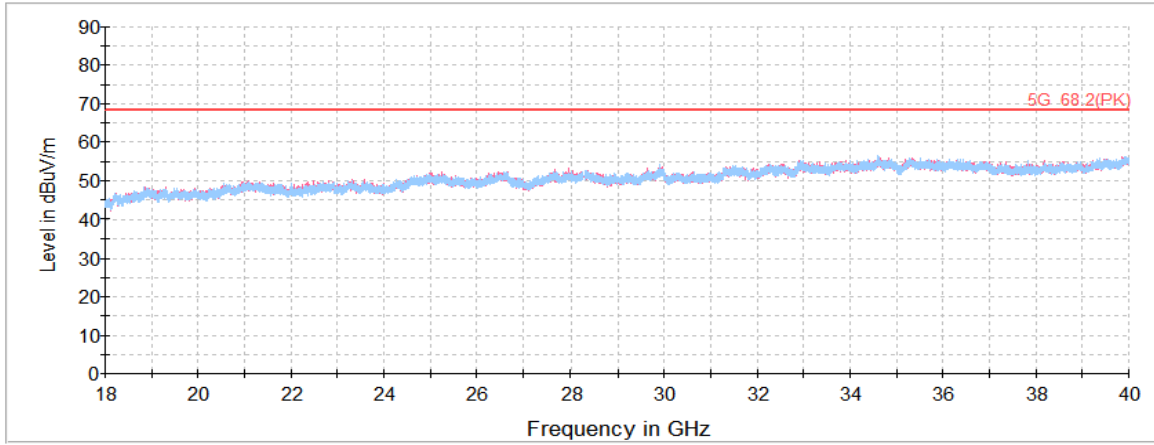

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (51) of (72)




802.11a UNII 3

Lowest Channel (5 745 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 722.78	V	42.54	34.87	-24.11	-	53.30	117.14	63.84
11 388.58 ¹⁾	V	59.82	38.01	-48.58	-	49.25	74.00	24.75
17 284.13	V	57.48	41.19	-45.56	-	53.11	68.20	15.09
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

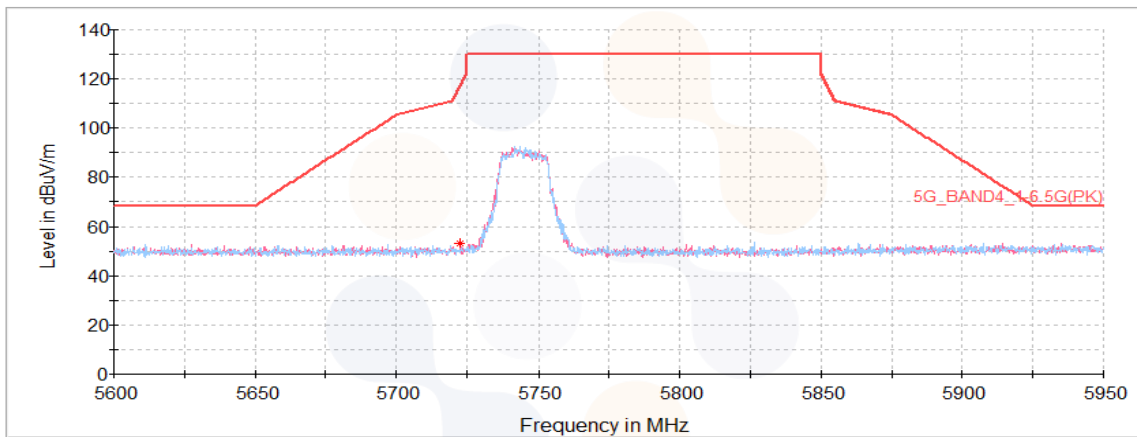


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (52) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

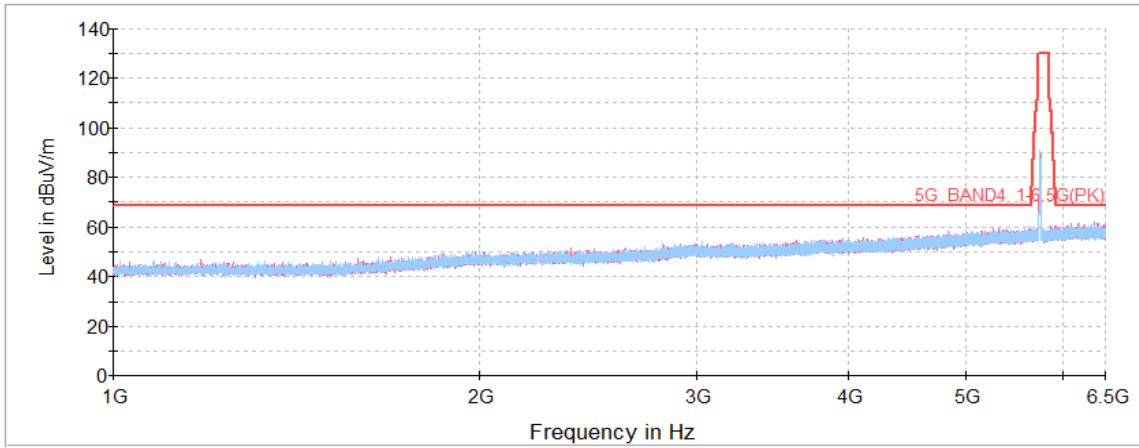

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

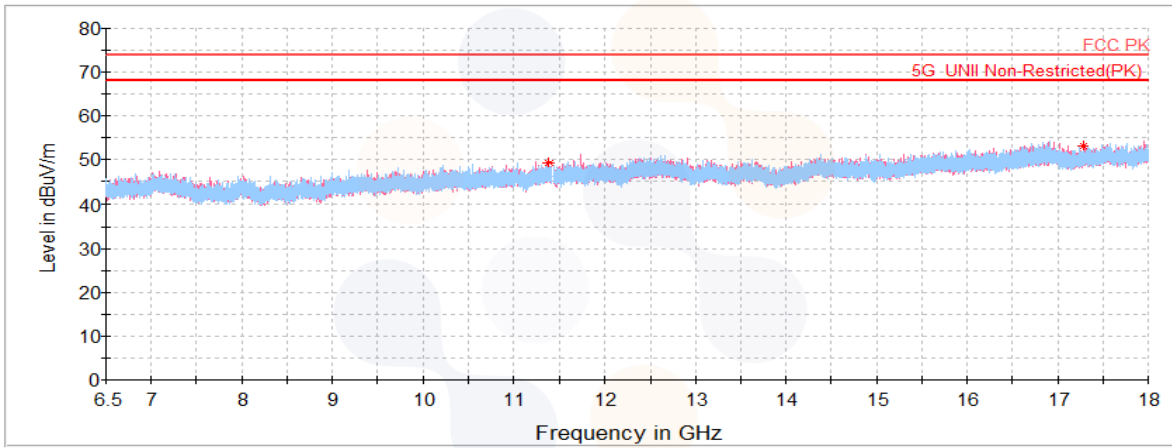

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (53) of (72)




Middle Channel (5 785 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
11 406.19 ¹⁾	V	60.78	38.02	-48.55	-	50.25	74.00	23.75
17 351.33	V	57.88	41.07	-45.38	-	53.57	68.20	14.63
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

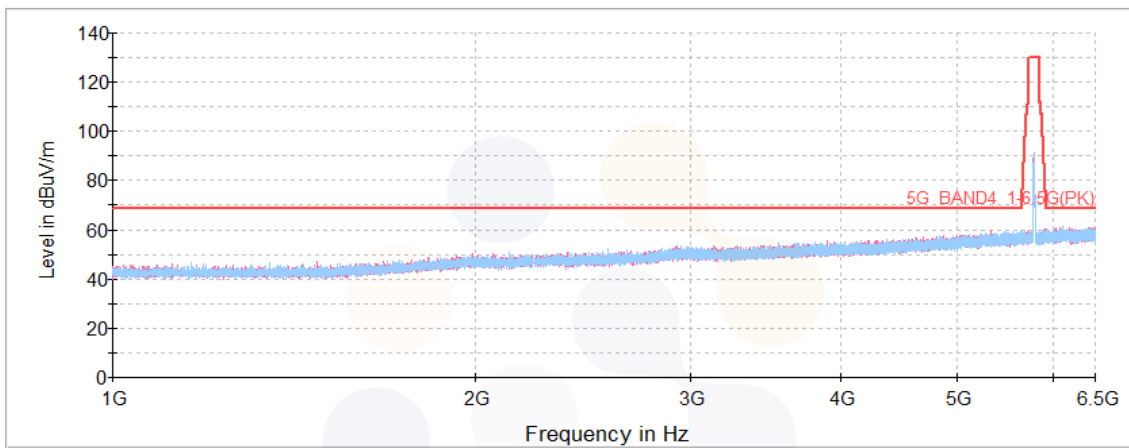

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

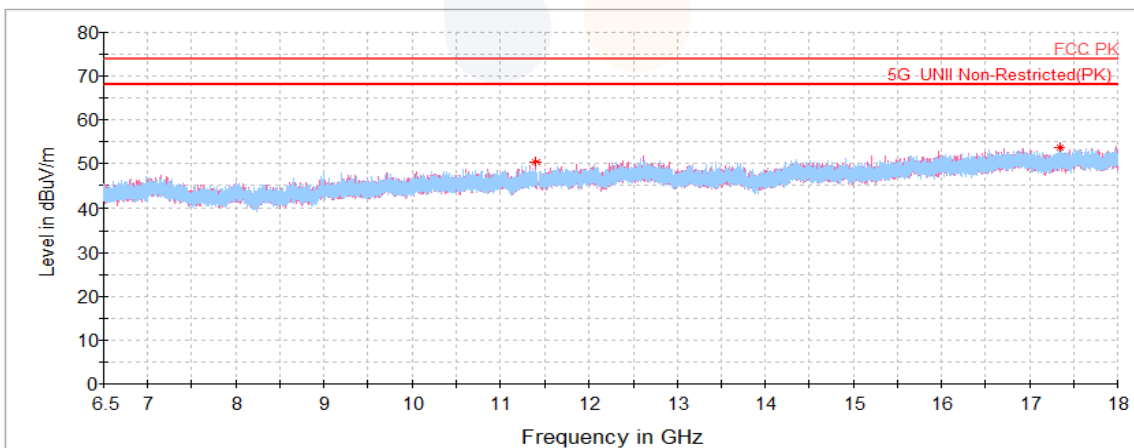

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (54) of (72)




Highest Channel (5 825 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
5 858.56	V	42.04	35.03	-23.62	-	53.45	109.80	56.35
11 581.56 ¹⁾	V	59.87	38.23	-48.49	-	49.61	74.00	24.39
17 413.14	V	57.31	40.96	-45.21	-	53.06	68.20	15.14
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

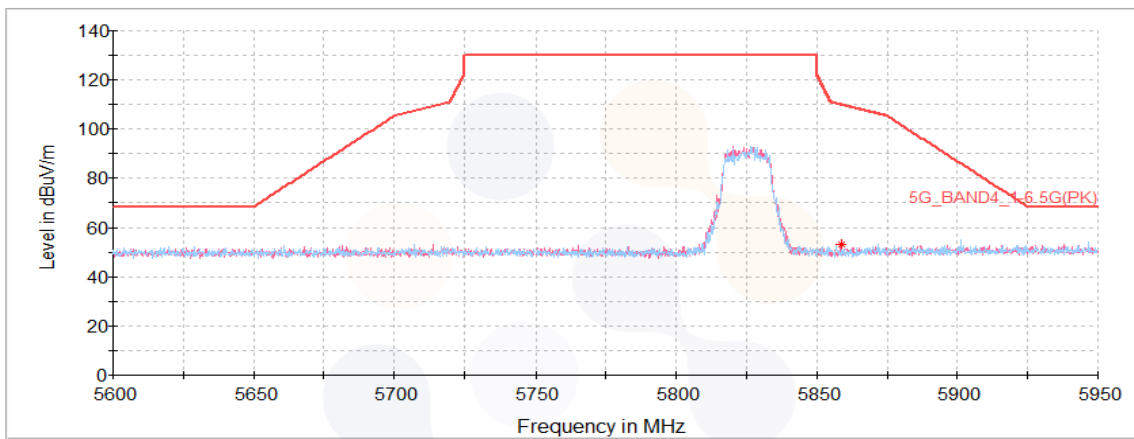

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

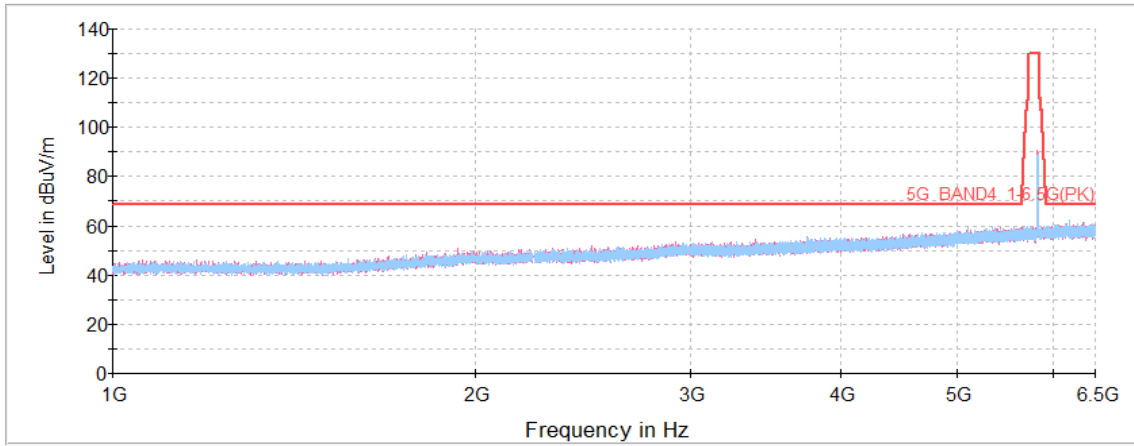

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

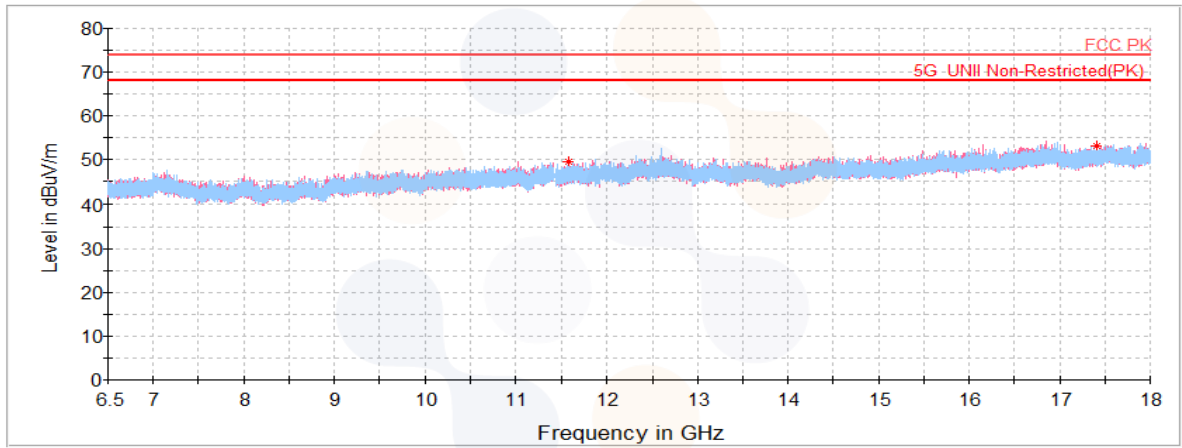

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (56) of (72)




802.11n HT20 UNII 3


Lowest Channel (5 745 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 714.88	V	41.68	34.86	-24.12	-	52.42	109.37	56.94
11 436.02 ¹⁾	H	59.46	38.05	-48.50	-	49.01	74.00	24.99
17 314.67	V	57.73	41.13	-45.48	-	53.38	68.20	14.82
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

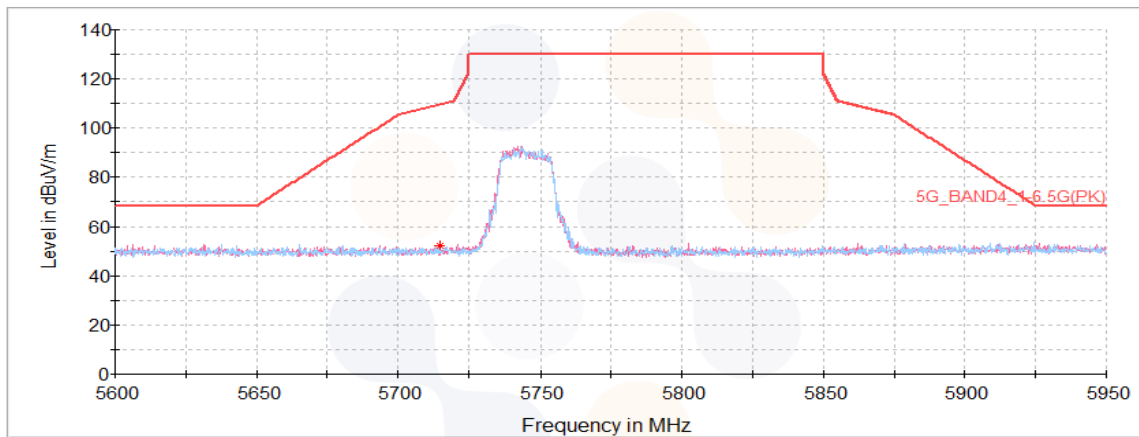

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

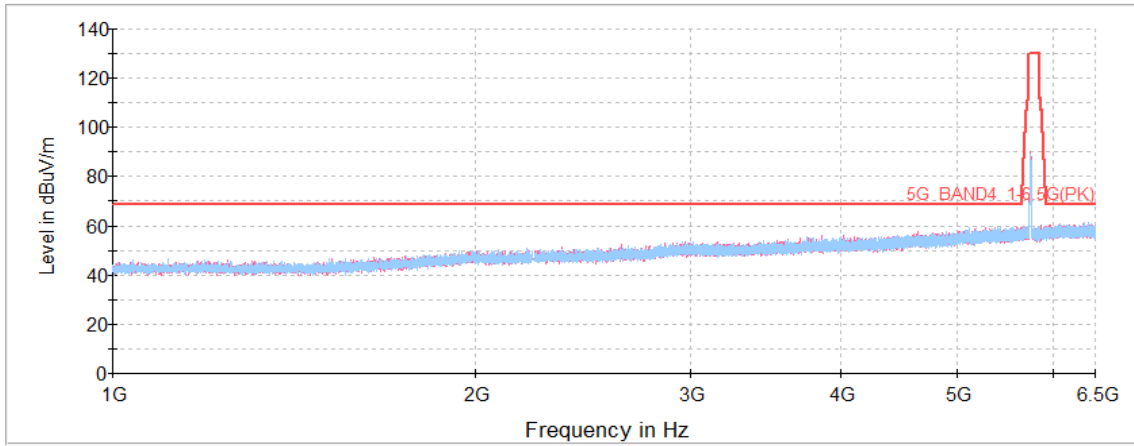

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

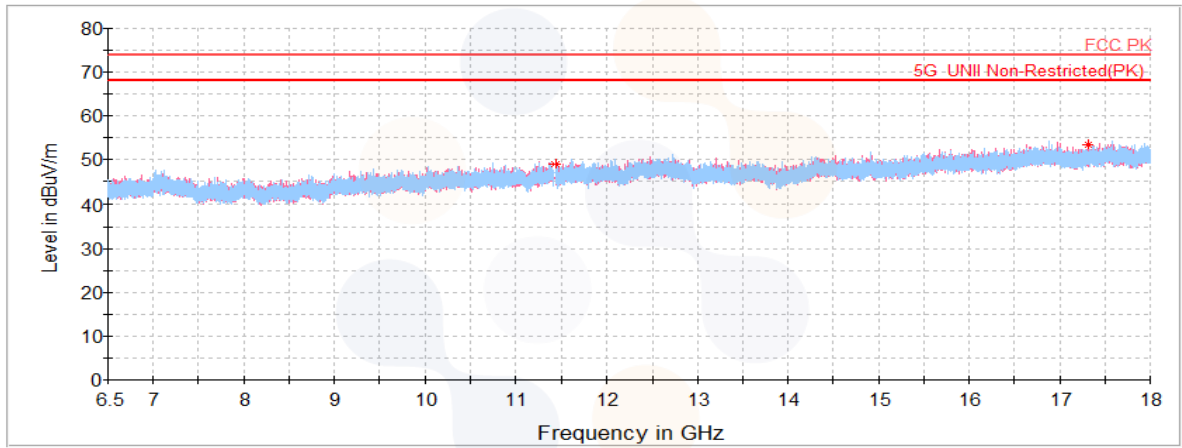

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (58) of (72)




Middle Channel (5 785 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
11 497.11 ¹⁾	V	59.51	38.10	-48.39	-	49.22	74.00	24.78
17 400.56	H	57.42	40.98	-45.24	-	53.16	68.20	15.04
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

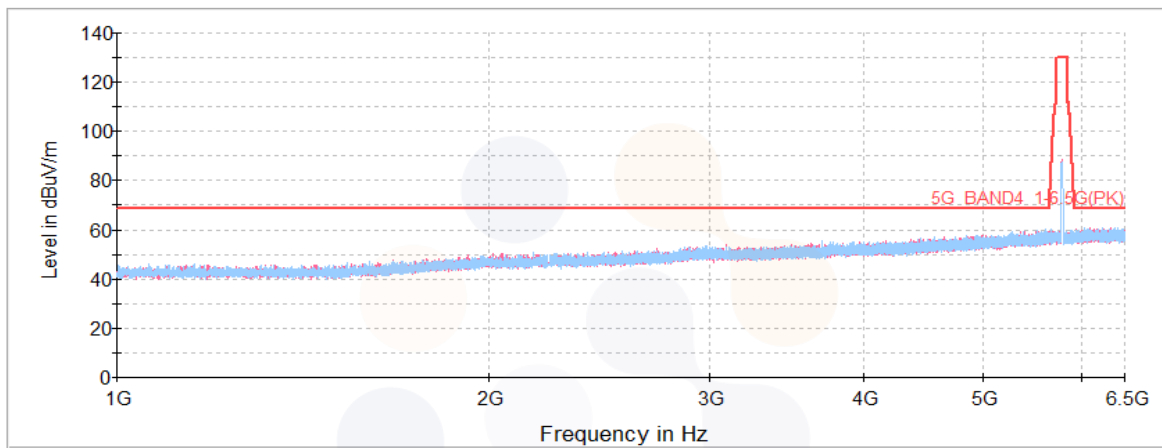

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

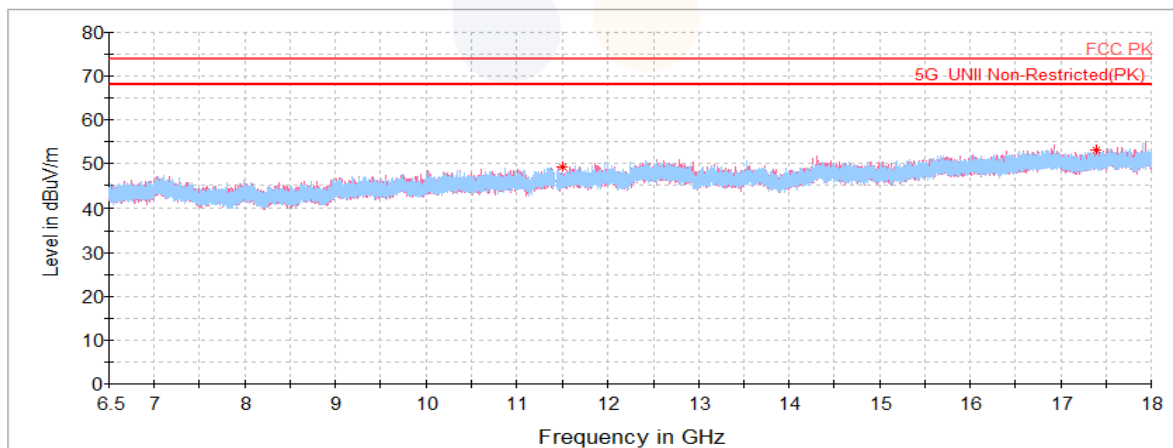

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (59) of (72)



Highest Channel (5 825 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 859.42	V	41.57	35.03	-23.62	-	52.98	109.56	56.58
11 631.88 ¹⁾	V	59.50	38.31	-48.55	-	49.26	74.00	24.74
17 456.27	V	57.26	40.88	-45.09	-	53.05	68.20	15.15
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

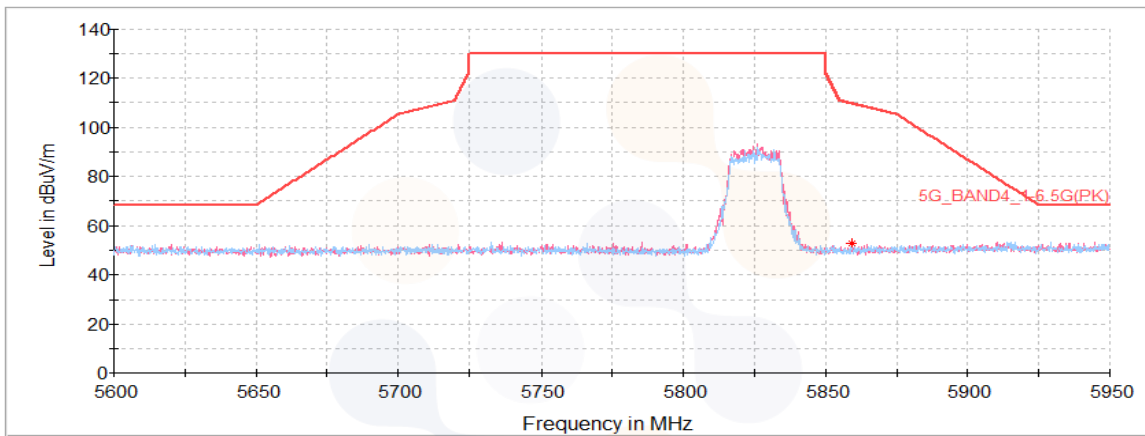


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (60) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

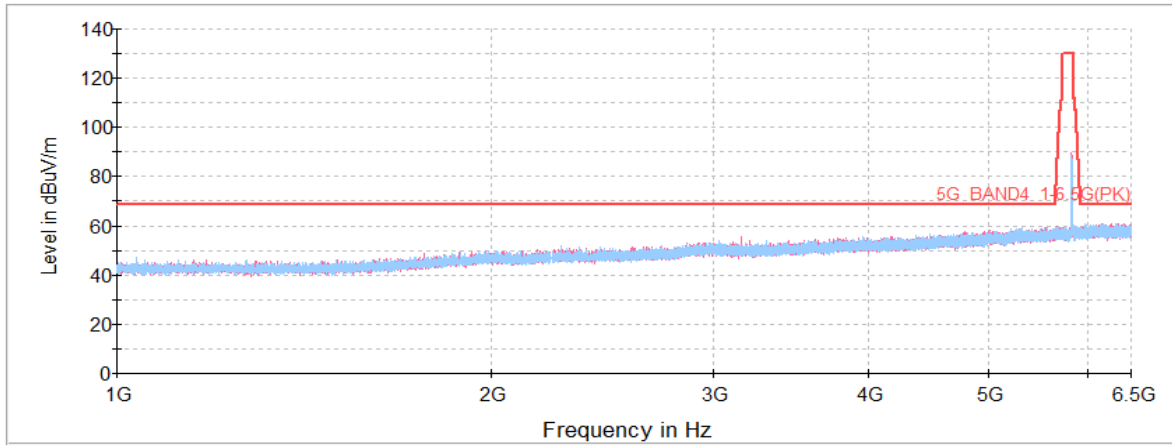

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

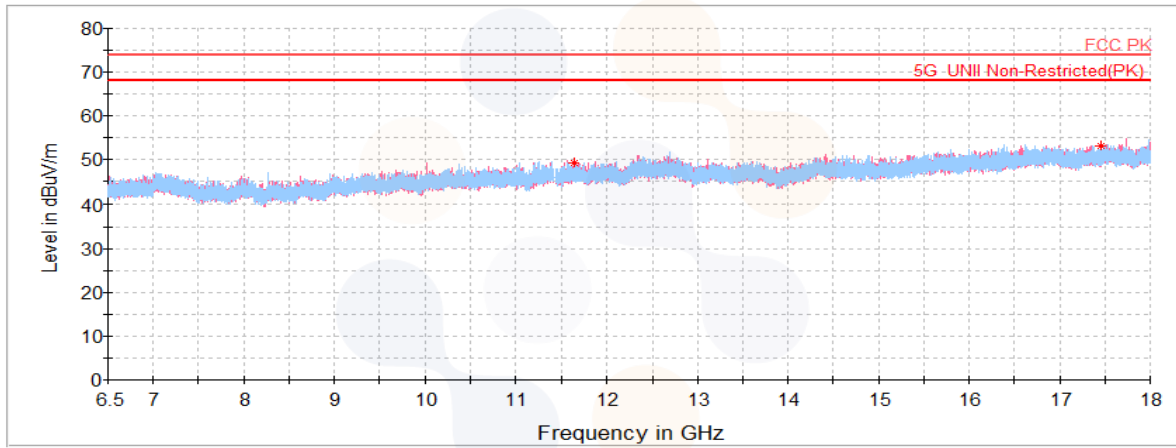

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (61) of (72)




802.11n HT40 UNII 3

Lowest Channel (5 755 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 713.33	H	44.23	34.86	-24.12	-	54.97	108.93	53.96
11 533.77 ¹⁾	V	59.17	38.15	-48.43	-	48.89	74.00	25.11
17 272.27	H	57.90	41.21	-45.59	-	53.52	68.20	14.68
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

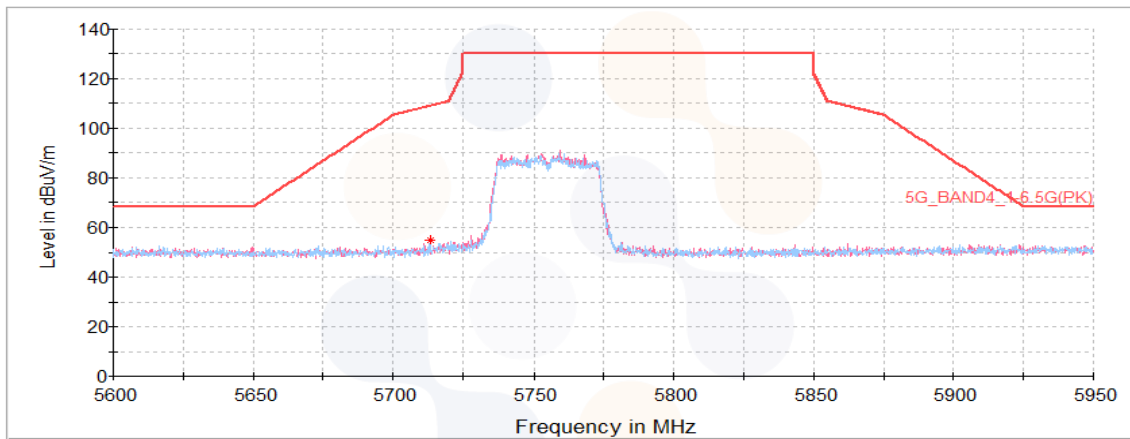


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (62) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

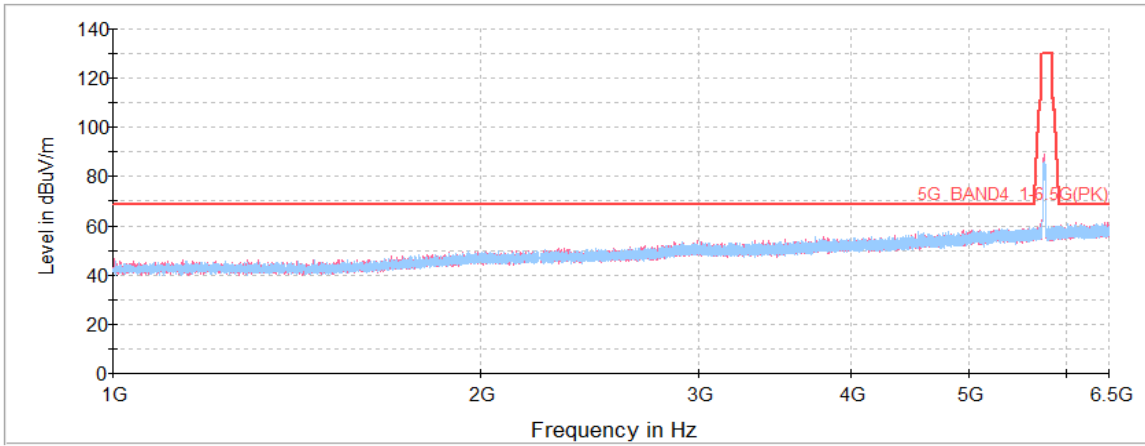

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

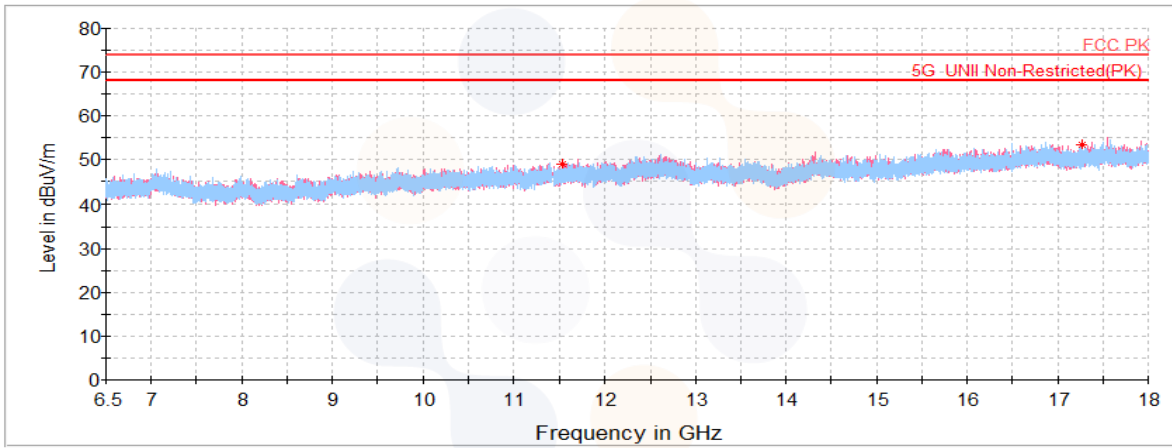

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (63) of (72)



Highest Channel (5 795 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
5 855.64	V	40.96	35.03	-23.64	-	52.35	110.62	58.27
11 527.66 ¹⁾	V	59.35	38.14	-48.42	-	49.07	74.00	24.93
17 384.03	V	58.55	41.01	-45.29	-	54.27	68.20	13.93
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

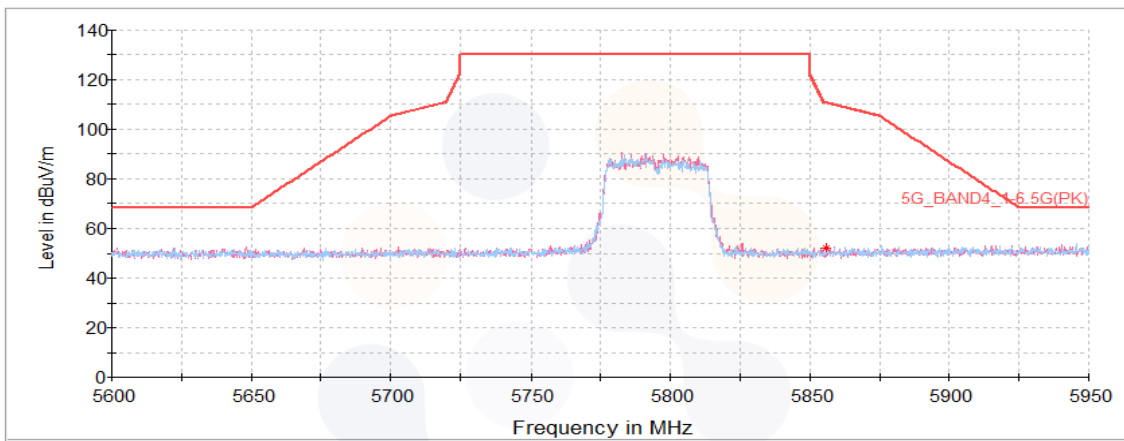


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (64) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

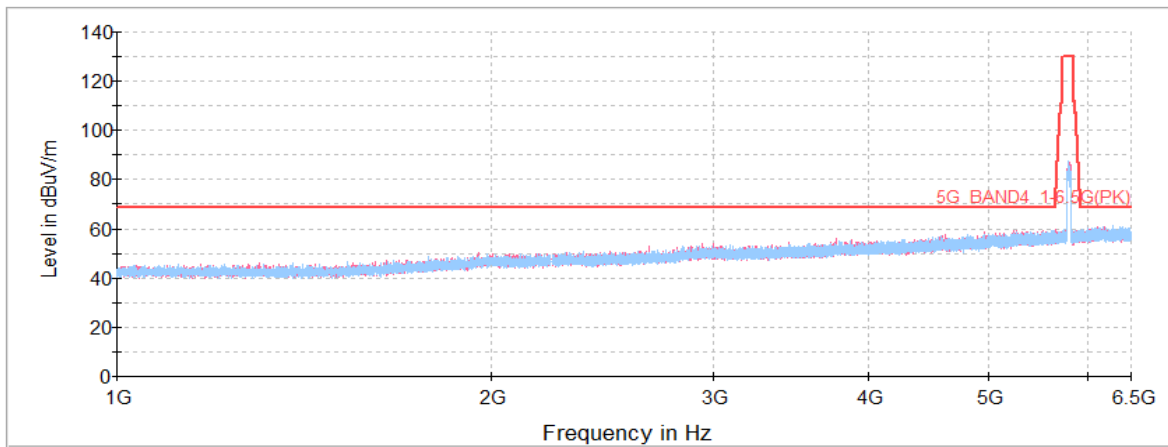

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

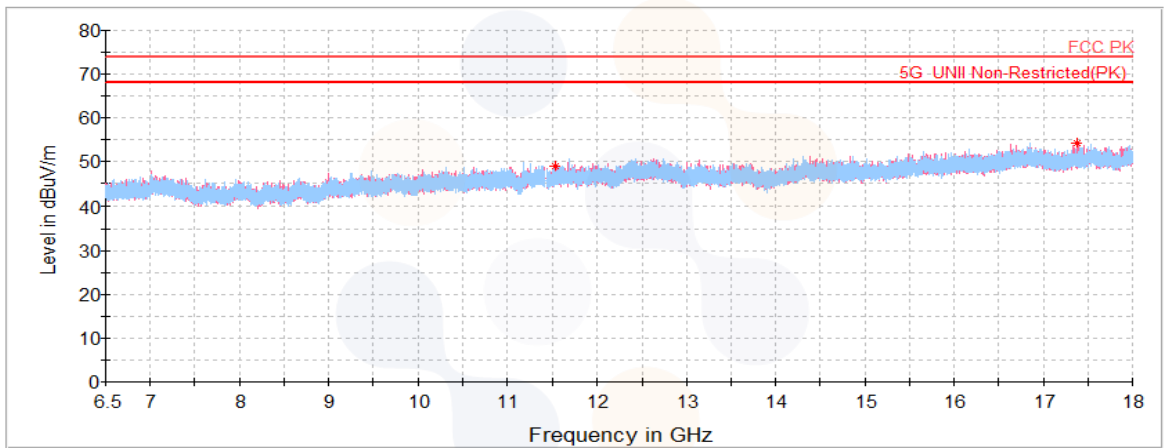

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (65) of (72)




802.11ac VHT80 UNII 3

Lowest Channel (5 775 MHz)

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB($\mu V/m$))	Limit (dB($\mu V/m$))	Margin (dB)
Peak data								
5 718.31	H	46.90	34.86	-24.11	-	57.65	110.33	52.68
5 874.72	H	42.04	35.05	-23.52	-	53.57	105.28	51.71
11 580.48 ¹⁾	V	59.30	38.23	-48.48	-	49.05	74.00	24.95
17 224.83	H	58.33	41.30	-45.72	-	53.91	68.20	14.29
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

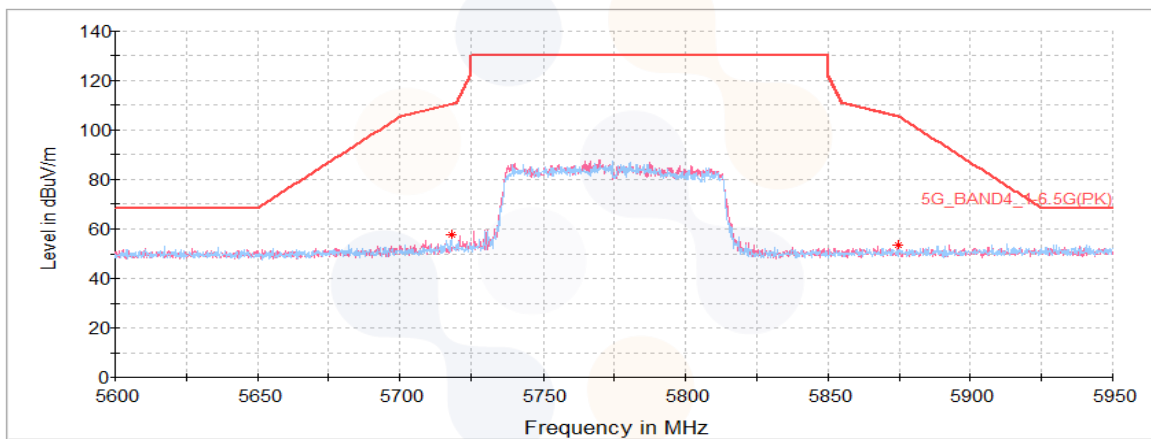


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (66) of (72)



Horizontal/Vertical for 1 GHz ~ 6.5 GHz

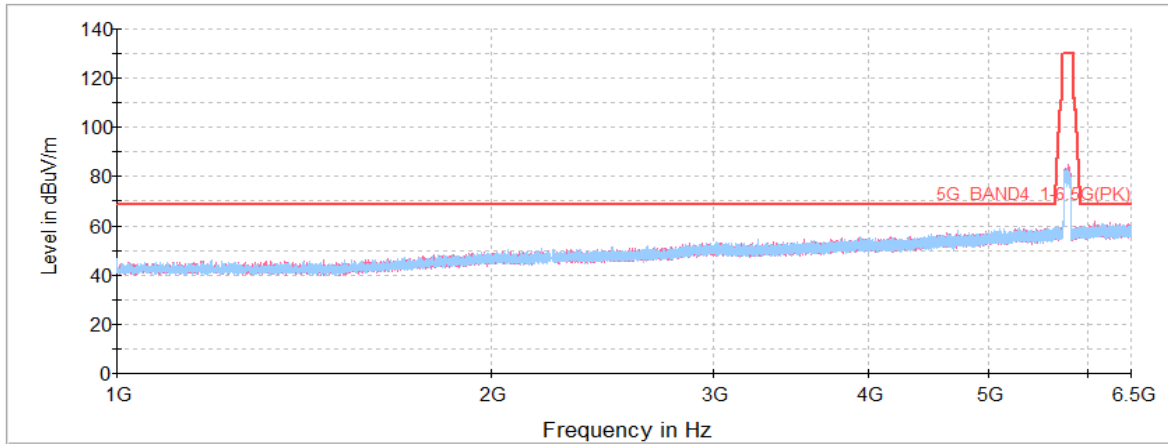

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

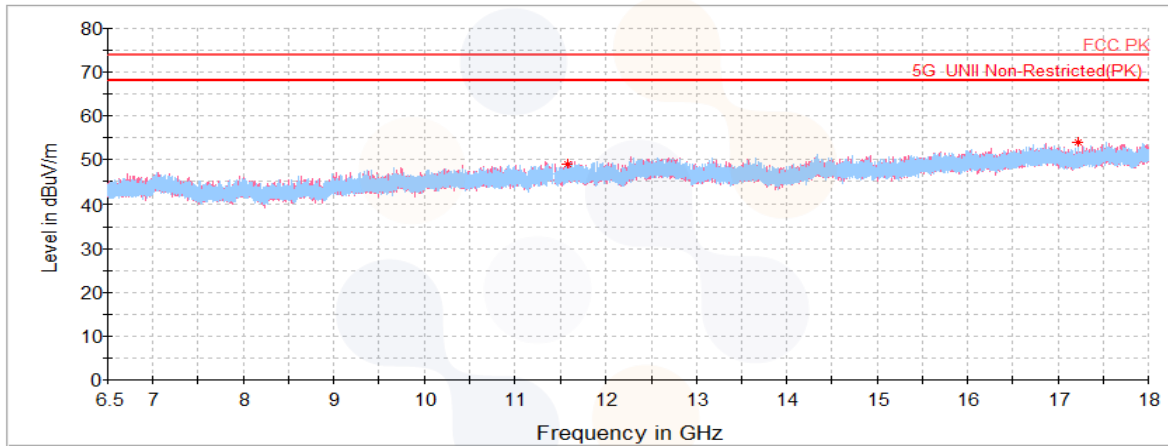

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (67) of (72)



Test results (Above 18 GHz) – Worst case: 802.11n HT40_UNII 3_5 795 MHz

Horizontal/Vertical for 18 GHz ~ 40 GHz

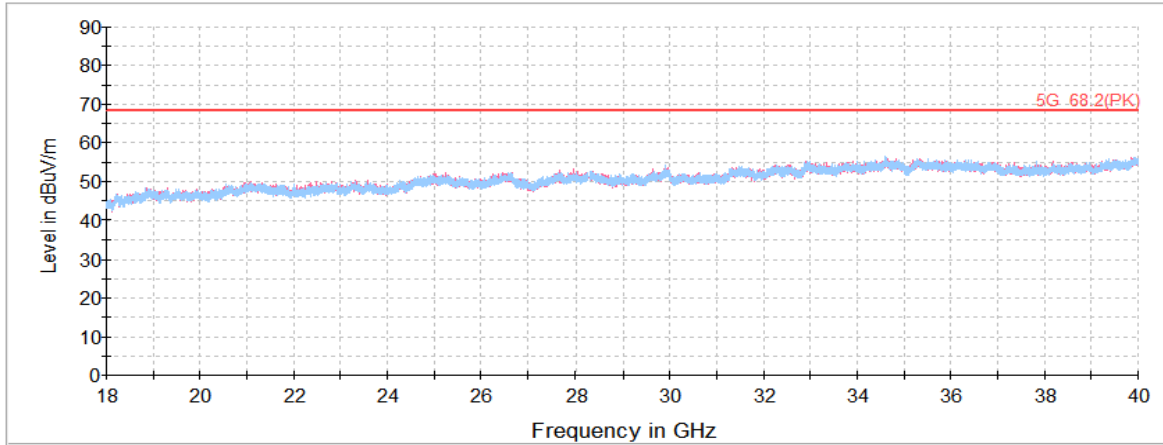

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (68) of (72)




Simultaneous condition


802.11ac VHT80 (5 210 MHz) + BT_EDR(3DH1)(2 480 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
3 612.83 ¹⁾	H	16.19	33.17	-4.70	-	44.66	74.00	29.34
4 945.47 ¹⁾	H	13.23	33.61	-4.01	-	42.83	74.00	31.17
7 440.84 ¹⁾	H	61.60	35.32	-52.16	-	44.76	74.00	29.24
10 431.20	V	59.78	37.26	-48.96	-	48.08	68.20	20.12
15 625.25 ¹⁾	H	56.54	40.60	-46.27	-	50.87	74.00	23.13
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 3.5 GHz

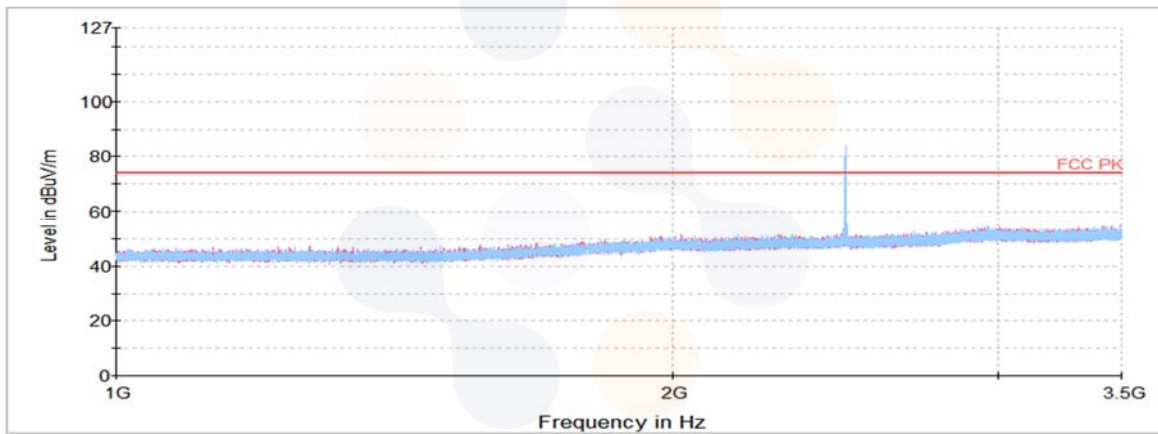

Horizontal/Vertical for 3.5 GHz ~ 5 GHz

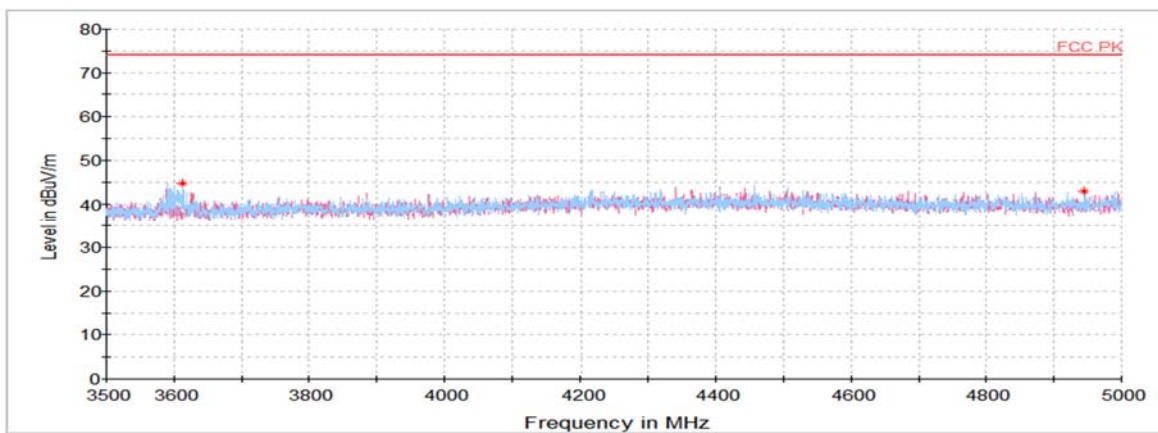


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0131-A
Page (69) of (72)




Horizontal/Vertical for 5 GHz ~ 6.5 GHz

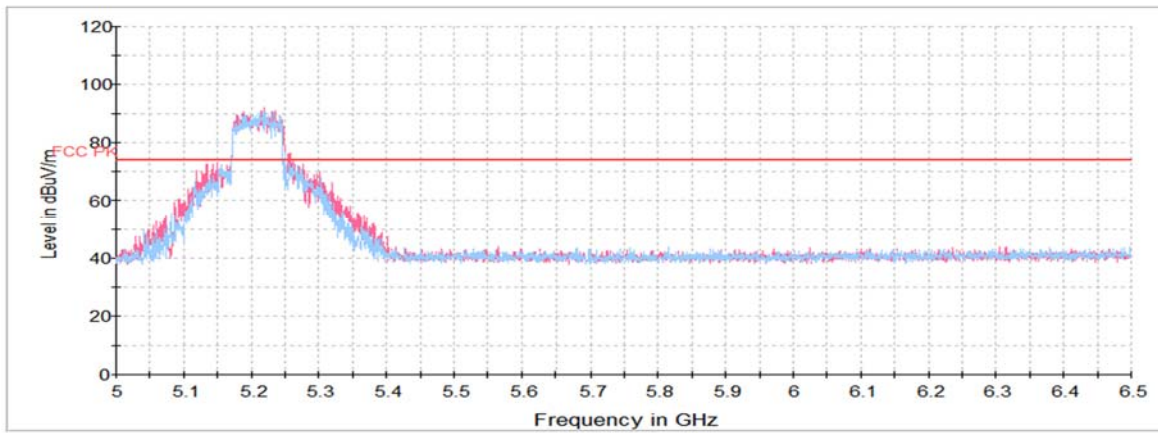

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

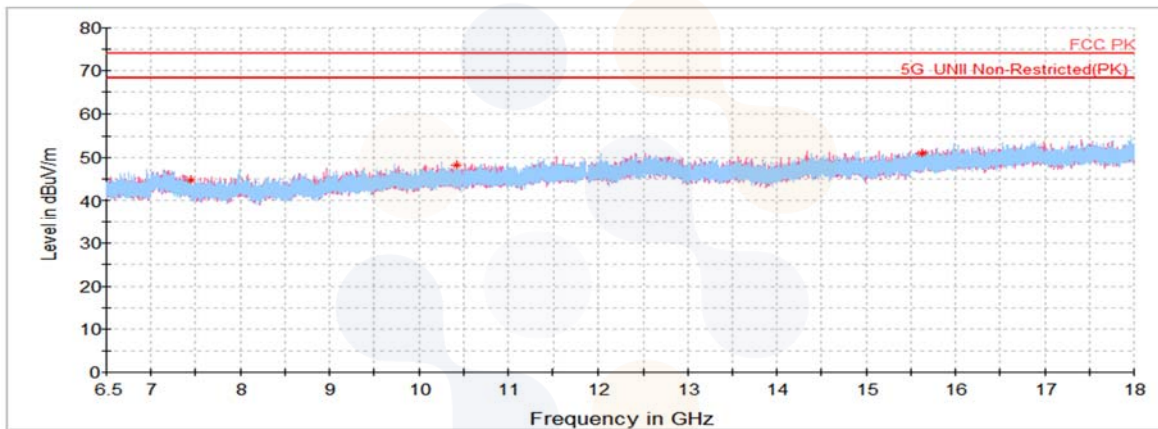


Horizontal/Vertical for 18 GHz ~ 40 GHz

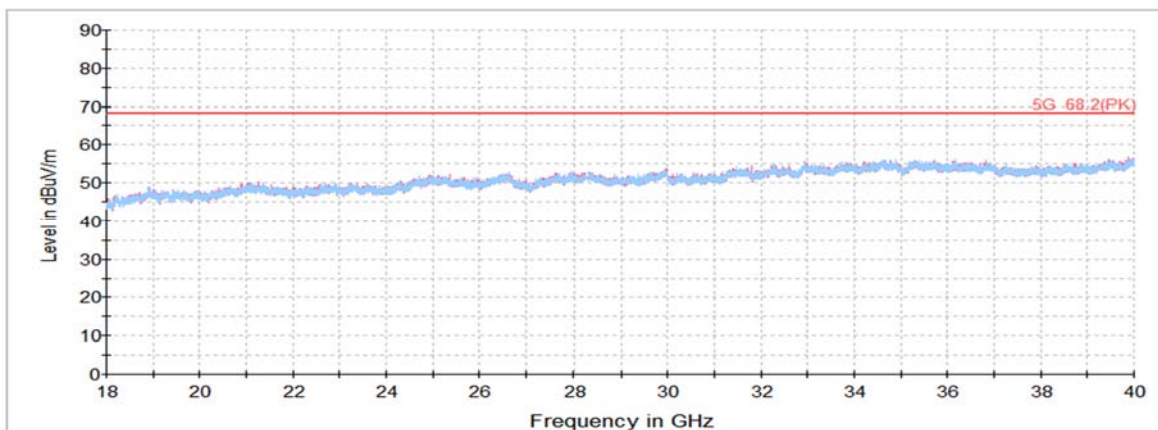

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.

7.6. AC Conducted emission

Test setup

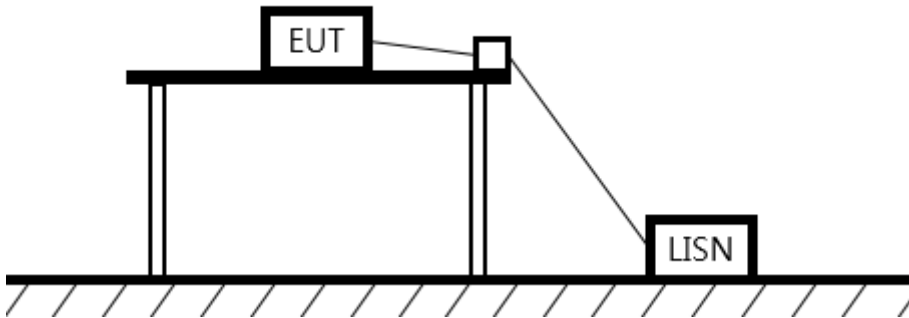

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0131-A
Page (71) of (72)



Test results

Worst case: 802.11a_UNII 1_ 5 240 MHz

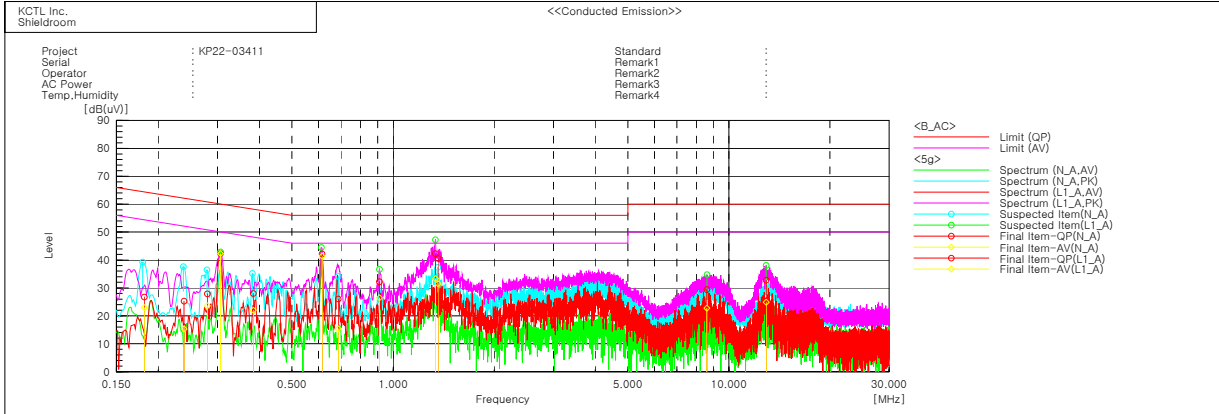

Final Result

--- N_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.18151	16.6	12.8	10.1	26.7	22.9	64.4	54.4	37.7	31.5
2	0.23848	15.6	5.6	9.7	25.3	15.3	62.1	52.1	36.8	36.8
3	0.28001	18.2	13.9	9.7	27.9	23.6	60.8	50.8	32.9	27.2
4	0.38388	18.2	12.3	9.8	28.0	22.1	58.2	48.2	30.2	26.1
5	0.68691	16.1	5.4	9.9	26.0	15.3	56.0	46.0	30.0	30.7
6	1.36216	30.8	21.7	9.8	40.6	31.5	56.0	46.0	15.4	14.5

--- L1_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.3063	32.6	32.6	9.7	42.3	42.3	60.1	50.1	17.8	7.8
2	0.61449	32.3	31.5	9.9	42.2	41.4	56.0	46.0	13.8	4.6
3	0.91129	22.4	16.7	9.8	32.2	26.5	56.0	46.0	23.8	19.5
4	1.3375	32.4	23.5	9.8	42.2	33.3	56.0	46.0	13.8	12.7
5	8.59894	19.4	12.7	10.0	29.4	22.7	60.0	50.0	30.6	27.3
6	12.91597	22.4	14.5	10.4	32.8	24.9	60.0	50.0	27.2	25.1

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV40	100989	22.12.21
EMI TEST RECEIVER	R&S	ESC17	100732	23.01.19
Bi-Log Antenna	TESEQ	CBL 6112D	55545	24.04.27
Amplifier	SONOMA INSTRUMENT	310N	284608	22.08.19
ATTENUATOR	KEYSIGHT	8491B-6dB	MY39271060	24.04.27
ISOLATION TRANSFORMER	ONETECH CO., LTD	OT-IT500VA	OTR1-16026	23.03.28
Horn antenna	ETS.lindgren	3117	155787	22.10.05
Horn antenna	ETS.lindgren	3116	00086635	23.05.04
Attenuator	API Inmet	40AH2W-10	12	23.05.03
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	23.07.11*
AMPLIFIER	LTC Microwave	LLA01185522Q-B	141	23.06.23
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000997	23.07.12*
LOOP Antenna	R&S	HFH2-Z2	100355	22.08.21
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	CO3000	1175/45850319/P	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	CO3000	1175/45850319/P	-
Highpass Filter	WT	WT-A1699-HS	WT160411002	23.05.03
TWO-LINE V - NETWORK	R&S	ENV216	101358	22.09.29
EMI TEST RECEIVER	R&S	ESC13	100001	22.08.19
Signal Generator	R&S	SMB100A	176206	23.01.19
Spectrum Analyzer	R&S	FSV30	100806	22.09.17
DC Power Supply	AGILENT	E3632A	MY40007371	23.05.02
Attenuator	API Inmet	40AH2W-10	11	23.05.03
Signal Generator	R&S	SMB100A	176206	23.01.19
Vector Signal Generator	R&S	SMBV100A	257566	23.07.04*
Attenuator	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	0004	23.05.02

*Tests related to this equipment were progressed after the calibration was completed.

End of test report