


7.4. 6 dB Bandwidth

Test setup



Limit

According to §15.407(e), Within the 5.725-585 GHz band, the minimum 6 dB bandwidth if U-NII devices shall be at least 500kHz

Test procedure

ANSI C63.10-2013 – Section 6.9.2

KDB 789033 D02 v02r01 - Section C.2

Test settings

◆ 6dB Bandwidth (Minimum Emission Bandwidth for the band 5.725–5.85 GHz)

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test results


Test mode	Band	Frequency (MHz)	Measured Bandwidth (MHz)	Minimum Bandwidth (MHz)
11a	UNII-3	5 745	16.43	0.5
		5 785	16.38	
		5 825	16.43	
11n HT20		5 745	16.78	
		5 785	17.38	
		5 825	17.38	
11n HT40		5 755	36.16	
		5 795	36.16	
11ac VHT80		5 775	75.76	




UNII-3 / 802.11a / 5 745 MHz

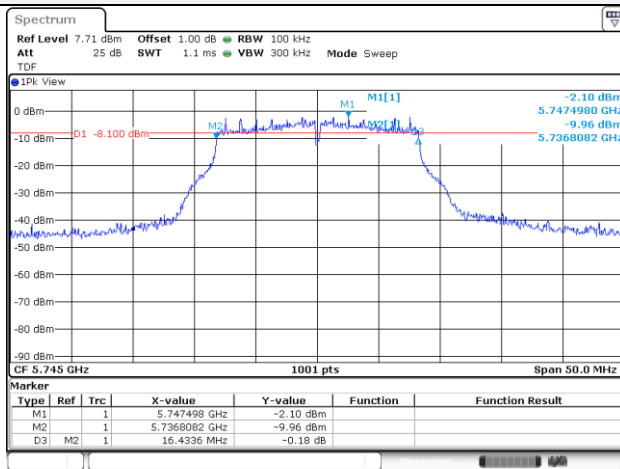


UNII-3 / 802.11n HT20 / 5 745 MHz

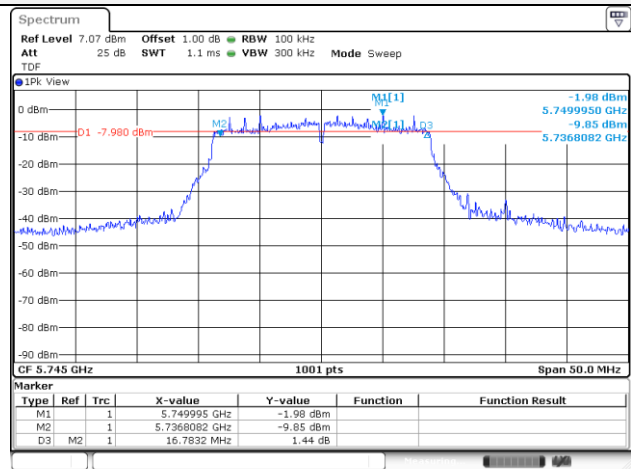


UNII-3 / 802.11a / 5 785 MHz

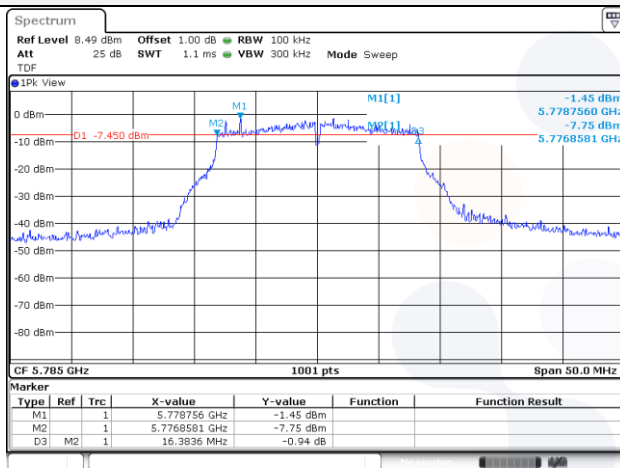


UNII-3 / 802.11n HT20 / 5 785 MHz

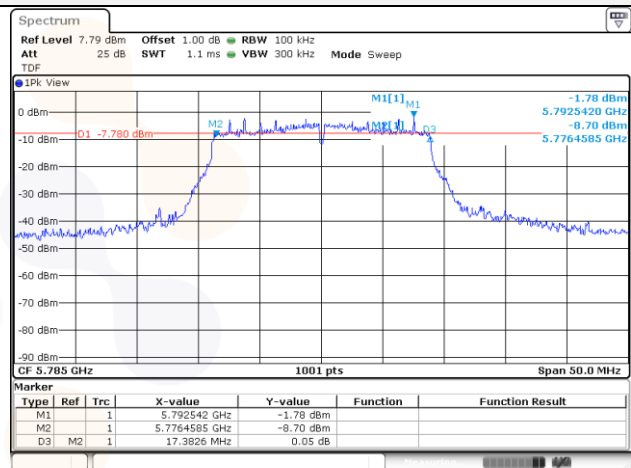


UNII-3 / 802.11a / 5 825 MHz

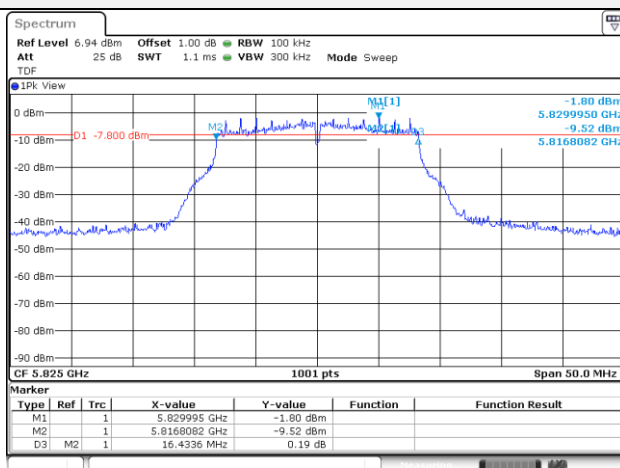


UNII-3 / 802.11n HT20 / 5 825 MHz

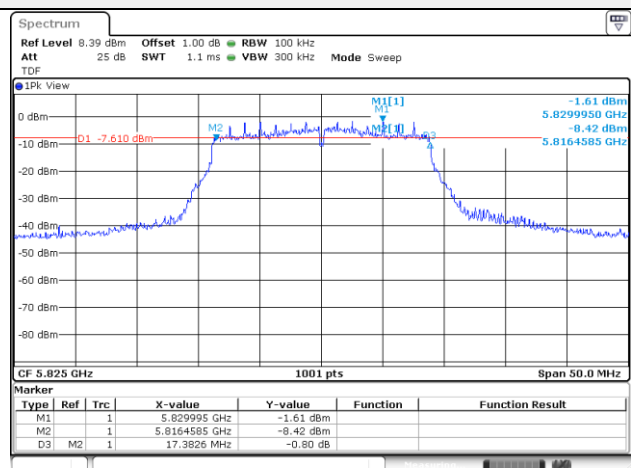


UNII-3 / 802.11n HT40 / 5 755 MHz

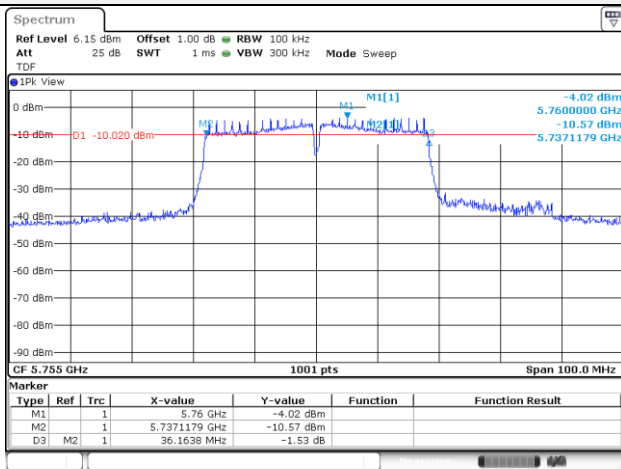

UNII-3 / 802.11ac VHT80 / 5 775 MHz

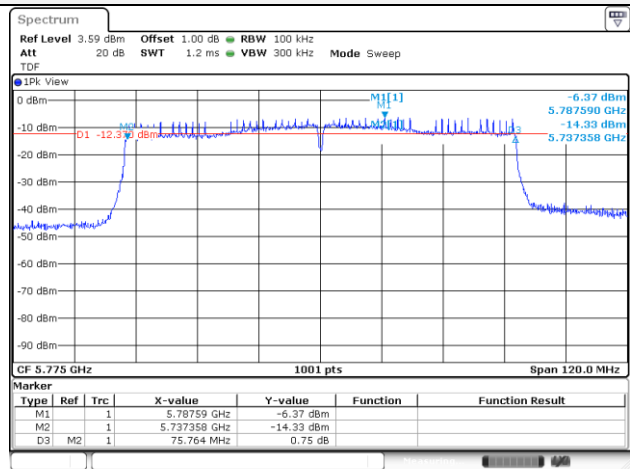

UNII-3 / 802.11n HT40 / 5 795 MHz

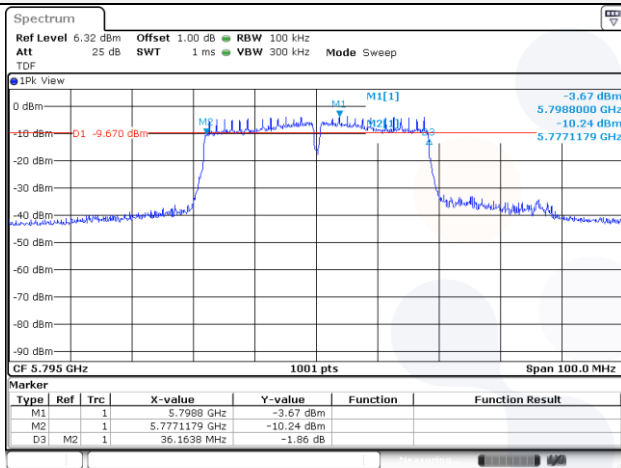


Blank


7.5. Spurious Emission, Band Edge and Restricted bands

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

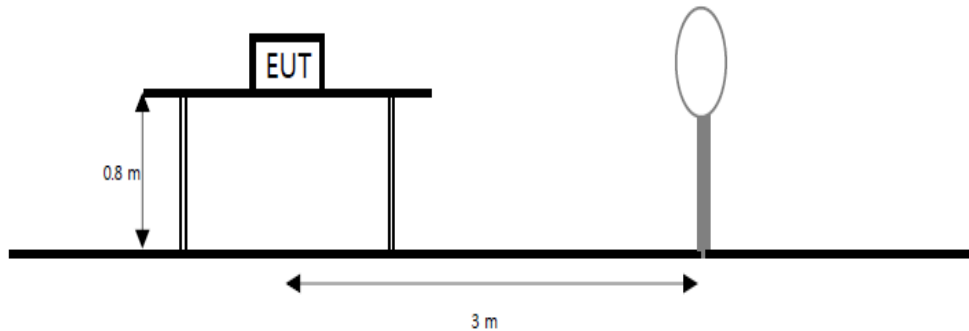

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

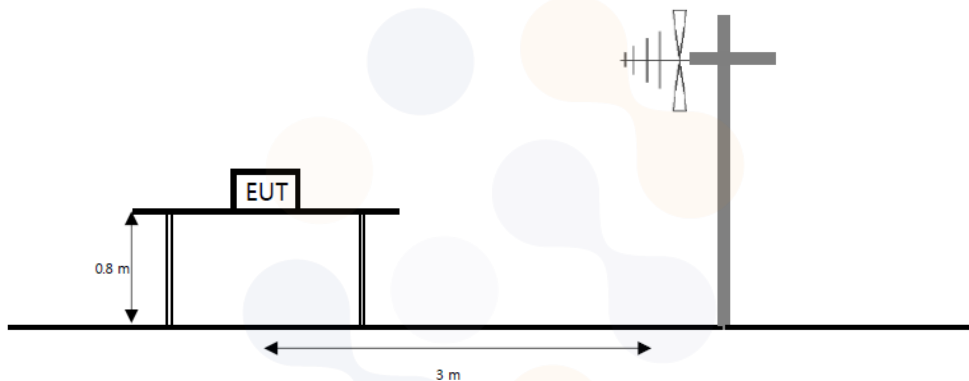

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

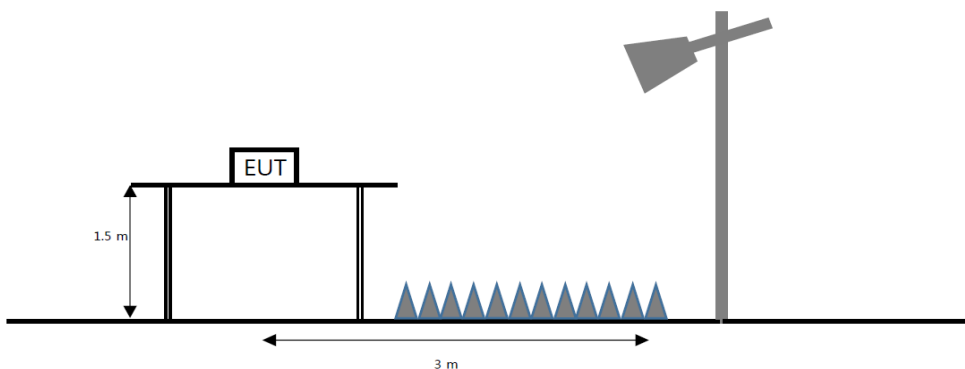

Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR22-SRF0198-C Page (33) of (77)	
---	---	---

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Test procedure

ANSI C63.10-2013 Section 12.7.5, 12.7.6, 12.7.7.2
 KDB 789033 D02 V02r01 – Section G

Test settings

Peak field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq$ (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq$ (3 $\times$ RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW $\geq$ [3 $\times$ RBW].
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.


6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ means restricted band.
6. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3m
7. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."
8. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.


Test results (Below 30 MHz) – Worst case: 802.11a_UNII 1_5 180 MHz

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

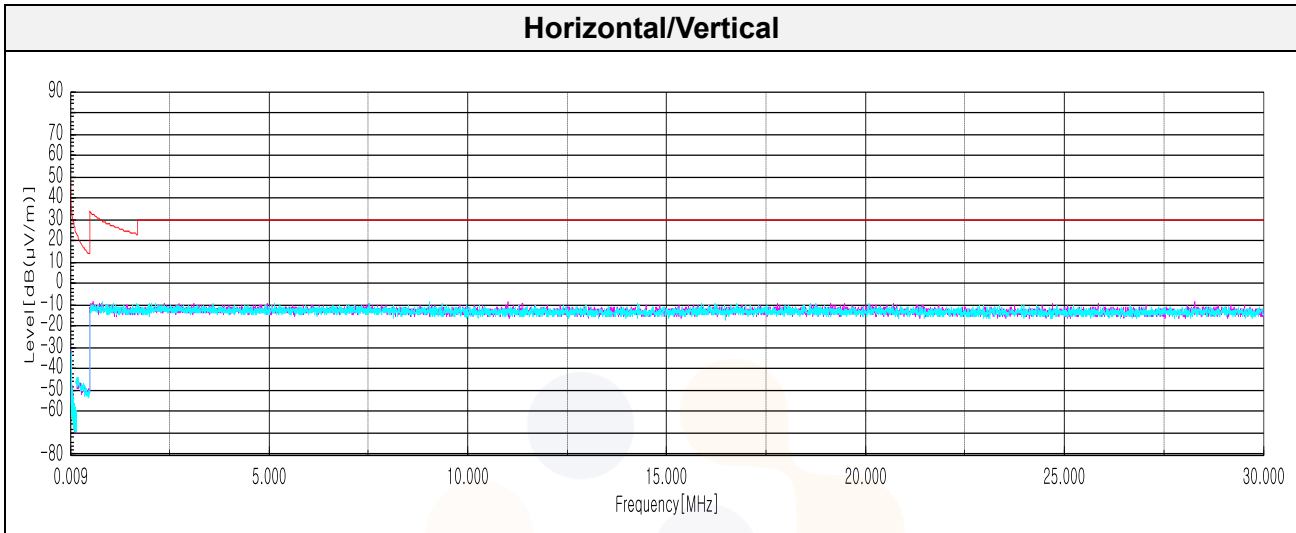

Test results (Below 1 000 MHz) – Worst case: 802.11a_UNII 1_ 5 180 MHz

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Quasi peak data								
39.58	V	25.90	19.49	-29.52	-	15.87	40.00	24.13
65.77	H	26.20	12.12	-28.88	-	9.44	40.00	30.56
69.41	H	24.80	12.24	-28.68	-	8.36	40.00	31.64
115.36 ¹⁾	H	23.10	17.54	-27.73	-	12.91	43.50	30.59
193.32	V	21.80	15.03	-26.31	-	10.52	43.50	32.98
450.01	H	35.30	22.70	-23.37	-	34.63	46.00	11.37

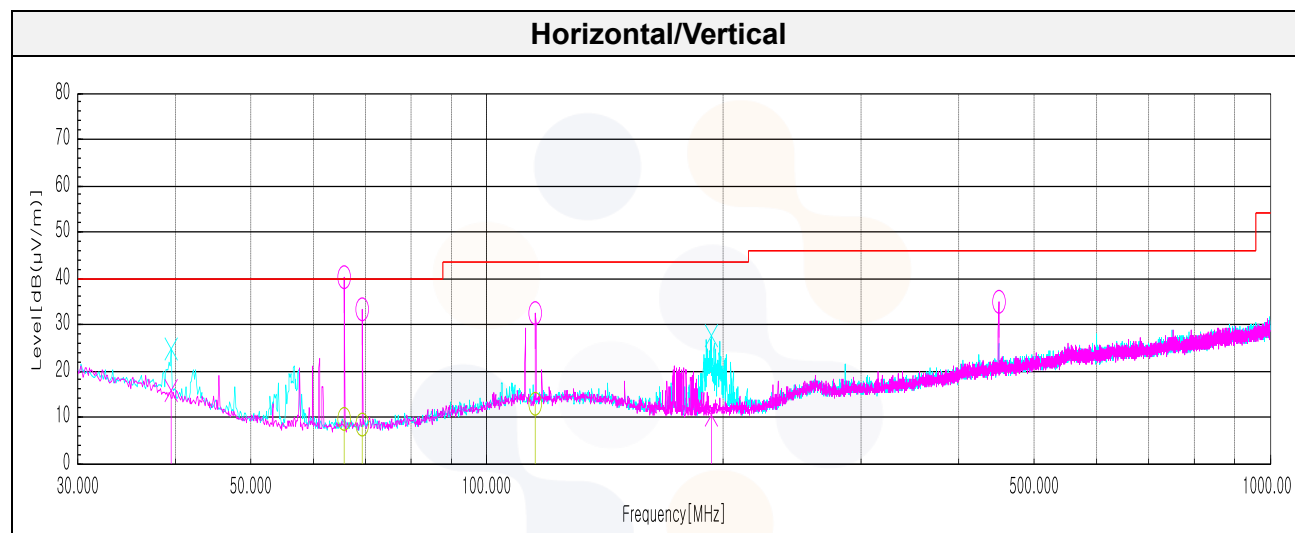


Test results (Above 1 000 MHz)

802.11a UNII 1

Lowest Channel (5 180 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.36 ¹⁾	H	73.52	28.03	-51.96	-	49.59	74.00	24.41
5 063.28 ¹⁾	V	41.82	33.78	-23.92	-	51.68	74.00	22.32
10 215.22	V	58.97	36.97	-48.04	-	47.90	68.20	20.30
15 376.20 ¹⁾	V	57.25	40.13	-47.01	-	50.37	74.00	23.63
Average Data								
5 063.28 ¹⁾	V	32.07	33.78	-23.92	0.30	42.23	54.00	11.77

Average data

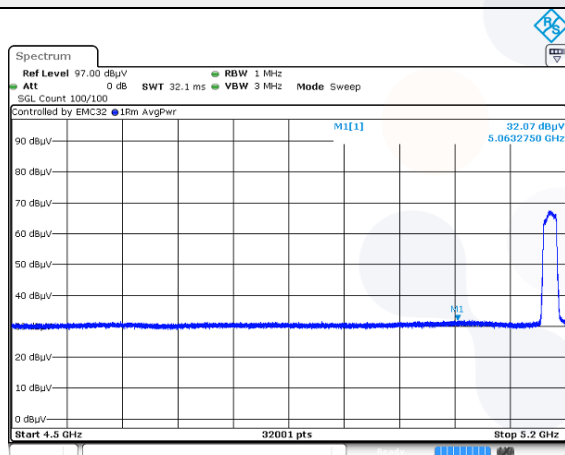


Blank


Horizontal/Vertical for Band-edge

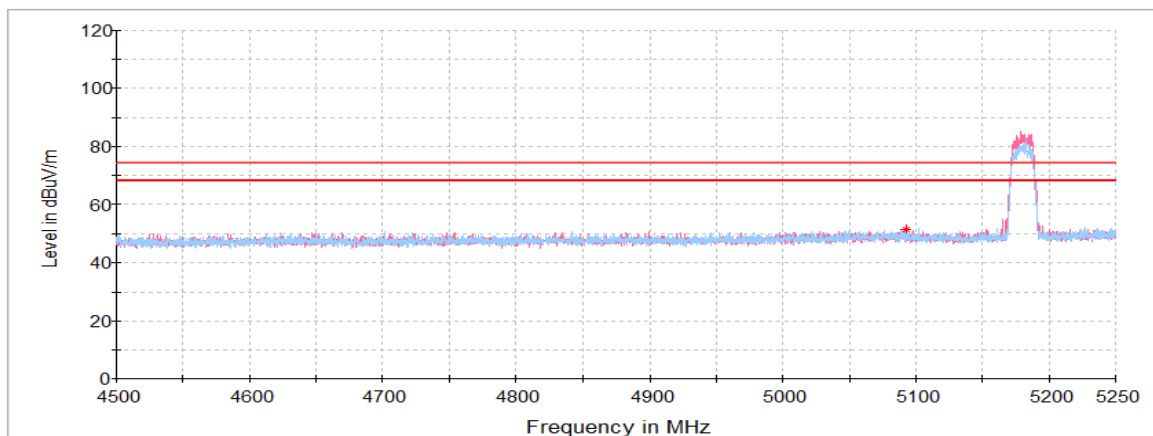

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

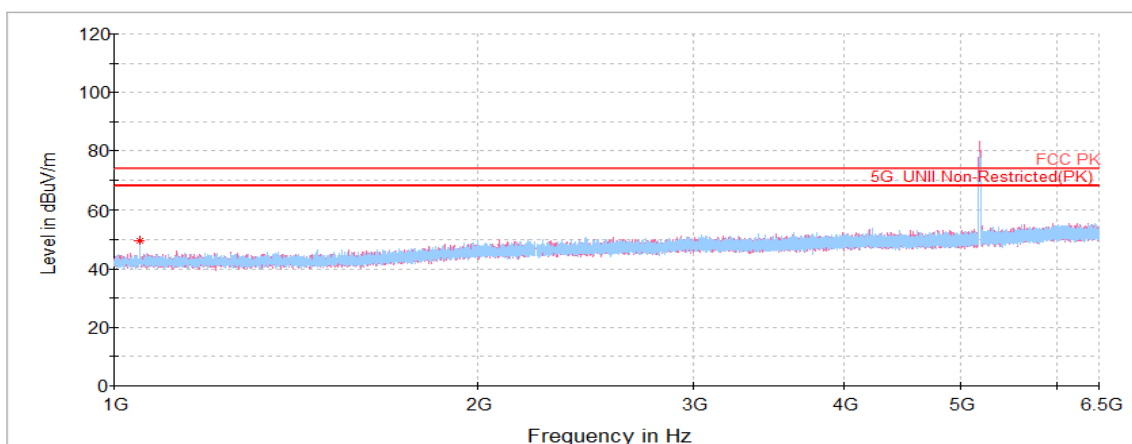


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

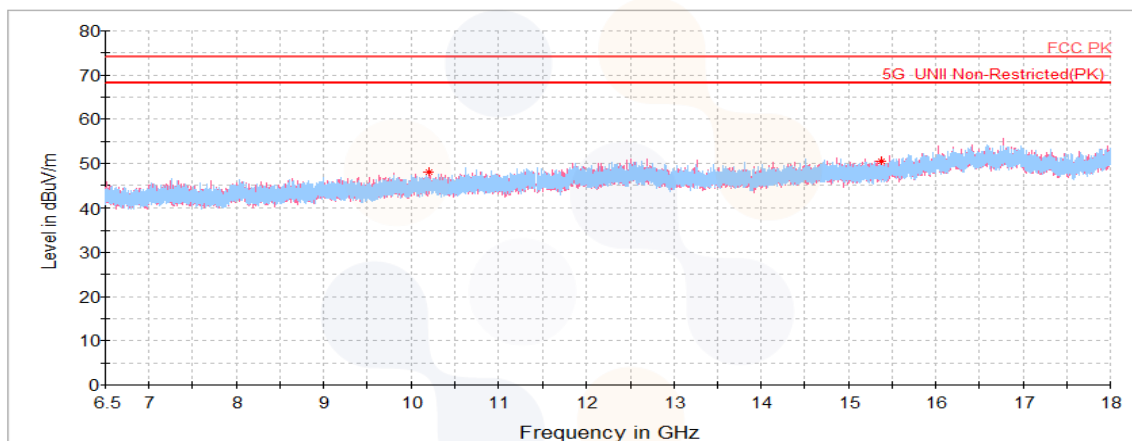


Middle Channel (5 200 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.19 ¹⁾	H	72.73	28.03	-51.96	-	48.80	74.00	25.20
10 485.83	V	57.75	37.19	-47.87	-	47.07	68.20	21.13
15 609.08 ¹⁾	V	57.19	40.39	-46.76	-	50.82	74.00	23.18
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

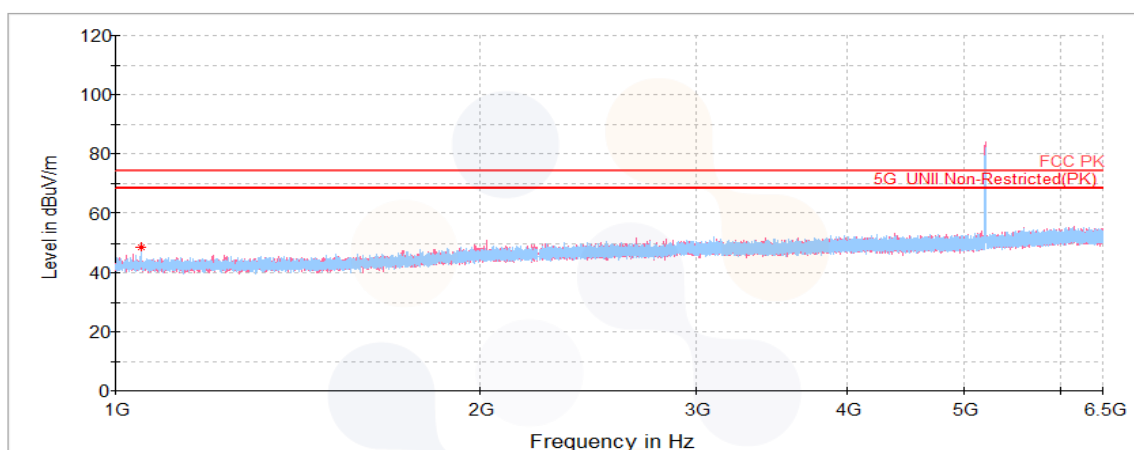


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

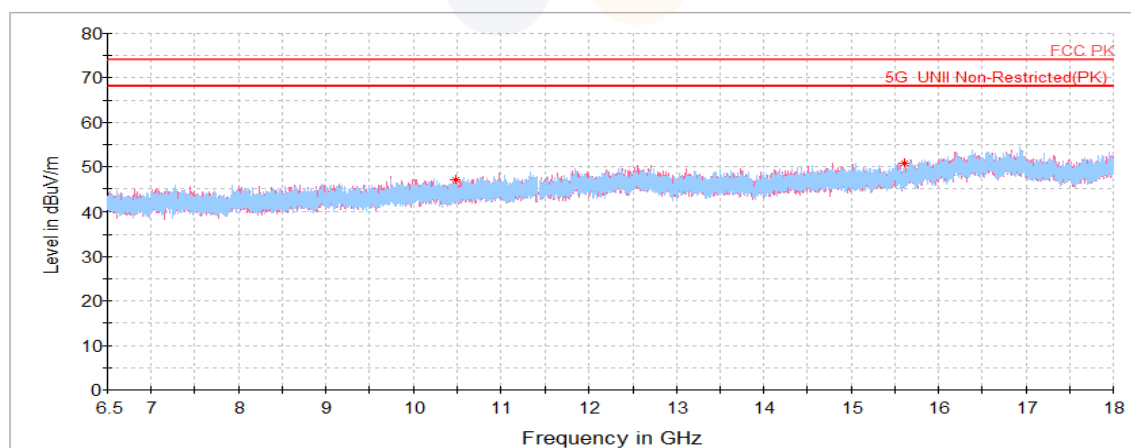


Highest Channel (5 240 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.84 ¹⁾	H	72.00	28.03	-51.96	-	48.07	74.00	25.93
10 552.67	H	57.94	37.23	-47.84	-	47.33	68.20	20.87
15 707.19 ¹⁾	V	56.86	40.47	-46.67	-	50.66	74.00	23.34
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

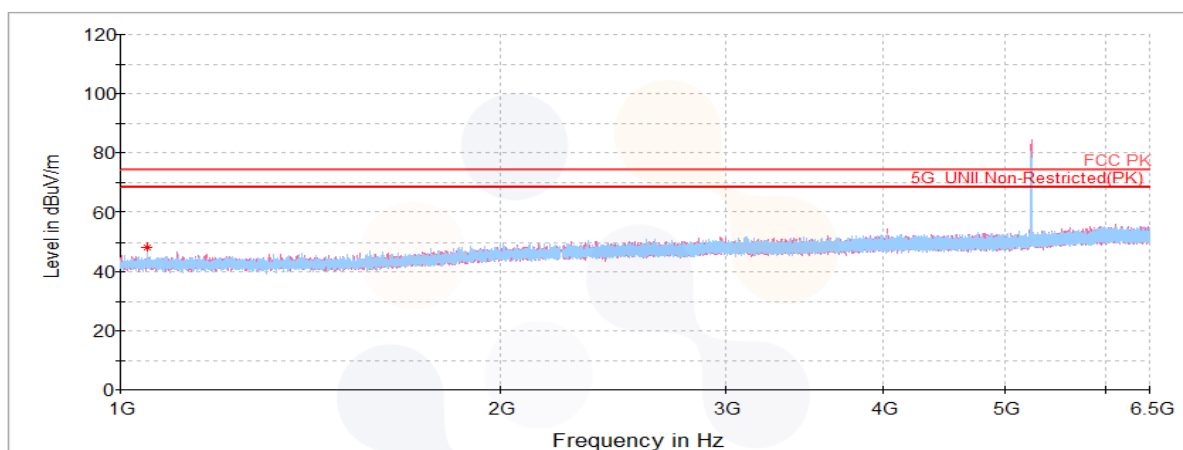


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

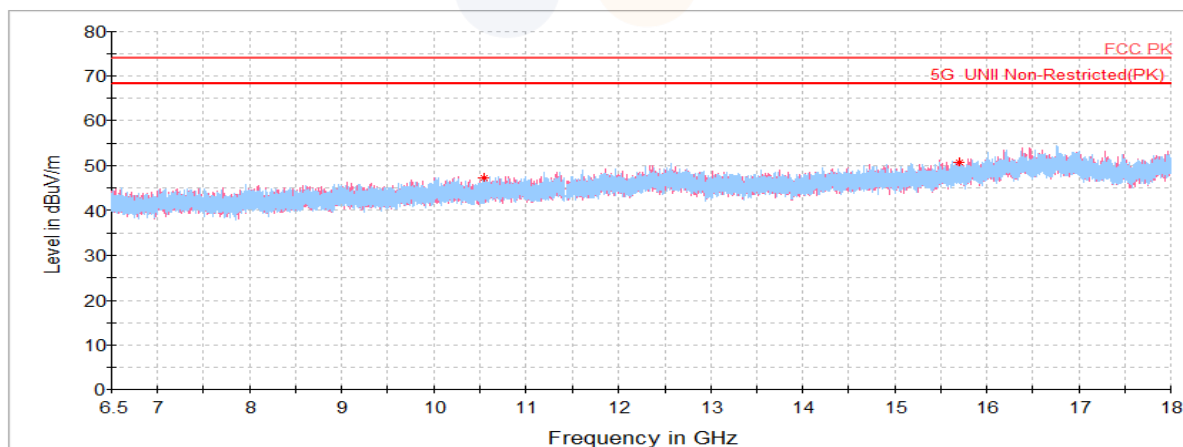


802.11n HT20 UNII 1

Lowest Channel (5 180 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.50 ¹⁾	H	73.31	28.03	-51.96	-	49.38	74.00	24.62
1 382.42 ¹⁾	H	70.42	28.23	-51.37	-	47.28	74.00	26.72
5 064.26 ¹⁾	V	41.40	33.78	-23.92	-	51.26	74.00	22.74
10 217.38	H	57.75	36.97	-48.04	-	46.68	68.20	21.52
15 639.63 ¹⁾	V	56.64	40.41	-46.73	-	50.32	74.00	23.68
Average Data								
5 064.26 ¹⁾	V	32.00	33.78	-23.92	0.32	42.19	54.00	11.81

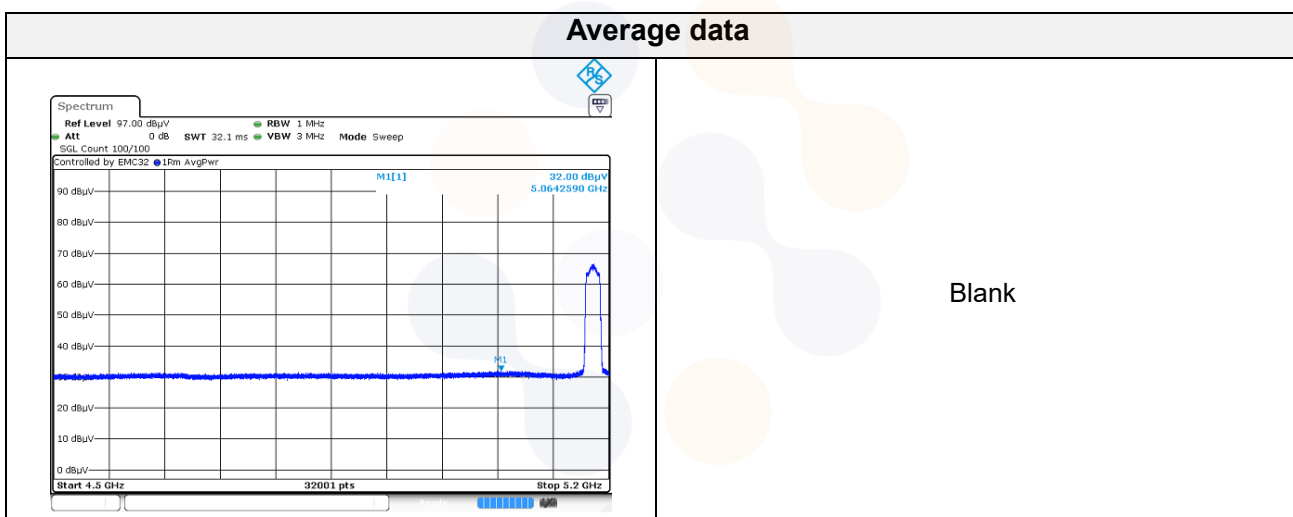


Horizontal/Vertical for Band-edge

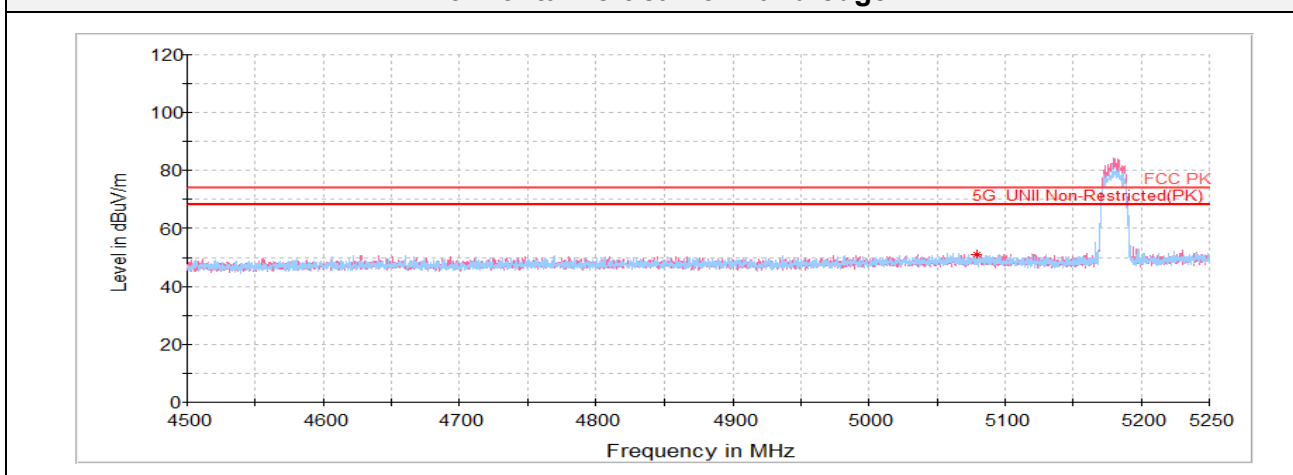

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

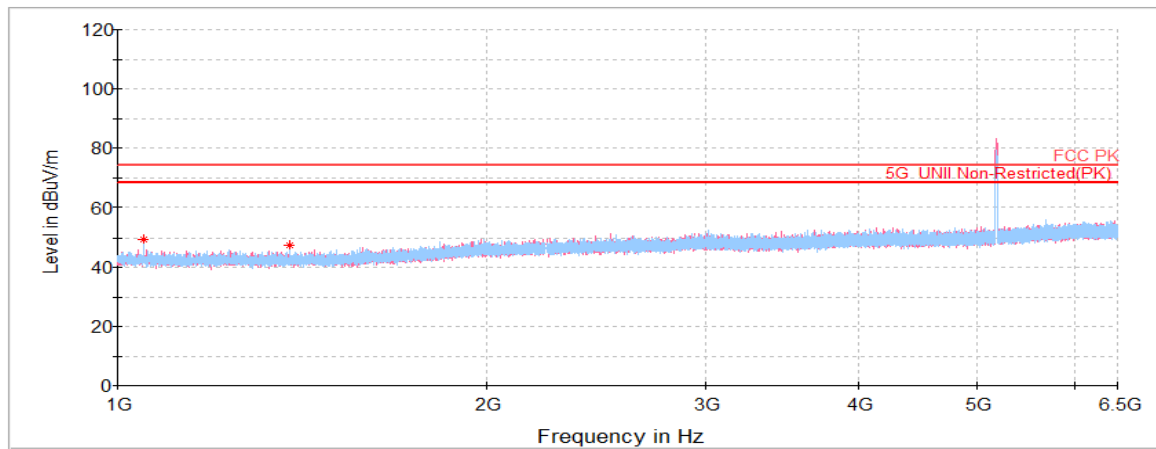


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

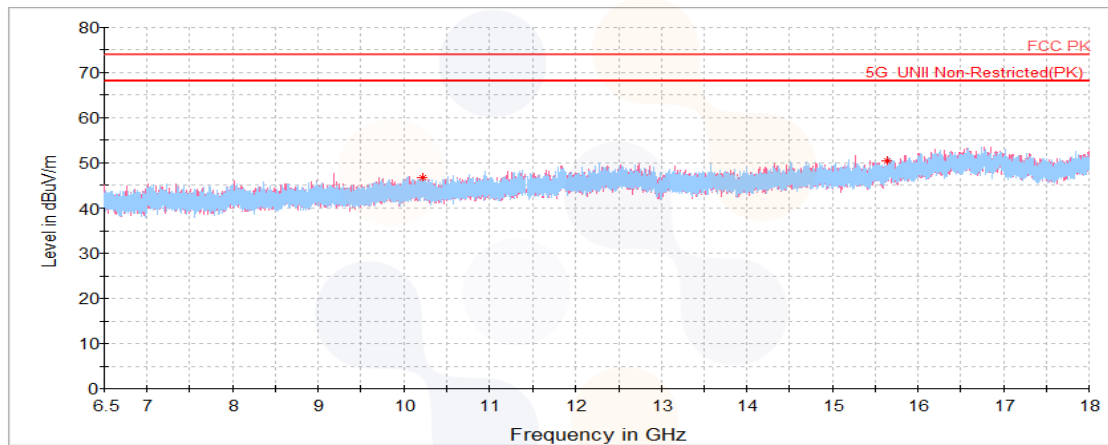


Middle Channel (5 200 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.19 ¹⁾	H	72.86	28.03	-51.96	-	48.93	74.00	25.07
1 597.61 ¹⁾	V	70.51	28.89	-50.90	-	48.50	74.00	25.50
10 341.72	H	58.28	37.07	-47.96	-	47.39	68.20	20.81
15 525.70 ¹⁾	V	57.38	40.32	-46.84	-	50.86	74.00	23.14
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

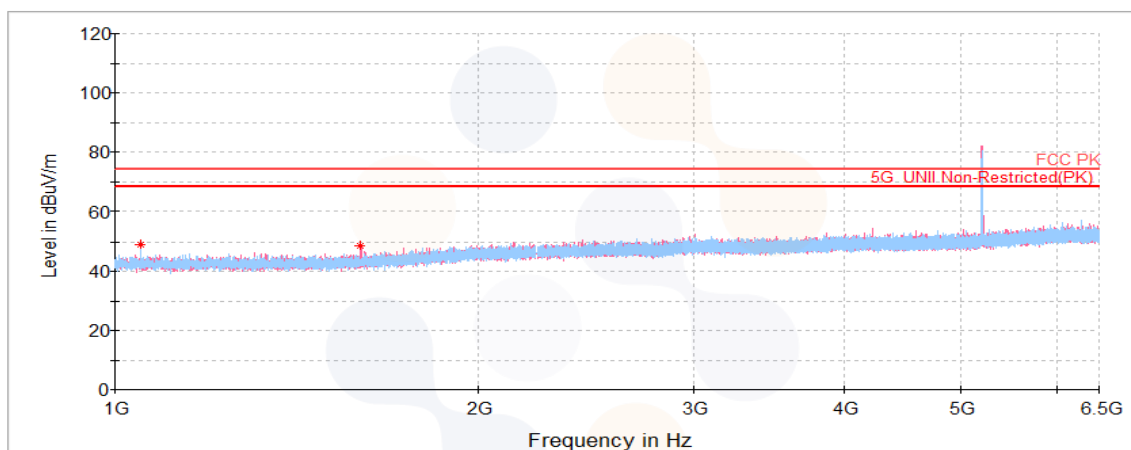


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

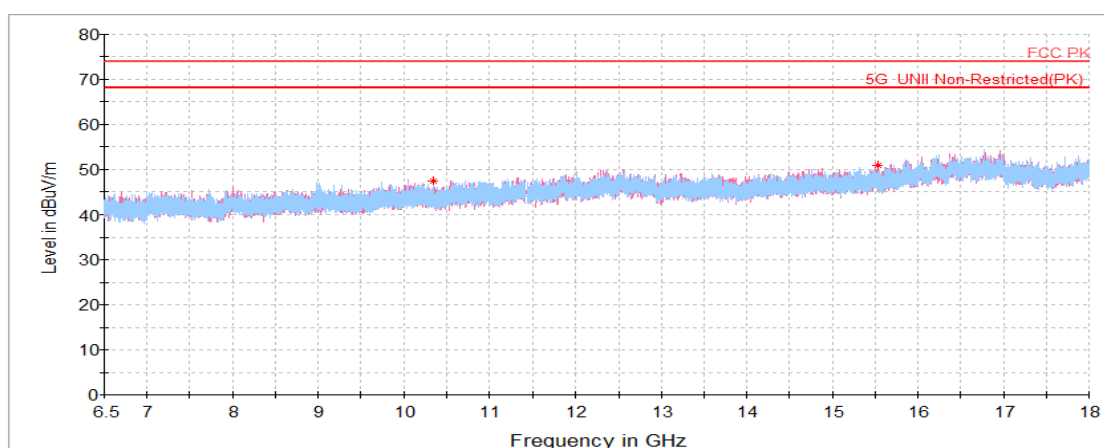


Highest Channel (5 240 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.36 ¹⁾	H	72.85	28.03	-51.96	-	48.92	74.00	25.08
10 286.02	H	58.50	37.03	-48.00	-	47.53	68.20	20.67
15 851.30 ¹⁾	H	56.84	40.58	-46.54	-	50.88	74.00	23.12
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

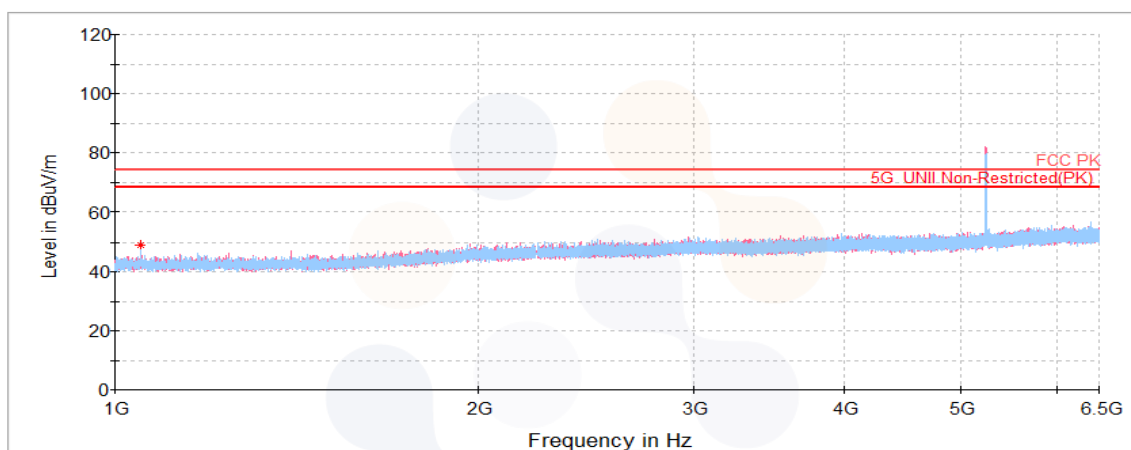



Horizontal/Vertical for 6.5 GHz ~ 18 GHz

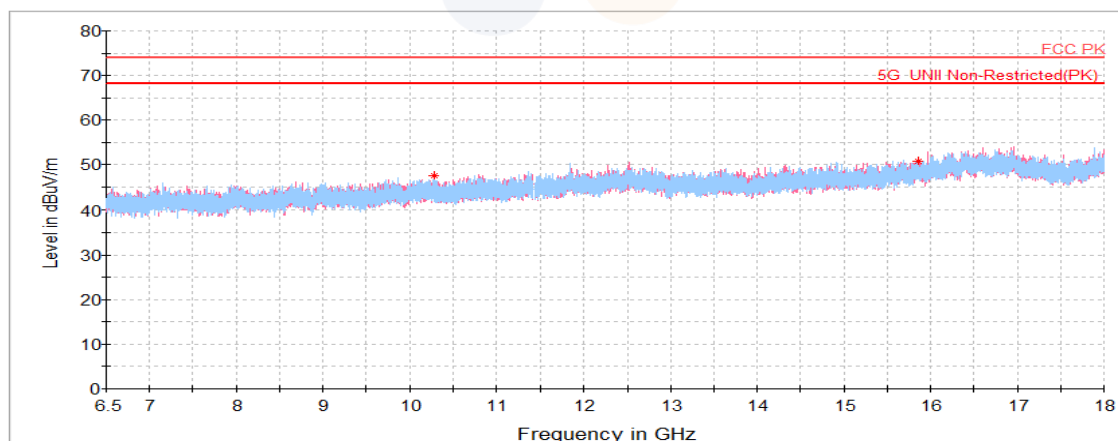


802.11n HT40 UNII 1

Lowest Channel (5 190 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.67 ¹⁾	H	71.14	28.03	-51.96	-	47.21	74.00	26.79
5 054.07 ¹⁾	V	41.89	33.76	-23.93	-	51.72	74.00	22.28
10 425.45	V	57.83	37.14	-47.91	-	47.06	68.20	21.14
15 552.66 ¹⁾	V	57.20	40.34	-46.81	-	50.73	74.00	23.27
Average Data								
5 054.07 ¹⁾	V	32.19	33.76	-23.93	0.62	42.66	54.00	11.34

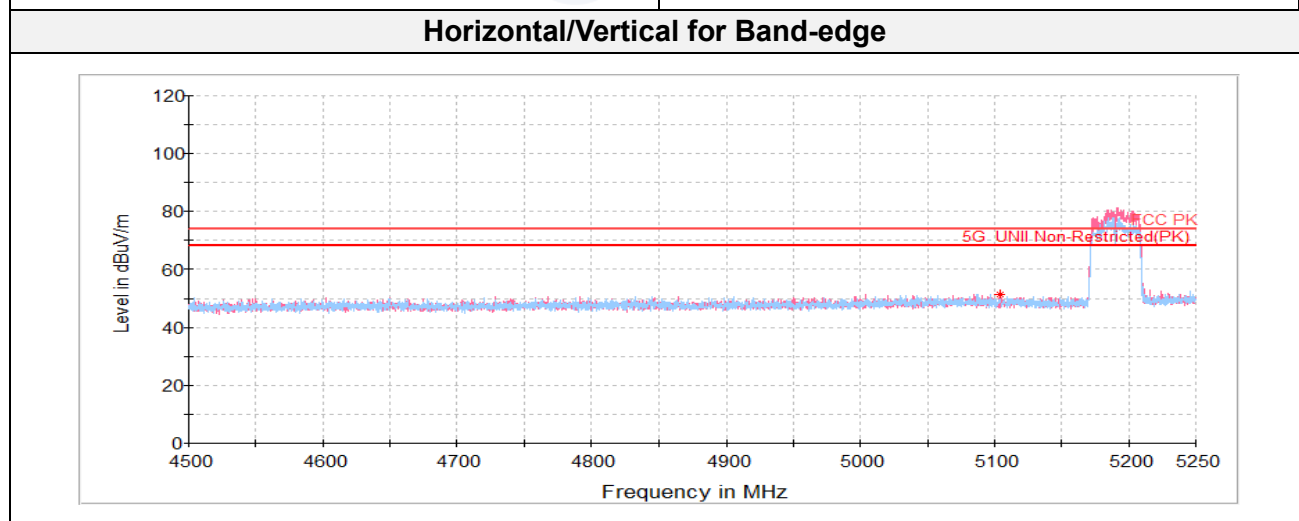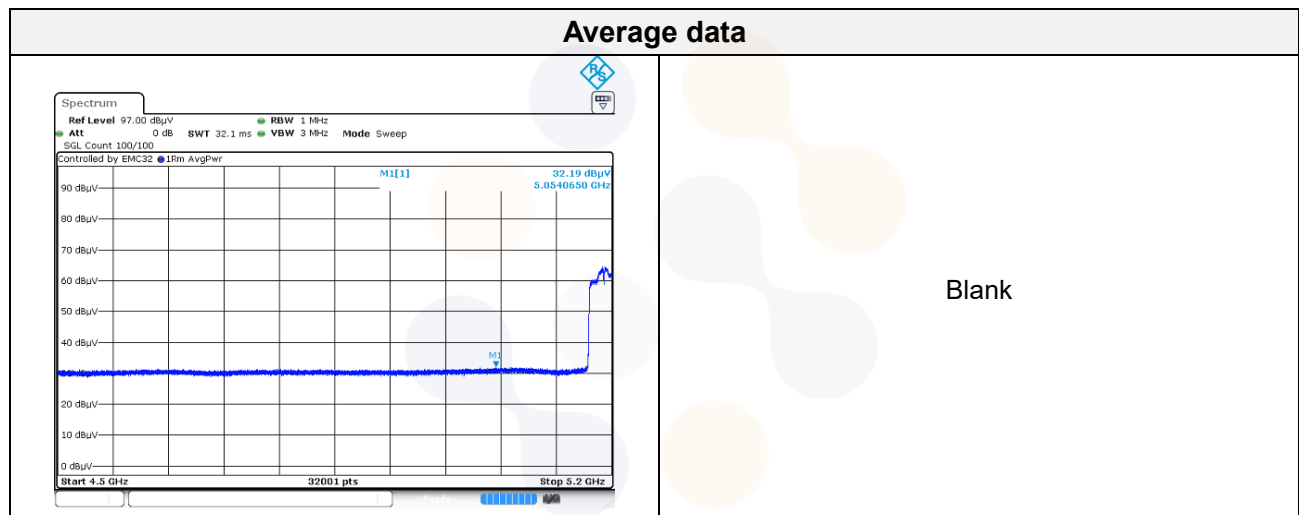

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

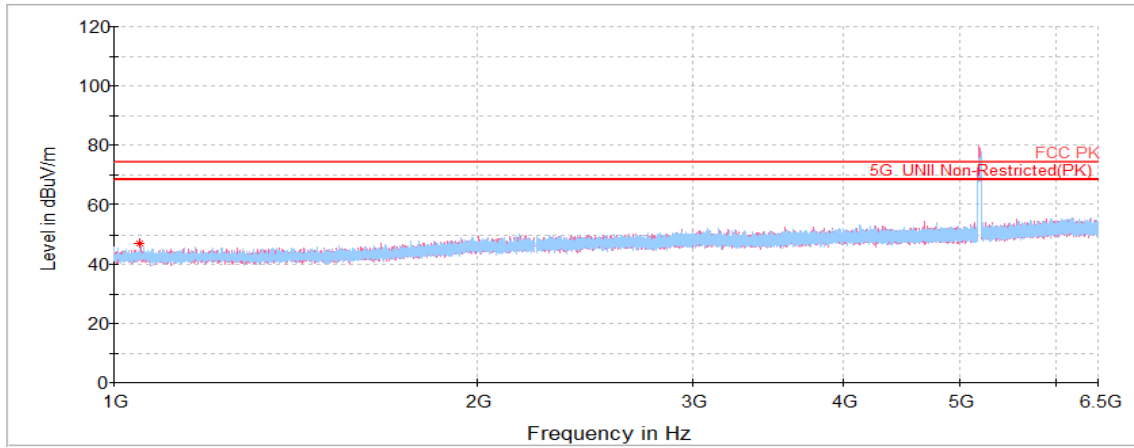


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

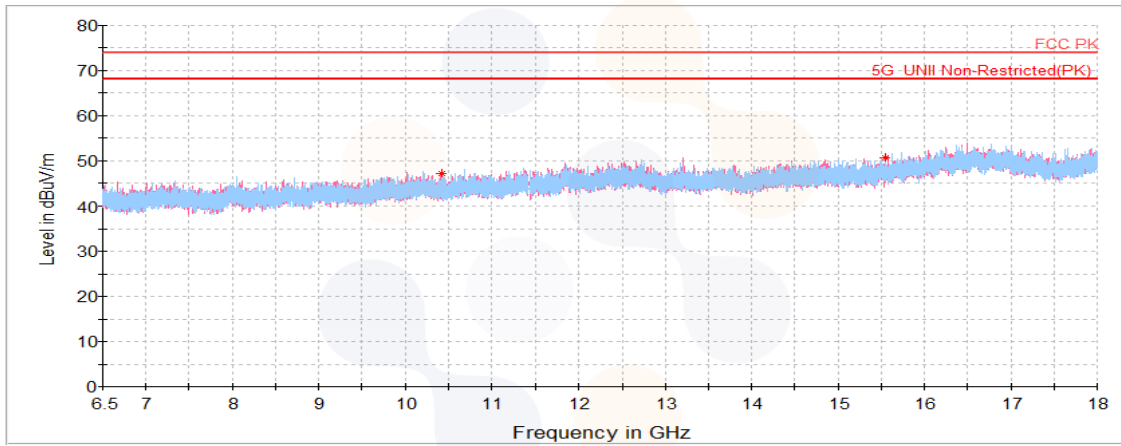


Highest Channel (5 230 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.19 ¹⁾	H	73.04	28.03	-51.96	-	49.11	74.00	24.89
1 153.83 ¹⁾	V	71.10	28.09	-51.82	-	47.37	74.00	26.63
10 300.75	V	58.45	37.04	-47.99	-	47.50	68.20	20.70
15 668.02 ¹⁾	V	56.93	40.43	-46.71	-	50.65	74.00	23.35
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

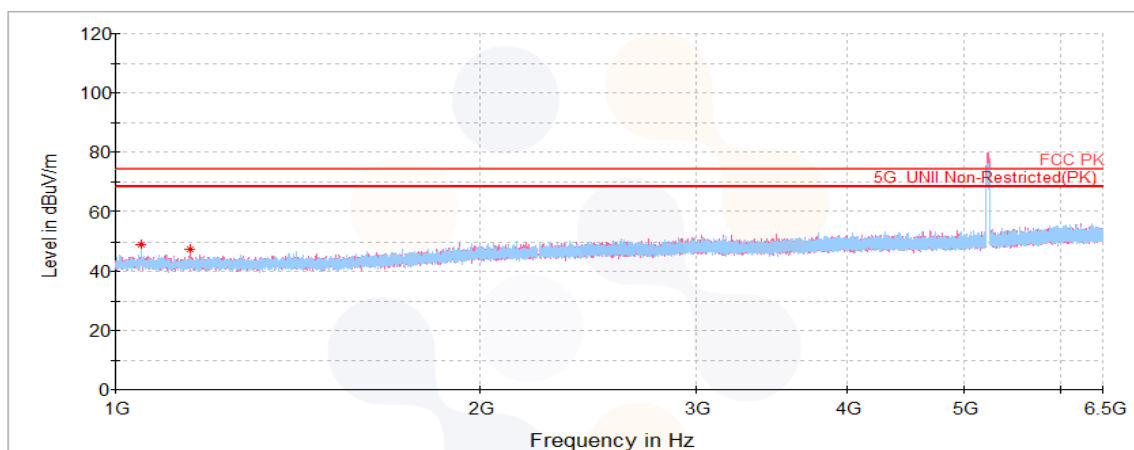



Horizontal/Vertical for 6.5 GHz ~ 18 GHz

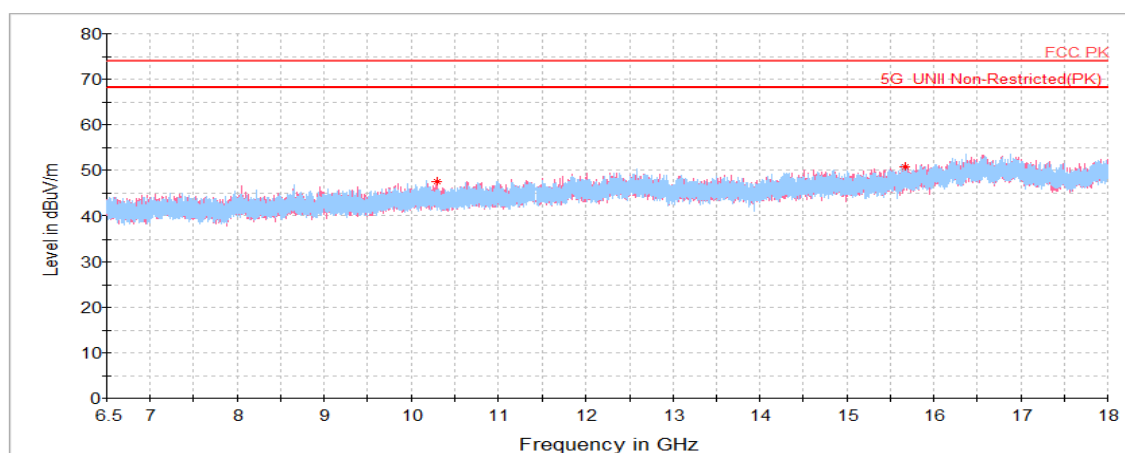


802.11ac VHT80 UNII 1

Lowest Channel (5 210 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
1 049.84 ¹⁾	H	71.17	28.03	-51.96	-	47.24	74.00	26.76
5 079.53 ¹⁾	V	42.33	33.80	-23.90	-	52.23	74.00	21.77
10 578.55	V	58.21	37.25	-47.83	-	47.63	68.20	20.57
15 713.66 ¹⁾	V	57.01	40.47	-46.66	-	50.82	74.00	23.18
Average Data								
5 079.53 ¹⁾	V	32.20	33.80	-23.90	1.16	43.26	54.00	10.74

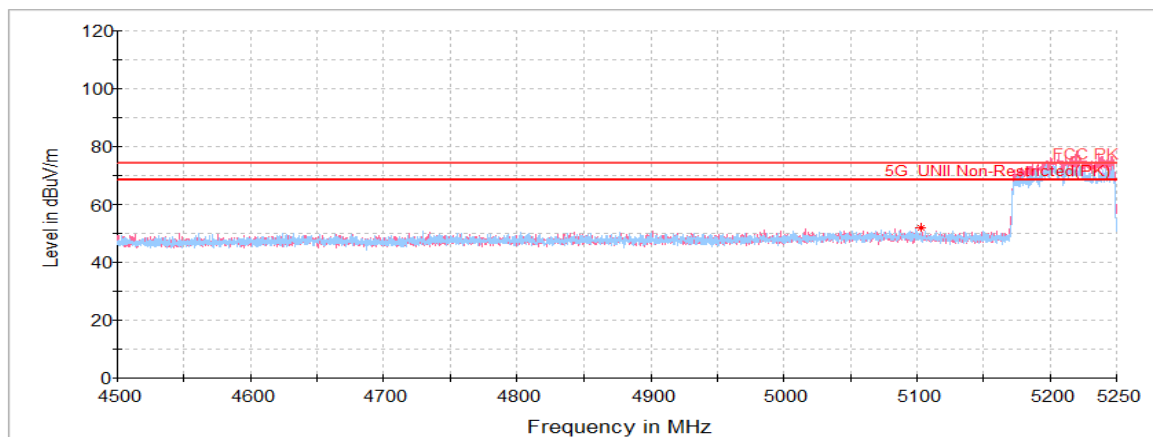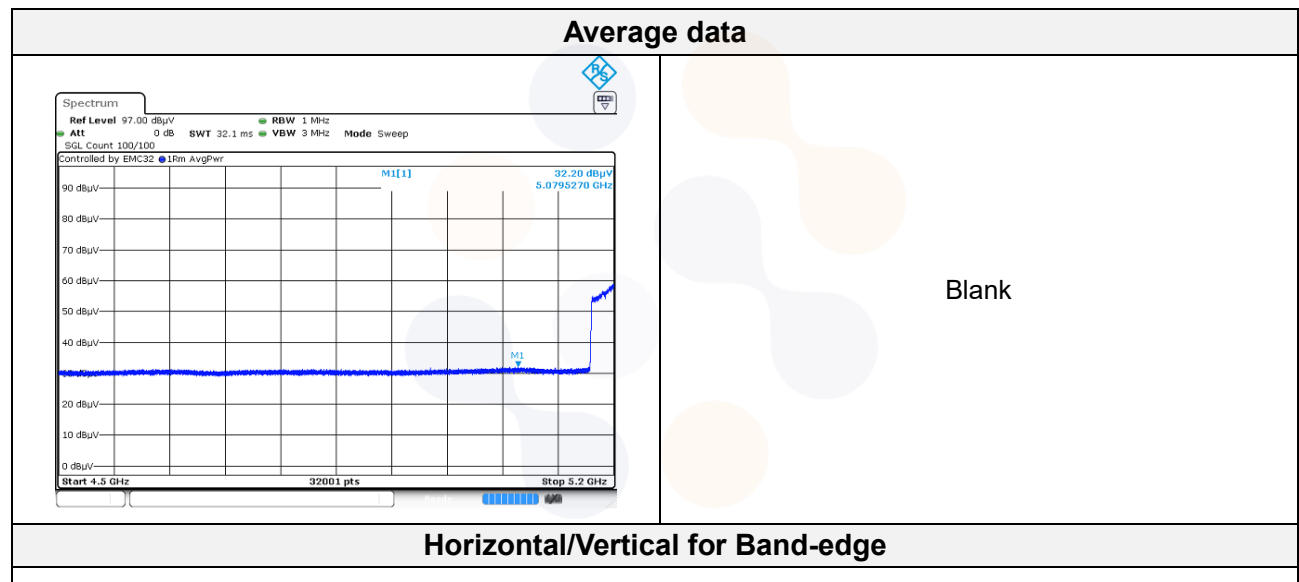

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

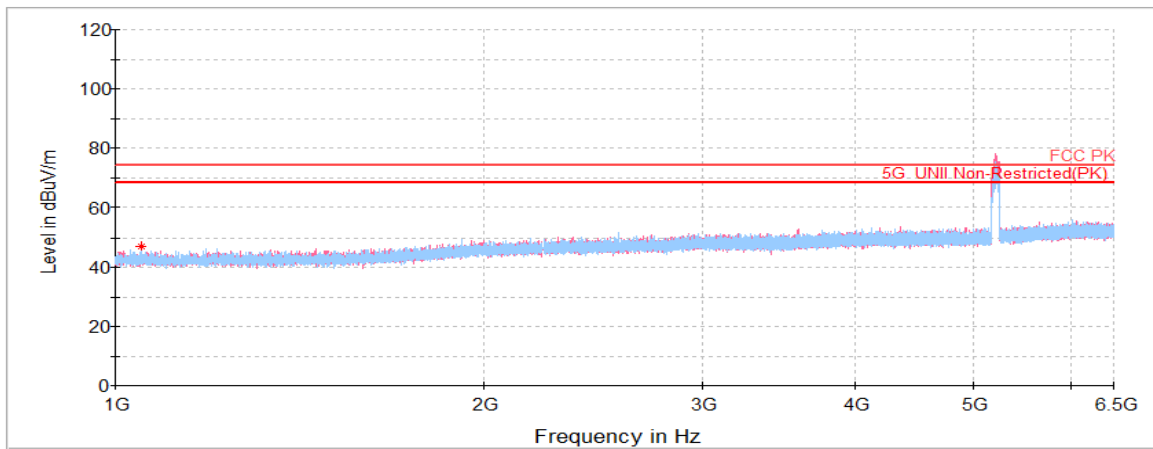


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

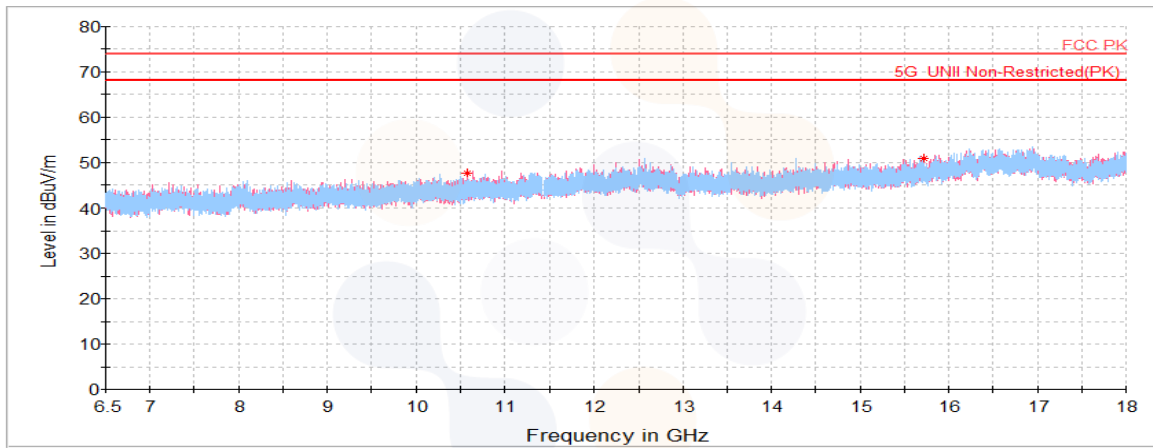

Test results (Above 18 GHz) – Worst case: 802.11n HT20_UNII 1_5 180 MHz

Horizontal/Vertical for 18 GHz ~ 40 GHz

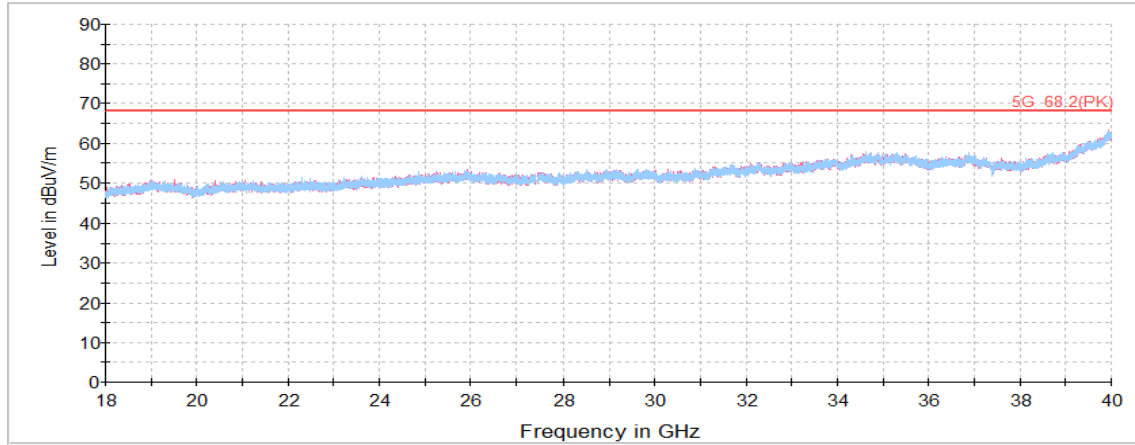


Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.

802.11a UNII 3


Lowest Channel (5 745 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
1 050.02 ¹⁾	H	73.58	28.03	-51.96	-	49.65	74.00	24.35
5 722.78	V	52.13	34.70	-22.97	-	63.86	117.14	53.28
11 686.86 ¹⁾	V	58.87	38.15	-47.72	-	49.30	74.00	24.70
17 206.86	V	55.73	41.49	-44.88	-	52.34	68.20	15.86
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

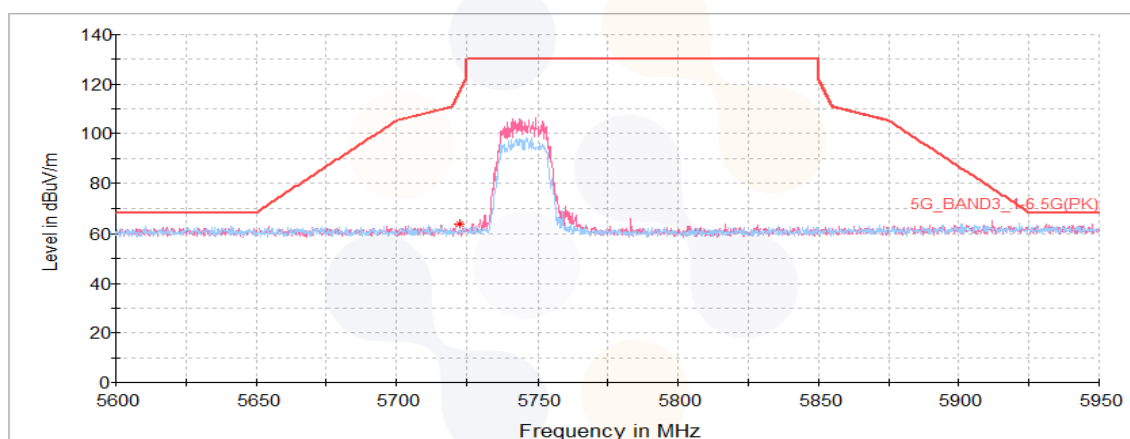

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

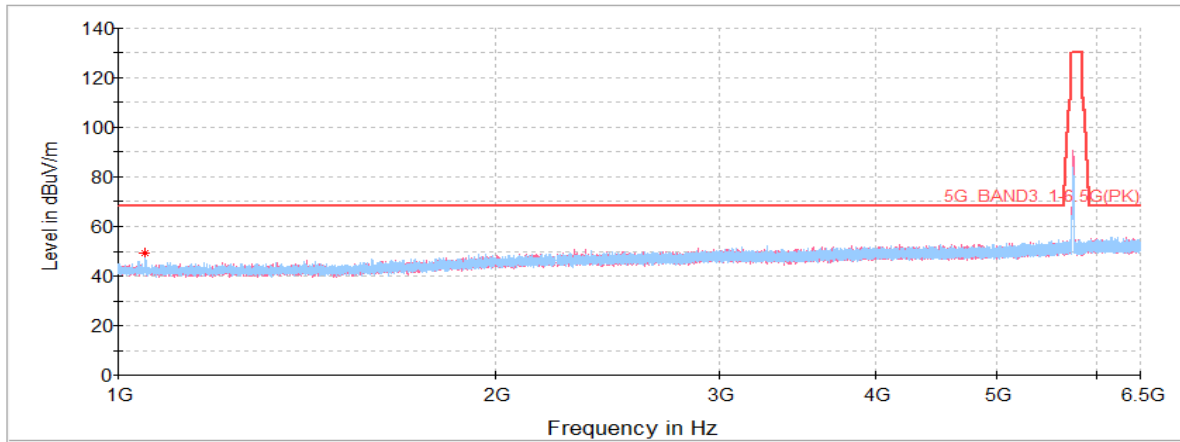


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

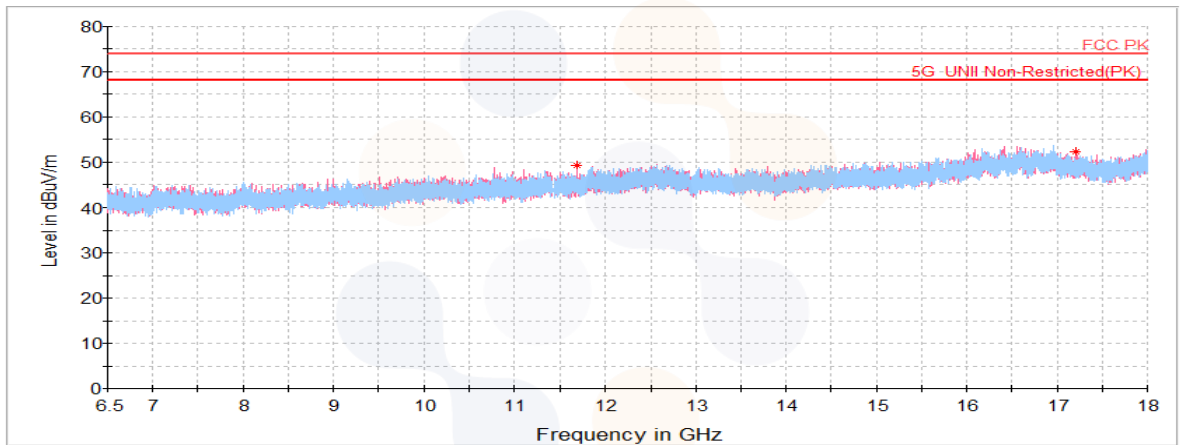


Middle Channel (5 785 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.84 ¹⁾	H	72.73	28.03	-51.96	-	48.80	74.00	25.20
11 360.91 ¹⁾	V	58.74	37.86	-47.65	-	48.95	74.00	25.05
17 333.72	V	55.24	41.37	-45.11	-	51.50	68.20	16.70
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

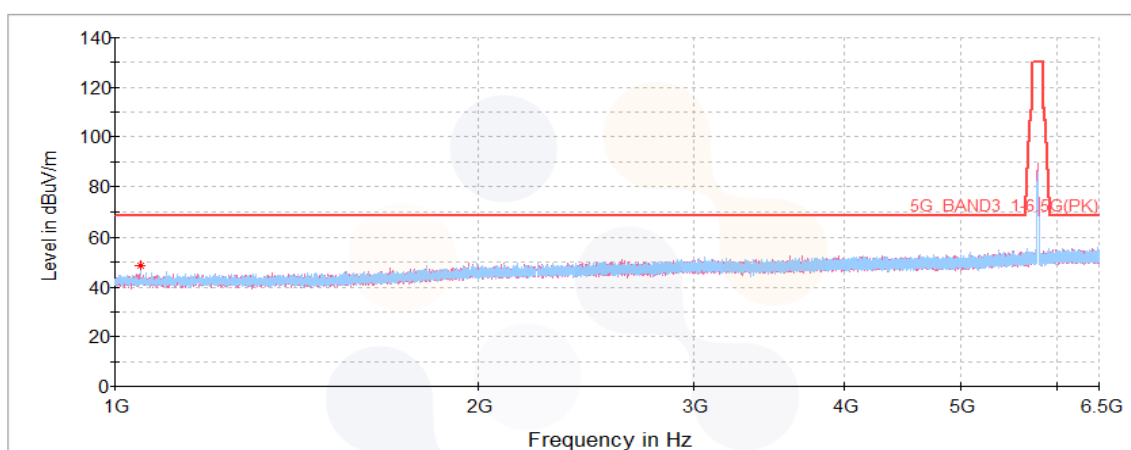


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

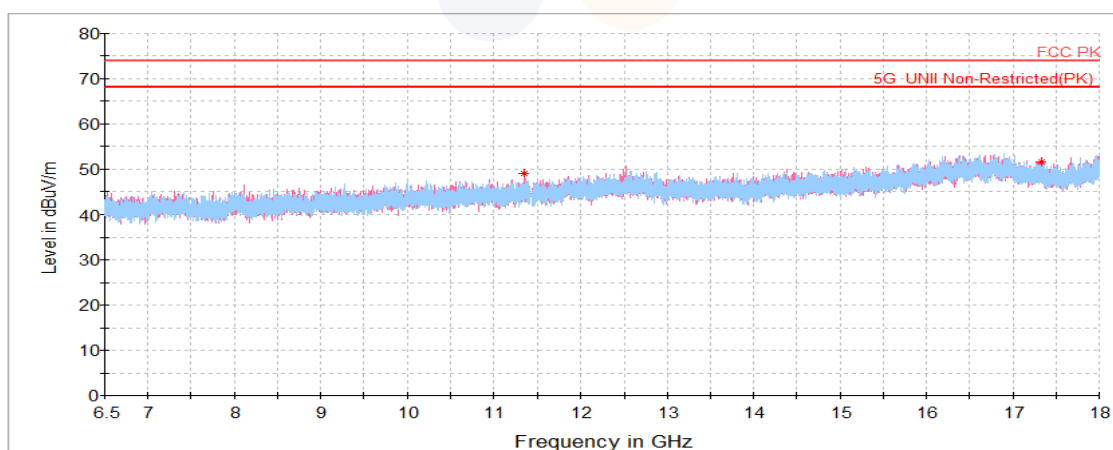


Highest Channel (5 825 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.19 ¹⁾	H	72.11	28.03	-51.96	-	48.18	74.00	25.82
5 886.58	V	52.18	35.00	-22.85	-	64.33	96.63	32.30
11 545.98 ¹⁾	V	56.95	38.04	-47.66	-	47.33	74.00	26.67
17 490.05	V	55.32	41.21	-45.40	-	51.13	68.20	17.07
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

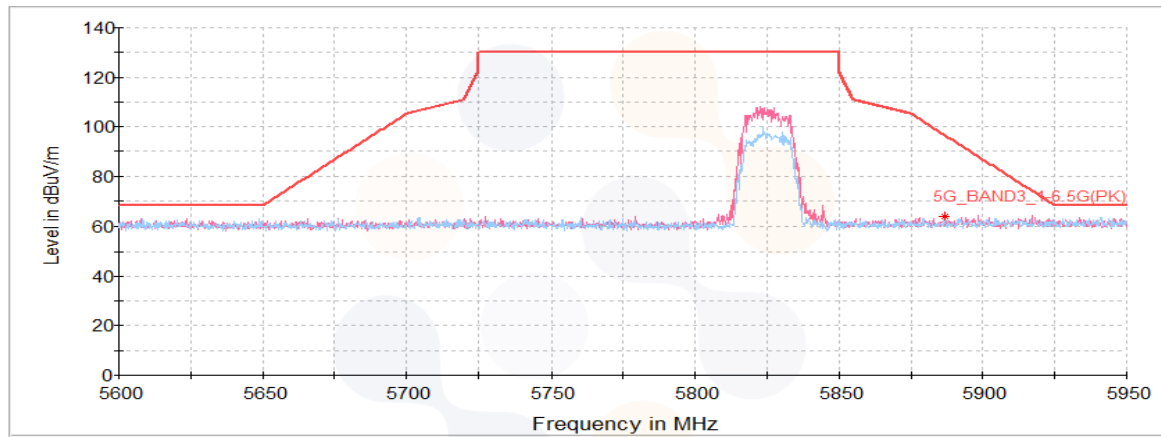

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

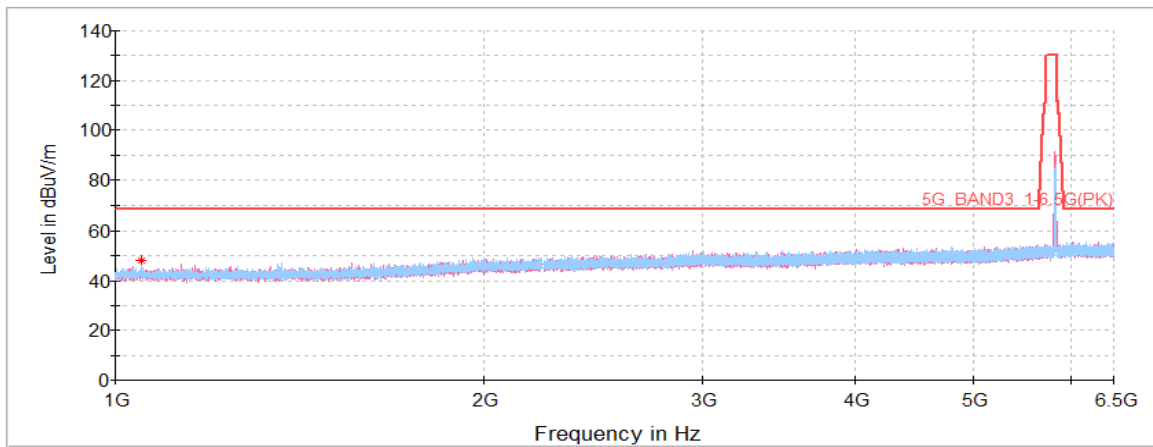

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

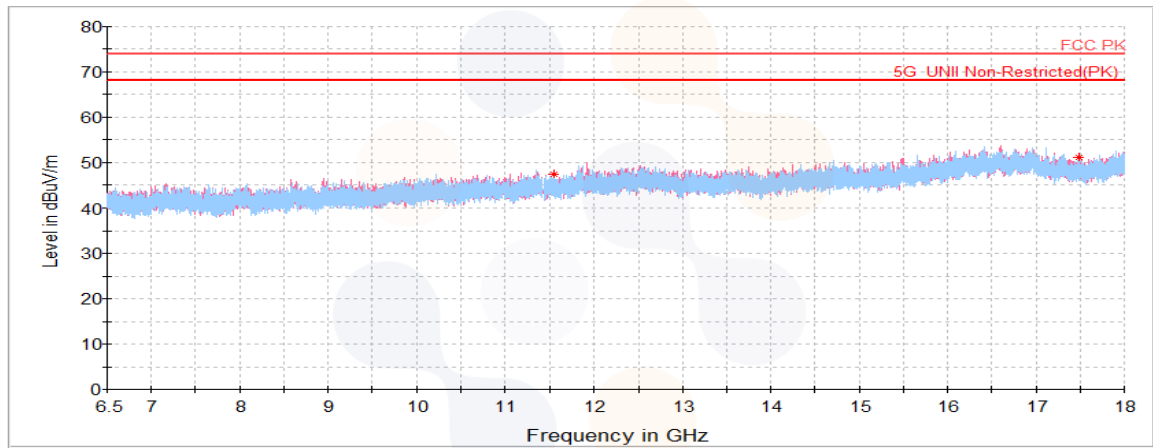


802.11n HT20 UNII 3


Lowest Channel (5 745 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
1 049.84 ¹⁾	H	73.08	28.03	-51.96	-	49.15	74.00	24.85
5 715.56	V	52.64	34.69	-23.00	-	64.33	109.56	45.23
11 382.47 ¹⁾	V	57.30	37.88	-47.65	-	47.53	74.00	26.47
17 198.95	H	55.27	41.50	-44.87	-	51.90	68.20	16.30
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

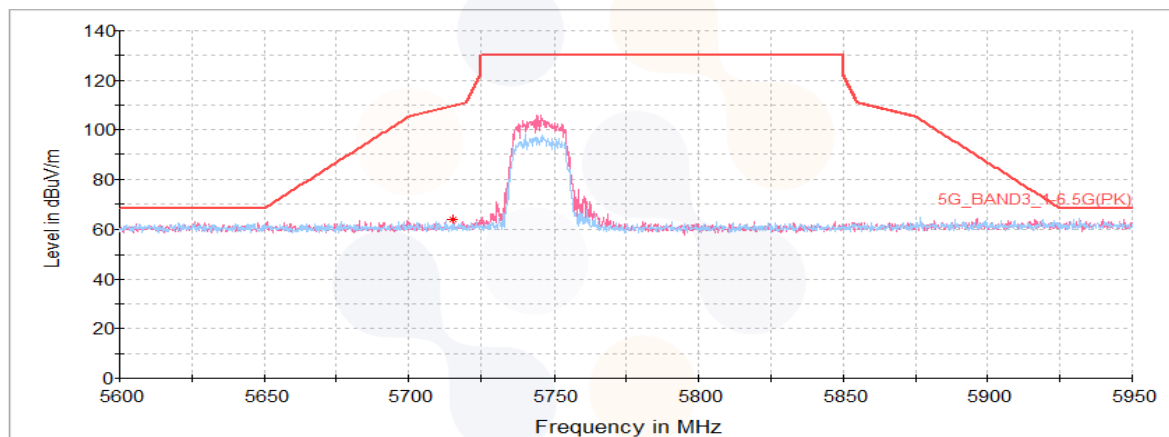

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

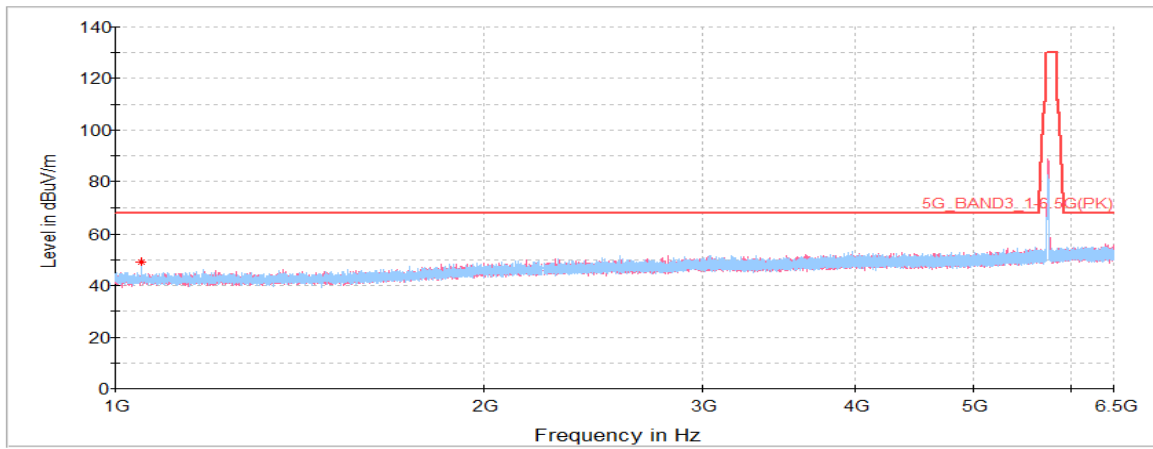


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

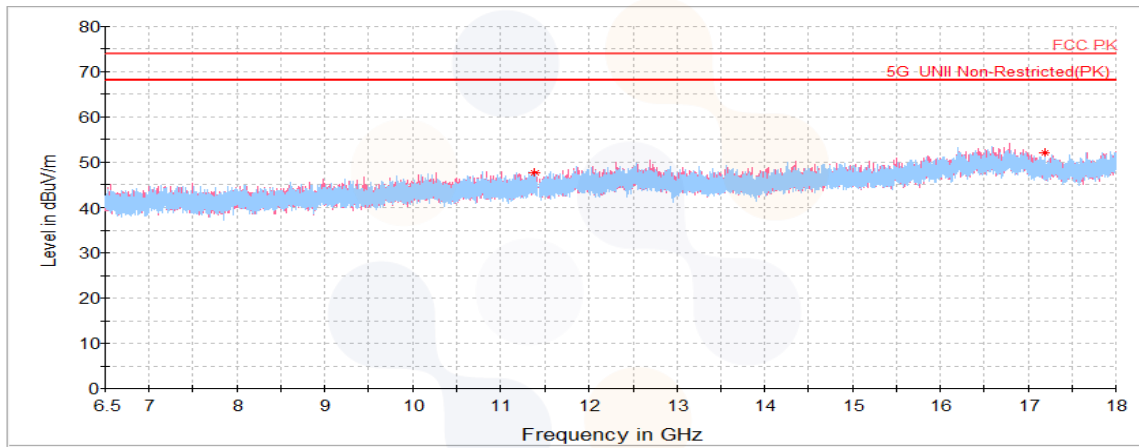


Middle Channel (5 785 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.84 ¹⁾	H	71.71	28.03	-51.96	-	47.78	74.00	26.22
11 468.36 ¹⁾	V	58.05	37.97	-47.64	-	48.38	74.00	25.62
17 316.47	V	55.72	41.38	-45.08	-	52.02	68.20	16.18
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

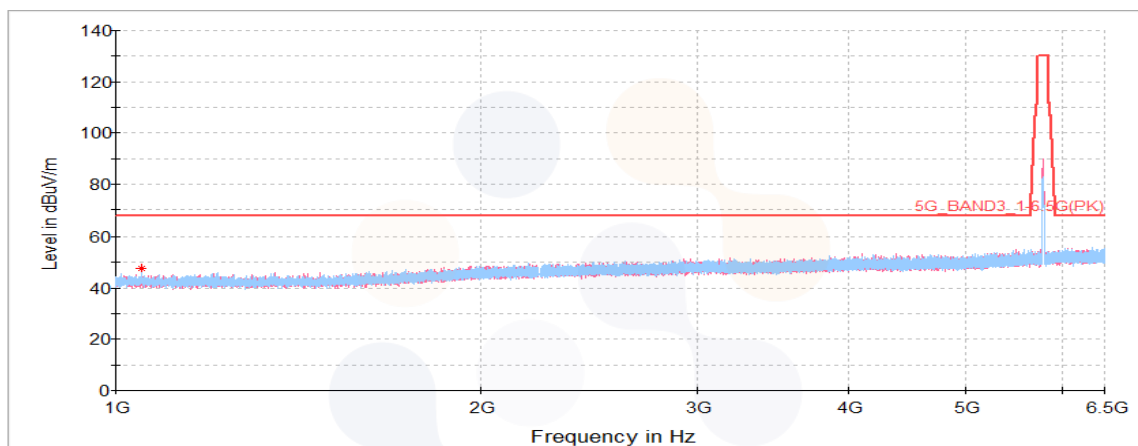


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

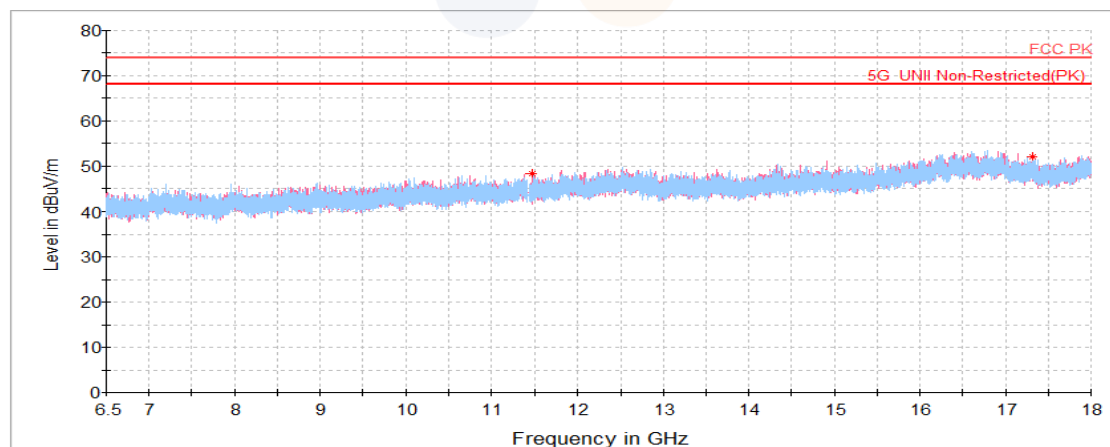


Highest Channel (5 825 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.67 ¹⁾	H	72.09	28.03	-51.96	-	48.16	74.00	25.84
1 597.09 ¹⁾	H	70.21	28.88	-50.91	-	48.18	74.00	25.82
5 859.08	V	52.04	34.95	-22.80	-	64.19	109.66	45.47
11 828.45 ¹⁾	H	58.86	38.26	-47.79	-	49.33	74.00	24.67
17 302.09	V	55.38	41.40	-45.06	-	51.72	68.20	16.48
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

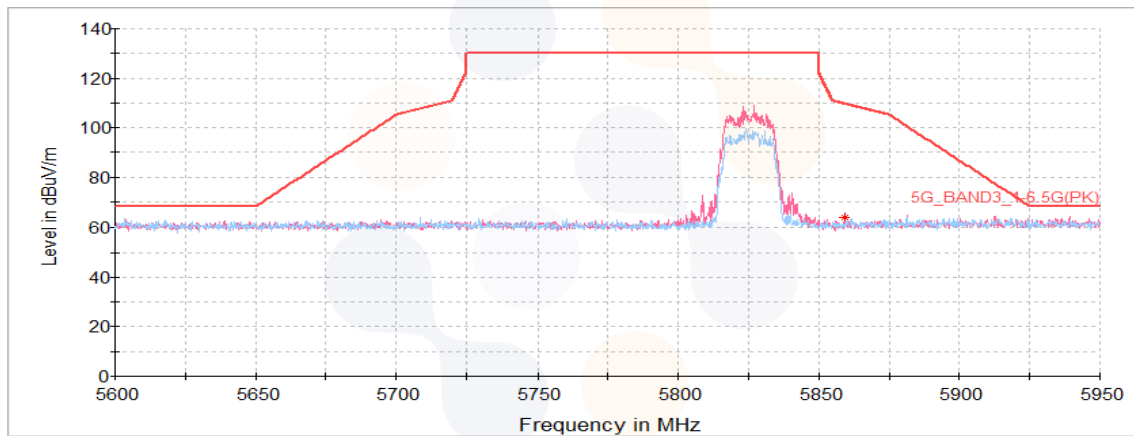

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

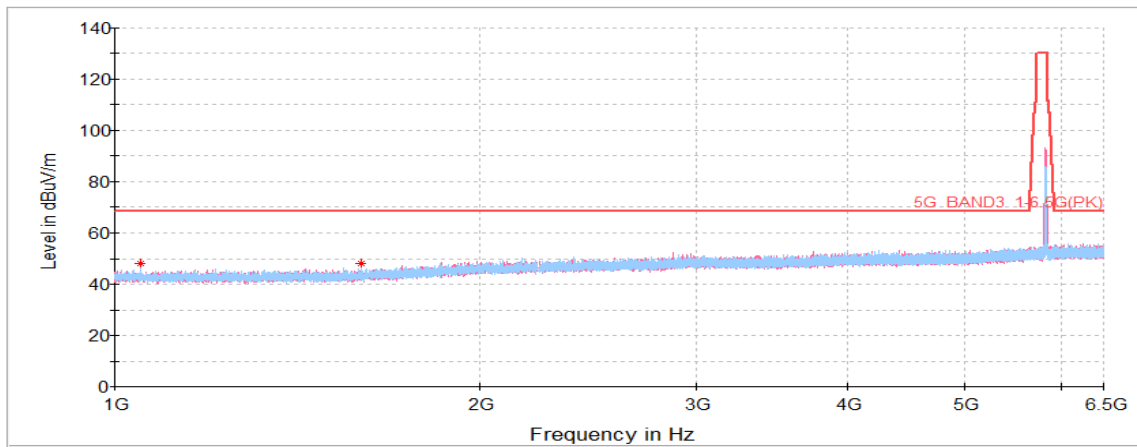


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

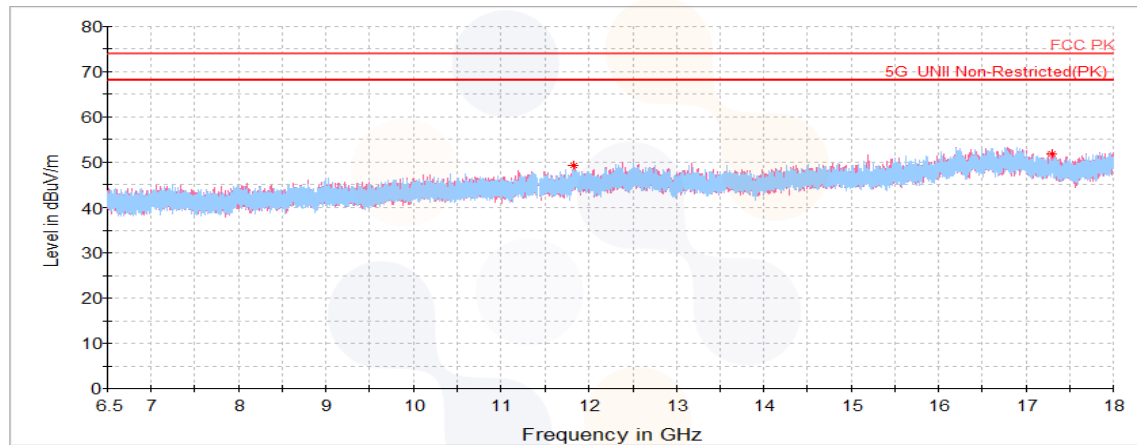


802.11n HT40 UNII 3

Lowest Channel (5 755 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.19 ¹⁾	H	71.67	28.03	-51.96	-	47.74	74.00	26.26
5 721.92	V	56.82	34.70	-22.98	-	68.54	115.18	46.64
11 516.16 ¹⁾	V	57.69	38.01	-47.65	-	48.05	74.00	25.95
17 166.97	V	54.31	41.53	-44.81	-	51.03	68.20	17.17
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

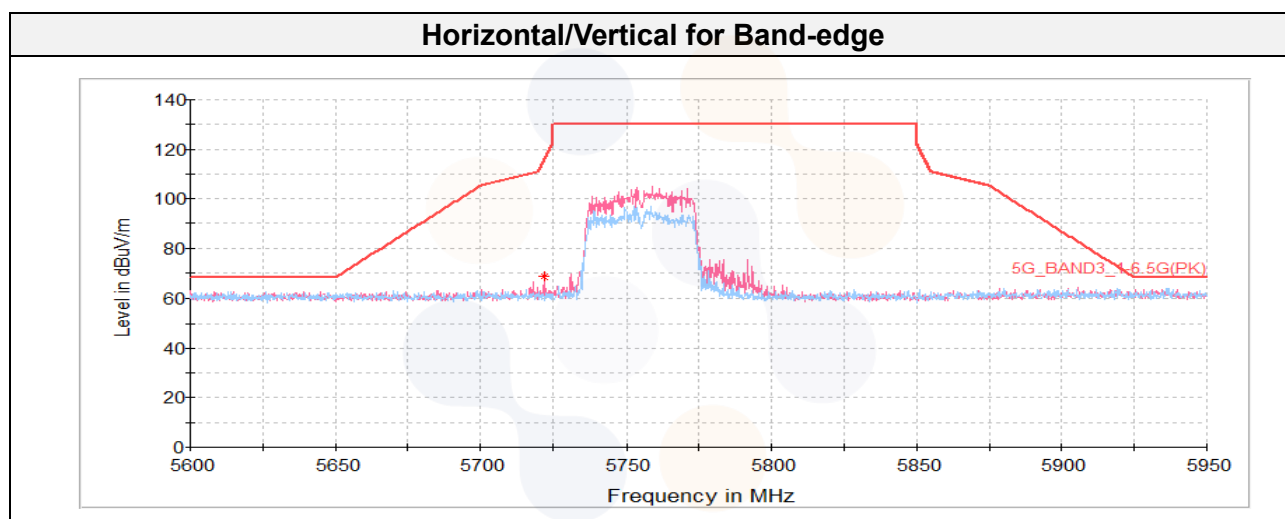

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

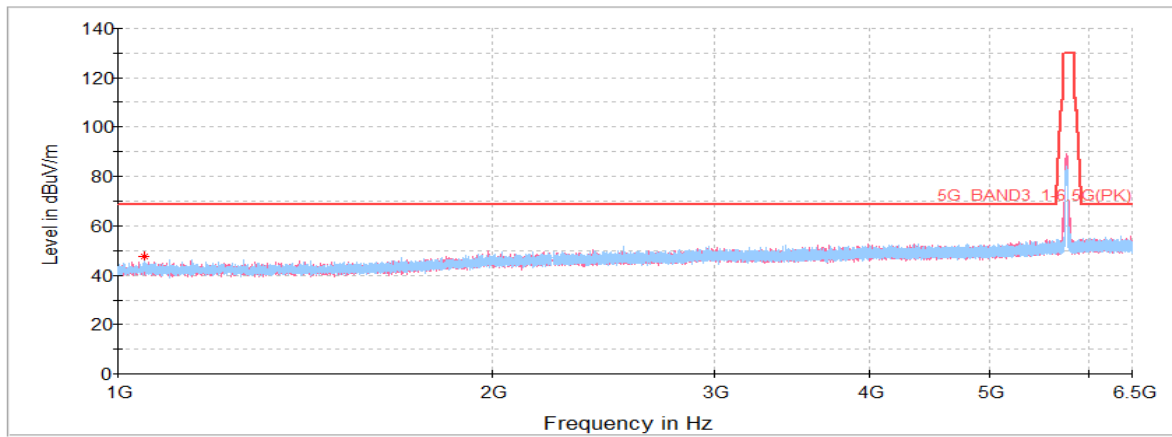


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

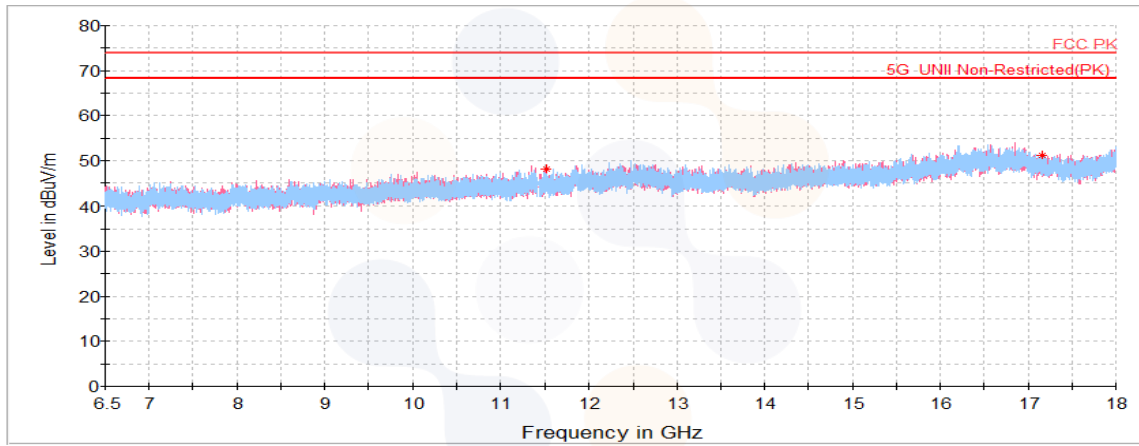


Highest Channel (5 795 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.02 ¹⁾	H	71.05	28.03	-51.96	-	47.12	74.00	26.88
5 857.88	H	51.88	34.94	-22.80	-	64.02	110.00	45.98
11 485.25 ¹⁾	V	57.89	37.99	-47.64	-	48.24	74.00	25.76
17 316.47	V	56.15	41.38	-45.08	-	52.45	68.20	15.75
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

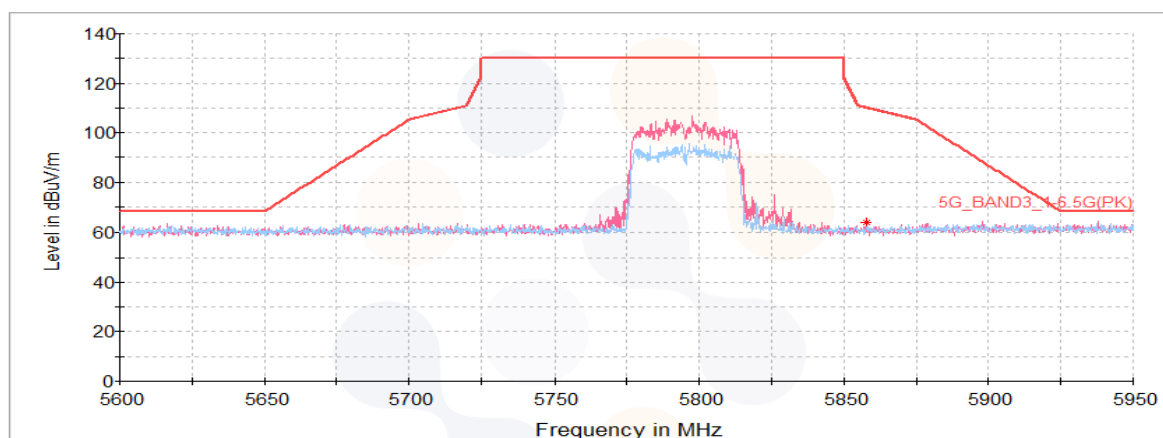

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

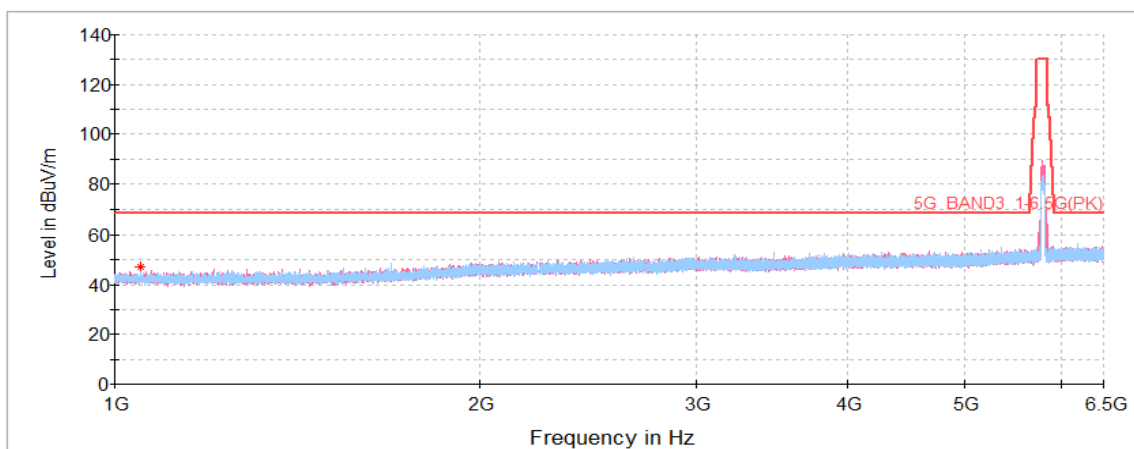


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

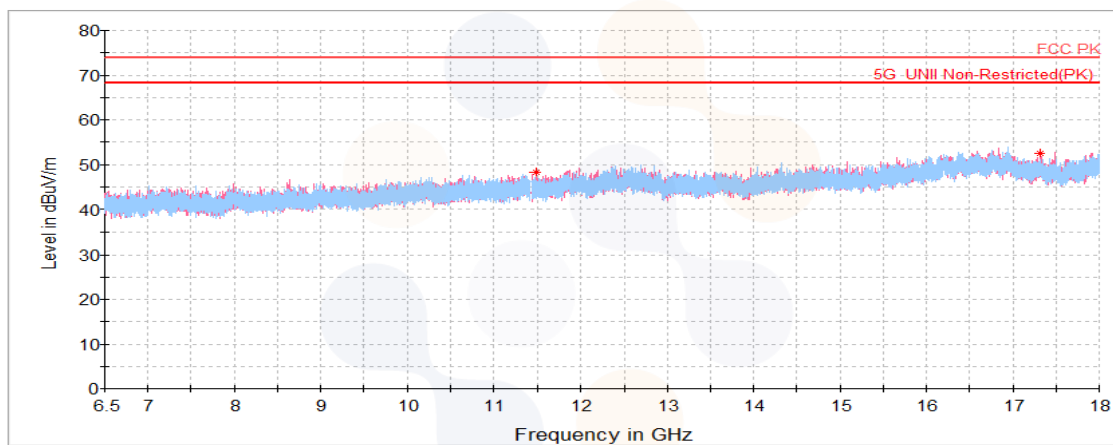


802.11ac VHT80 UNII 3

Lowest Channel (5 775 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 699.92	H	52.87	34.66	-23.05	-	64.48	68.20	3.72
5 876.44	V	52.19	34.98	-22.83	-	64.34	68.20	3.86
11 598.45 ¹⁾	H	57.58	38.08	-47.68	-	47.98	74.00	26.02
17 251.78	V	55.60	41.45	-44.97	-	52.08	68.20	16.12
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

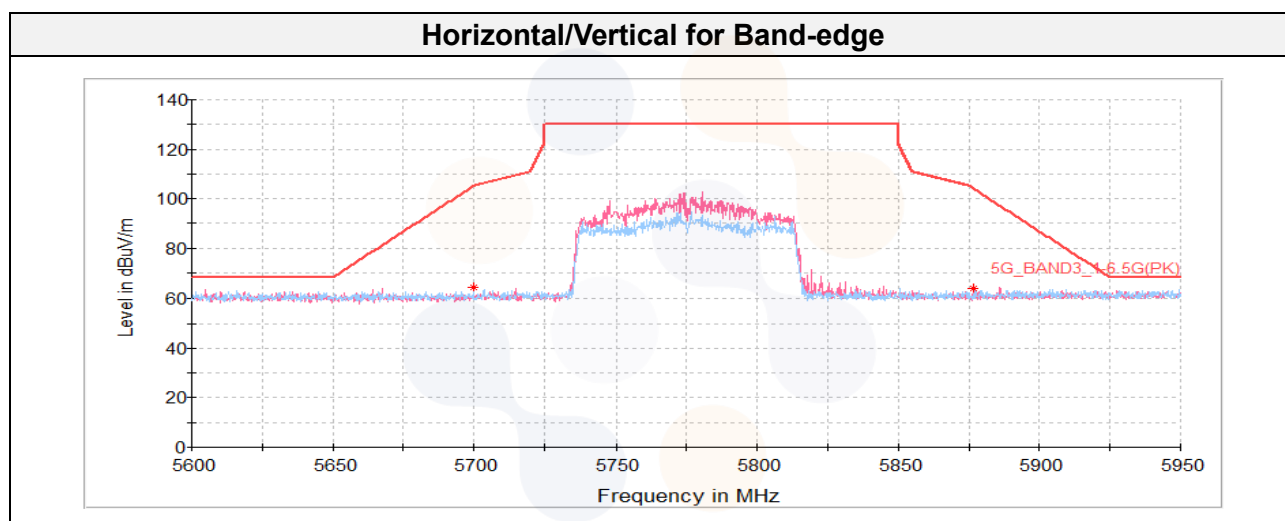

Horizontal/Vertical for 1 GHz ~ 6.5 GHz

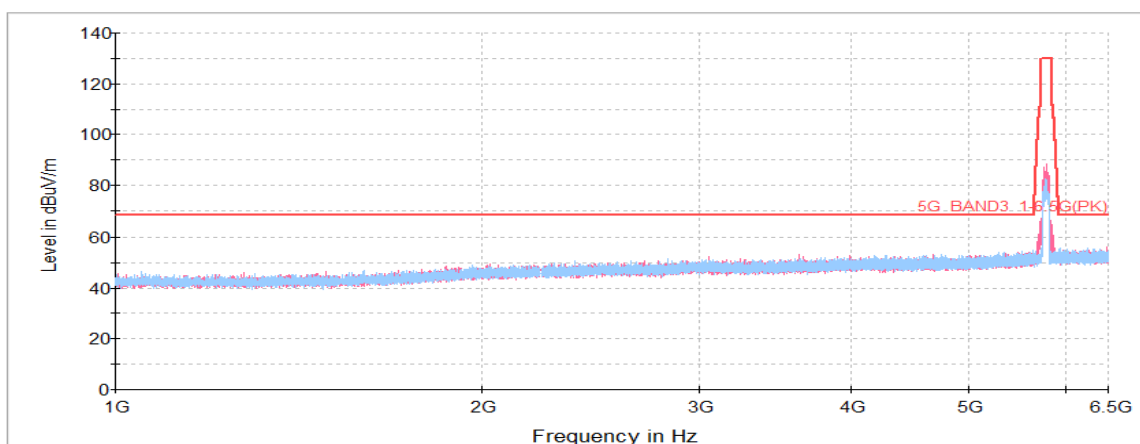


Horizontal/Vertical for 6.5 GHz ~ 18 GHz

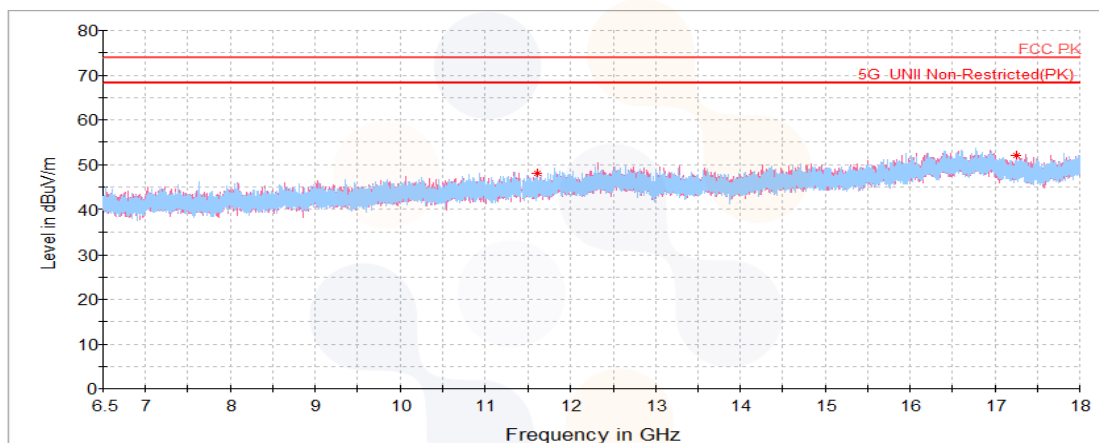

Test results (Above 18 GHz) – Worst case: 802.11n HT40_UNII 3_5 795 MHz

Horizontal/Vertical for 18 GHz ~ 40 GHz

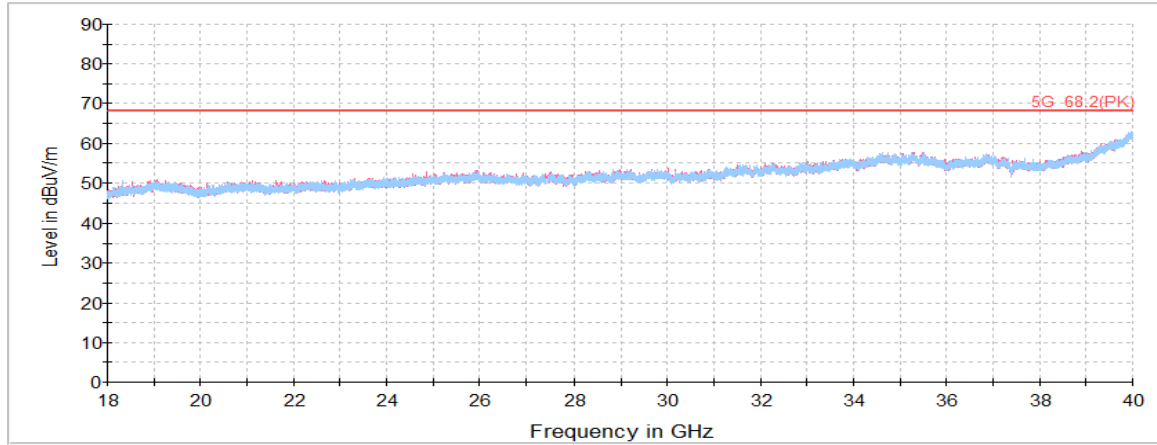


Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.


Simultaneous condition

802.11ac VHT80 (5 210 MHz) + BT_EDR(3DH1)(2 480 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 050.08 ¹⁾	V	42.84	28.03	-20.47	-	50.40	74.00	23.60
3 992.55 ¹⁾	V	66.79	33.59	-56.35	-	44.03	74.00	29.97
4 812.70 ¹⁾	H	65.44	33.70	-55.15	-	43.99	74.00	30.01
7 318.66 ¹⁾	H	63.35	35.16	-51.60	-	46.91	74.00	27.09
10 279.19	V	59.20	37.02	-48.00	-	48.22	68.20	19.98
15 681.33 ¹⁾	V	58.42	40.45	-46.69	-	52.18	74.00	21.82
Average Data								
15 681.33 ¹⁾	V	48.29	40.45	-46.69	1.16	43.21	54.00	10.79

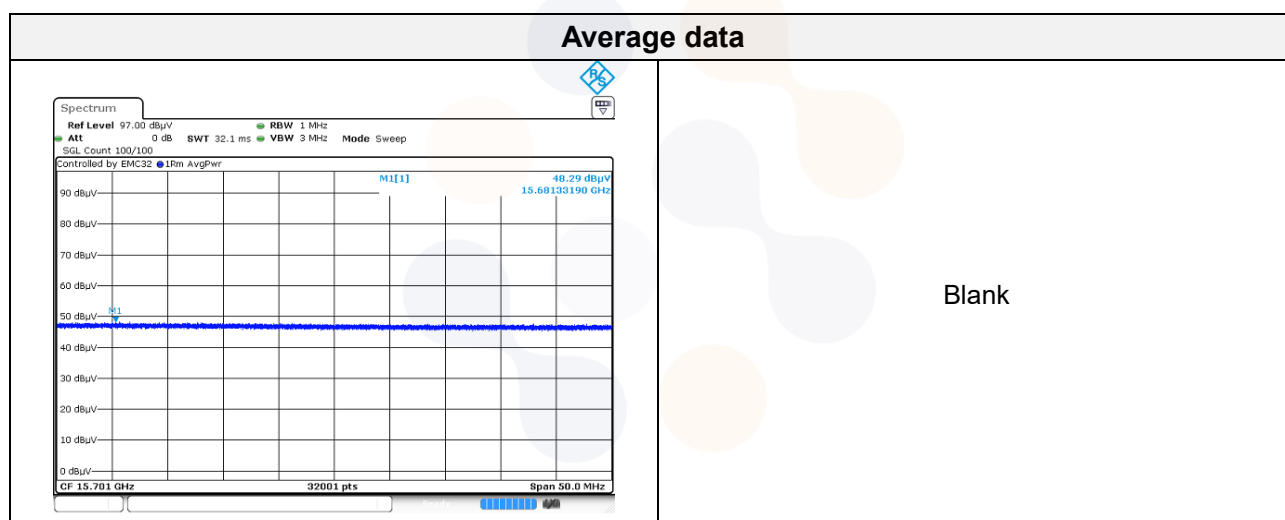


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

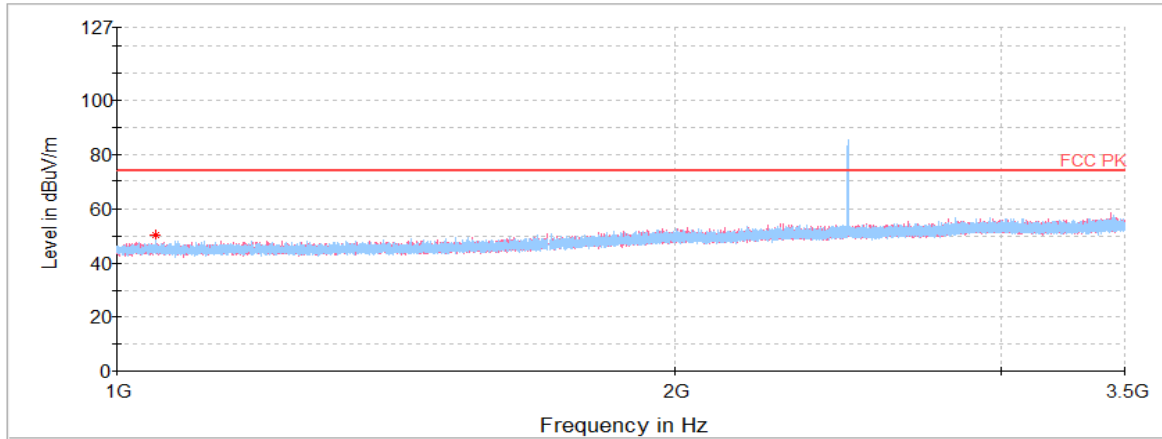


Horizontal/Vertical for 3.5 GHz ~ 5 GHz

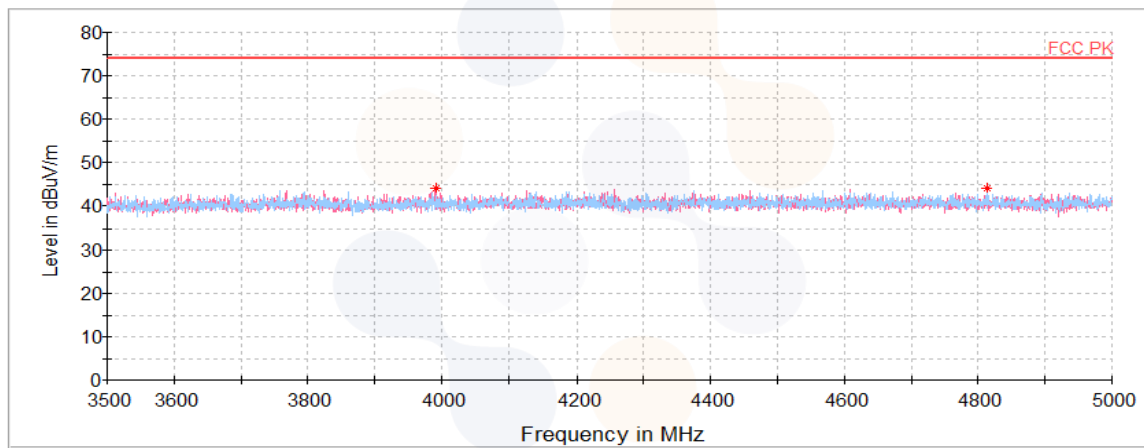


Horizontal/Vertical for 5 GHz ~ 6.5 GHz

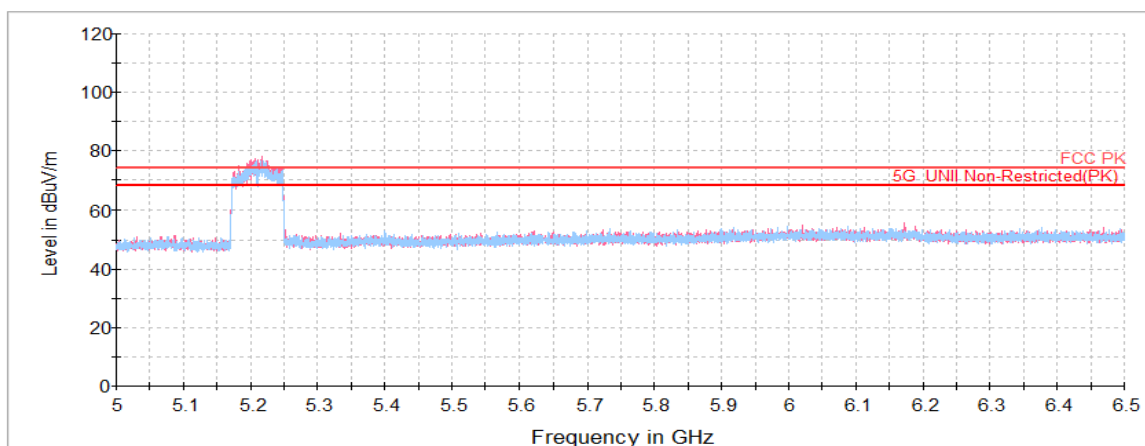

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

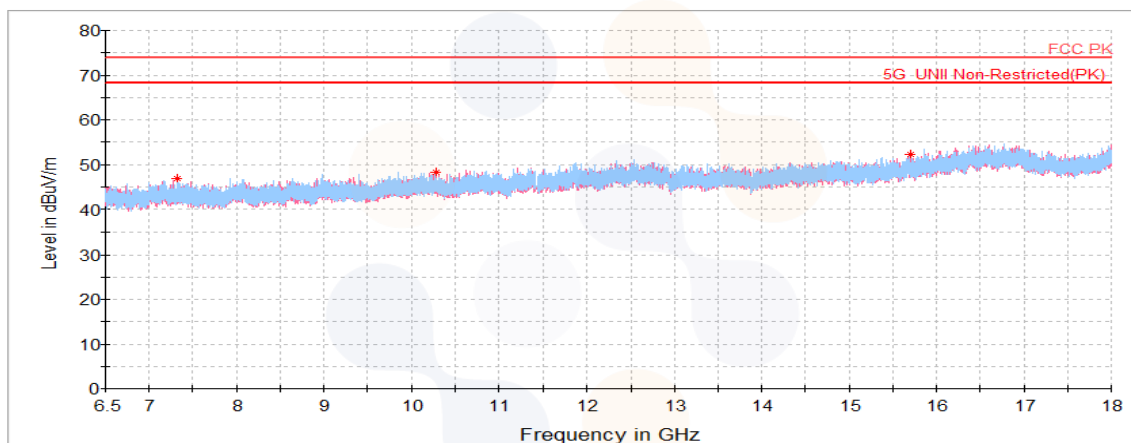

Horizontal/Vertical for 18 GHz ~ 40 GHz

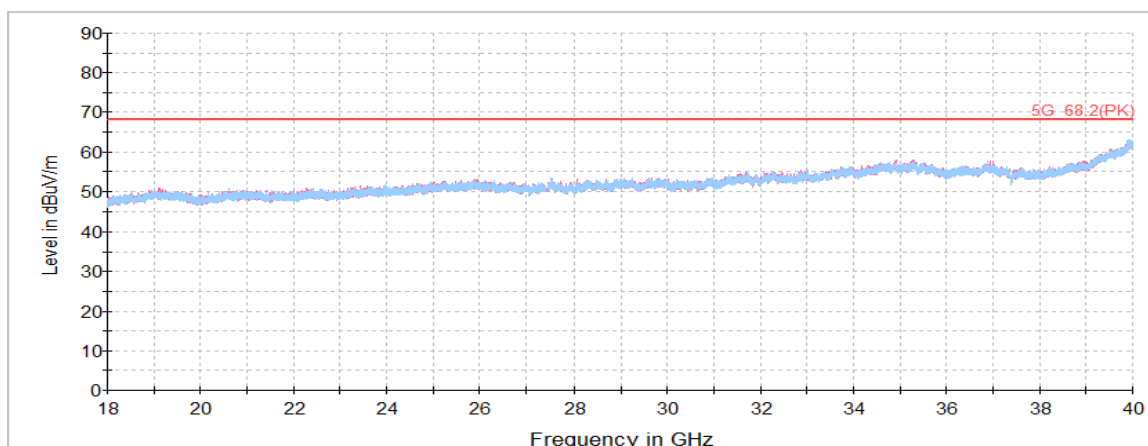


Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.


Simultaneous condition

Case 4 : 802.11ac80 VHT80 (5 210 MHz) + BLE_1 MBit/s(37 Bytes)(2 480 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
1 049.92 ¹⁾	V	41.60	28.03	-20.47	-	49.16	74.00	24.84
1 141.72 ¹⁾	H	41.28	28.09	-20.38	-	48.99	74.00	25.01
3 509.97	V	67.54	33.01	-56.56	-	43.99	68.20	24.21
3 986.20 ¹⁾	V	67.66	33.58	-56.36	-	44.88	74.00	29.12
4 253.09 ¹⁾	H	66.48	33.65	-55.97	-	44.16	74.00	29.84
8 647.98	V	61.69	35.49	-49.59	-	47.59	68.20	20.61
10 312.61	V	58.33	37.05	-47.98	-	47.40	68.20	20.80
15 795.50 ¹⁾	V	59.10	40.54	-46.59	-	53.05	74.00	20.95
Average Data								
15 795.50 ¹⁾	V	48.07	40.54	-46.59	1.16	43.18	54.00	10.82

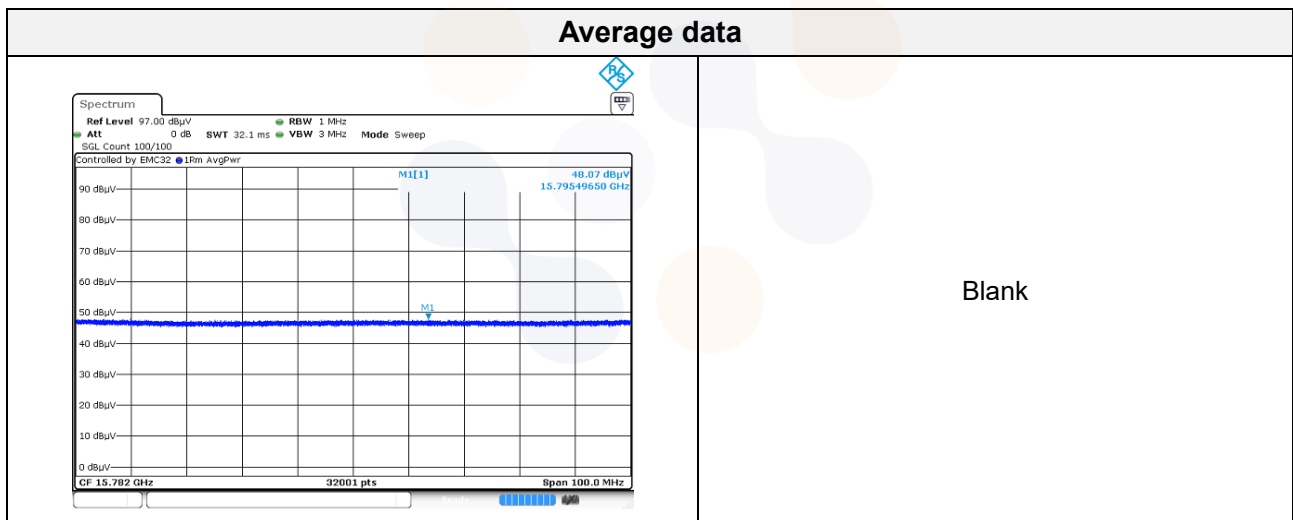


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

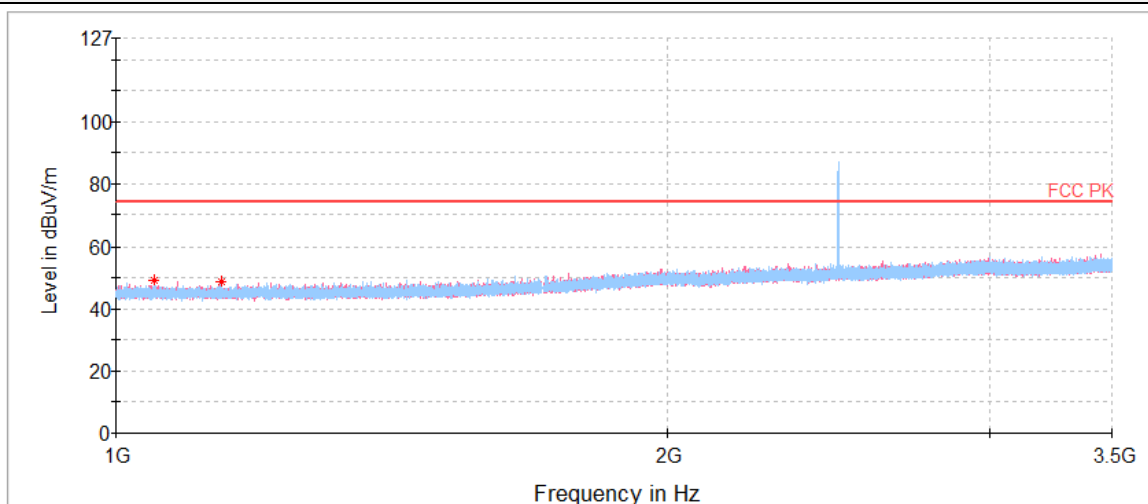


Horizontal/Vertical for 3.5 GHz ~ 5 GHz

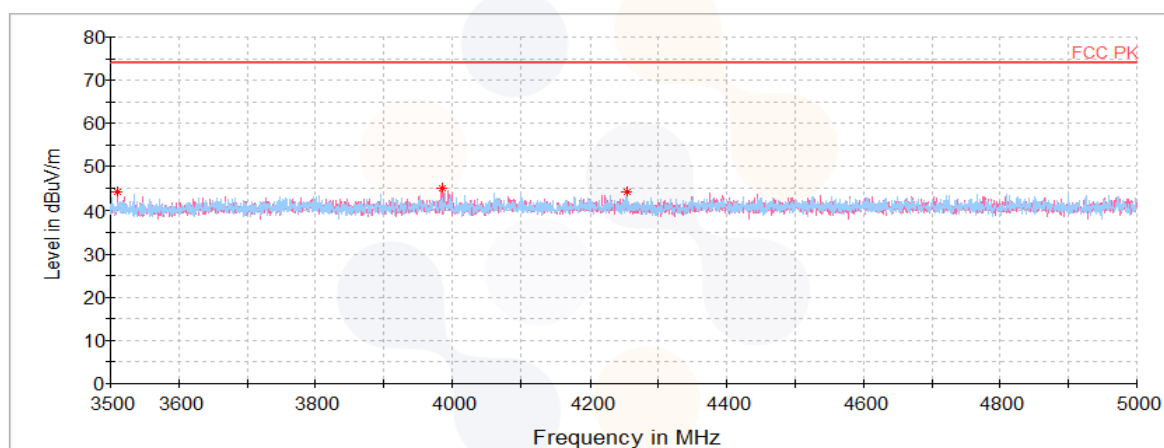


Horizontal/Vertical for 5 GHz ~ 6.5 GHz

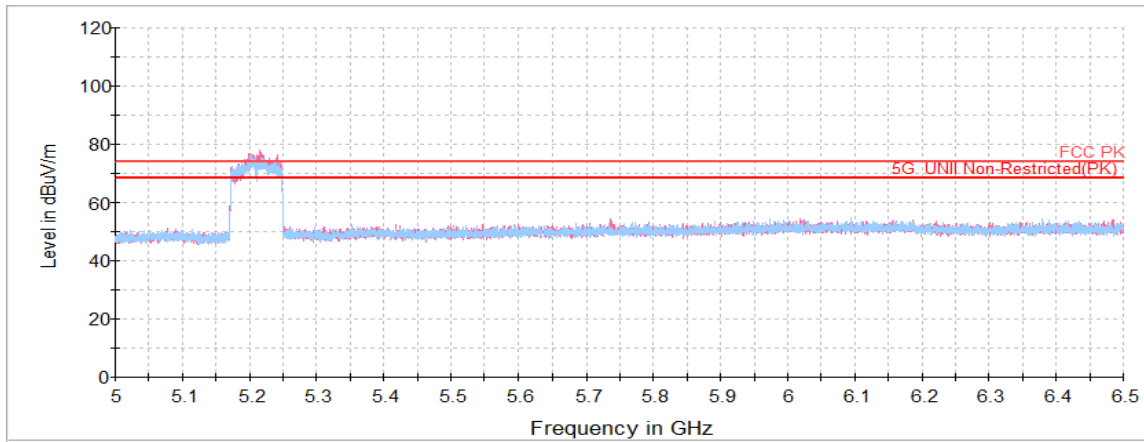

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

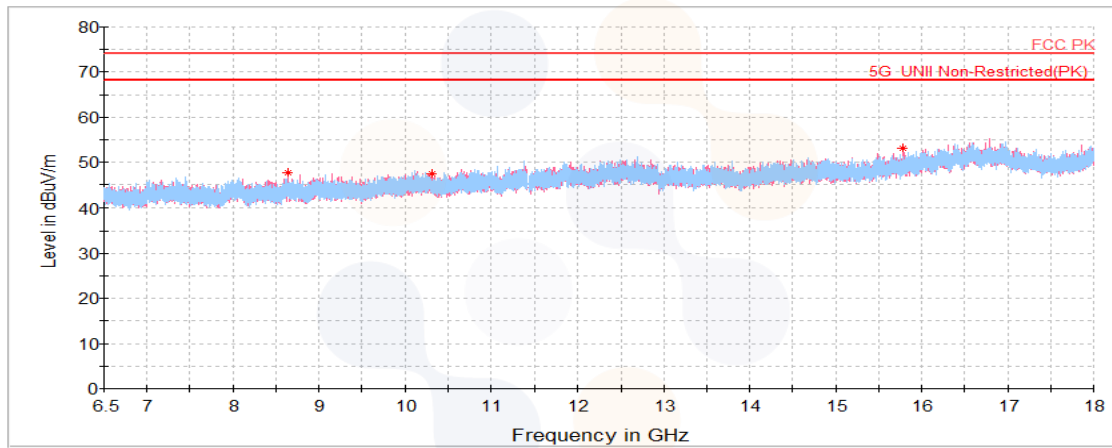


Horizontal/Vertical for 18 GHz ~ 40 GHz

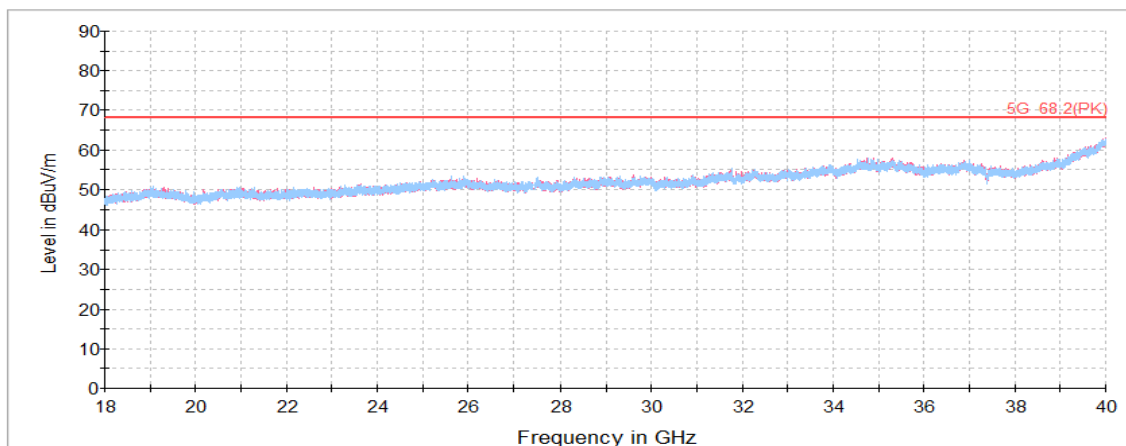

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.

7.6. AC Conducted emission

Test setup

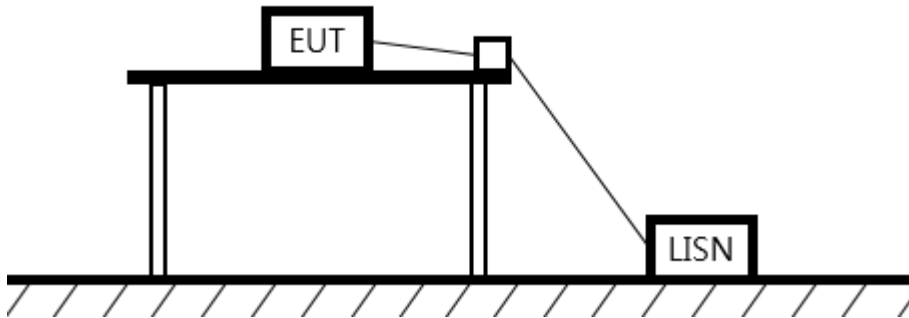

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50μH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dBμV/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

Test results

Worst case: 802.11a_UNII 1_ 5 240 MHz

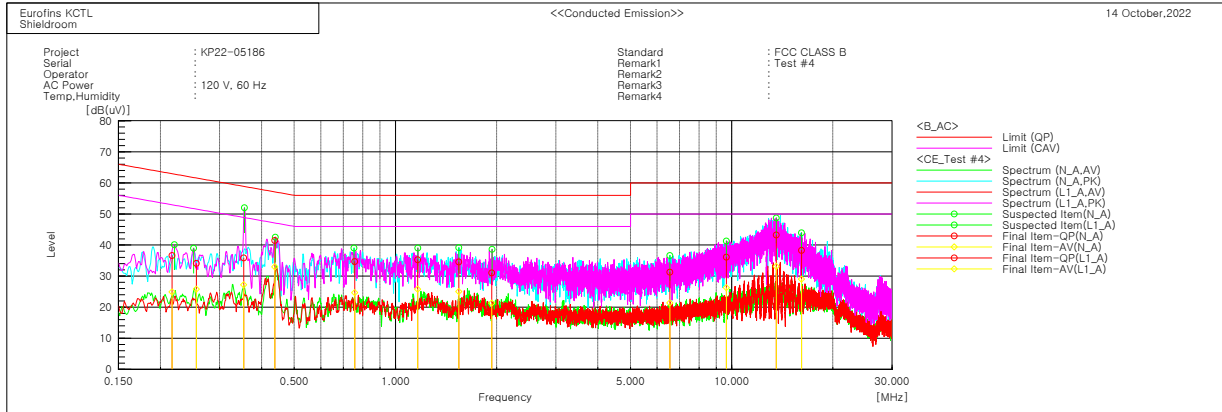

Final Result

--- N_A Phase ---									
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	QP CAV
1	0.75671	24.8	14.7	9.9	34.7	24.6	56.0	46.0	21.3
2	1.54287	24.7	15.1	9.9	34.6	25.0	56.0	46.0	21.4
3	6.54669	21.2	11.3	10.1	31.3	21.4	60.0	50.0	28.7

--- L1_A Phase ---									
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	QP CAV
1	0.2164	26.7	15.0	9.9	36.6	24.9	63.0	53.0	26.4
2	0.25561	24.3	16.0	9.8	34.1	25.8	61.6	51.6	27.5
3	0.35371	25.9	17.3	9.9	35.8	27.2	58.9	48.9	23.1
4	0.43783	31.4	22.9	10.0	41.4	32.9	57.1	47.1	15.7
5	1.16373	25.4	15.9	9.9	35.3	25.8	56.0	46.0	20.7
6	1.93411	21.1	11.4	9.9	31.0	21.3	56.0	46.0	25.0
7	9.64819	25.8	16.0	10.3	36.1	26.3	60.0	50.0	23.9
8	13.57747	32.7	22.6	10.5	43.2	33.1	60.0	50.0	16.8
9	16.12863	27.6	18.4	10.6	38.2	29.0	60.0	50.0	21.8

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	101437	23.07.12
DC Power Supply	AGILENT	E3632A	MY51220373	23.07.11
Attenuator	API Inmet	40AH2W-10	18	23.05.03
Power Sensor	R&S	NRP-Z81	1137.9009.02-106223-bB	23.05.03
Signal Generator	R&S	SMB100A	176206	23.01.19
Vector Signal Generator	R&S	SMBV100A	257566	23.07.04
Spectrum Analyzer	R&S	FSV40	100989	23.10.14
EMI TEST RECEIVER	R&S	ESC17	100732	23.01.19
Bi-Log Antenna	TESEQ	CBL 6112D	62438	24.08.24
Amplifier	SONOMA INSTRUMENT	310N	284608	23.08.18
ATTENUATOR	KEYSIGHT	8491B-6dB	MY39271060	24.04.27
ISOLATION TRANSFORMER	ONETECH CO., LTD	OT-IT500VA	OTR1-16026	23.03.28
Horn antenna	ETS.lindgren	3117	155787	22.09.29
Horn antenna	ETS.lindgren	3116	86635	23.05.04
Attenuator	API Inmet	40AH2W-10	12	23.05.03
AMPLIFIER	B&Z Technologies	BZRT-00504000-481055-382525	26299-27735	23.09.19
AMPLIFIER	B&Z Technologies	BZR-0050400-551028-252525	27736	23.09.19
LOOP Antenna	R&S	HFH2-Z2	100355	24.08.10
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	CO3000	1175/45850319/P	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	CO3000	1175/45850319/P	-
Highpass Filter	WT	WT-A1699-HS	WT160411002	23.05.03
Highpass Filter	Qotana	DBHF058004000A	20070100016	23.07.04
TWO-LINE V - NETWORK	R&S	ENV216	101358	23.09.29
EMI TEST RECEIVER	R&S	ESC13	100001	23.08.18

*Tests related to this equipment were progressed after the calibration was completed.

End of test report