



FCC Test Report

Test report no.: EMC_381FCC15.247_2003_Si-Ge
FCC Part 15.247 for DSSS systems / CANADA RSS-210

EUT: WLAN Model: BCM94306CB
FCC ID: QDS-BRCM1006



Accredited according to ISO/IEC 17025



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Table of Contents

- 1 **General information**
- 1.1 **Notes**
- 1.2 **Testing laboratory**
- 1.3 **Details of applicant**
- 1.4 **Application details**
- 1.5 **Test item**
- 1.6 **Test standards**
- 2 **Technical test**
- 2.1 **Summary of test results**
- 2.2 **Test report**
- 1 **General information**
- 1.1 **Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:

EMC Engineer: Harpreet Sidhu

1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com

1.3 Details of applicant

Name : Broadcom corporation
Street : 190 Mathilda Place
City / Zip Code : Sunnyvale, CA 94086
Country : USA
Contact : Chris McGough
Telephone : 408-922-5810
Tele-fax : 408-543-3399
e-mail : cmcgough@broadcom.com

1.4 Application details

Date of receipt of application : 2003-02-14
Date of receipt test item : 2003-02-14
Date of test : 2003-02-14/15/18

1.5 Test item

Manufacturer : Applicant
Model No. (EUT) : BCM94306CB
Description : [54g wireless LAN PCMCIA type CardBus](#)
FCC ID : QDS-BRCM1006

Additional information

Frequency : 2412MHz – 2462MHz
Type of modulation : DSSS / OFDM (orthogonal frequency division multiplexing)
Number of channels : 11
Antenna : Chip antenna
Power supply : 3.3 VDC from Host
Output power : 25.83dBm (382.82mW) conducted peak power
(For EIRP and Source-based time-averaged output please see page no.11)
Extreme temp. Tolerance : 0°C to +85°C

Host (Laptop) Information

Brand / Model : Dell / PP02X

1.6 Test standards: FCC Part 15 §15.247 / CANADA RSS-210


NOTE: This test report represents retesting of pre-approved WLAN Model: BCM94306CB with different (Si-Ge) power amp. The original FCC filing was covered under test report no. EMC_381FCC15.247_2003

2 Technical test


2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only "passed" if all single measurements are "passed")	Passed

Technical responsibility for area of testing:

2003-04-25	EMC & Radio	Lothar Schmidt (Manager)	
Date	Section	Name	Signature

Responsible for test report and project leader:

2003-04-25	EMC & Radio	Harpreet Sidhu (EMC Engineer)	
Date	Section	Name	Signature

2.2 Test report

TEST REPORT

Test report no.: EMC_381FCC15.247_2003_Si-Ge

EUT: WLAN Model: BCM94306CB

FCC ID: QDS-BRCM1006

TEST REPORT REFERENCE

LIST OF MEASUREMENTS		PAGE
SPECTRUM BANDWIDTH OF DSSS SYSTEM	§15.247(a) (2)	7
OUTPUT POWER	§ 15.247 (b) (1)	11
POWER SPECTRAL DENSITY	§15.247 (d)	21
BAND EDGE COMPLIANCE	§15.247 (c)	29
EMISSION LIMITATIONS	§ 15.247 (c) (1)	33
CONDUCTED EMISSIONS	§ 15.107/207	47
RECEIVER SPURIOUS RADIATION	§ 15.209	48
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		53
BLOCK DIAGRAMS		54

**SPECTRUM BANDWIDTH OF DSSS SYSTEM
6 dB bandwidth**

§15.247(a) (2)

TEST CONDITIONS		6 dB BANDWIDTH (MHz)		
Frequency (MHz)		2412	2437	2462
T_{nom}(23)°C	V_{nom}(3.3) VDC	15.98	15.43	15.38

LIMIT


SUBCLAUSE §15.247(a) (2)

The minimum 6dB bandwidth shall be at least 500 KHz

**SPECTRUM BANDWIDTH OF DSSS SYSTEM
6 dB bandwidth**

§15.247(a) (2)


Lowest Channel: 2412MHz

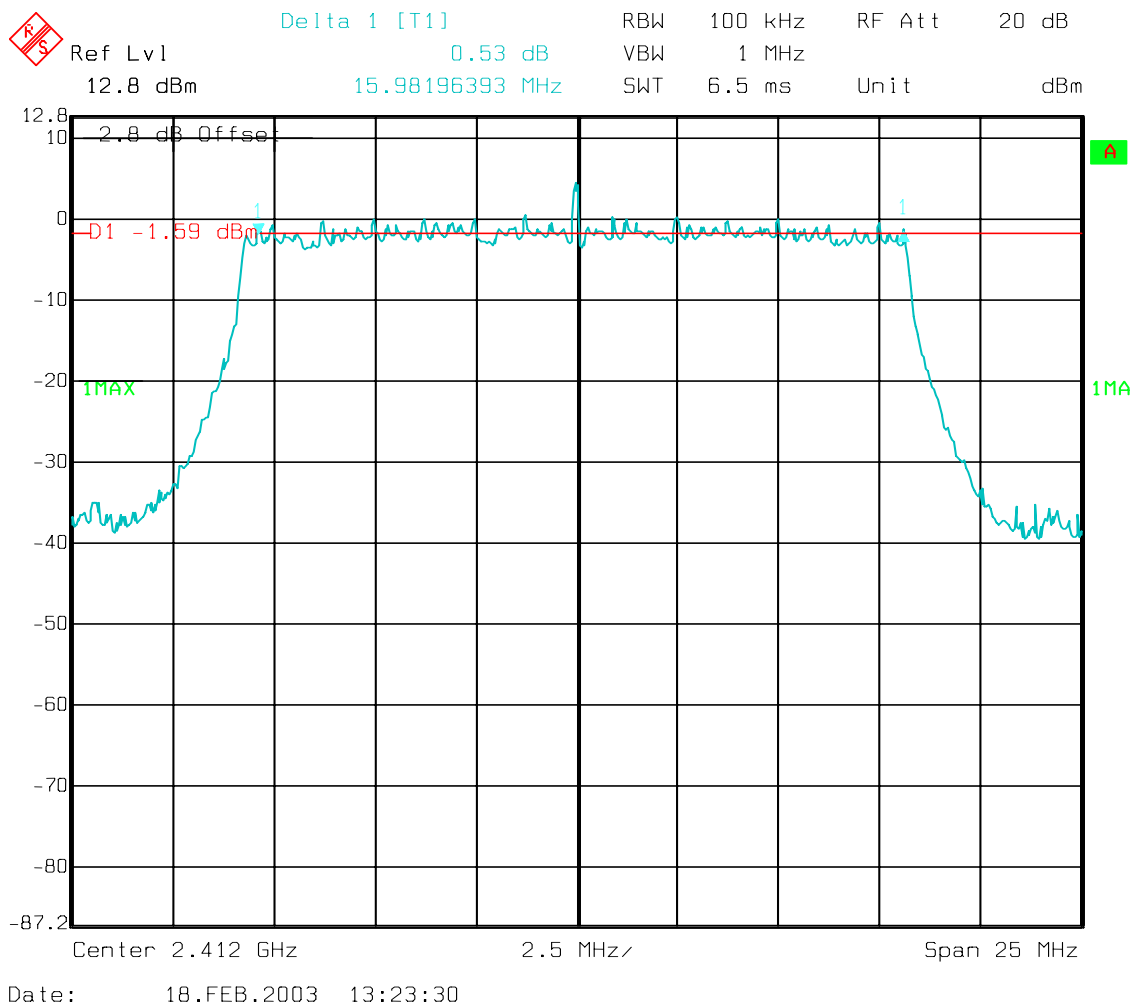

SPECTRUM BANDWIDTH OF DSSSS SYSTEM
6 dB bandwidth

§15.247(a) (2)

Mid Channel: 2437MHz

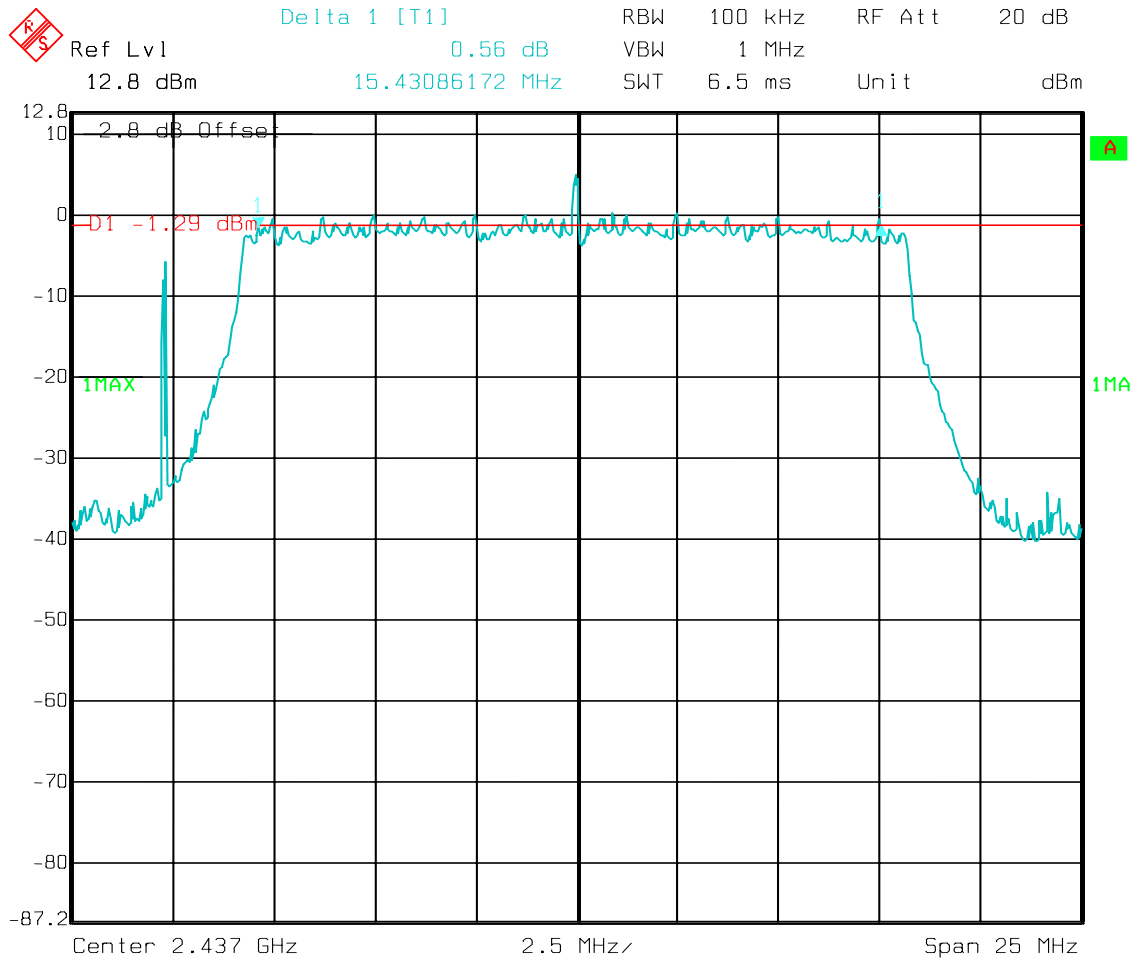


Date: 18.FEB.2003 13:21:04

**SPECTRUM BANDWIDTH OF DSSS SYSTEM
6 dB bandwidth**

§15.247(a) (2)

Highest Channel: 2462MHz

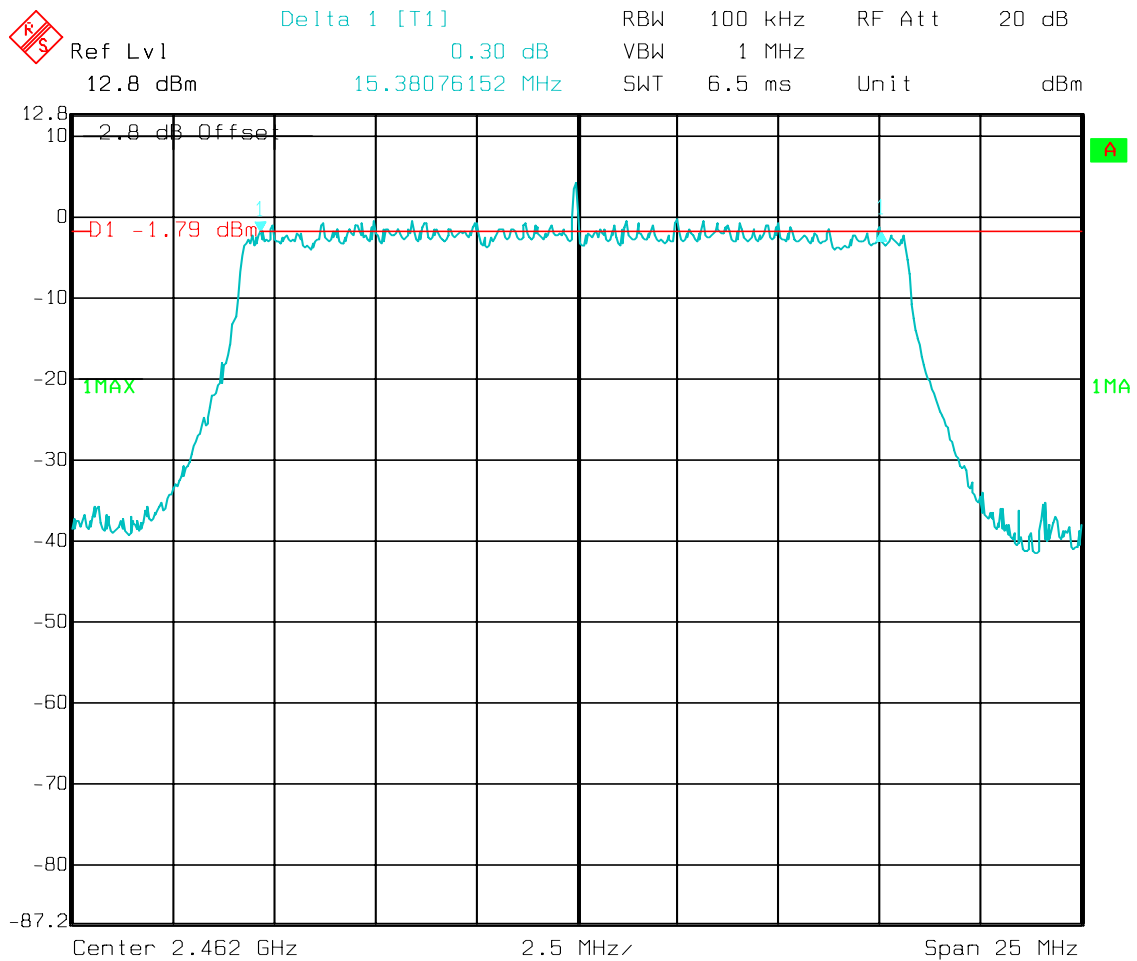

Date: 18.FEB.2003 13:17:48

OUTPUT POWER

§ 15.247 (b) (1)

	Low channel	Mid channel	High channel
*Conducted Peak Power	25.62dBm	25.83dBm	25.09dBm
*Radiated Power (EIRP)	25.73dBm	24.31dBm	23.62dBm
**Source-based time averaged output	18.85dBm	19.06dBm	18.32dBm

***For details please refer to pages 12(Conducted output power results), 16(EIRP calculation) & 17(duty cycle measurements) respectively.**

****The source-based time-averaged output power is calculated using the duty cycle (measurement result see page 17-20, These values are used to determine if the TCB route can be used)**

**MAXIMUM PEAK OUTPUT POWER
(Conducted)**

§ 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)		2412		2437	2462
T _{nom} (23)°C	V _{nom} (3.3) VDC	Pk	*25.62	*25.83	*25.09
Measurement uncertainty		±0.5dBm			

RBW / VBW: 10MHz

*To comply with following;

RBW / VBW should be equal to or greater than the 6dB BW

All measured values are corrected by **10log 6dB BW / used BW**

(Therefore correction factor of 2.03, 1.88 & 1.86 is added to low, mid& high channel measurements respectively)

LIMIT


SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt / 30dBm

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b) (1)


Lowest Channel: 2412MHz

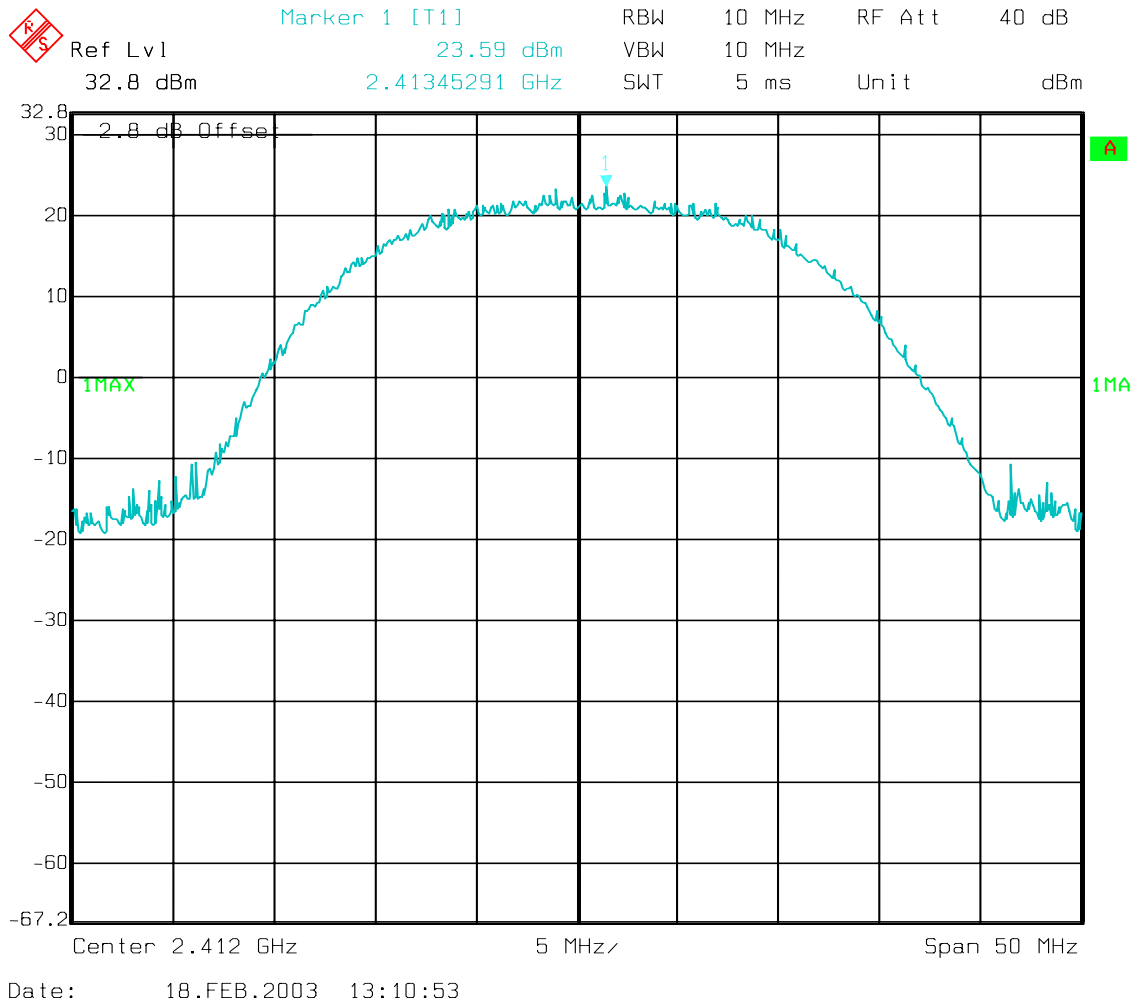

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Mid Channel: 2437MHz

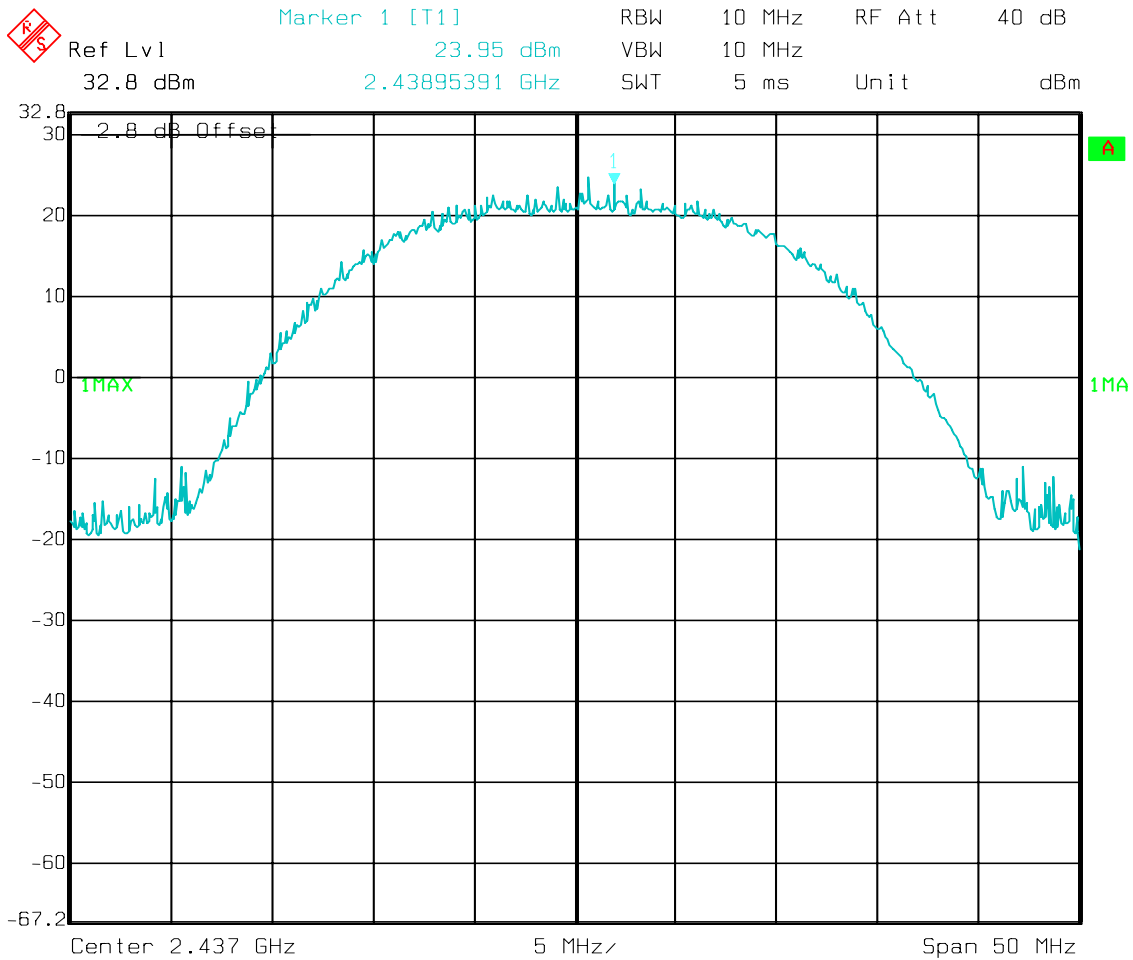


Date: 18.FEB.2003 13:11:53

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Highest Channel: 2462MHz

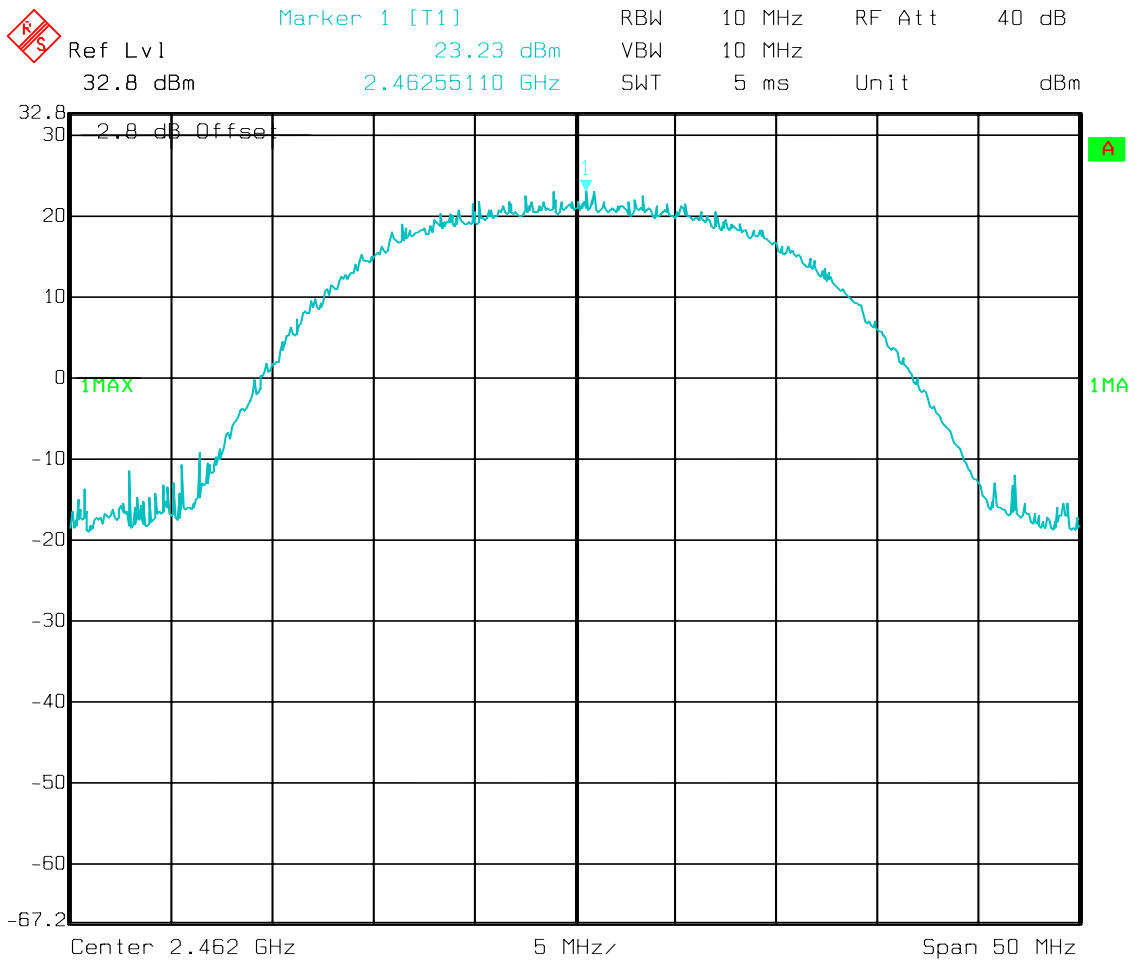

Date: 18.FEB.2003 13:13:25

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)**

§ 15.247 (b) (1)

EIRP:

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
		2412	2437	2462
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} (3.3) VDC	*25.73	*24.31	*23.62
Measurement uncertainty		±0.5dBm		

*To comply with following;

RBW / VBW should be equal to or greater than the 6dB BW

All measured values are corrected by **10log 6dB BW / used BW**

(Therefore correction factor of 2.03, 1.88 & 1.86 is added to low, mid& high channel measurements respectively)

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	30dBm on Conducted

SOURCE-BASED TIME-AVERAGED OUTPUT

$T_{x\ on} = 140.2\ \mu s$

$T_{x\ on} + T_{x\ off} = 661.32\ \mu s$

Duty factor = $T_{x\ on} / T_{x\ on} + T_{x\ off} = 140.2 / 661.32 = 0.21$

Therefore;


(Example for Low channel)

Source-based time averaged output = Max. Conducted Peak Power + 10log(duty factor)
 = 25.62 – 6.77 = **18.85dBm**

TEST CONDITIONS		SOURCE-BASED TIME AVERAGED OUTPUT (dBm)		
		2412	2437	2462
T_{nom}(23)°C	V_{nom}(3.3) VDC	18.85	19.06	18.32


Please refer to the plots on next pages

Transmitter ON time – Tx_{on}

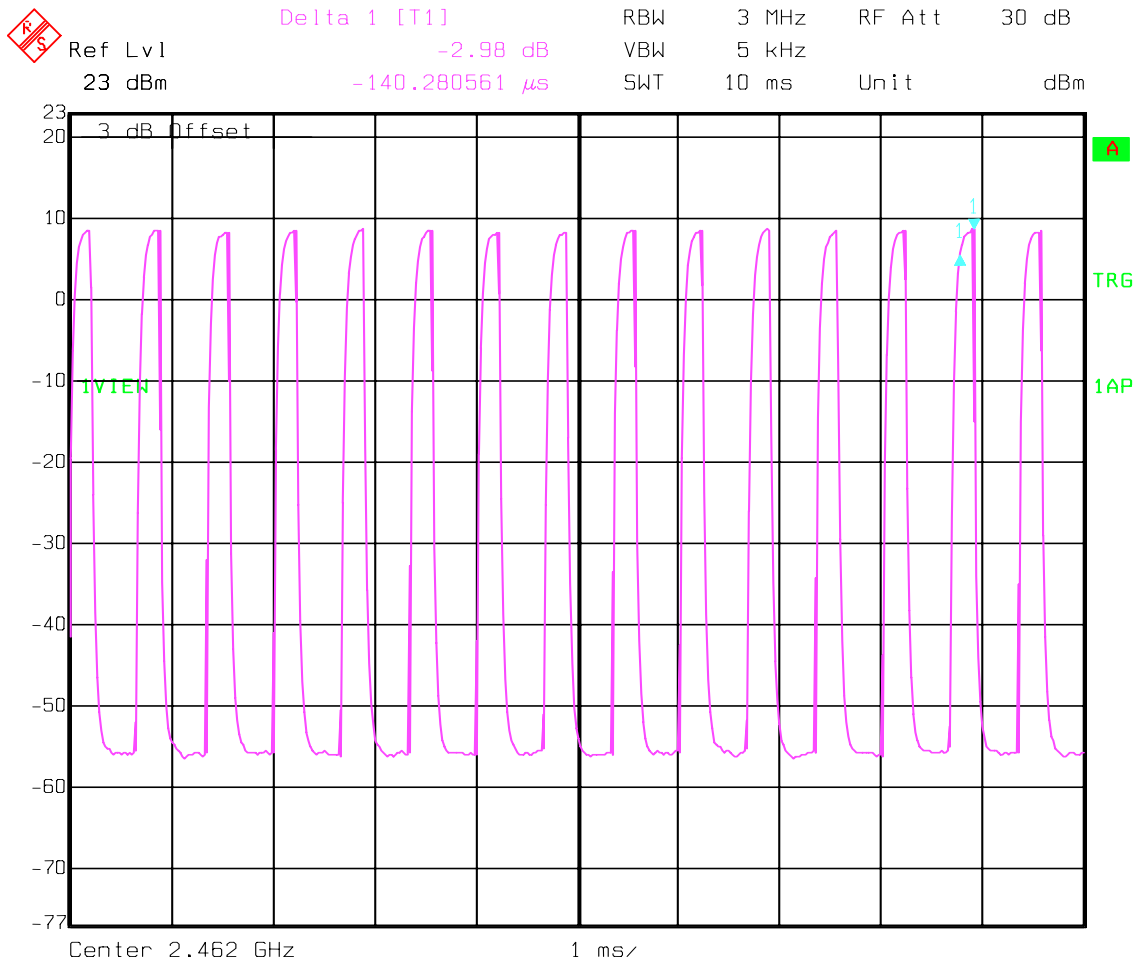


Date: 11.DEC.2002 03:43:11

Transmitter ON+OFF time – $T_{x_{on}} + T_{x_{off}}$

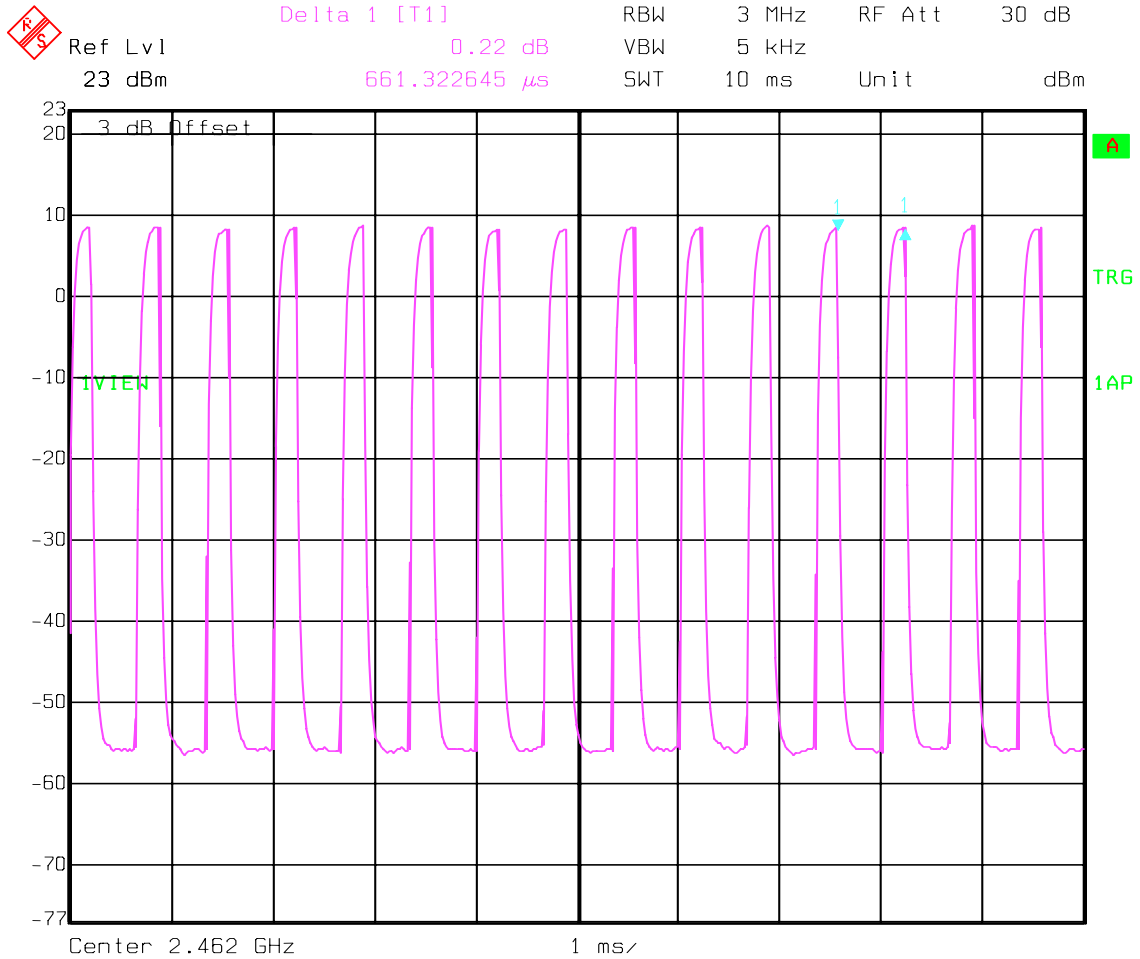

Date: 11.DEC.2002 03:45:09

100ms plot – to show repetition of pattern

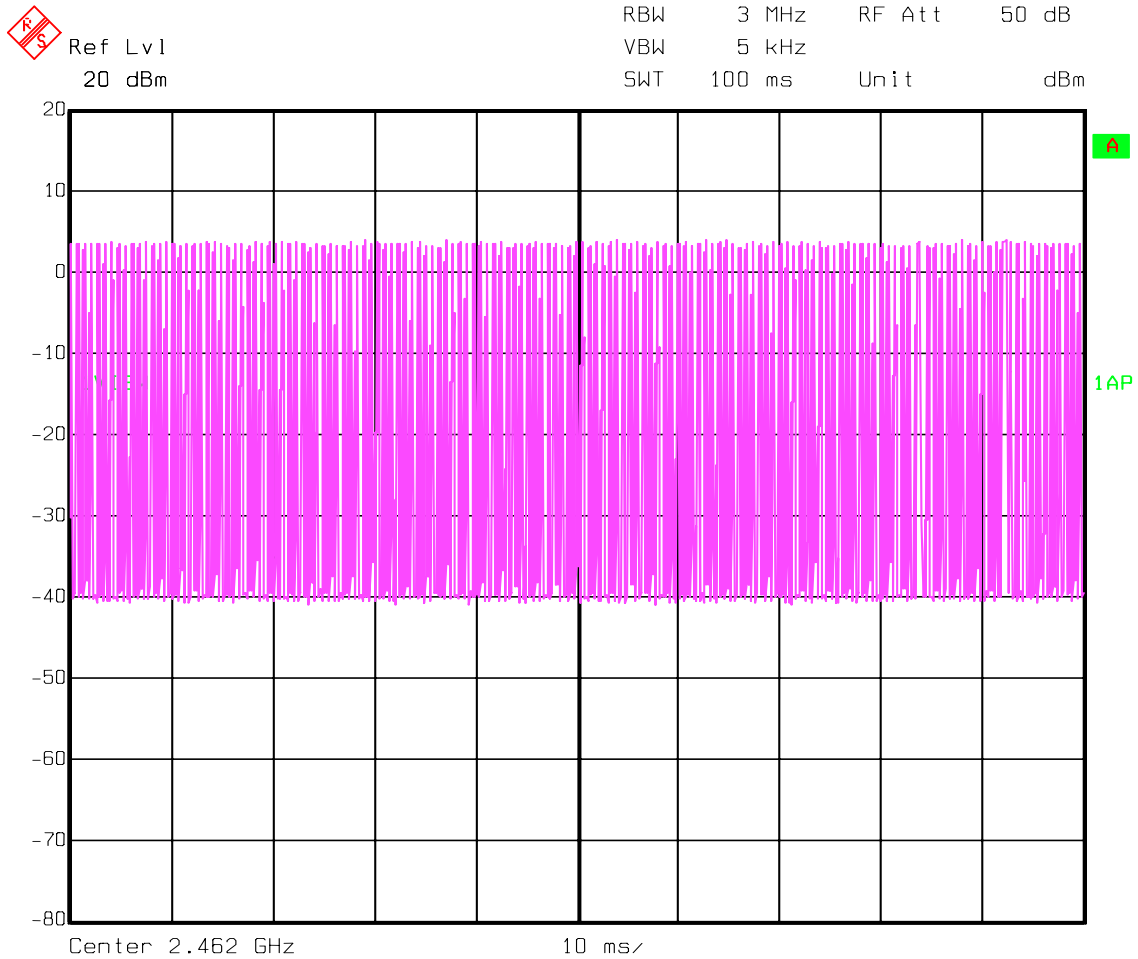

Date: 11.DEC.2002 04:22:23

POWER SPECTRAL DENSITY

§15.247 (d)

TEST CONDITIONS		POWER SPECTRAL DENSITY (dBm)		
		2412	2437	2462
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} (3.3) VDC	1.13	1.64	1.28

LIMIT

SUBCLAUSE §15.247(d)


The peak power spectral density shall not be greater than 8dBm in any 3 kHz band

ANALYZER SETTINGS: RBW=3KHz, VBW=3KHz

POWER SPECTRAL DENSITY

§15.247(d)

Lowest Channel: 2412MHz

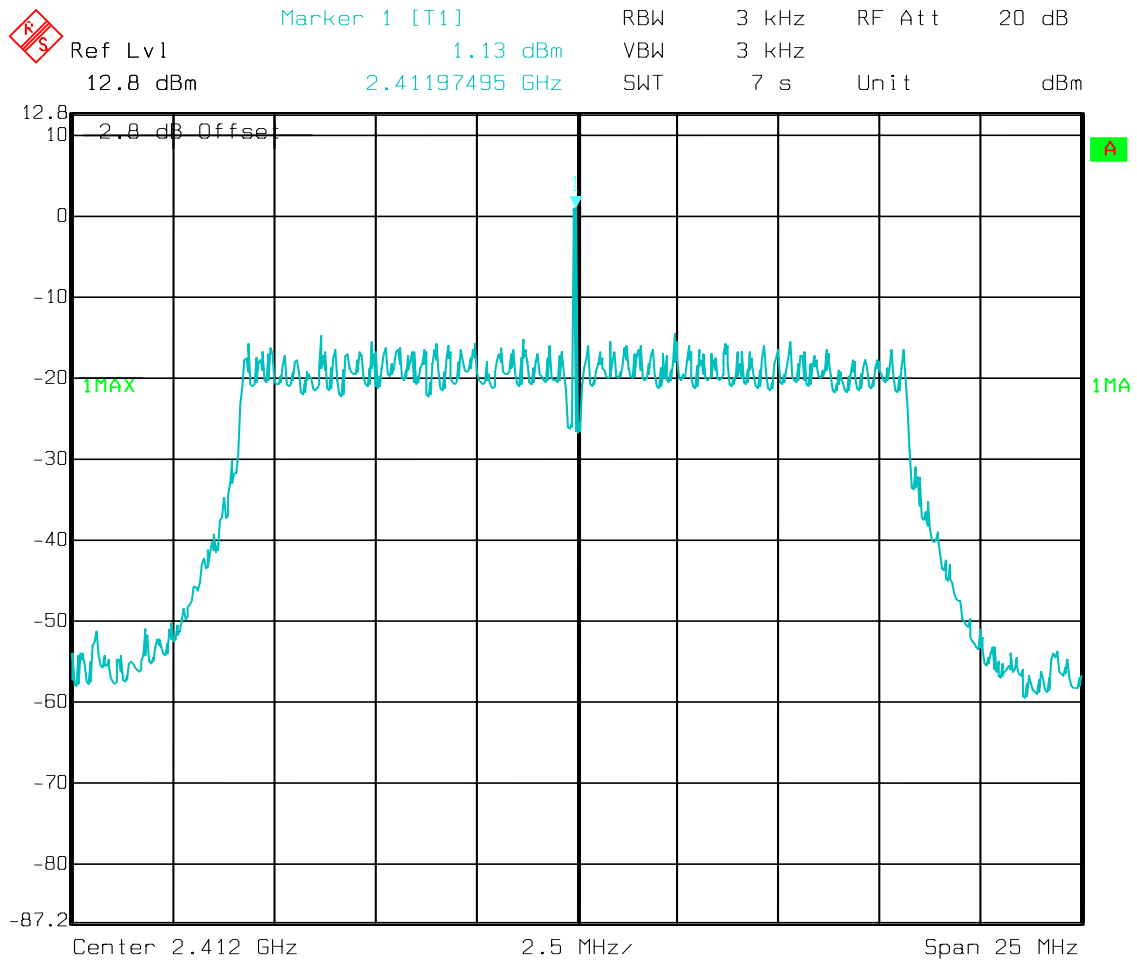


Date: 18.FEB.2003 13:26:15

POWER SPECTRAL DENSITY

§15.247(d)

Mid Channel: 2437MHz

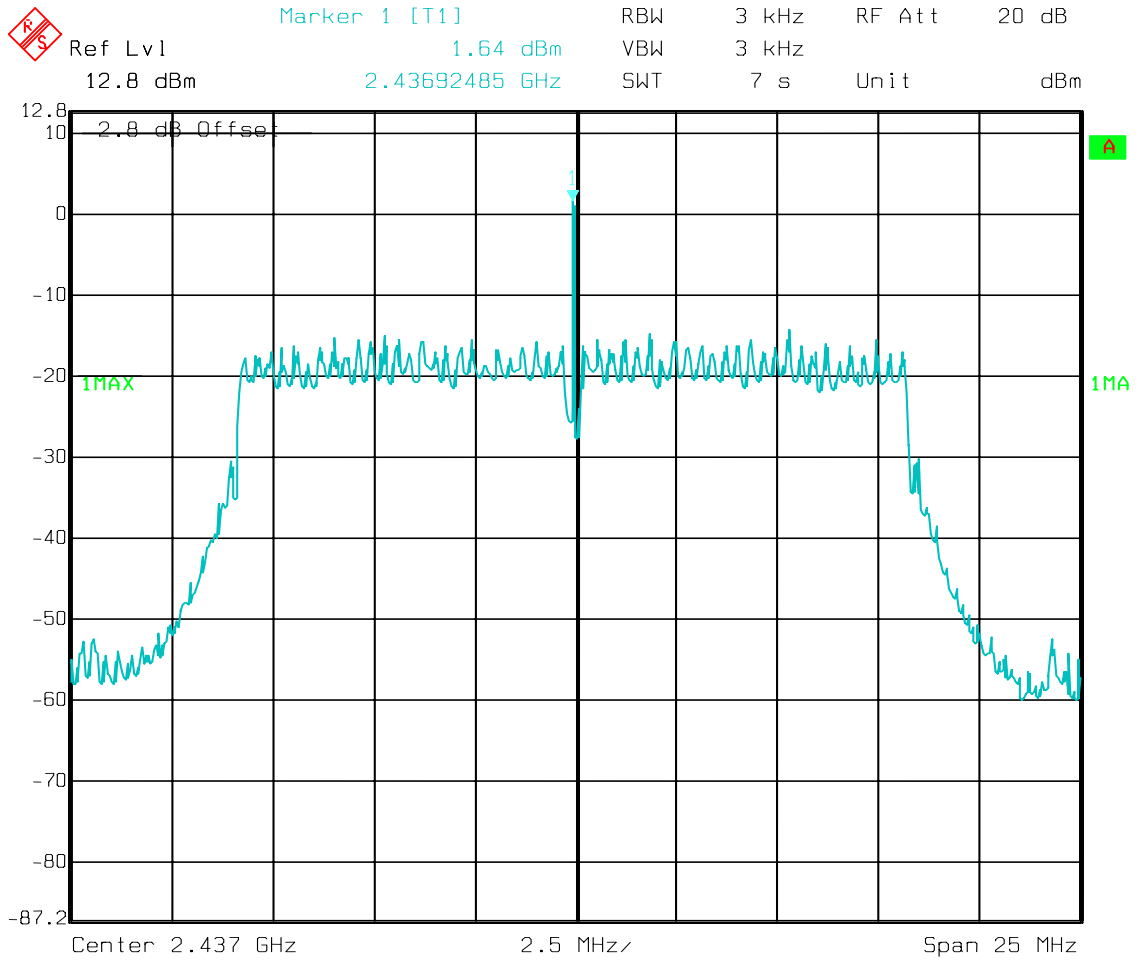


Date: 18.FEB.2003 13:27:43

POWER SPECTRAL DENSITY

§15.247(d)

Highest Channel: 2462MHz

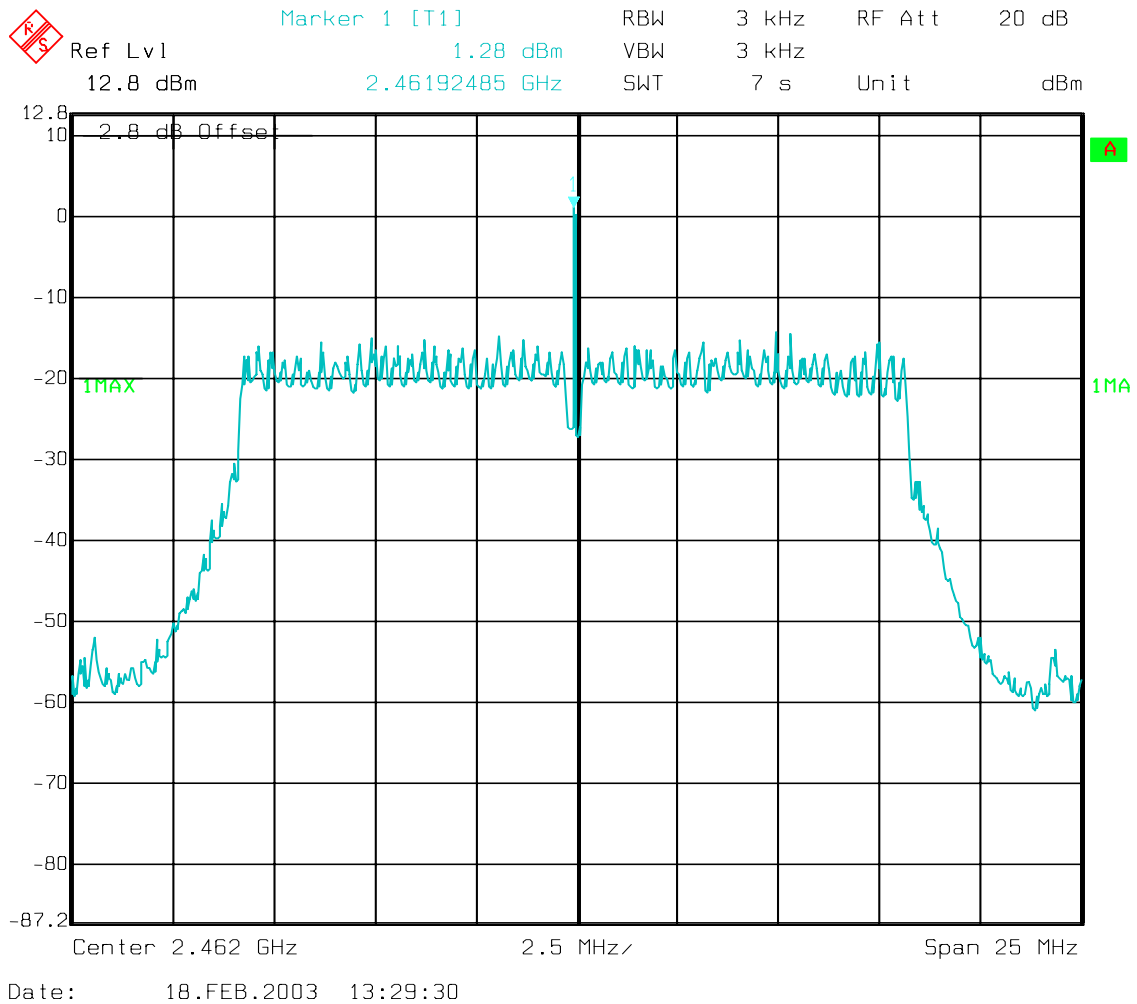

POWER SPECTRAL DENSITY

RSS-210

TEST CONDITIONS		POWER SPECTRAL DENSITY (dBm/MHz)		
		2412	2437	2462
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} (3.3) VDC	*11.37	*11.31	*11.37

*Correction factor of 60dBm is added to convert measured values from dBm/Hz to dBm/MHz

LIMIT

RSS-210


The peak power spectral density shall be $\leq 50\text{mW/MHz}$ (17dBm/MHz)

ANALYZER SETTINGS: RBW=1MHz, VBW=1MHz

POWER SPECTRAL DENSITY

RSS-210


Lowest Channel: 2412MHz

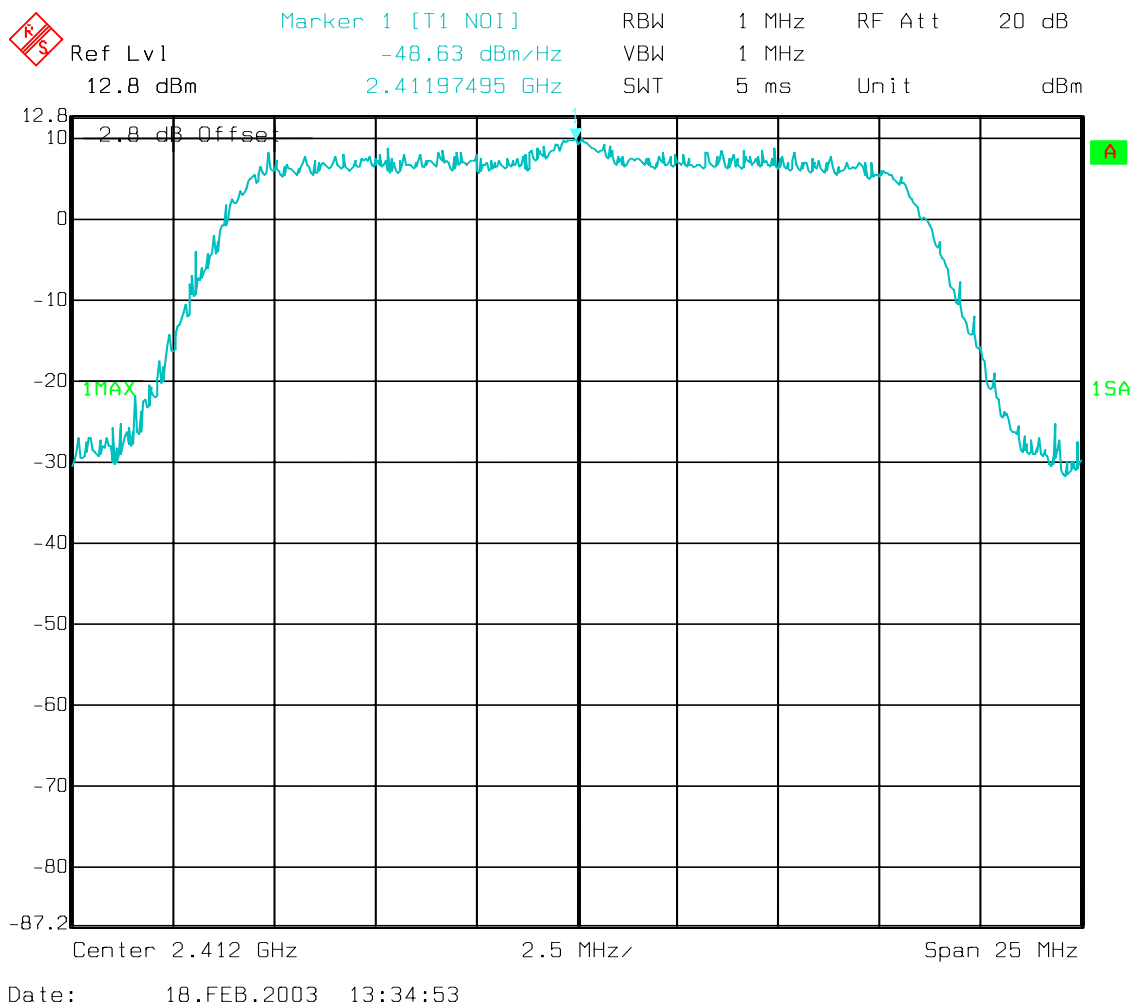

POWER SPECTRAL DENSITY

RSS-210

Mid Channel: 2437MHz

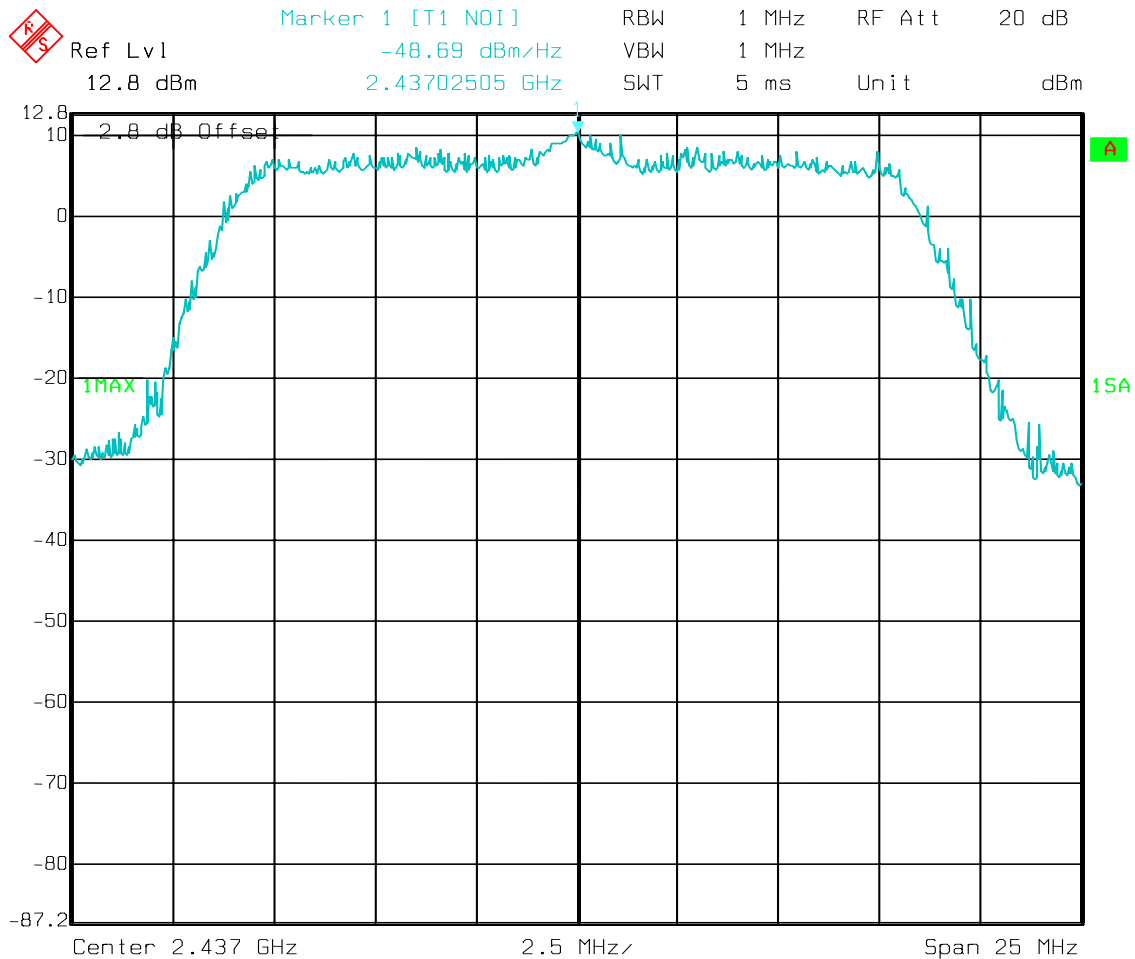


Date: 18.FEB.2003 13:32:21

POWER SPECTRAL DENSITY

RSS-210

Highest Channel: 2462MHz

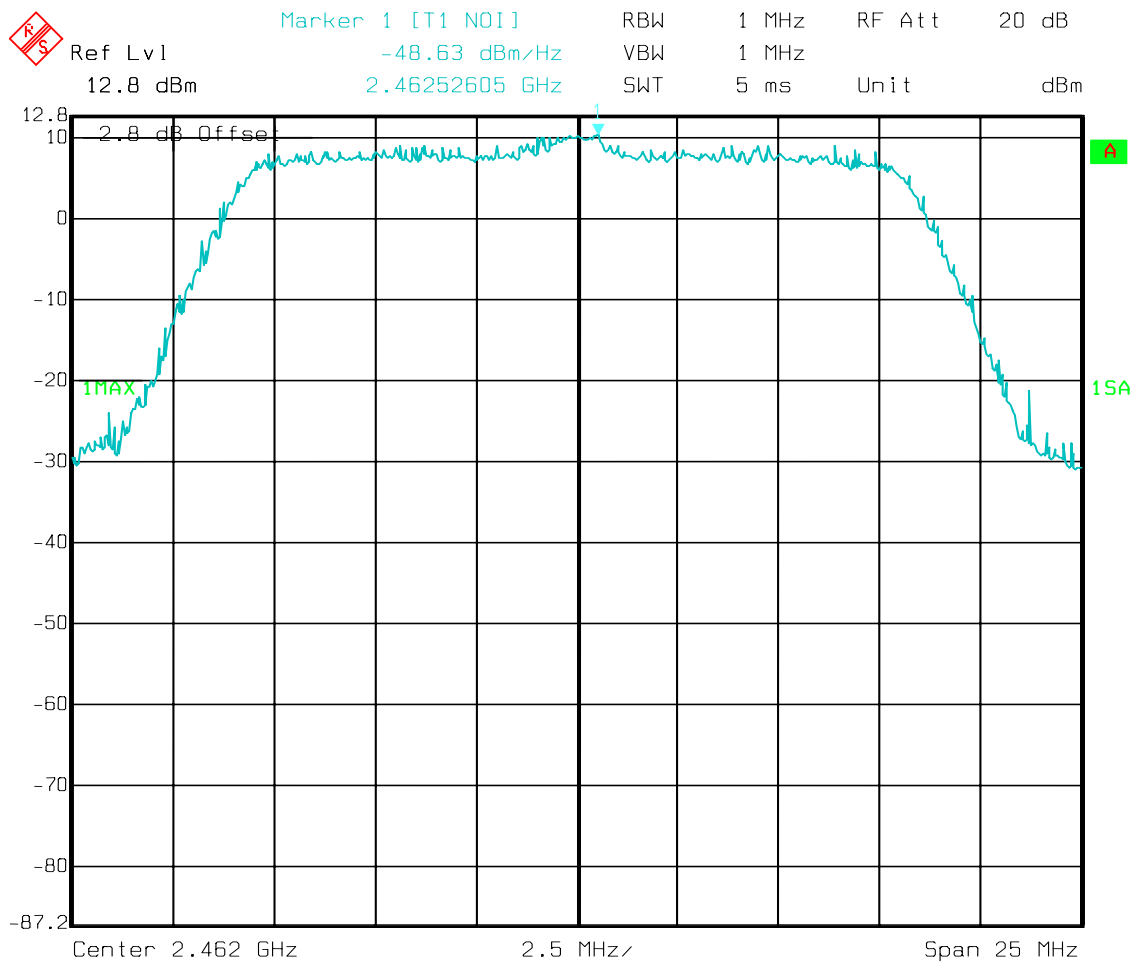

Date: 18.FEB.2003 13:31:02


BAND EDGE COMPLIANCE

§15.247 (c)

**Low frequency section (spurious in the restricted band 2310 – 2390 MHz)
(Average measurement)**

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

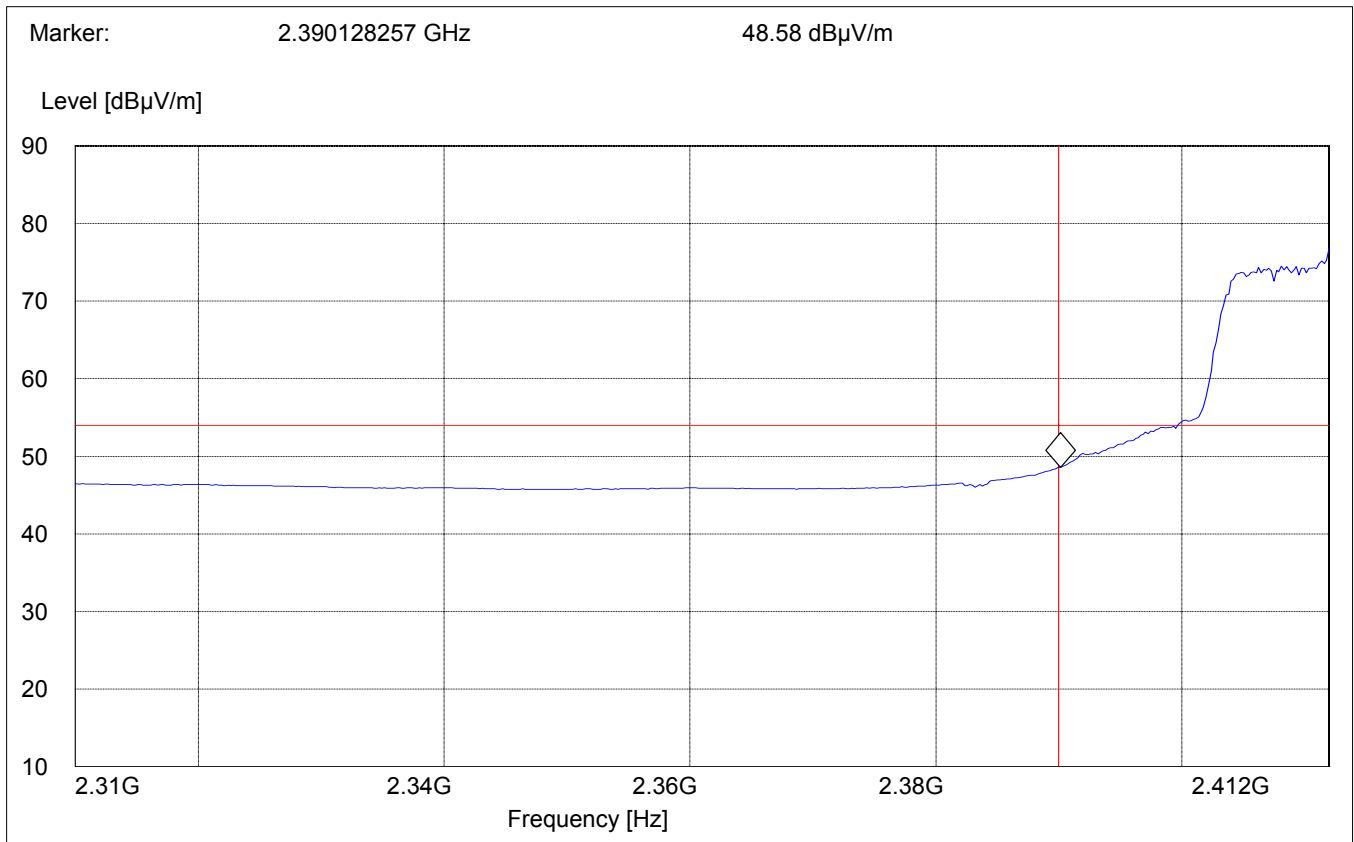


BAND EDGE COMPLIANCE

§15.247 (c)

**Low frequency section (spurious in the restricted band 2310 – 2390 MHz)
(Peak measurement)**

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

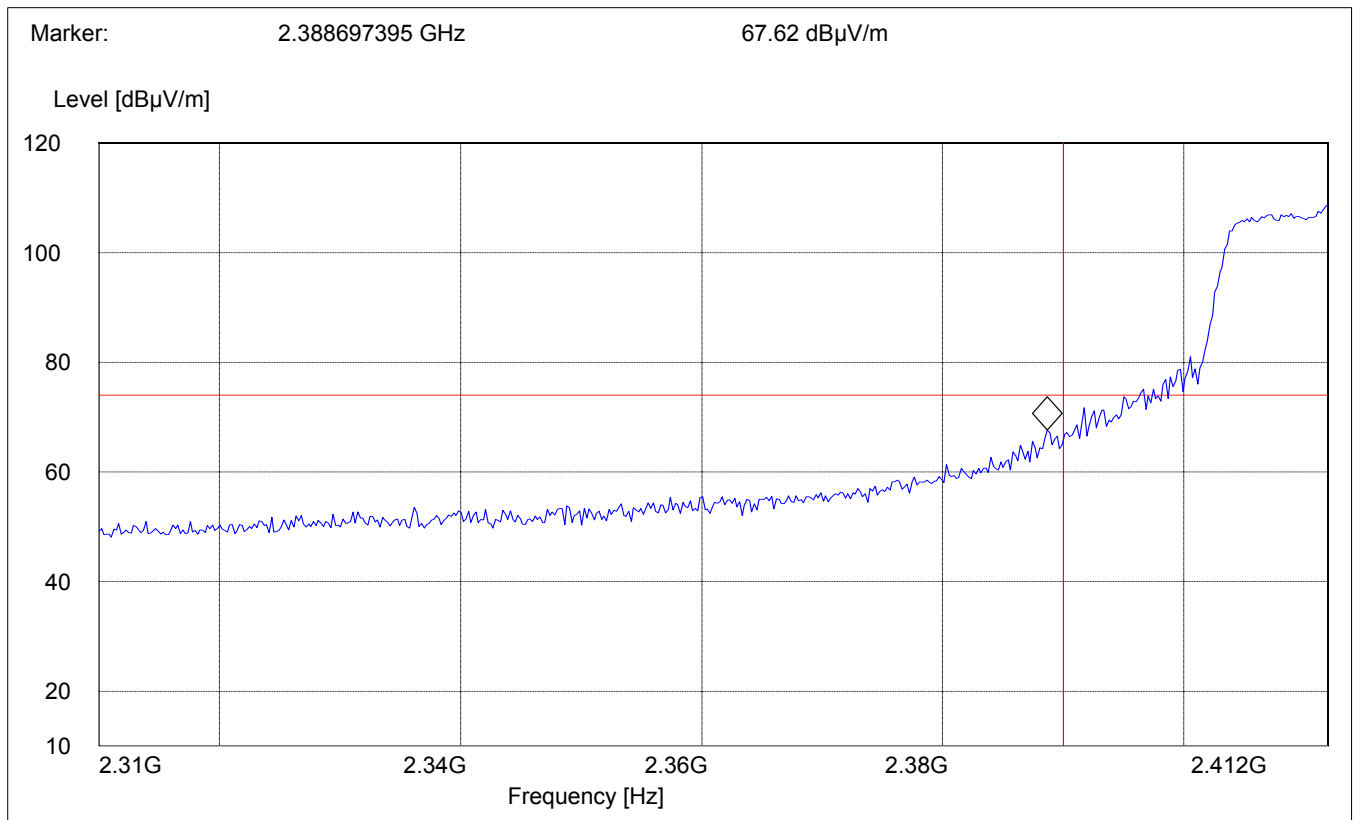


BAND EDGE COMPLIANCE

§15.247 (c)

**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)
(Average measurement)**

Operating condition : Tx at 2472MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

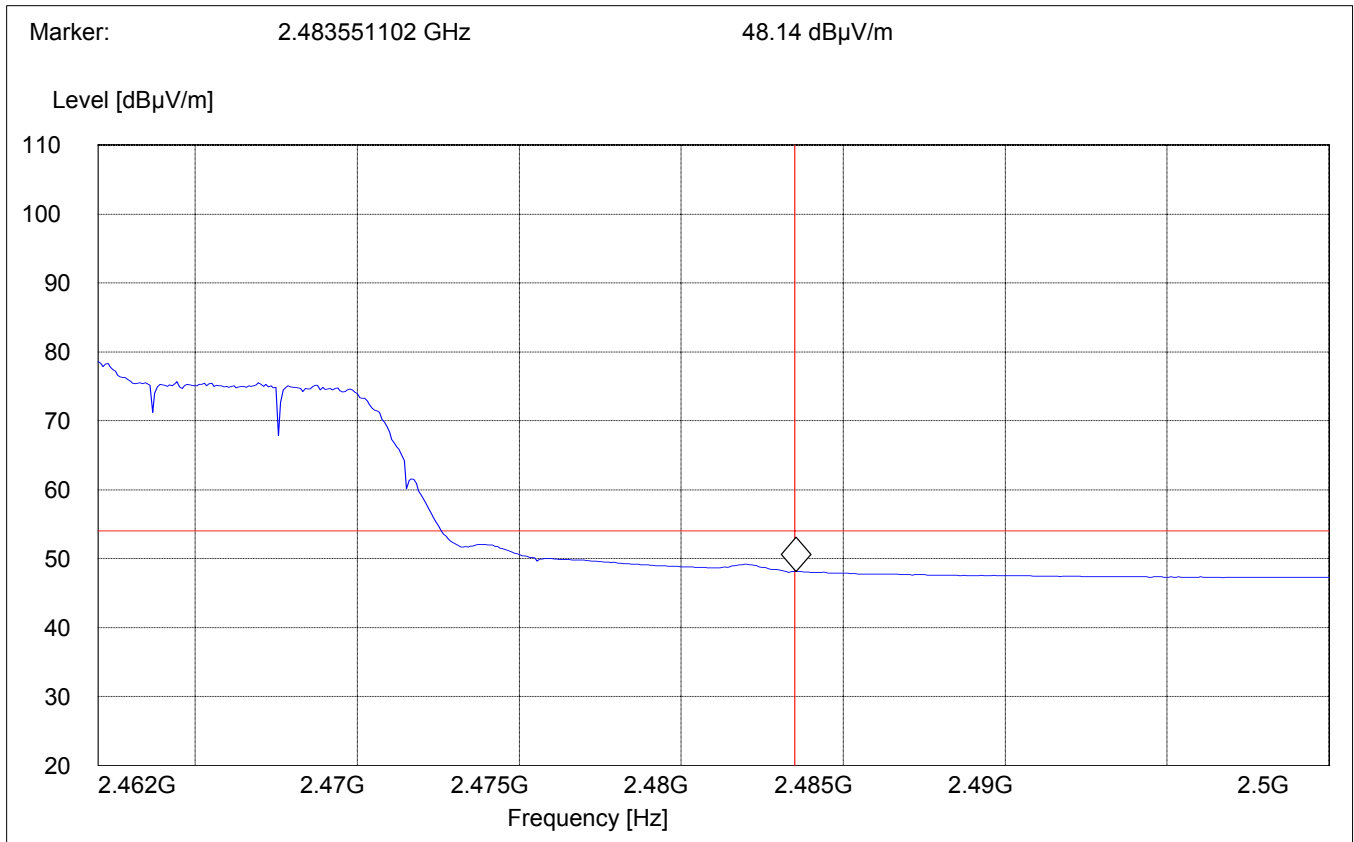


BAND EDGE COMPLIANCE

§15.247 (c)

**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)
(Peak measurement)**

Operating condition : Tx at 2472MHz
 SWEEP TABLE : "FCC15.247 HBE_PK"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

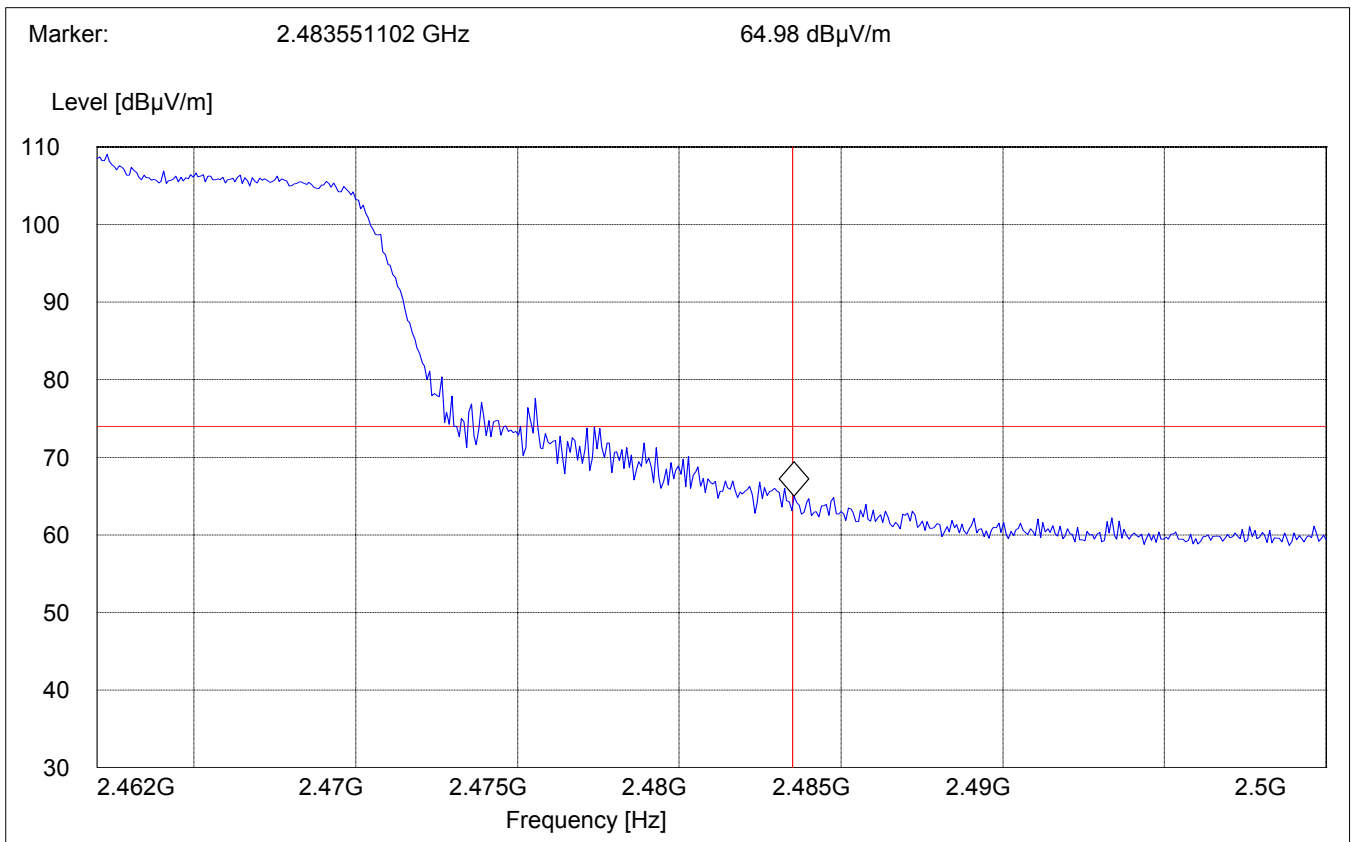

**EMISSION LIMITATIONS
Transmitter (Conducted)
LIMITS**

§ 15.247 (c) (1)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).


NOTE: Frequency resolution is not fine enough to show the exact frequency of the carrier.

EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2412MHz): 10kHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

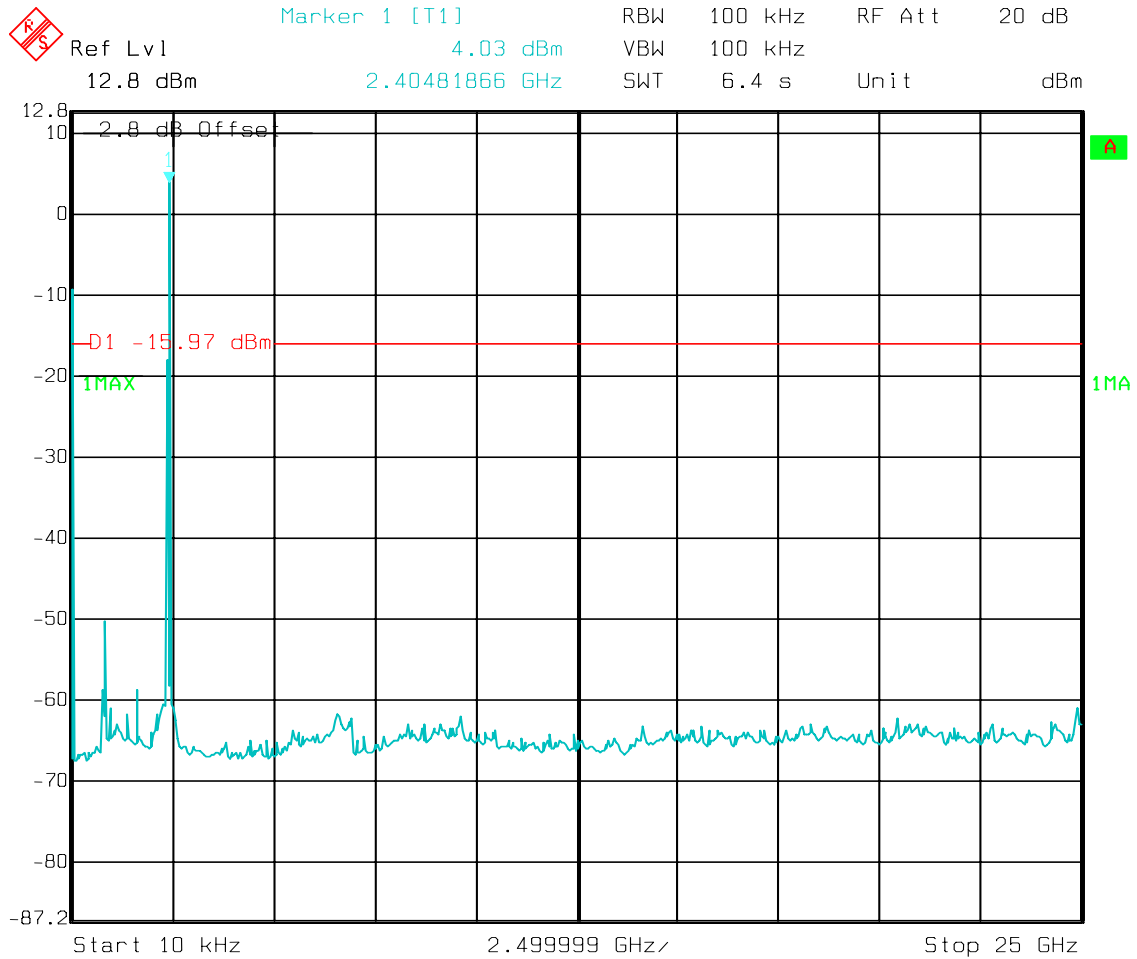


EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Mid Channel (2437MHz): 10kHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

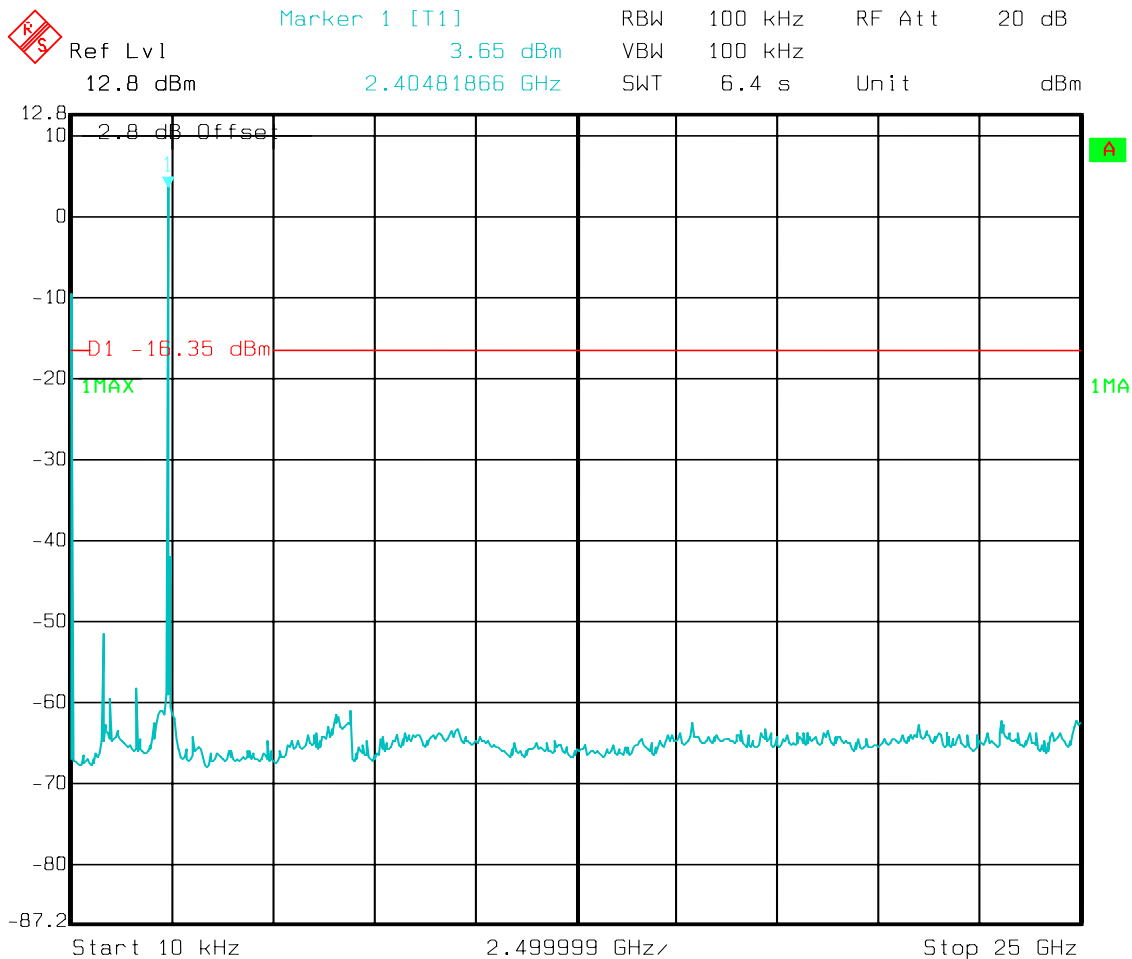


Date: 18.FEB.2003 13:40:39

EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Highest Channel (2462MHz): 10MHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

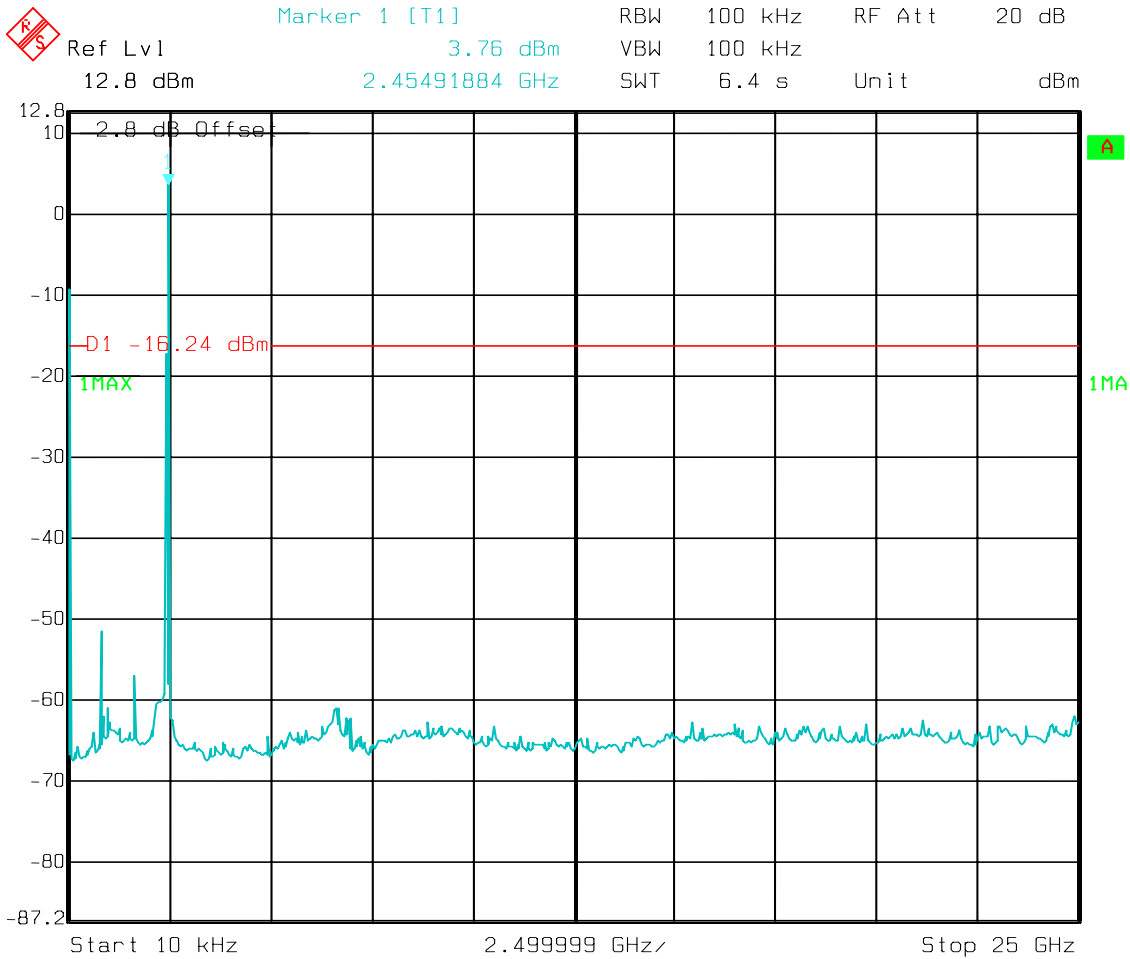

Date: 18.FEB.2003 13:42:45

**EMISSION LIMITATIONS
Transmitter (Radiated)**

§ 15.247 (c) (1)

LIMITS

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

Transmit at Lowest channel Frequency 2412MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Middle channel Frequency 2437MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Highest channel Frequency 2462MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2412MHz): 30MHz – 1GHz

Note: This plot is valid for all three (low, mid, high) channels.

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

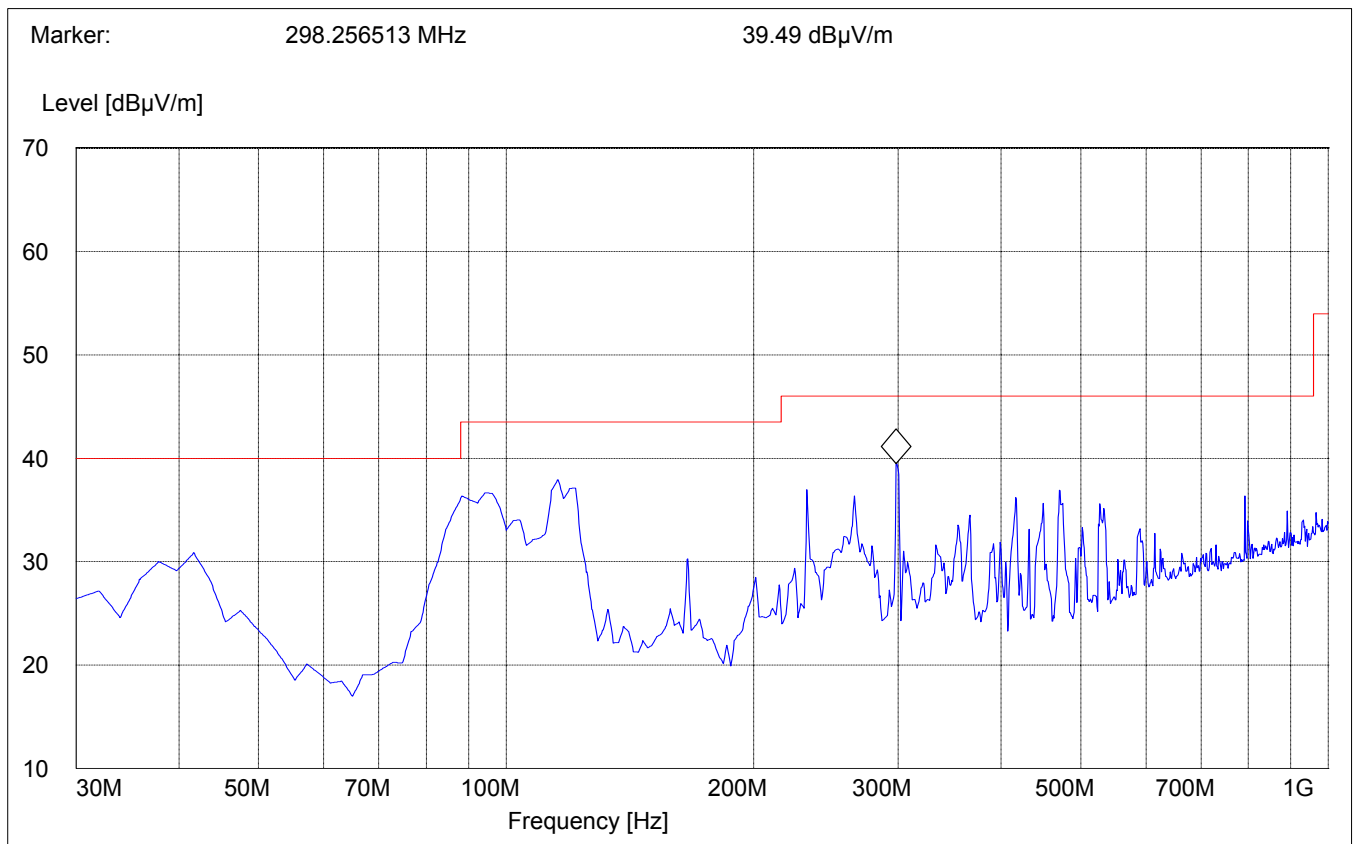

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Lowest Channel (2412MHz): 1GHz – 3GHz

Average Measurement with VBW=10Hz

Note: The peak above the limit line is the carrier freq.


SWEEP TABLE:		"BT Spuri hi 1-3G"				
Short Description:		Bluetooth Spurious 1-3GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

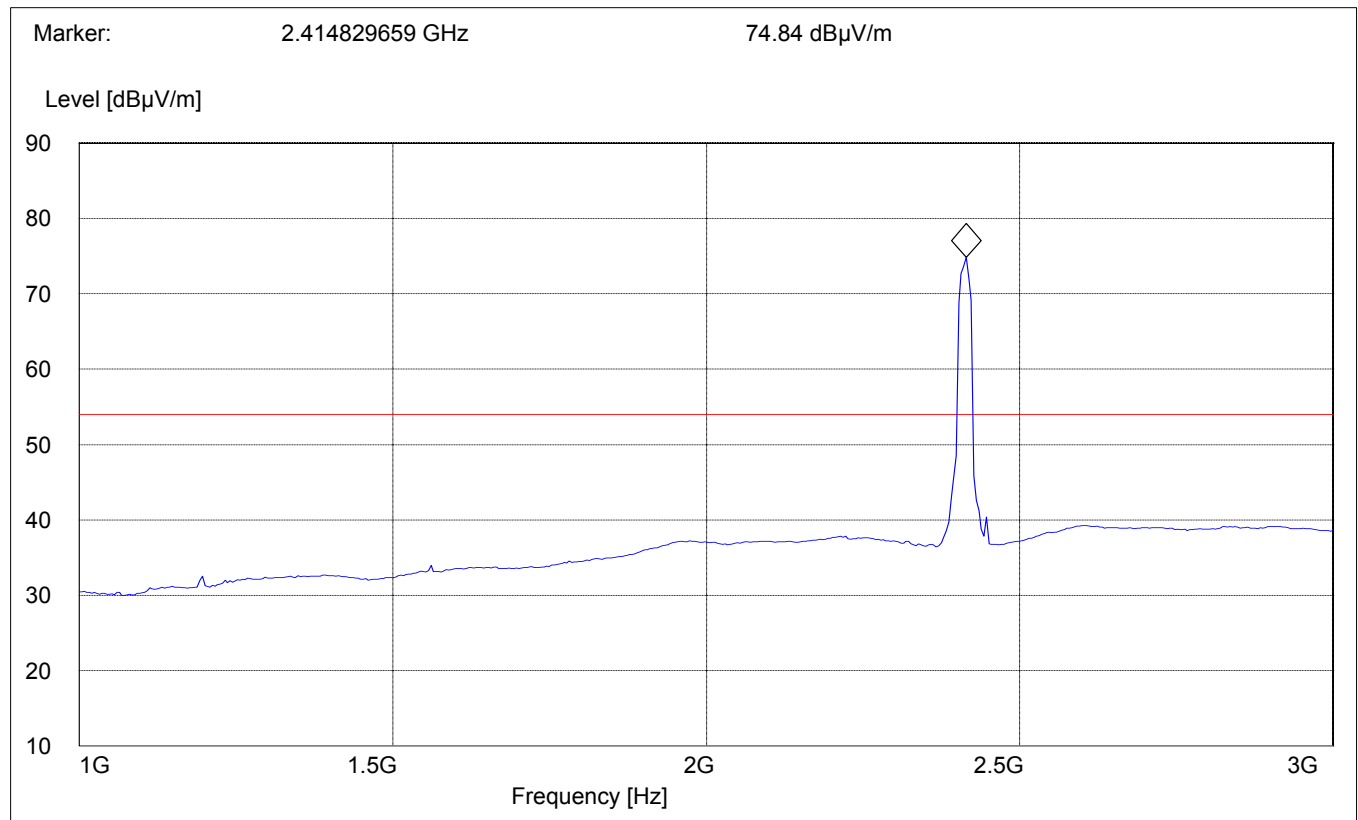

EMISSION LIMITATIONS - Radiated (Transmitter)
Lowest Channel (2412MHz): 3GHz – 18GHz

§ 15.247 (c) (1)

SWEEP TABLE:		"BT Spuri hi 3-18G"				
Short Description:		Bluetooth Spurious 3-18GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

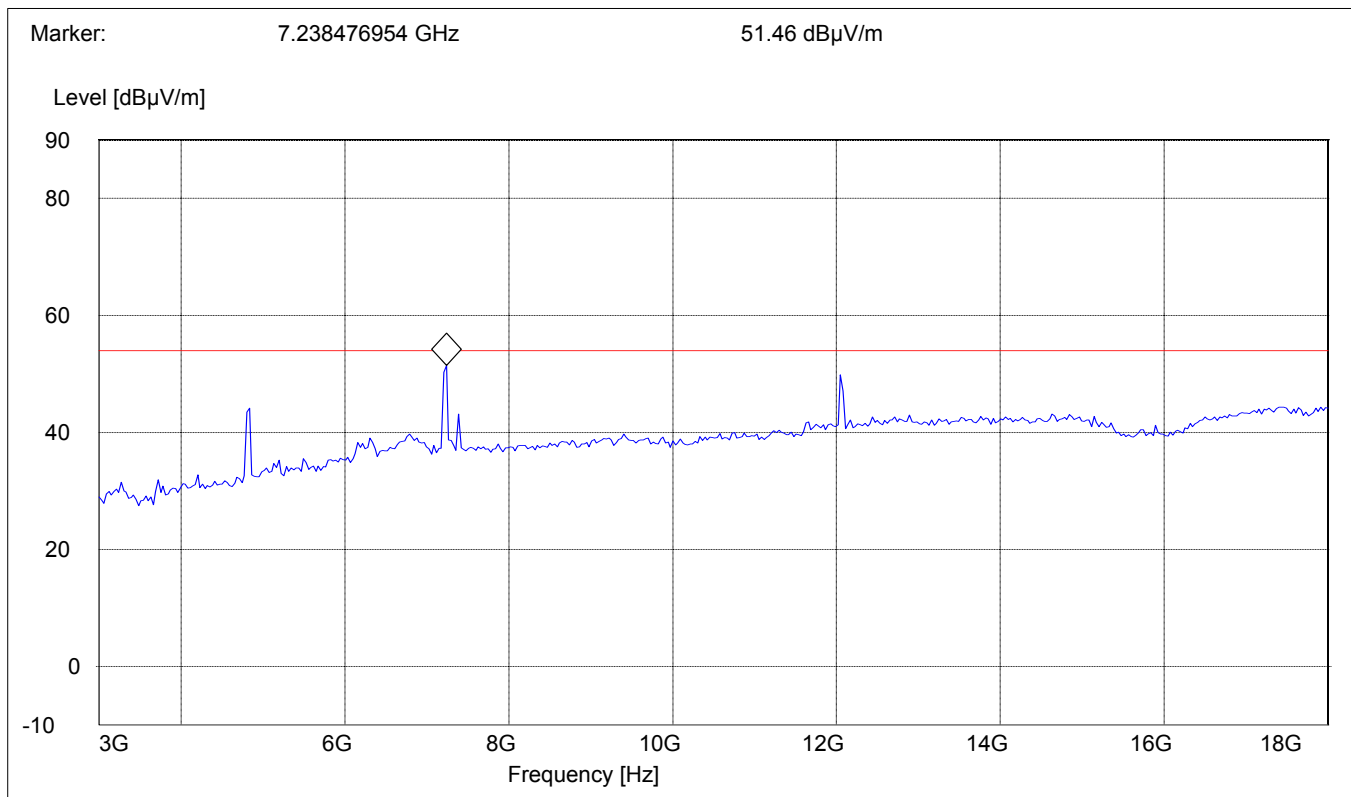


EMISSION LIMITATIONS - Radiated (Transmitter)
Mid Channel (2437MHz): 1GHz – 3GHz

§ 15.247 (c) (1)

Average Measurement with VBW=10Hz

Note: The peak above the limit line is the carrier freq.


SWEEP TABLE:		"BT Spuri hi 1-3G"				
Short Description:		Bluetooth Spurious 1-3GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

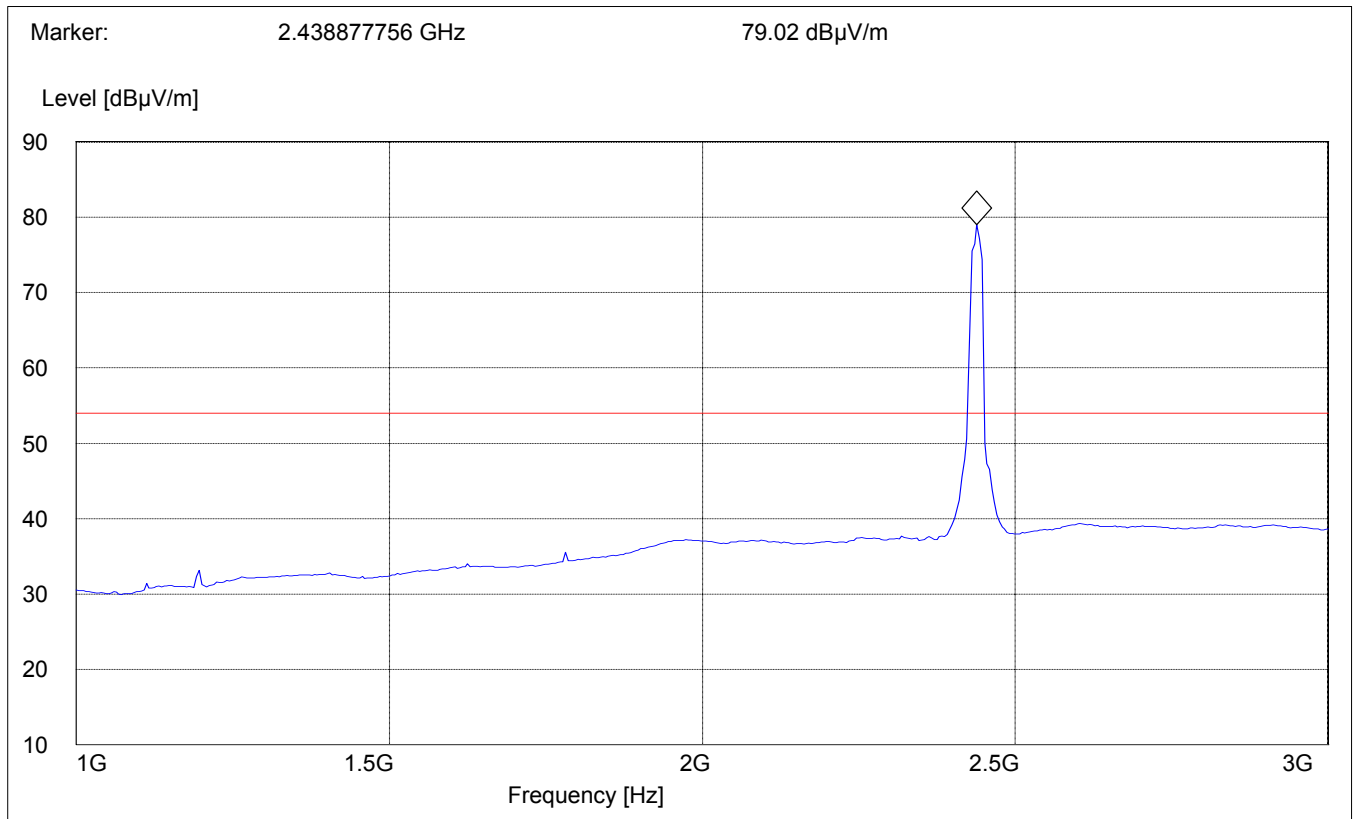

EMISSION LIMITATIONS - Radiated (Transmitter)
Mid Channel (2437MHz): 3GHz – 18GHz

§ 15.247 (c) (1)

SWEEP TABLE:		"BT Spuri hi 3-18G"				
Short Description:		Bluetooth Spurious 3-18GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

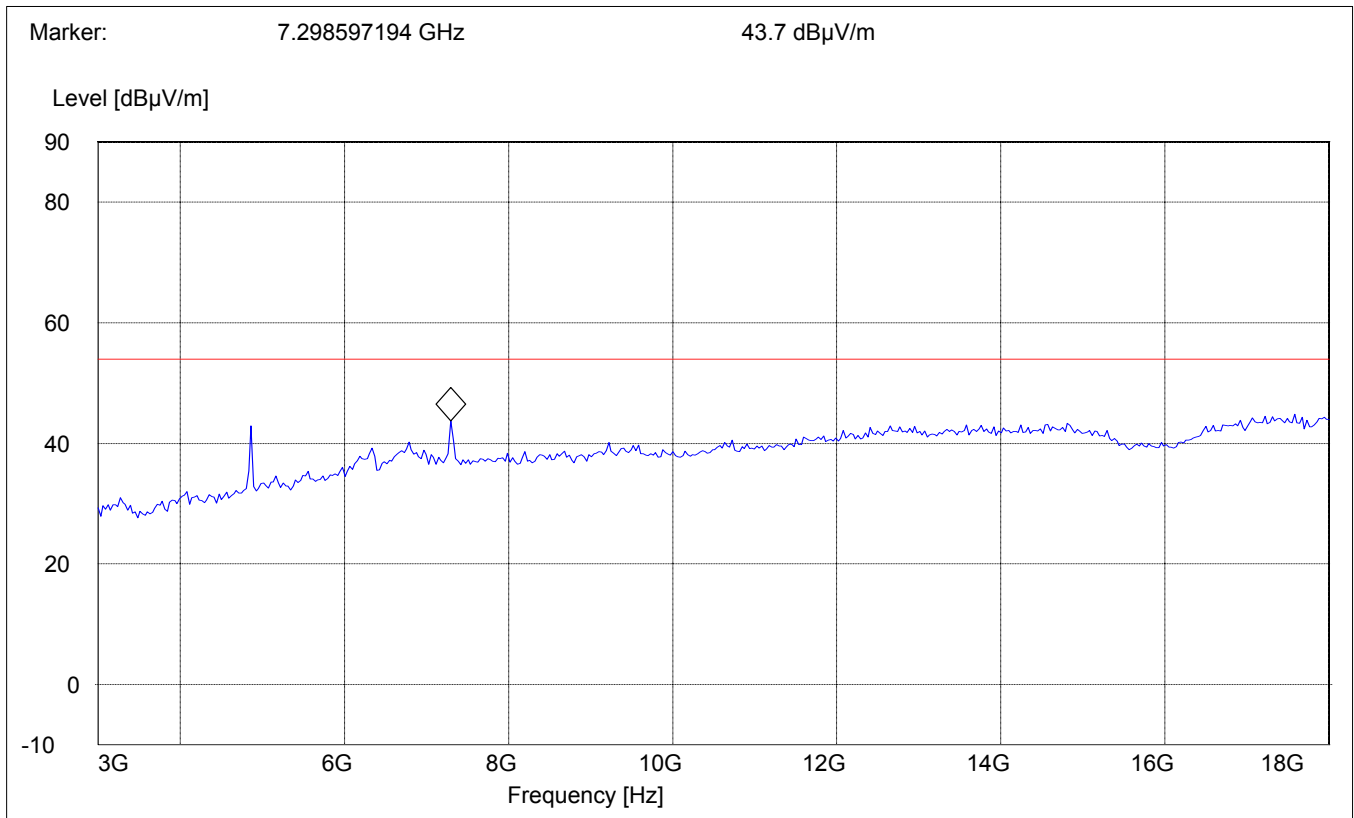

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Highest Channel (2462MHz): 1GHz – 3GHz

Average Measurement with VBW=10Hz

Note: The peak above the limit line is the carrier freq.


SWEEP TABLE:		"BT Spuri hi 1-3G"				
Short Description:		Bluetooth Spurious 1-3GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

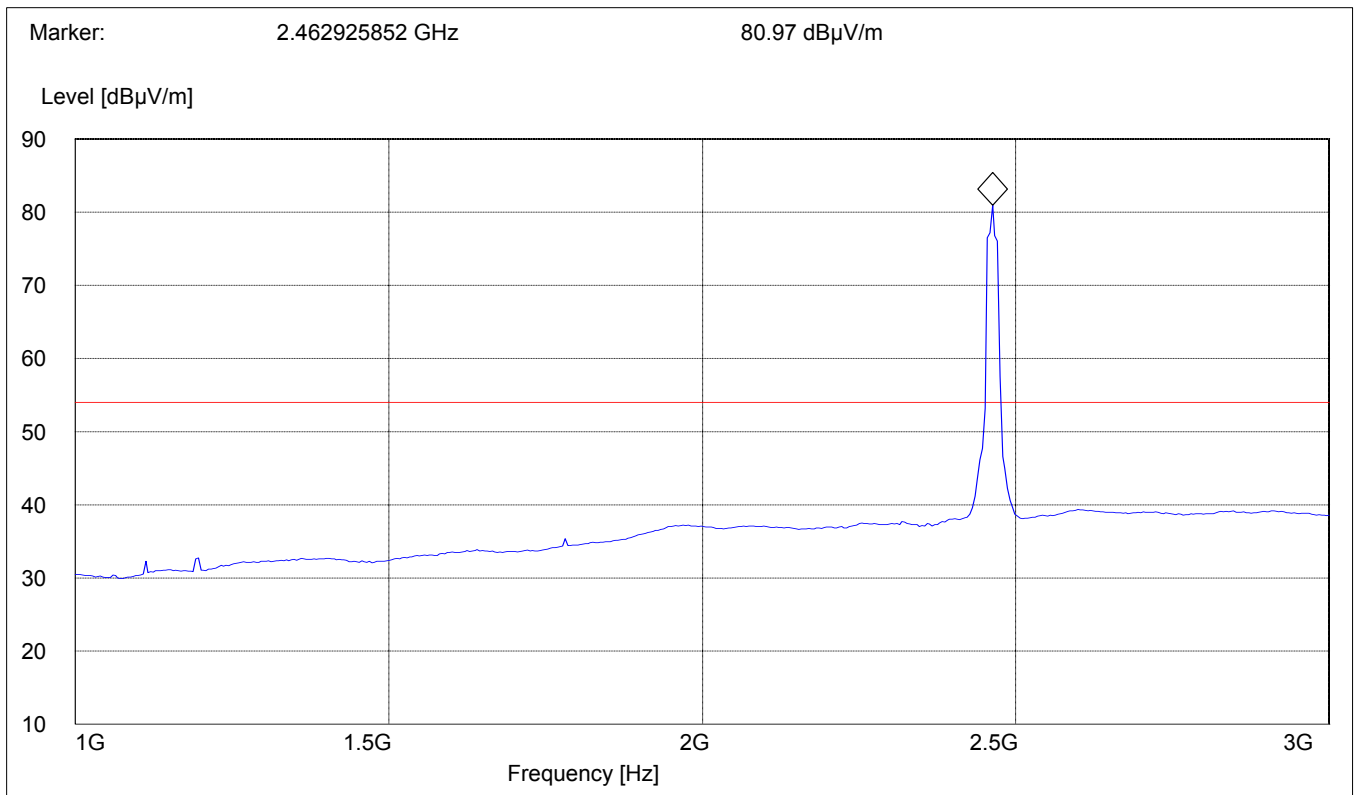

EMISSION LIMITATIONS - Radiated (Transmitter)
Highest Channel (2462MHz): 3GHz – 18GHz

§ 15.247 (c) (1)

SWEEP TABLE:		"BT Spuri hi 3-18G"				
Short Description:		Bluetooth Spurious 3-18GHz				
Start	Stop	Detector	Meas.	RBW		Transducer
Frequency	Frequency	Time	Bandw.		VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

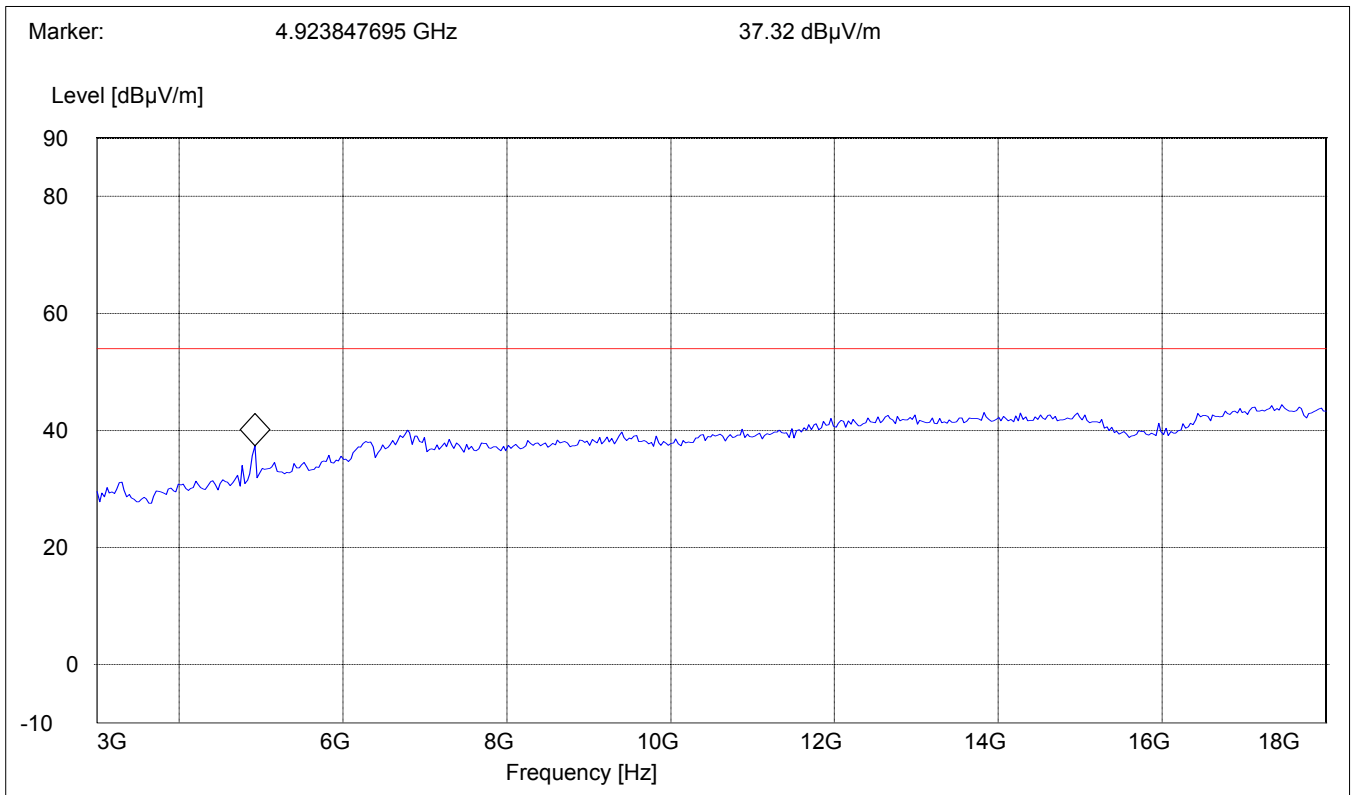


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

18GHz – 25GHz

Note: This plot is valid for all three (low, mid, high) channels.

SWEEP TABLE:		"BT Spuri hi 18-25G"			
Short Description:		Bluetooth Spurious 18-25GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

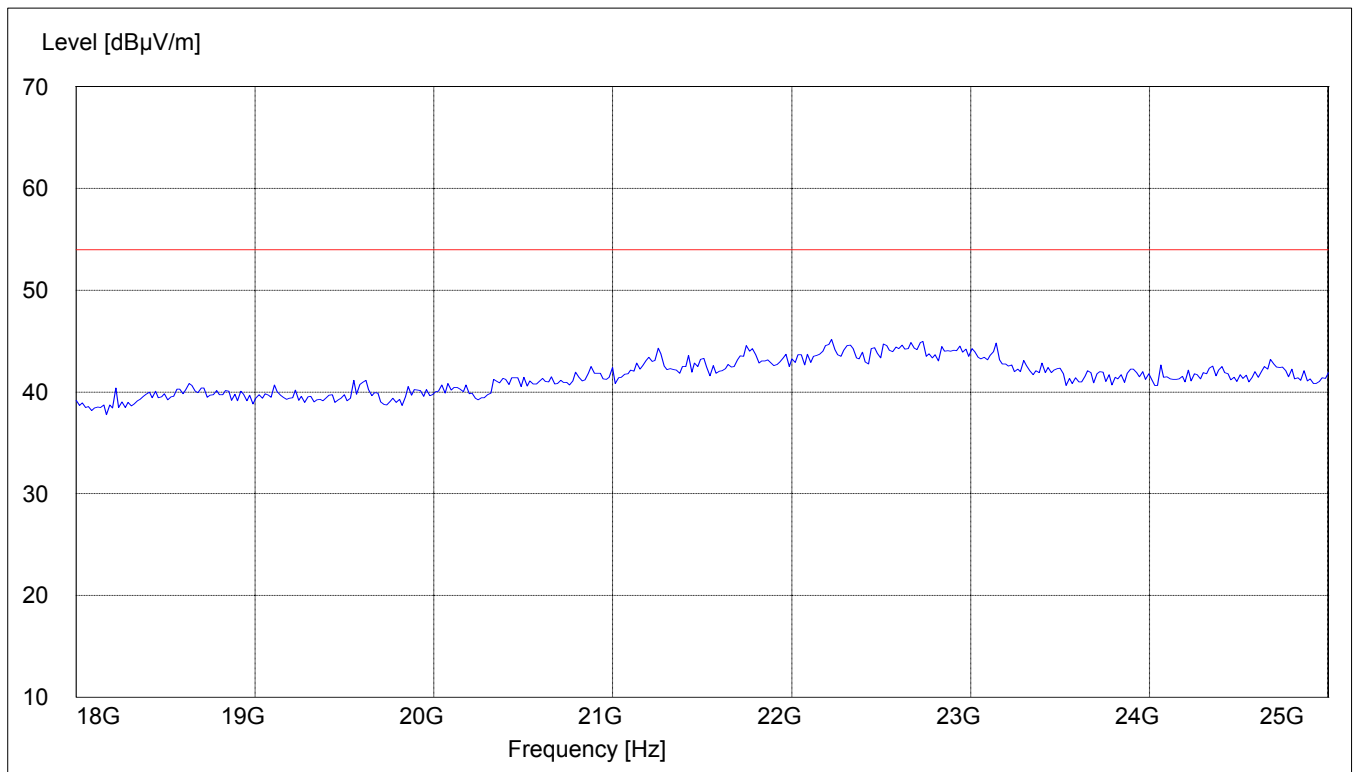

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

SWEEP TABLE: "55022 cond"

Short Description:		EN 55022 for 150KHz-30MHz			
Start	Stop	Detector	Meas	IF	Transducer
Frequency	Frequency		Time	Bandw.	
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

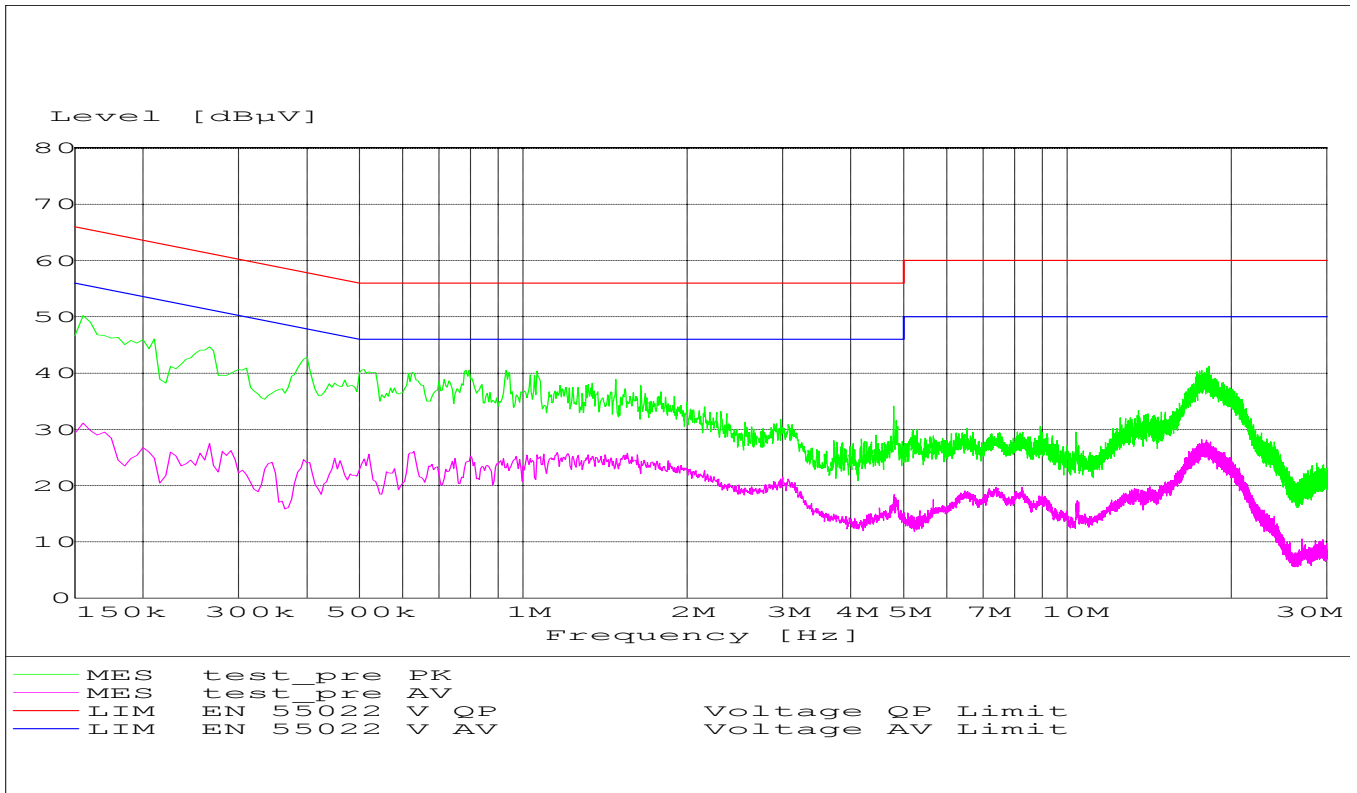

RECEIVER SPURIOUS RADIATION**§ 15.209****Limits**

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:


The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

**RECEIVER SPURIOUS RADIATION
30MHz – 1GHz**

§ 15.209

Note: This plot shows peak measurements only.

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas. Time	RBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

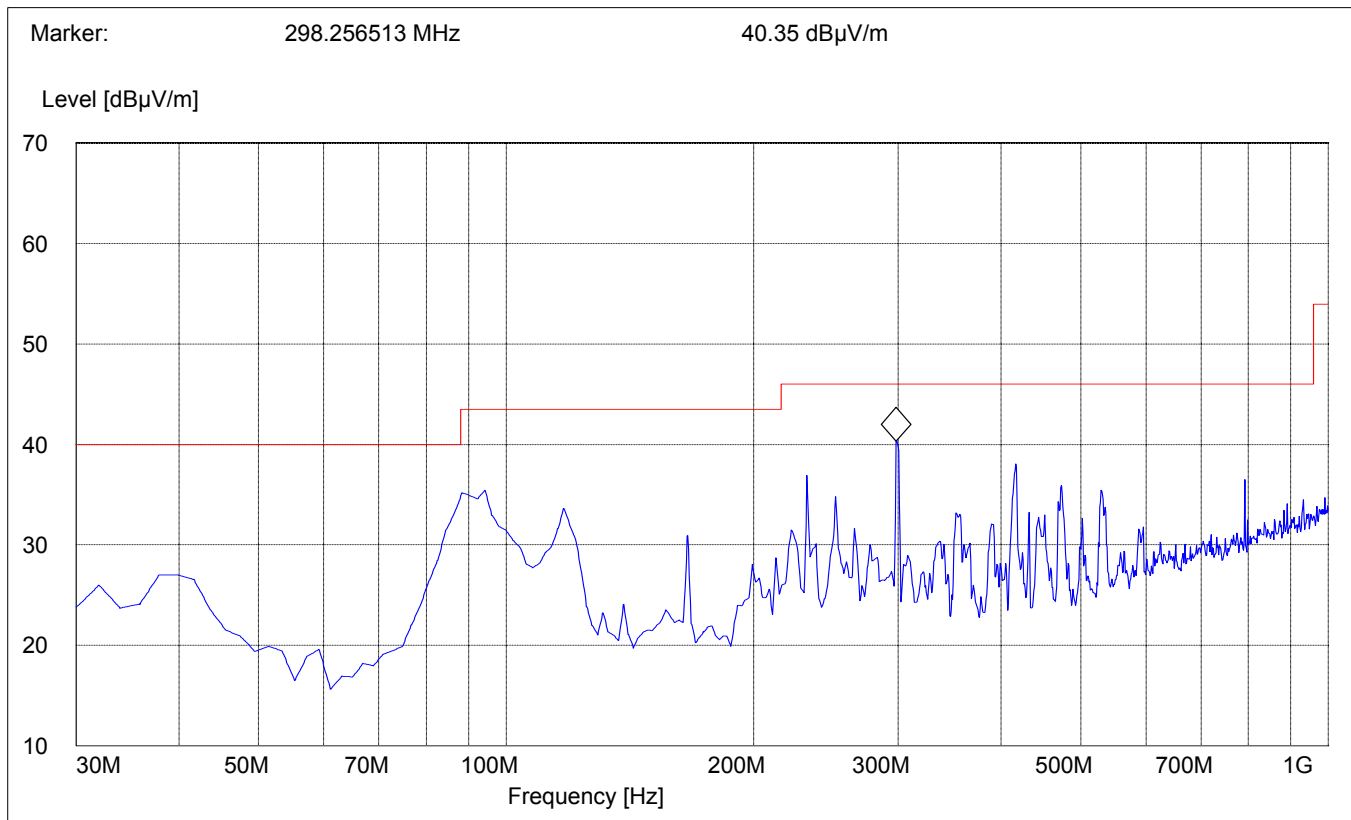


RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 3GHz

Average Measurement with VBW=10Hz


SWEEP TABLE:		"BT Spuri hi 1-3G"				
Short Description:		Bluetooth Spurious 1-3GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.	VBW		
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

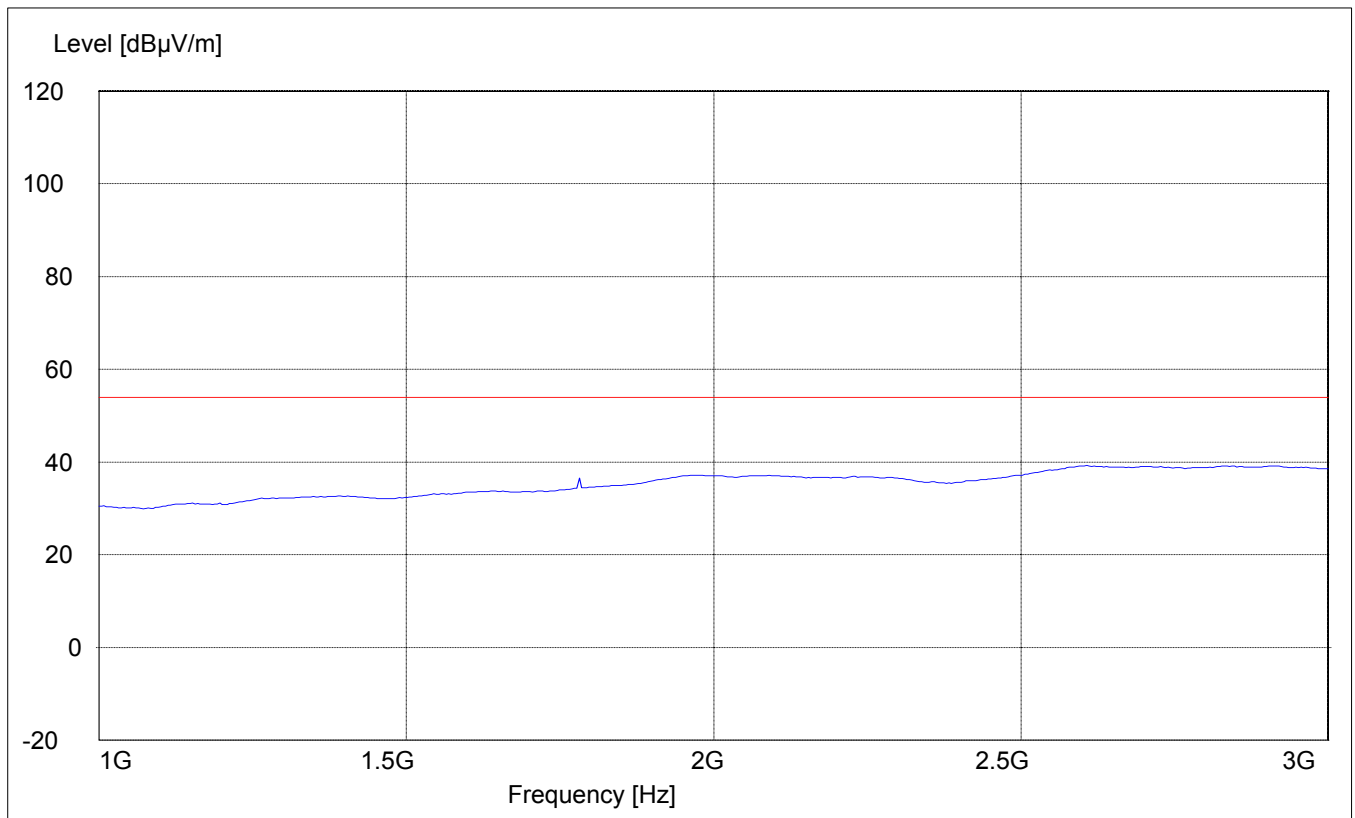

RECEIVER SPURIOUS RADIATION
3GHz – 18GHz

§ 15.209


SWEEP TABLE:		"BT Spuri hi 3-18G"			
Short Description:		Bluetooth Spurious 3-18GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

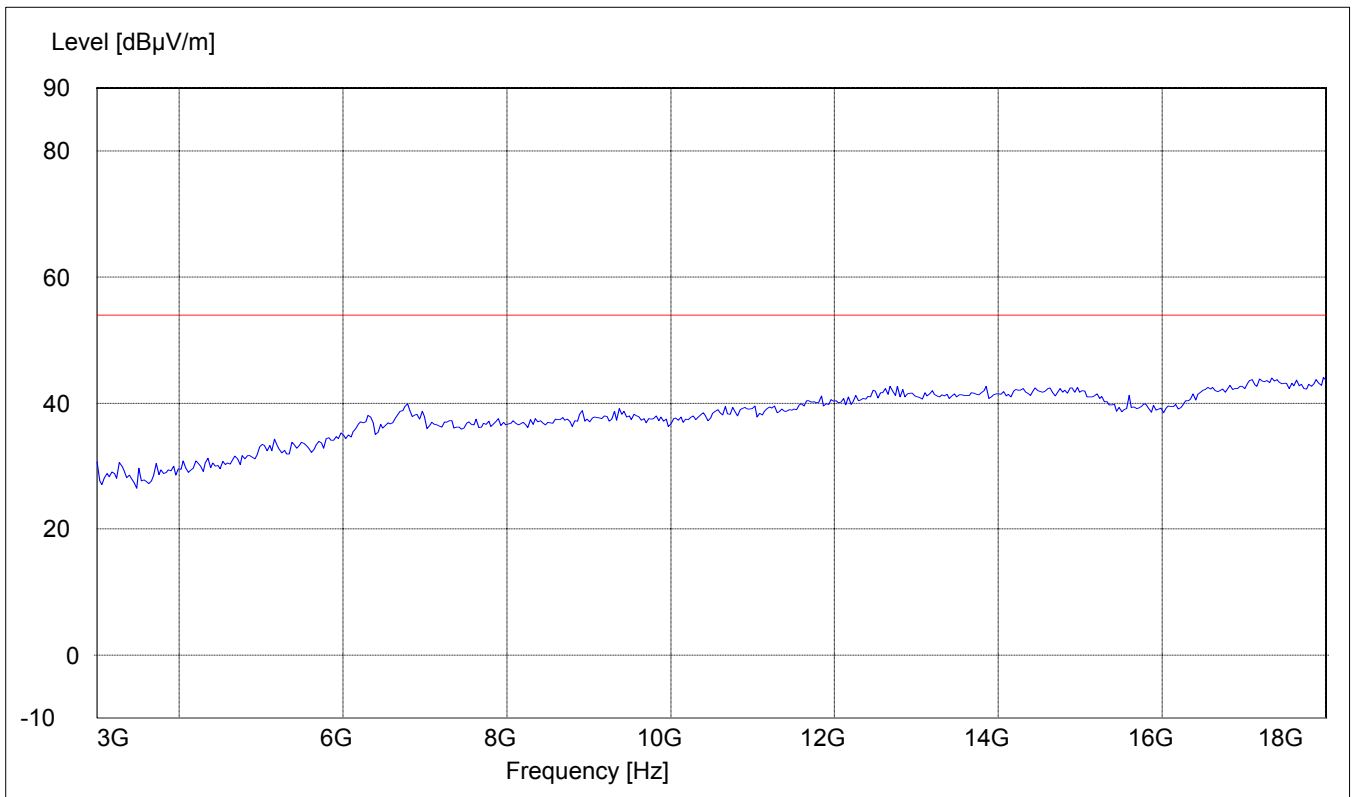

RECEIVER SPURIOUS RADIATION
18GHz – 25GHz

§ 15.209


SWEEP TABLE:		"BT Spuri hi 18-25G"			
Short Description:		Bluetooth Spurious 18-25GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

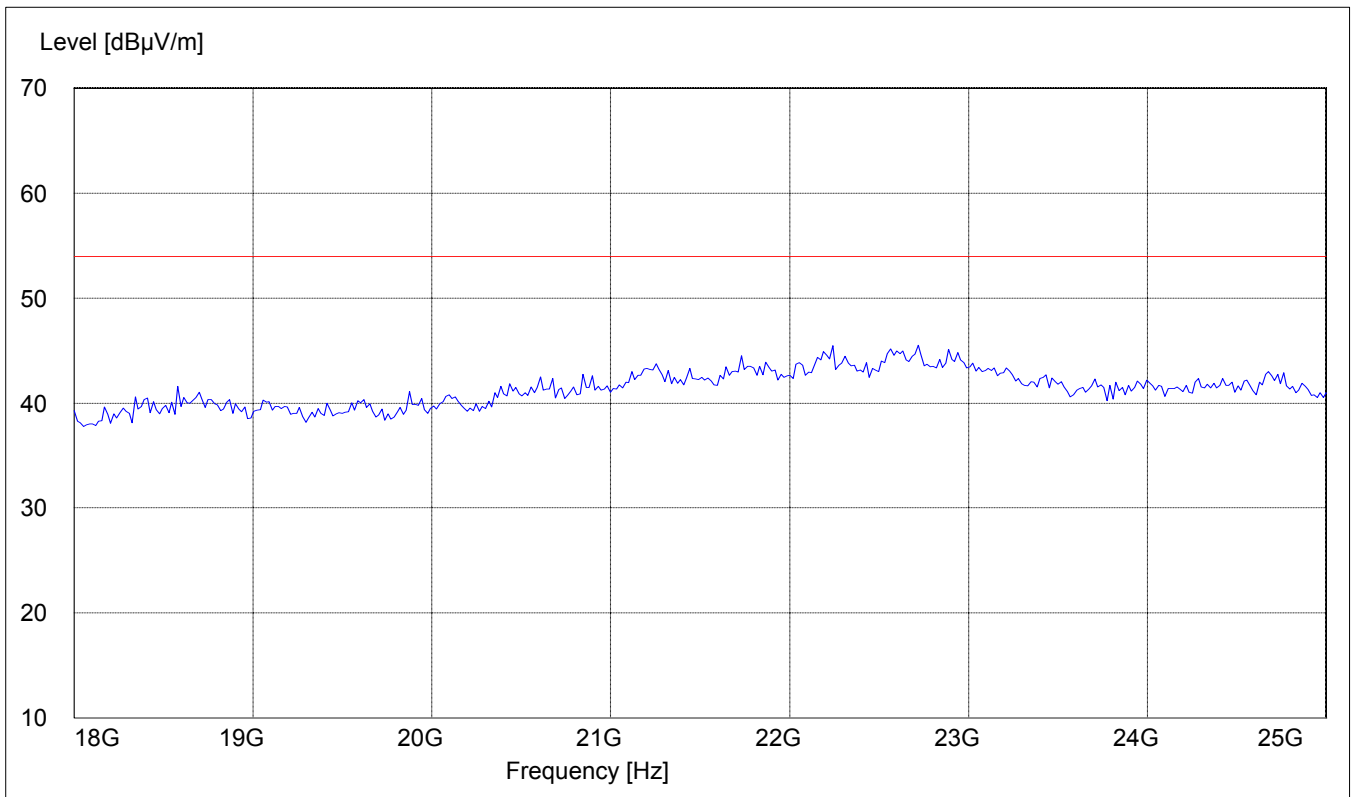

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	EPM-442A	Hewlett Packard	GB37170232
05	Power Amplifier	250W1000	Amplifier Research	300031
06	Biconilog Antenna	3141	EMCO	0005-1186
07	Horn Antenna	SAS-200/571	AH Systems	325
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Votch	G1115
10	Pre-Amplifier	JS4-00102600	Miteq	00616
11	2-3GHz band reject filter	BRM50701	Microtronics	NA
12	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807

BLOCK DIAGRAMS
Conducted Testing

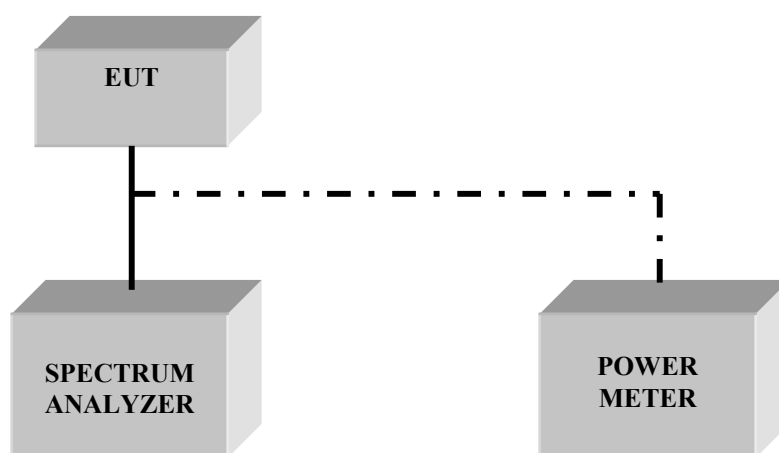

Radiated Testing

ANECHOIC CHAMBER

