



Elliott Laboratories Inc.  
www.elliottlabs.com

684 West Maude Avenue  
Sunnyvale, CA 94086-3518

408-245-7800 Phone  
408-245-3499 Fax

November 19, 2002

Chief, Equipment Authorization Branch,  
Authorization and Evaluation Division,  
Office of Engineering and Technology  
FEDERAL COMMUNICATIONS COMMISSION  
P.O. Box 358315  
Pittsburgh, PA 15251-5315

Gentlemen:

The enclosed documents constitute a formal submittal and application for a Grant of Equipment Authorization pursuant to Subpart C of Part 15 of FCC Rules (CFR 47) regarding intentional radiators. Data within this report demonstrates that the equipment tested complies with the FCC limits for intentional radiators.

This application is for a limited modular approval. As the device operates under two sections of the FCC's rules, it is considered a composite device. This application and report covers the operation of the device under part 15.247 for the frequency band 2412-2462 MHz.

Elliott Laboratories, as duly authorized agent prepared this submittal. A copy of the letter of our appointment as agent is enclosed.

If there are any questions or if further information is needed, please contact Elliott Laboratories for assistance.

Sincerely,

A handwritten signature in black ink that reads "Juan Martinez".

Juan Martinez  
Sr. EMC Engineer

JM/dmg

Enclosures: Agent Authorization Letter  
Emissions Test Report with Exhibits

***Electromagnetic Emissions Test Report  
and  
Application for Grant of Equipment Authorization  
pursuant to  
FCC Part 15, Subpart C  
and  
Industry Canada RSS 210  
Broadcom Corporation  
Model: BCM94309MP in Dell PP05L laptop***


FCC ID: QDS-BRCM1007

GRANTEE: Broadcom Corporation  
400 East Caribbean Drive  
Sunnyvale, CA 94089

TEST SITE: Elliott Laboratories, Inc.  
684 W. Maude Avenue  
Sunnyvale, CA 94086

REPORT DATE: December 20, 2002

FINAL TEST DATE: December 16, December 17 and  
December 18, 2002

AUTHORIZED SIGNATORY:   
\_\_\_\_\_  
Juan Martinez  
Sr. EMC Engineer



Elliott Laboratories, Inc. is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

**TABLE OF CONTENTS**

<b>COVER PAGE</b> .....	<b>1</b>
<b>TABLE OF CONTENTS</b> .....	<b>2</b>
<b>DECLARATION OF COMPLIANCE</b> .....	<b>3</b>
<b>SCOPE</b> .....	<b>4</b>
<b>OBJECTIVE</b> .....	<b>4</b>
<b>STATEMENT OF COMPLIANCE</b> .....	<b>4</b>
<b>SUMMARY OF RESULTS</b> .....	<b>5</b>
DSSS OPERATION IN THE 2400-2483.5MHZ BAND.....	5
DTS OPERATION IN THE 2400-2483.5MHZ BAND.....	6
MEASUREMENT UNCERTAINTIES .....	7
<b>EQUIPMENT UNDER TEST (EUT) DETAILS</b> .....	<b>8</b>
GENERAL .....	8
ENCLOSURE .....	8
MODIFICATIONS .....	8
SUPPORT EQUIPMENT .....	9
EUT INTERFACE PORTS.....	9
EUT OPERATION DURING TESTING .....	9
<b>TEST SITE</b> .....	<b>10</b>
GENERAL INFORMATION .....	10
CONDUCTED EMISSIONS CONSIDERATIONS .....	10
RADIATED EMISSIONS CONSIDERATIONS .....	10
<b>MEASUREMENT INSTRUMENTATION</b> .....	<b>11</b>
RECEIVER SYSTEM .....	11
INSTRUMENT CONTROL COMPUTER.....	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN) .....	11
POWER METER .....	12
FILTERS/ATTENUATORS .....	12
ANTENNAS .....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE .....	12
INSTRUMENT CALIBRATION .....	12
<b>TEST PROCEDURES</b> .....	<b>13</b>
EUT AND CABLE PLACEMENT .....	13
CONDUCTED EMISSIONS .....	13
RADIATED EMISSIONS .....	13
CONDUCTED EMISSIONS FROM ANTENNA PORT.....	14
<b>SPECIFICATION LIMITS AND SAMPLE CALCULATIONS</b> .....	<b>15</b>
CONDUCTED EMISSIONS LIMITS – AC MAINS PORT.....	15
RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209 .....	15
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....	16
SAMPLE CALCULATIONS - RADIATED EMISSIONS .....	17
EXHIBIT 1: Test Equipment Calibration Data.....	1
EXHIBIT 2: Test Data Log Sheets .....	2
EXHIBIT 3: Test Configuration Photographs.....	3
EXHIBIT 4: Proposed FCC ID Label & Label Location .....	4
EXHIBIT 5: Detailed Photographs .....	5
EXHIBIT 6: OEM Manual .....	6
EXHIBIT 7: Block Diagram.....	7
EXHIBIT 8: Schematic Diagrams .....	8
EXHIBIT 9: Theory of Operation.....	9
EXHIBIT 11: RF Exposure Information .....	10
EXHIBIT 12: Modular Approval Justification.....	11

---

**DECLARATION OF COMPLIANCE**

Equipment Name and Model:  
BCM94309MP in Dell PP05L laptop


Manufacturer:  
Broadcom Corporation  
400 East Caribbean Drive  
Sunnyvale, CA 94089

Tested to applicable standards:  
RSS-210, Issue 4, December 2000 (Low Power License-Exempt Radiocommunication Devices)  
FCC Part 15 Subpart C (DSSS and DTS)

Measurement Facility Description Filed With Department of Industry:

Departmental Acknowledgement Number: IC2845 **SV3** Dated July 30, 2001  
Departmental Acknowledgement Number: IC2845 **SV4** Dated July 19, 2001

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above mentioned departmental standards (through the use of ANSI C63.4 as detailed in section 5.3 of RSS-210, Issue 4); and that the equipment performed in accordance with the data submitted in this report.

Signature	
Name	Juan Martinez
Title	Sr. EMC Engineer
Company	Elliott Laboratories Inc.
Address	684 W. Maude Ave Sunnyvale, CA 94086 USA

Date: December 20, 2002

Maintenance of compliance with the above standards is the responsibility of the manufacturer. Any modification of the product that may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

---

## **SCOPE**

An electromagnetic emissions test has been performed on the Broadcom Corporation, model BCM94309MP in Dell PP05L laptop pursuant to Subpart C of Part 15 of FCC Rules for intentional radiators. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Broadcom Corporation model BCM94309MP in Dell PP05L laptop and therefore apply only to the tested sample. The sample was selected and prepared by David Boldy of Broadcom Corporation.

## **OBJECTIVE**

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units that are subsequently manufactured.

## **STATEMENT OF COMPLIANCE**

The tested sample of Broadcom Corporation model BCM94309MP in Dell PP05L laptop complied with the requirements of Subpart C of Part 15 of the FCC Rules for low power intentional radiators.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product that may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**SUMMARY OF RESULTS****DSSS OPERATION IN THE 2400-2483.5MHz BAND**

FCC Part 15 Section	RSS 210 Section	Description	Measured Value	Comments	Result
15.247(a)	6.6.2(o)	Digital Modulation	Systems uses Direct Sequence Spread Spectrum techniques	System must utilize a digital transmission technology	Complies
-	6.6.2 (o) (b)	Processing Gain	As per communication from Industry Canada, this requirement has been withdrawn		
15.247 (a) (2)	-	6dB Bandwidth	> 10 MHz	Minimum allowed is 500kHz	Complies
15.247 (b) (3) 15.247 b(4) (i)	-	Output Power	17.6 dBm (0.0575Watts) EIRP = 0.080 W	Multi-point applications: Maximum permitted is 1Watt, with EIRP limited to 4 Watts.	Complies
-	6.2.2(o)(b)	Output Power	17.6 dBm (0.0575 Watts) EIRP = 0.080 W	Maximum permitted is 1Watt. EIRP must not exceed 4 Watts for unlicensed use.	Complies
15.247(d)	6.2.2 (o)(b)	Power Spectral Density	-8.1 dBm / 3 kHz	Maximum permitted is 8dBm/3kHz	Complies
-	6.2.2(o) (d)	Power Spectral Density	5.5mW / MHz	For unlicensed use in the 2400-2450MHz band, use is restarted to indoor use only with spectral density limited to 50mW / MHz (calculated from output power divided by bandwidth)	Complies
15.247(c)	6.2.2(e) (1)	Spurious Emissions – Antenna Conducted 30MHz – 25GHz	All spurious emissions < -20dBc	All spurious emissions < -20dBc. Emissions in restricted bands must meet the radiated emissions limits detailed in 15.207	Complies
15.247(c) / 15.209	6.2.2(e) (1)	Radiated Spurious Emissions 30MHz – 25GHz	50.5 dBuV/m @ 2390 MHz (-3.5dB)		Complies
15.207	6.6	AC Conducted Emissions	46.1 dBuV @ 0.242 MHz (-16dB)	Conducted emissions from the AC power port must meet the limits set forth in RSS210 and 15.207	Complies
15.247 (b) (5)		RF Exposure Requirements	SAR Report		Complies
15.203	6.2.2(o) (e2)	RF Connector	Antenna and connector is integral to the host device	Specialized connector provided for use in Laptop	Complies

EIRP calculated using antenna gain of 1.45dBi (1.4) in the 2.4 GHz band

**DTS OPERATION IN THE 2400-2483.5MHz BAND**

FCC Part 15 Section	RSS 210 Section	Description	Measured Value	Comments	Result
15.247(a)	6.6.2(o)	Digital Modulation	Systems uses Direct Sequence Spread Spectrum techniques	System must utilize a digital transmission technology	Complies
-	6.6.2 (o) (b)	Processing Gain	As per communication from Industry Canada, this requirement has been withdrawn		
15.247 (a) (2)	-	6dB Bandwidth	16.7 MHz	Minimum allowed is 500kHz	Complies
15.247 (b) (3) 15.247 b(4) (i)	-	Output Power	19.8 dBm (0.095Watts) EIRP = 0.133 W	Multi-point applications: Maximum permitted is 1Watt, with EIRP limited to 4 Watts.	Complies
-	6.2.2(o)(b)	Output Power	19.8 dBm (0.095 Watts) EIRP = 0.133 W	Maximum permitted is 1Watt. EIRP must not exceed 4 Watts for unlicensed use.	Complies
15.247(d)	6.2.2 (o)(b)	Power Spectral Density	-11.7 dBm/3 kHz	Maximum permitted is 8dBm/3kHz	Complies
-	6.2.2(o) (d)	Power Spectral Density	5.8mW / MHz	For unlicensed use in the 2400-2450MHz band, use is restarted to indoor use only with spectral density limited to 50mW / MHz (calculated from output power divided by bandwidth)	Complies
15.247(c)	6.2.2(e) (1)	Spurious Emissions – Antenna Conducted 30MHz – 25GHz	All spurious emissions < -20dBc	All spurious emissions < -20dBc. Emissions in restricted bands must meet the radiated emissions limits detailed in 15.207	Complies
15.247(c) / 15.209	6.2.2(e) (1)	Radiated Spurious Emissions 30MHz – 25GHz	53.6 dBuV/m @ 2390 MHz (-0.4dB)		Complies
15.207	6.6	AC Conducted Emissions	46.1 dBuV @ 0.242 MHz (-16dB)	Conducted emissions from the AC power port must meet the limits set forth in RSS210 and 15.207	Complies
15.247 (b) (5)		RF Exposure Requirements	SAR Report		
15.203	6.2.2(o) (e2)	RF Connector	Antenna and connector is integral to the host device	Integral antenna or specialized connector required	Complies

EIRP calculated using antenna gain of 1.45dBi (1.4) in the 2.4 GHz band

---

**MEASUREMENT UNCERTAINTIES**

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.6



**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Broadcom Corporation model BCM94309MP is a mini PCI Card dual band (802.11a, 802.11b and 802.11g) transceiver that is designed to be installed into a Dell model PP05L laptop PC and connect to antennas mounted in the base of the Dell laptop. The host laptop was treated as table-top equipment during testing to simulate the end user environment.

The EUT has the following operating frequency ranges (as measured from center frequency of each channel): 2412 – 2462 MHz and 5180-5320 MHz. Operation on the channels from 2412-2462 MHz is to be certified under the FCC/Industry Canada rules for spread spectrum devices (FCC 15.247 and RSS 210 6.2.2(o)). Operation on the channels 5180-5320 MHz is to be certified under the FCC/Industry Canada rules for UNII and LELAN devices (FCC 15 E and RSS 210 6.2.2(q1)).

The EUT is intended for indoor use in laptop computers. As such it meets the requirements for the frequency band 2400-2450MHz detailed in RSS210 for unlicensed operation.

The sample was received on December 11, 2002 and tested on December 16, December 17 and December 18, 2002. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number	Proposed FCC ID #
Broadcom BCM94309MP Mini PCI Transceiver	none	QDS-BRCM1007

**ENCLOSURE**

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a Dell Laptop computer.

**MODIFICATIONS**

The EUT did not require modifications during testing in order to comply with the emission specifications.

**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	Inspiron 600M	Laptop	9T447X01	LNQTAI-36176-M5-E
US Robotics	Pilot 1000	PDA	6.0482E+11	MQ90001
HP	Thinkjet 2225C	Printer	2714540166	DS16XU2225

**EUT INTERFACE PORTS**

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Laptop serial	Palm	Multiconductor	Shieleded	1.5
Laptop Parallel	Printer	Multiconductor	Shieleded	1.5
Laptop Adapter	AC Mains	Two conductor	Unshielded	1.5

**EUT OPERATION DURING TESTING**

The radio was transmitting at full power on the specified channels with a 100 % duty cycle and at a data rates from 1 to 54 Mb/s. The channels were selected since they are at the top, near the center and at the bottom of the allocated bands. The radio uses 8-chip complementary code keying (CCK), 11-chip differential quadrature phase shift keying (DQPSK) modulation for 802.11b operation and Orthogonal Frequency Division Multiplexing (OFDM) for 802.11a and 802.11g operation.

For measurements of radiated emissions below 1GHz and AC conducted emissions, the host laptop was connected to two peripherals (PDA and Printer) and had a scrolling 'H' pattern displayed on the screen.

---

## **TEST SITE**

### **GENERAL INFORMATION**

Final test measurements were taken on December 16, December 17 and December 18, 2002 at the Elliott Laboratories Open Area Test Sites #3 and 4 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

### **CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

### **RADIATED EMISSIONS CONSIDERATIONS**

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

---

**MEASUREMENT INSTRUMENTATION****RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

**INSTRUMENT CONTROL COMPUTER**

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs that control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

**LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

---

**POWER METER**

A power meter and peak power sensor are used for all direct output power measurements from transmitters as they provide a broadband indication of the power output.

**FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

**ANTENNAS**

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

**ANTENNA MAST AND EQUIPMENT TURNTABLE**

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

**INSTRUMENT CALIBRATION**

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

---

**TEST PROCEDURES****EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

**CONDUCTED EMISSIONS**

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

**RADIATED EMISSIONS**

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

---

**CONDUCTED EMISSIONS FROM ANTENNA PORT**

Direct measurements are performed with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

**CONDUCTED EMISSIONS LIMITS – AC MAINS PORT**

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

**RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209**

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0



---

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

B = Broadband Correction Factor\*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

**EXHIBIT 1: Test Equipment Calibration Data**

1 Page

**Radiated Emissions, 30 - 1000 MHz, 16-Dec-02****Engineer: rwong**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	Biconical Antenna, 30-300 MHz	EL30.300	773	12	3/5/2002	3/5/2003
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1321	12	4/23/2002	4/23/2003
Rohde & Schwarz	Test Receiver, 20-1300 MHz	ESVP	1317	12	5/3/2002	5/3/2003
Fischer Custom Comm.	LISN, Freq. 0.9 -30 MHz,16 Amp	FCC-LISN-50/250-16-2	1079	12	7/2/2002	7/2/2003
Rohde& Schwarz	Pulse Limiter	ESH3 Z2	1401	12	3/12/2002	3/12/2003
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	274	12	1/16/2002	1/16/2003

**Conducted and Radiated Emissions, 17-Dec-02****Engineer: Chris**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Electro Metrics	Conical log spiral antenna	LCA-25	1291	12	3/25/2002	3/25/2003
Elliott Laboratories	Biconical Antenna, 30-300 MHz	DM-105-T1	382	12	9/5/2002	9/5/2003
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	786	12	3/2/2002	3/2/2003
Hewlett Packard	EMC Spectrum Analyzer 9kHz - 6.5GHz	8595EM	787	12	12/4/2002	12/4/2003
Hewlett Packard	Microwave EMI test system (SA40, 9Hz - 40GHz), system 2	84125C	1410	12	4/2/2002	4/2/2003
Hewlett Packard	Microwave Preamplifier 0.5-26.5GHz	83017A	1257	12	10/7/2002	10/7/2003
Hewlett Packard	RF Preamplifier, 100 kHz - 1.3 GHz	8447D	999	12	4/24/2002	4/24/2003

**Radiated Emissions, 1 - 40GHz, 17-Dec-02****Engineer: Chris**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 9Hz - 40GHz), system 2	84125C	1410	12	4/2/2002	4/2/2003
Hewlett Packard	Spectrum Analyzer, 26GHz	8563E	F1202LB	12	9/27/2002	9/27/2003

**Conducted and Radiated Emissions, 18-Dec-02****Engineer: Jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	487	12	4/22/2002	4/22/2003
Hewlett Packard	High Pass filter, 3.5GHz	P/N 84300-80038	1157	12	3/1/2002	3/1/2003
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	12	1/15/2002	1/15/2003
Hewlett Packard	Spectrum Analyzer, 9KHz - 22GHz	8593EM	1319	12	11/19/2002	11/19/2003
Hewlett Packard	Spectrum Analyzer 9kHz - 40 GHz	8564E (84125C)	1393	12	2/21/2002	2/21/2003

**Conducted and Radiated Emissions, 19-Dec-02****Engineer: Chris**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	786	12	3/2/2002	3/2/2003
Hewlett Packard	EMC Spectrum Analyzer 9kHz - 6.5GHz	8595EM	780	12	2/11/2002	2/11/2003
Hewlett Packard	High Pass filter, 3.5GHz	P/N 84300-80038	1157	12	3/1/2002	3/1/2003
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12	8/14/2002	8/14/2003
Hewlett Packard	Spectrum Analyzer, 26GHz	8563E	F1202LB	12	9/27/2002	9/27/2003

***EXHIBIT 2: Test Data Log Sheets***

***ELECTROMAGNETIC EMISSIONS***

***TEST LOG SHEETS***

***AND***

***MEASUREMENT DATA***

T49605 75 Pages



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
	Proj Eng: David Bare
Contact: David Moldy	
Emissions Spec: FCC Part 15 B, C & E, RSS-210	Class: -
Immunity Spec: N/A	Environment: -

# EMC Test Data

For The

**Broadcom**

Model

**BCM94309MP**



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Emissions Spec: FCC Part 15 B, C & E, RSS-210	Class: -
Immunity Spec: N/A	Environment: -

### EUT INFORMATION

#### General Description

The EUT is a 802.11a/g/b mini PC card which is designed for wireless internet access for the laptop. Normally, the EUT would be table-top during operation. The EUT was treated as table-top equipment during testing to simulate the end user environment.

#### Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Broadcom	BCM94309MP	Mini PCI Transceiver		

#### Antenna

The EUT uses the antenna an antenna integral to the laptop with a gain of 5.6 dBi in the 5150 - 5350 MHz band and 1.45 dBi in the 2400 - 2483.5 MHz band.

The antenna connector used is non-standard antenna (Hirose U.FL series) to meet the requirements of FCC Part 15.203 and RSS-210

#### EUT Enclosure

The EUT does not have an enclosure as it is intended to be installed in a Dell alptop computer.

#### Modification History

Mod. #	Test	Date	Modification
1			



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
	Proj Eng: David Bare
Contact: David Moldy	
Emissions Spec: FCC Part 15 B, C & E, RSS-210	Class: -
Immunity Spec: N/A	Environment: -





## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Emissions Spec: FCC Part 15 B, C & E, RSS-210	Class: -
Immunity Spec: N/A	Environment: -

### Test Configuration #1

#### Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	Inspiron 600M	Laptop	9T447X01	LNQTAI-36176-M5-E
US Robotics	Pilot 1000	PDA	6.0482E+11	MQ90001
HP	Thinkjet 2225C	Printer	2714540166	DS16XU2225

#### Interface Cabling and Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Laptop serial	Palm	Multiconductor	Shielded	1.5
Laptop Parallel	Printer	Multiconductor	Shielded	1.5
Laptop Adapter	AC Mains	Two conductor	Unshielded	1.5

#### EUT Operation During Emissions Testing (Radio)

The radio was transmitting at full power on the specified channels with a 100 % duty cycle and at a data rates from 1 to 54 Mb/s. The channels were selected since they are at the top, near the center and at the bottom of the allocated bands. The radio uses 8-chip complementary code keying (CCK), 11-chip differential quadrature phase shift keying (DQPSK) modulation for 802.11b operation and Orthogonal Frequency Division Multiplexing (OFDM) for 802.11a and 802.11g operation.



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
	Proj Eng: David Bare
Contact: David Moldy	
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Conducted & Radiated Emissions

#### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/19/2002  
Test Engineer: Chris Byleckie  
Test Location: SVOATS #2

Config. Used: 1  
Config Change:  
EUT Voltage: 120V/60Hz

#### General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

**Ambient Conditions:** Temperature: 11.5°C  
Rel. Humidity: 52%

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	RE, 30 - 24620 MHz - Spurious Emissions	FCC Part 15.209 / 15.247(c)	Pass	-3.5 dB @ 2390 MHz

#### Modifications Made During Testing:

No modifications were made to the EUT during testing

#### Deviations From The Standard





No deviations were made from the requirements of the standard.



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Bandedge Plots (1Mb/s)

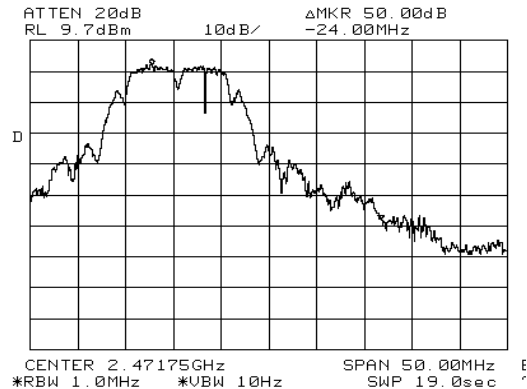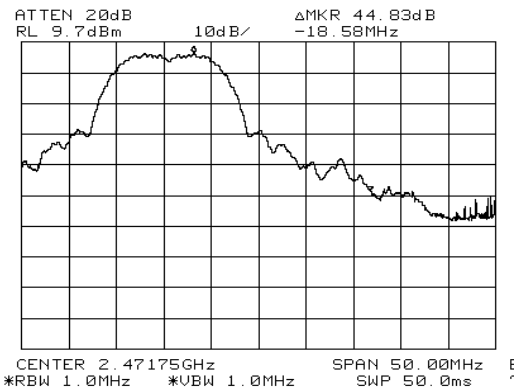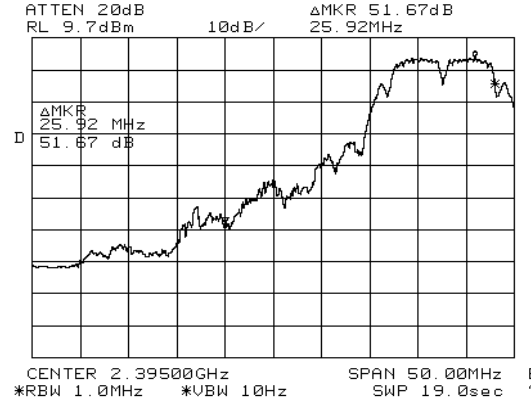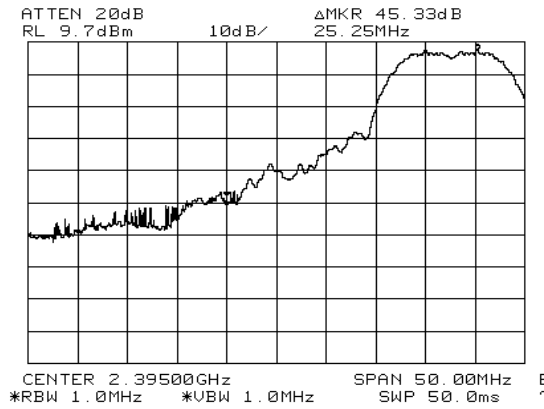

## Fundamental Field Strength Measurements used for bandedge field strength calculations

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2412.000	105.7	V	-	-	Pk	-	-	RBW = VBW = 1 MHz
2412.000	102.2	V	-	-	Avg	-	-	RBW = 1MHz, VBW = 10Hz
2462.000	102.6	V	-	-	Pk	-	-	RBW = VBW = 1 MHz
2462.000	97.9	V	-	-	Avg	-	-	RBW = 1MHz, VBW = 10Hz



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A



## Band Edge Field Strength Calculations (1 Mb/s)

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.0	60.4	v	74.0	-13.6	Pk	-	-	Note 1
2390.0	50.5	v	54.0	-3.5	Avg	-	-	Note 1
2483.5	57.8	v	74.0	-16.2	Pk	-	-	Note 2
2483.5	47.9	v	54.0	-6.1	Avg	-	-	Note 2

Note 1: EUT operating on the lowest channel available in the 2.4 - 2.4835 GHz band. Signal level calculated using the relative measurements in plots (45.3 dBc for peak and 51.7dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.

Note 2: EUT operating on highest channel available in the 2.4 - 2.4835 GHz band. Signal level calculated using the relative measurements in plots (44.8 dBc for peak and 50.0dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.

## Bandedge Plots (11Mb/s)

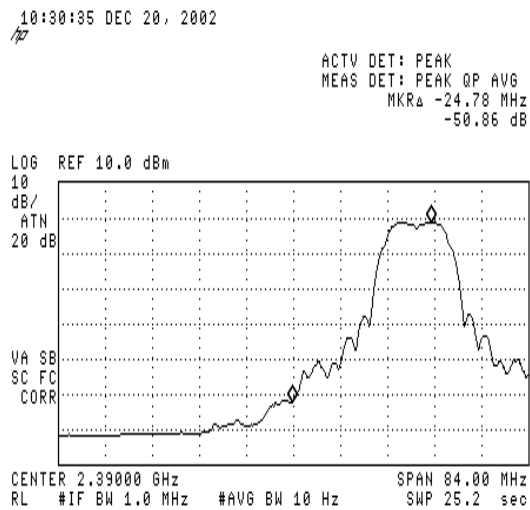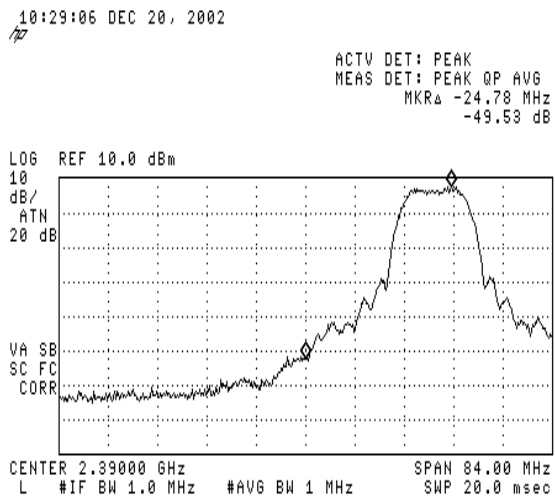




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Bandedge Plots (11Mb/s)

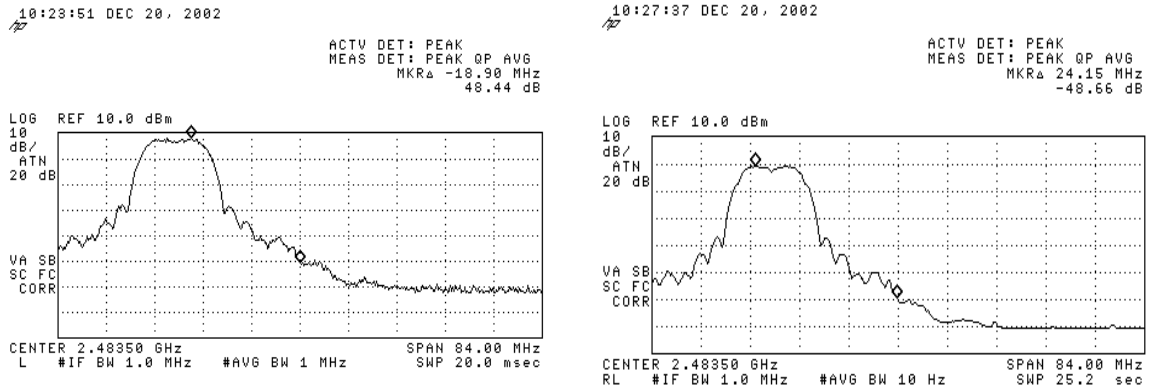

## Fundamental Field Strength Measurements used for bandedge field strength calculations

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2412.000	108.1	V	-	-	Pk	-	-	RBW = VBW = 1 MHz
2412.000	98.4	V	-	-	Avg	-	-	RBW = 1MHz, VBW = 10Hz
2462.000	106.6	V	-	-	Pk	-	-	RBW = VBW = 1 MHz
2462.000	97.7	V	-	-	Avg	-	-	RBW = 1MHz, VBW = 10Hz

## Band Edge Field Strength Calculations (11 Mb/s)

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.0	58.6	v	74.0	-15.4	Pk	-	-	Note 1
2390.0	47.5	v	54.0	-6.5	Avg	-	-	Note 1
2483.5	58.2	v	74.0	-15.8	Pk	-	-	Note 2
2483.5	49.0	v	54.0	-5.0	Avg	-	-	Note 2

Note 1: EUT operating on the lowest channel available in the 2.4 - 2.4835 GHz band. Signal level calculated using the relative measurements in plots (49.5 dBc for peak and 50.9 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.

Note 2: EUT operating on highest channel available in the 2.4 - 2.4835 GHz band. Signal level calculated using the relative measurements in plots (48.4 dBc for peak and 48.7 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.





## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #1b: Radiated Spurious Emissions, 30-25000 MHz. Center Channel @ 2437 MHz

	H	V
Fundamental emission level @ 3m in 100kHz RBW:		
Limit for emissions outside of restricted bands:	-20 dB $\mu$ V/m	

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4874.00	49.6	v	74.0	-24.4	Pk			
4874.00	36.1	v	54.0	-17.9	Avg			
7311.00	53.8	v	74.0	-20.2	Pk			
7311.00	39.0	v	54.0	-15.0	Avg			
12185.00	54.9	v	74.0	-19.1	Pk			
12185.00	44.8	v	54.0	-9.2	Avg			
4874.00	48.1	h	74.0	-25.9	Pk			
4874.00	35.7	h	54.0	-18.3	Avg			
7311.00	51.9	h	74.0	-22.1	Pk			
7311.00	38.8	h	54.0	-15.2	Avg			
12185.00	54.7	h	74.0	-19.3	Pk			
12185.00	43.3	h	54.0	-10.7	Avg			

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2:







## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Conducted & Radiated Emissions

#### Test Specifics

Objective: The objective of this test session is to perform engineering evaluation testing of the EUT with respect to the specification listed above.

Date of Test: 12/18/2002  
 Test Engineer: jmartinez  
 Test Location: SVOATS #3

Config. Used: 1  
 Config Change:  
 EUT Voltage: 120V/60Hz

#### General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators used.

**Ambient Conditions:** Temperature: 12°C  
 Rel. Humidity: 44%

#### Summary of Results

Run #	Test Performed	Limit	Result	Comment
1	RE, 30 - 24620 MHz - Spurious Emissions	FCC Part 15.209 / 15.247(c)	Pass	-0.4 dB @ 2390 MHz
2	6dB Bandwidth	15.247(a)	Pass	> 16 MHz
3	Output Power	15.247(b)	Pass	19.8 dBm @ 2437 MHz
4	Power Spectral Density (PSD)	15.247(d)	Pass	-11.7 dBm @ 2437 MHz
5	CE, 30 - 24620 MHz - Spurious Emissions	FCC Part 15.209 / 15.247(c)	Pass	> 20 dBc

#### Modifications Made During Testing:

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #1a: Radiated Spurious Emissions, 30-24120 MHz. Low Channel @ 2412 MHz

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4824.000	46.6	v	74.0	-27.4	Pk	135	1.2	
4824.000	32.8	v	54.0	-21.2	Avg	135	1.2	
7236.000	51.3	v	74.0	-22.7	Pk	135	1.5	
7236.000	38.9	v	54.0	-15.1	Avg	135	1.5	
4824.000	46.5	h	74.0	-27.5	Pk	130	1.0	
4824.000	34.1	h	54.0	-19.9	Avg	130	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

### Run #1b: Radiated Spurious Emissions, 30-24370 MHz. Center Channel @ 2437 MHz

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4874.000	46.5	v	74.0	-27.5	Pk	95	1.8	
4874.000	34.0	v	54.0	-20.0	Avg	95	1.8	
7311.000	51.7	v	74.0	-22.3	Pk	330	1.5	
7311.000	39.2	v	54.0	-14.8	Avg	330	1.5	
4874.000	46.4	h	74.0	-27.6	Pk	190	1.2	
4874.000	34.1	h	54.0	-19.9	Avg	190	1.2	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

### Run #1c: Radiated Spurious Emissions, 30-24620 MHz. High Channel @ 2462 MHz

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4924.000	46.4	v	74.0	-27.6	Pk	330	1.8	
4924.000	34.8	v	54.0	-19.2	Avg	330	1.8	
7386.000	51.8	v	74.0	-22.2	Pk	135	1.6	
7386.000	39.7	v	54.0	-14.3	Avg	135	1.6	
4924.000	47.3	h	74.0	-26.7	Pk	30	1.5	
4924.000	34.6	h	54.0	-19.4	Avg	30	1.5	





Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Bandedge Plots

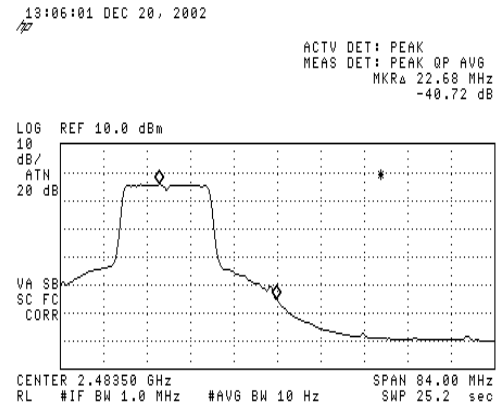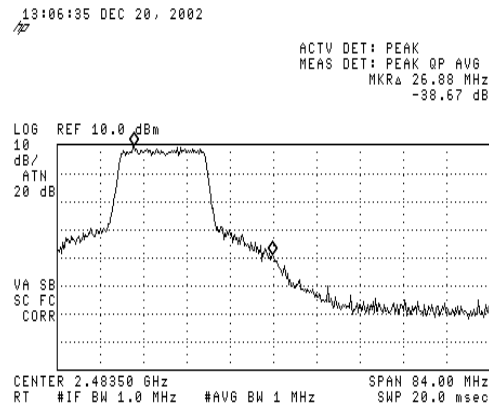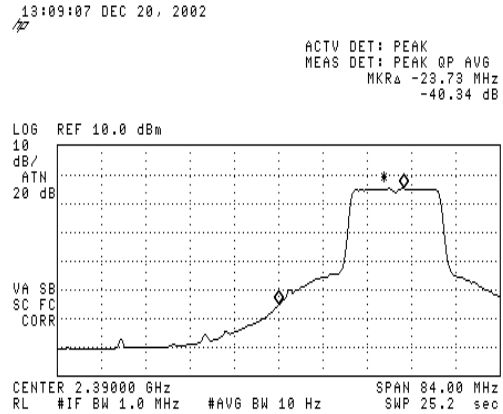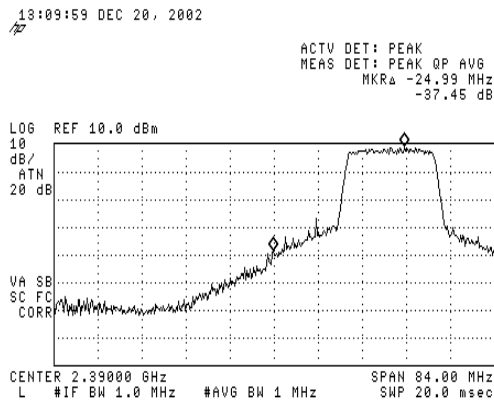

## Fundamental Field Strength Measurements used for bandedge field strength calculations

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2412.000	106.4	V	-	-	Pk	-	-	RBW = VBW = 1 MHz
2412.000	93.9	V	-	-	Avg	-	-	RBW = 1MHz, VBW = 10Hz
2462.000	104.4	V	-	-	Pk	-	-	RBW = VBW = 1 MHz
2462.000	93.3	V	-	-	Avg	-	-	RBW = 1MHz, VBW = 10Hz



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #1d: Band Edge Field Strength Calculations

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.407		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2390.0	68.9	v	74.0	-5.1	Pk	-	-	Note 1
2390.0	53.6	v	54.0	-0.4	Avg	-	-	Note 1
2483.5	65.7	v	74.0	-8.3	Pk	-	-	Note 2
2483.5	52.6	v	54.0	-1.4	Avg	-	-	Note 2

Note 1:	EUT operating on the lowest channel available in the 2.4 - 2.4835 GHz band. Signal level calculated using the relative measurements in plots (37.5 dBc for peak and 40.3 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on the lowest channel available in the 2.4 - 2.4835 GHz band. Signal level calculated using the relative measurements in plots (38.7 dBc for peak and 40.7 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A


## Run #2: Signal Bandwidth

Channel	Frequency	Resolution Bandwidth	6dB BW	26dB BW	99% BW
	(MHz)	(kHz)	(MHz)	(MHz)	(MHz)
Low	2412	100	16.8	19.3	16.7
Mid	2437	100	16.9	19.1	16.7
High	2462	100	16.7	18.8	16.6


6-dB

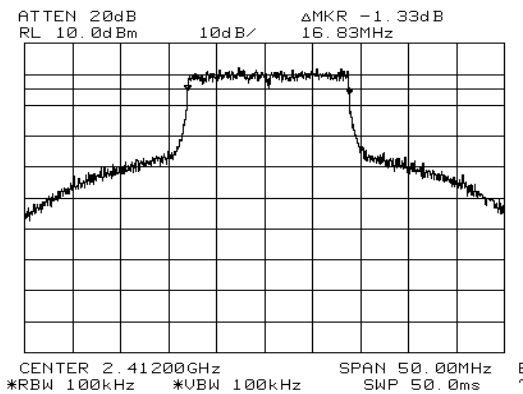

26-dB

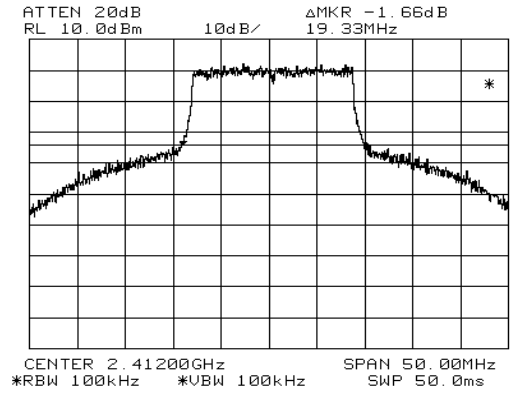




99%

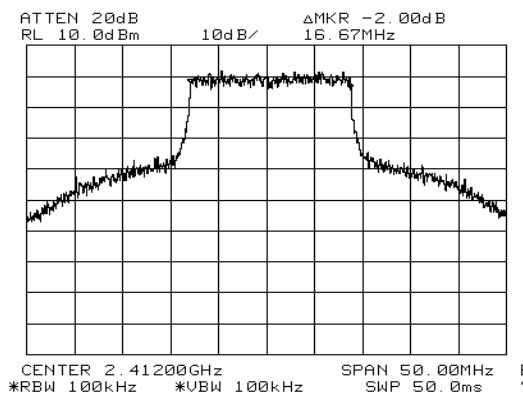



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

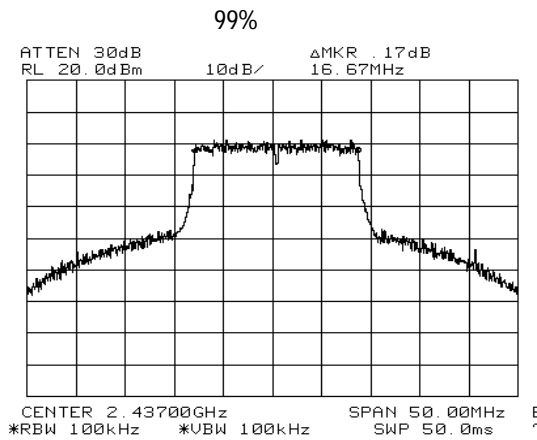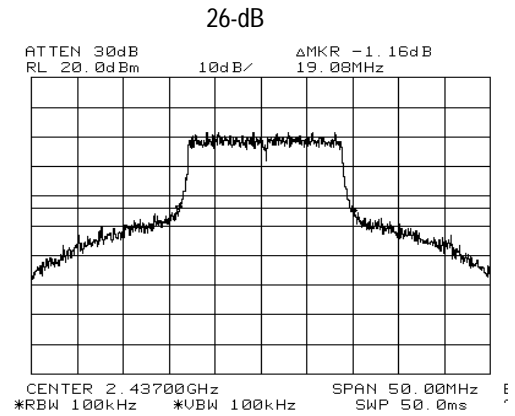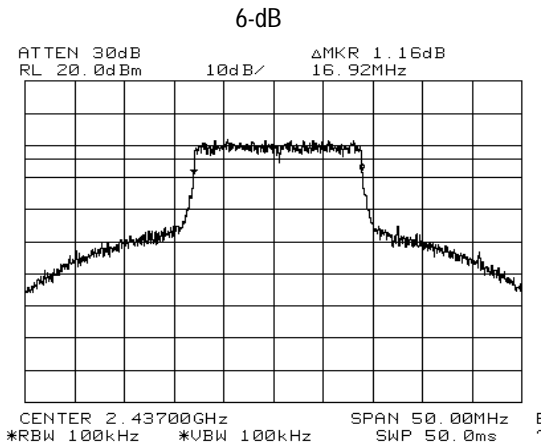





# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A


6-dB

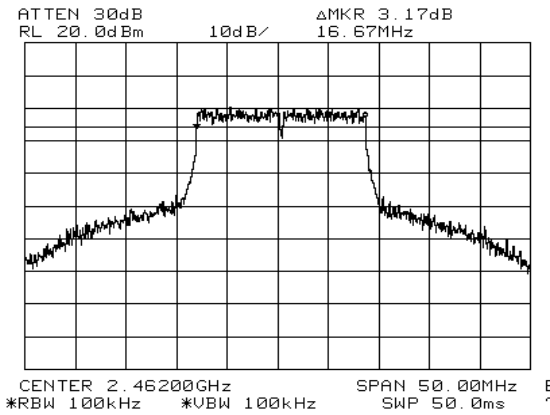

26-dB

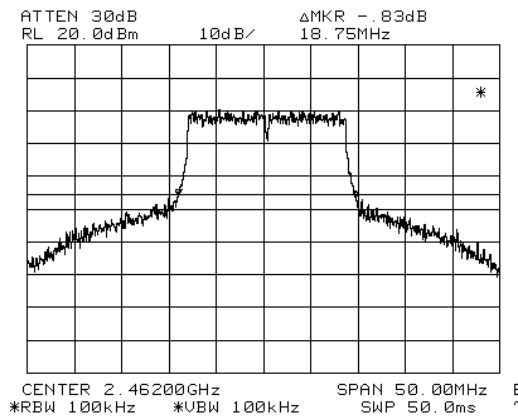

99%

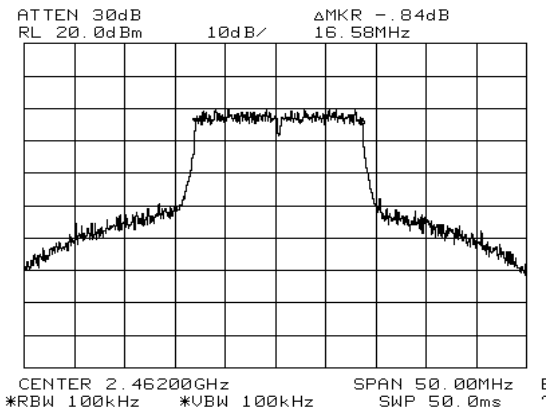



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #3: Output Power



Channel	Frequency (MHz)	Output Power	Graph reference #
Low	2412	19.4	none
	2417	19.8	none
Mid	2437	19.8	none
	2457	19.7	none
High	2462	19.5	none

Note 1: Measured using peak power meter

Note 2: Meaximun ERP is  $19.8+1.45 = 21.25$  dBm.

### Run #3: Power Spectral Density

Channel	Frequency (MHz)	Res BW	P.S.D. dBm (averaged over 1 second in a 3kHz bandwidth)	Graph reference #
Low	2412	3 kHz	-12.1 dBm	See below
Mid	2437	3 kHz	-11.7 dBm	See below
High	2462	3 kHz	-12.1 dBm	See below

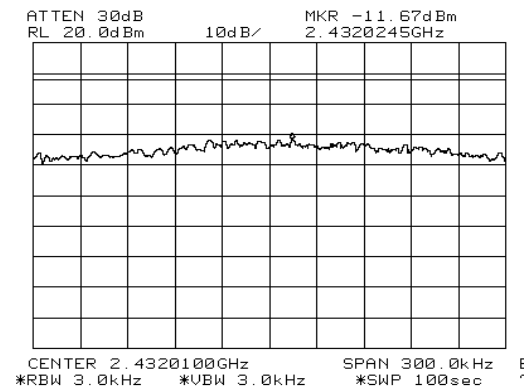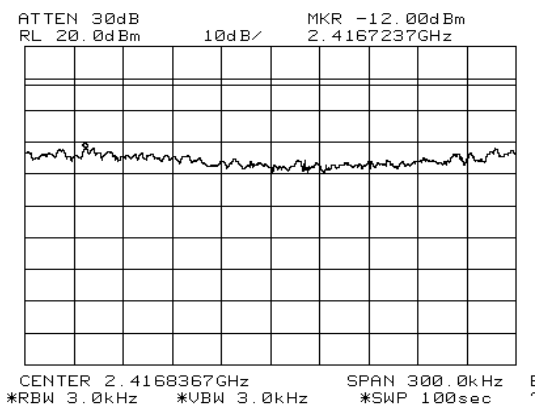






# EMC Test Data


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #3: Power Spectral Density Cont'

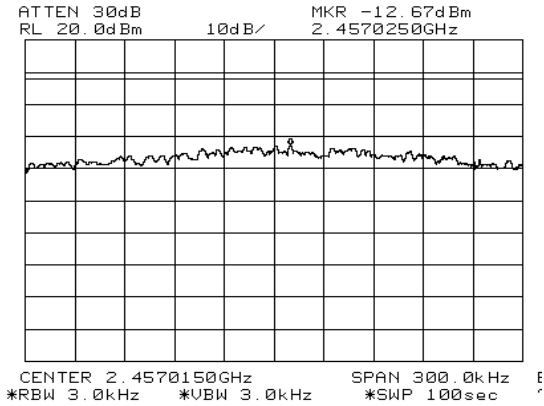


## Run #5: Out of Band


### Low

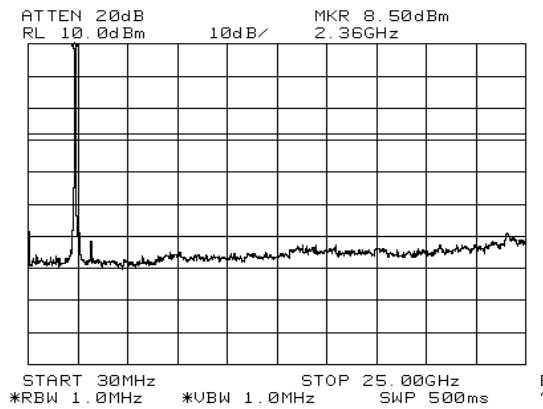

### Middle

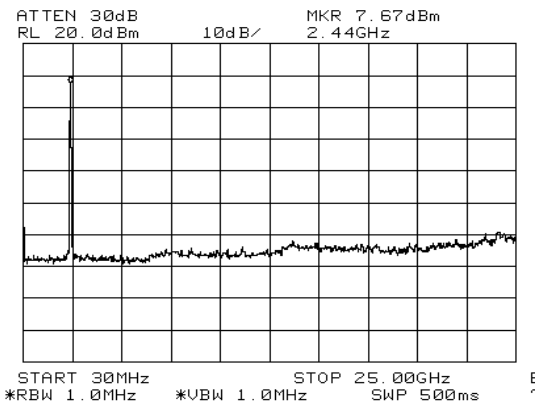

### High Channel

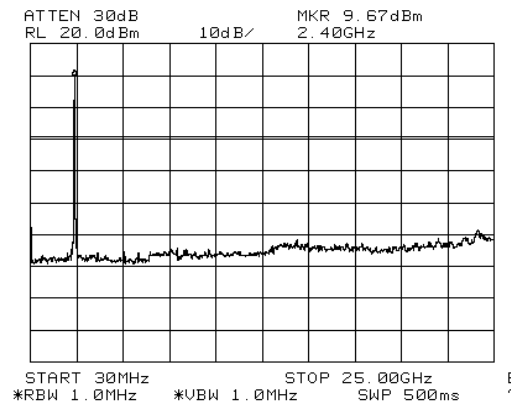



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Conducted & Radiated Emissions

### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/17/2002  
 Test Engineer: Chris Byleckie  
 Test Location: Chamber #2

Config. Used: 1  
 Config Change:  
 EUT Voltage: 120V/60Hz

### General Test Configuration

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

**Ambient Conditions:**            Temperature: 24°C  
    Rel. Humidity: 80%

### Summary of Results

Run #	Test Performed	Limit	Result	Comments
1	Output Power	15.407(a) (1), (2)	Pass	21.8 dBm
2	Power Spectral Density (PSD)	15.407(a) (1), (2)	Pass	-0.2 dBm/MHz
3	26 dB Bandwidth	15.407	Pass	> 20 MHz
3	20 dB Bandwidth	RSS 210	Pass	> 20 MHz
4	Peak Excursion Envelope	15.407(a) (6)	Pass	Peak to average excursion < 13dB
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	All emissions below the -27dBm/MHz limit
6	Radiated - Out of Band Spurious	15.407(b)	Pass	All emissions below the 15.209 limit



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Modifications Made During Testing:

No modifications were made to the EUT during testing

### Deviations From The Standard

No deviations were made from the requirements of the standard.

### Run #1a: Output Power Data Rate 54Mb/s

The minimum VBW required for power measurements using a spectrum analyzer is 1/T, where T is the pulse transmission rate.

Pulse Transmission Rate: 4.0  $\mu$ S  
 Minimum VBW: 250 kHz  
 VBW Used: 300 kHz

Antenna Gain: 5.6 dBi

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm) (note 3)	Comments
36	5180	15.0	17.0	Note 2, 4
52	5260	21.5	24.0	Note 2 (15.8 dBm avg)
64	5320	21.8	24.0	Note 2

Note 1:	Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 300kHz)
Note 2:	Measured using a Rohde & Schwartz Power Meter with a peak power sensor
Note 3:	RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.
Note 4:	Used a 3dB pad. Clients software did not have enough control to set the Pout for both data rates



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
	Proj Eng: David Bare
Contact: David Moldy	
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #1b: Output Power Data Rate 6Mb/s

The minimum VBW required for power measurements using a spectrum analyzer is 1/T, where T is the pulse transmission rate.

Pulse Transmission Rate: 4.0 uS  
 Minimum VBW: 250 kHz  
 VBW Used: 300 kHz

Antenna Gain: 5.6 dBi

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm) (note 3)	Comments
36	5180	15.9	17.0	Note 2,4
52	5260	21.9	24.0	Note 2
64	5320	22.0	24.0	Note 2

- Note 1: Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW =300kHz)
- Note 2: Measured using a Rhode & Schwarz Power Meter with a peak power sensor
- Note 3: RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.
- Note 4: Used a 3dB pad. Clients software did not have enough control to set the Pout for both data rates



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #2: Bandwidth Power Spectral Density Data Rate 54Mb/s

Antenna Gain: 5.6 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)				Graph Reference
		Peak PSD <sup>2</sup>		Peak PSD <sup>2</sup>		
		Measured	Limit	Calculated	RSS210 check	
36	5180	-18.8	4.0			T49605/204
52	5260	-10.3	11.0			T49605/205
64	5320	-10.4	11.0			T49605/206

Note 1: RBW = Resolution bandwidth used on the spectrum analyzer to measure the signal bandwidth. This is at least 1% of the 26dB emission bandwidth


Note 2: Average PSD is calculated for RSS210 and is the equal to the output power divided by the emissions 99% power bandwidth. The Peak PSD was measured using RBW = 1MHz, VBW >=3MHz, video averaging ON as the EUT was continuously transmitting. There was no need to time gate the analyzer or use other techniques as the EUT was continuously transmitting.




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Plots Showing Power Spectral Density (RBW = 1MHz, VBW = 3 MHz, video averaging ON)

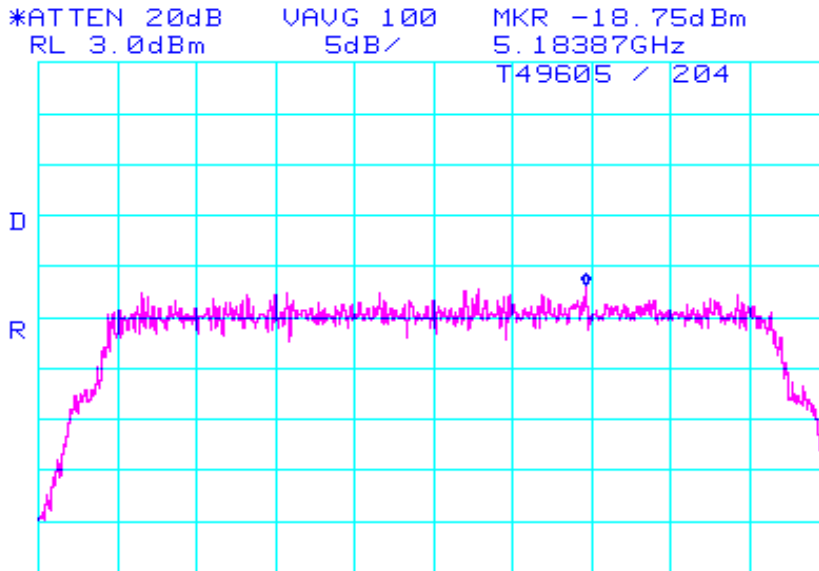

CENTER 5.18000GHz    SPAN 20.00MHz    ERR 112  
\*RBW 1.0MHz    \*VBW 3.0MHz    SWP 50.0ms    ??CMD??

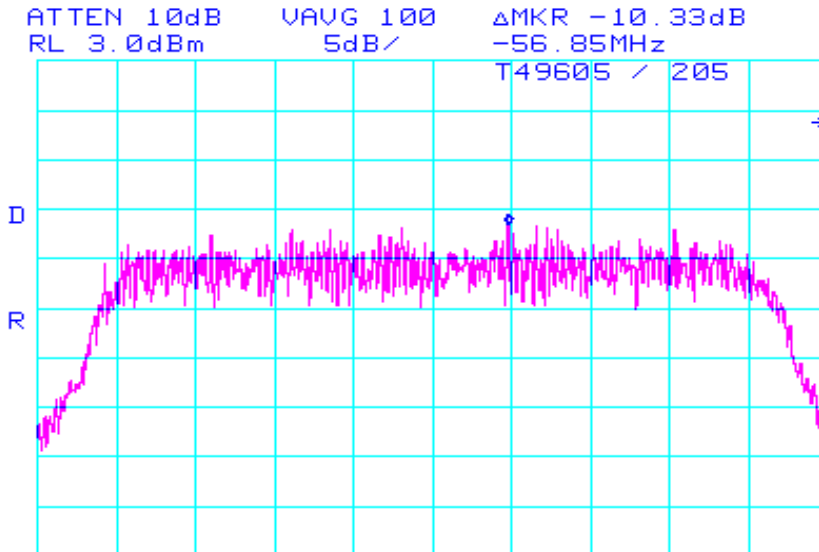


CENTER 5.26000GHz    SPAN 20.00MHz    ERR 112  
\*RBW 1.0MHz    \*VBW 3.0MHz    SWP 50.0ms    ??CMD??



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

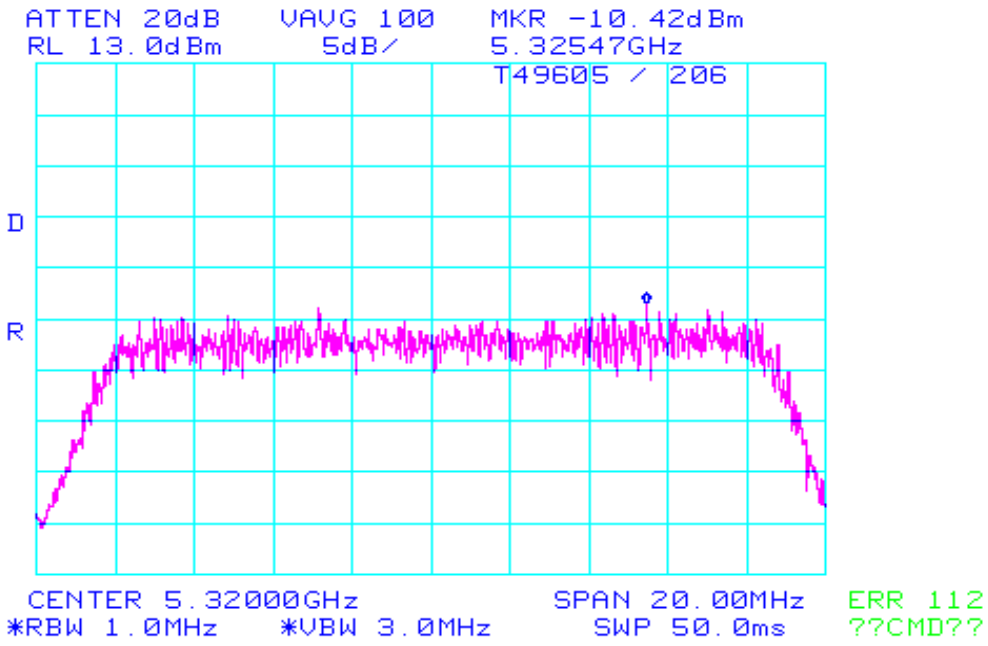



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A


**Run #2: Bandwidth Power Spectral Density Data Rate 6Mb/s**

Antenna Gain: 5.6 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)				Graph Reference
		Peak PSD <sup>2</sup>		Peak PSD <sup>2</sup>		
		Measured	Limit	Calculated	RSS210 check	
36	5180	-5.2	4.0			T49605/201
52	5260	-2.7	11.0			T49605/202
64	5320	-0.2	11.0			T49605/203

Note 1: RBW = Resolution bandwidth used on the spectrum analyzer to measure the signal bandwidth. This is at least 1% of the 26dB emission bandwidth

Note 2: Average PSD is calculated for RSS210 and is the equal to the output power divided by the emissions 99% power bandwidth. The Peak PSD was measured using RBW = 1MHz, VBW >=3MHz, video averaging ON as the EUT was continuously transmitting. There was no need to time gate the analyzer or use other techniques as the EUT was continuously transmitting.


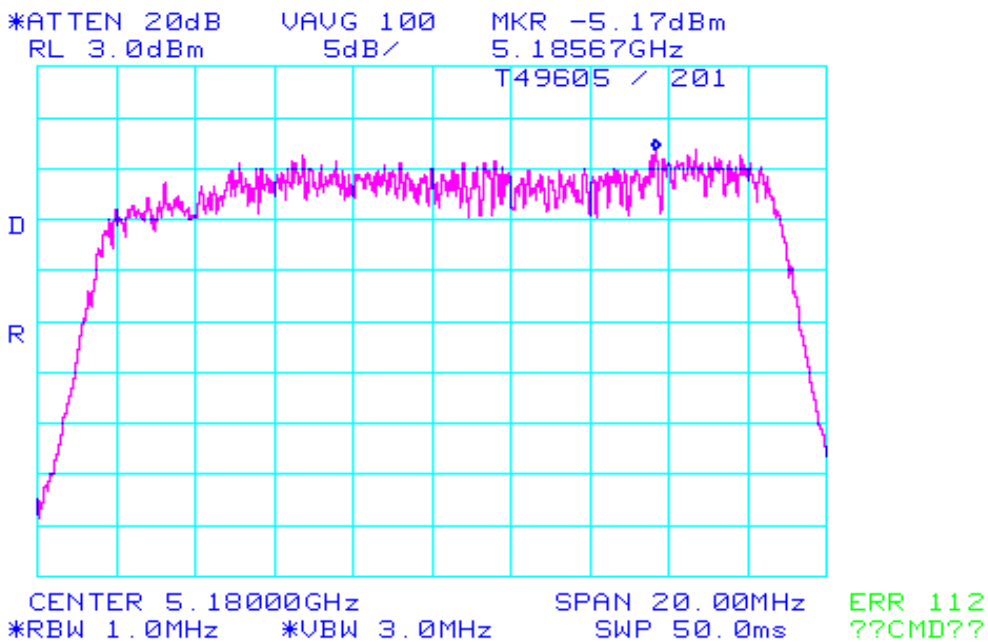






# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

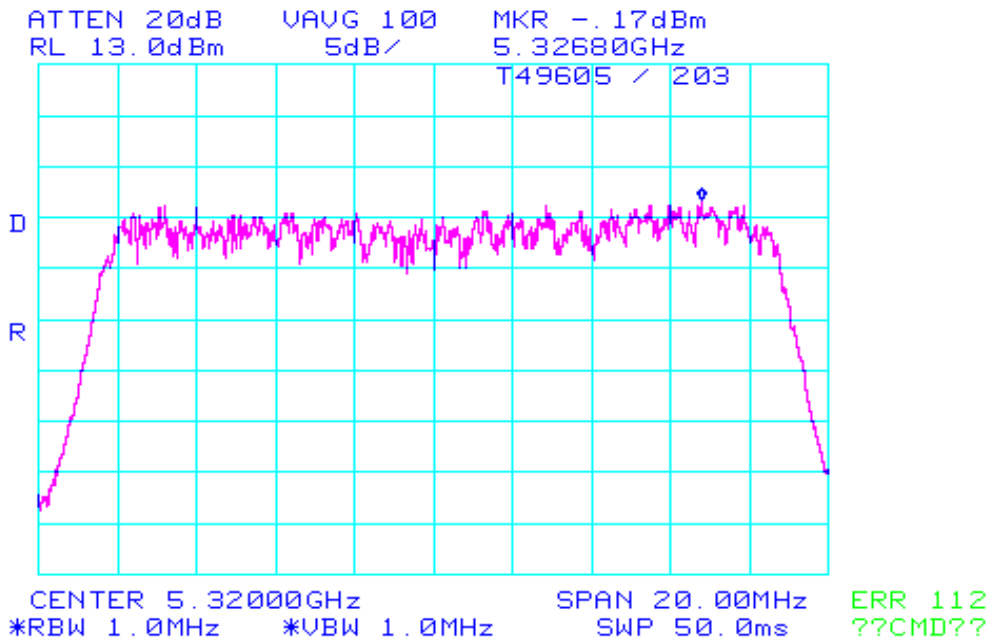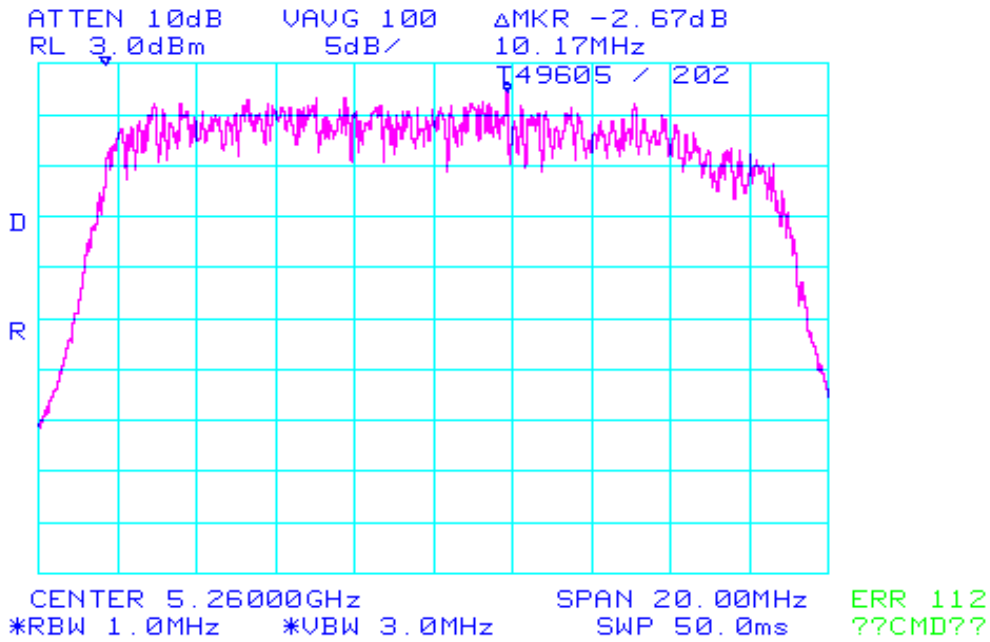




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A



## Run #3: Signal Bandwidth Data Rate 6MB

Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
36	5180	300 kHz	19.2	18.2	T49605/301
52	5260	300 kHz	26.7	18.3	T49605/302
64	5320	300 kHz	30	18.3	T49605/303

### Plots Showing Signal Bandwidth

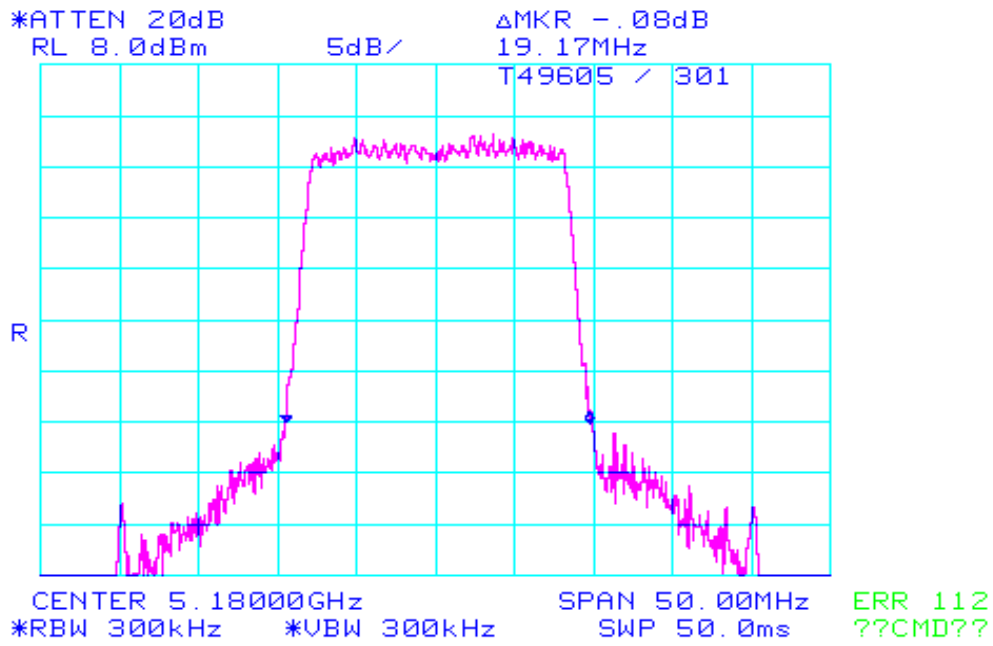

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

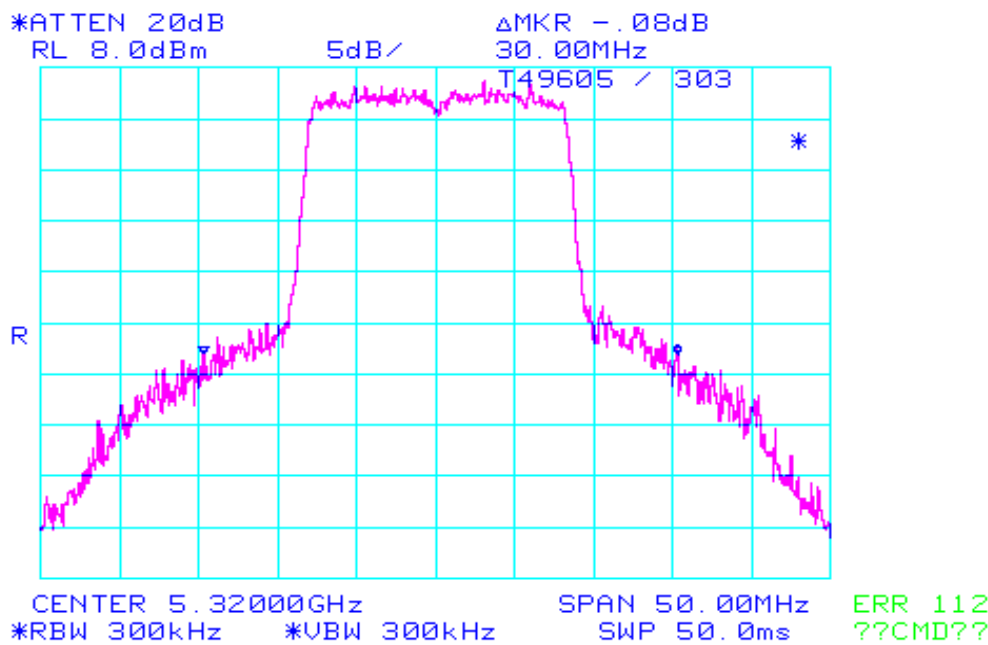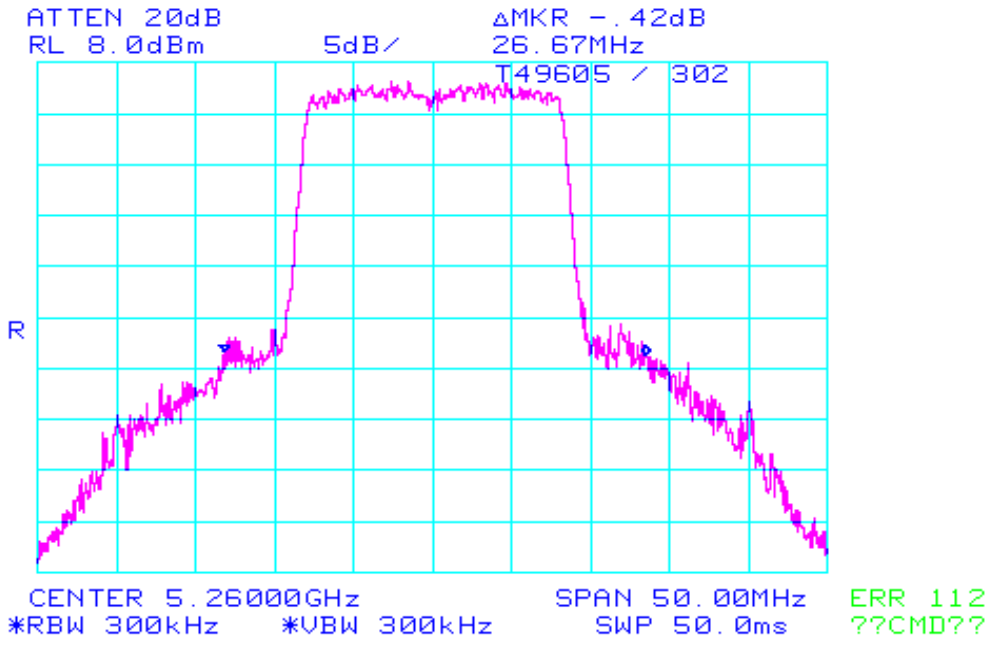




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #3: Signal Bandwidth Data Rate 54MB



Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
36	5180	300 kHz	19.0	18	T49605/304
52	5260	300 kHz	25.3	18.4	T49605/305
64	5320	300 kHz	28.2	18	T49605/306

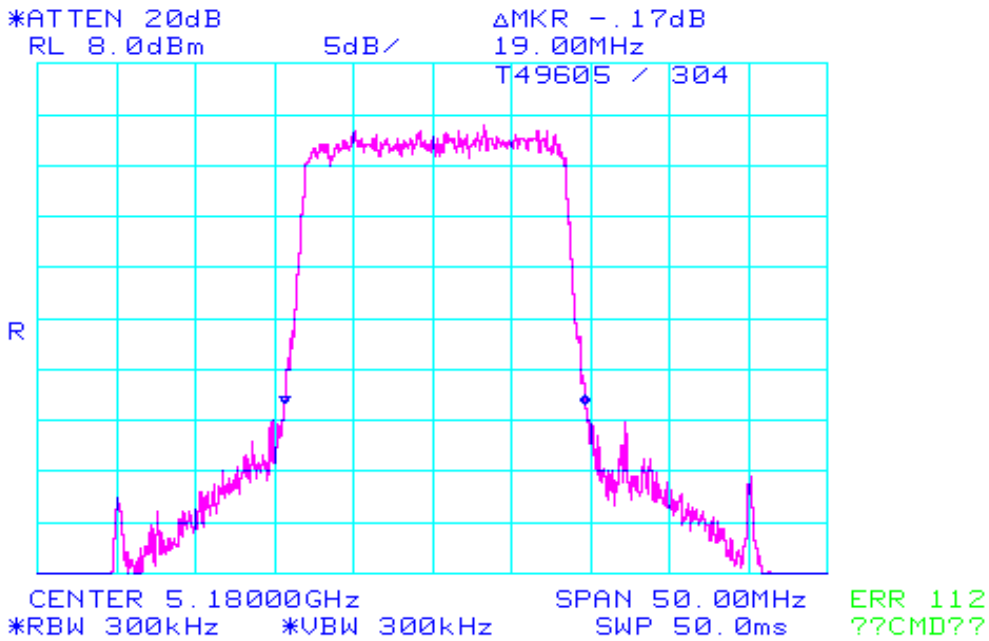



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

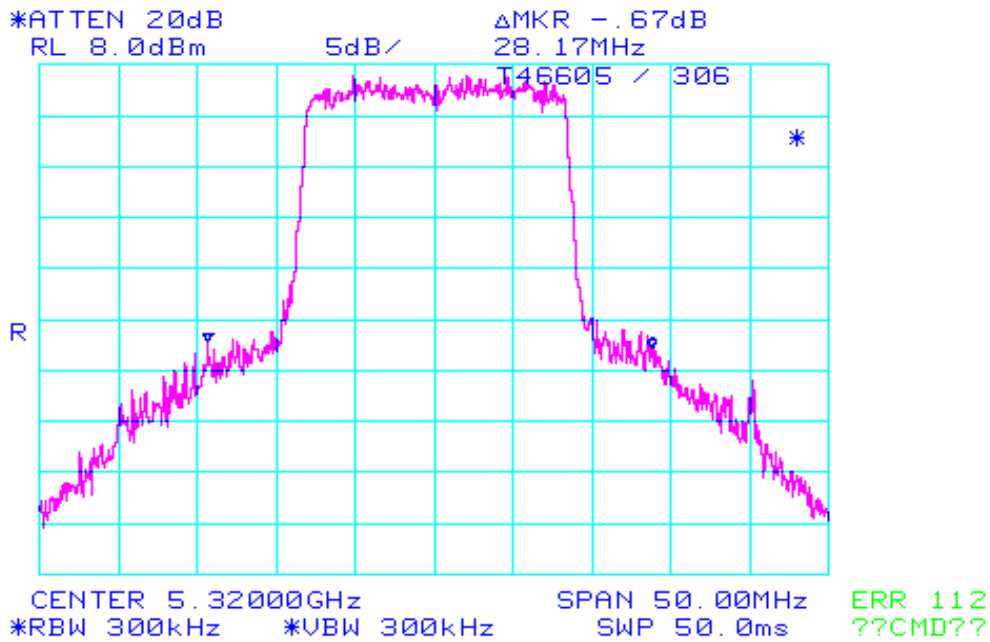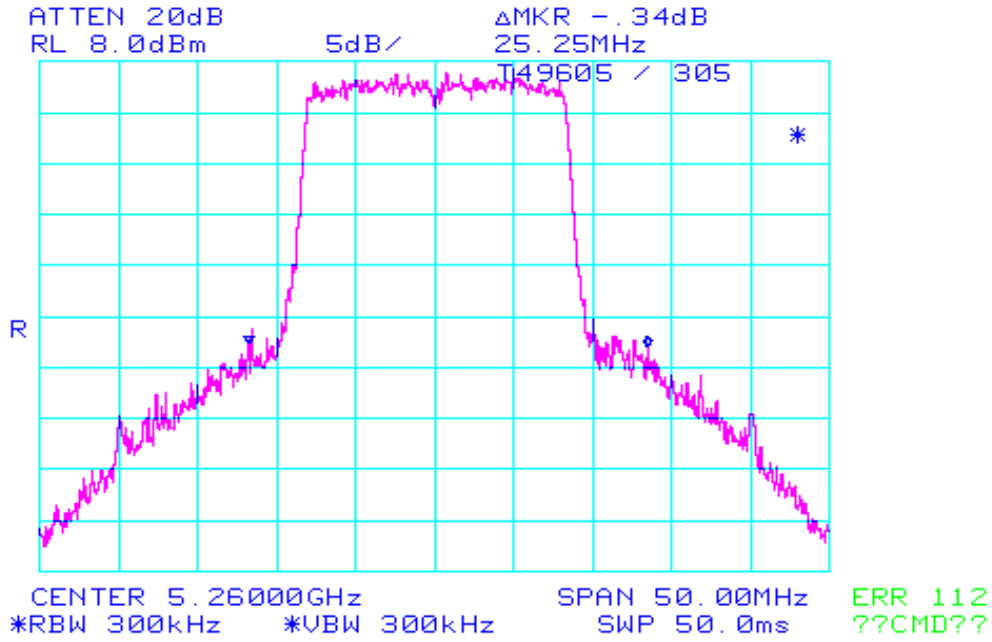



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A


## Run #4: Peak Excursion Measurement Data Rate 54 MBp/s

### Plots Showing Peak Excursion

Trace A: RBW = VBW = 1MHz


Trace B: RBW = 1 MHz, VBW = 30kHz

Peak Excursion = 4.66 dB.

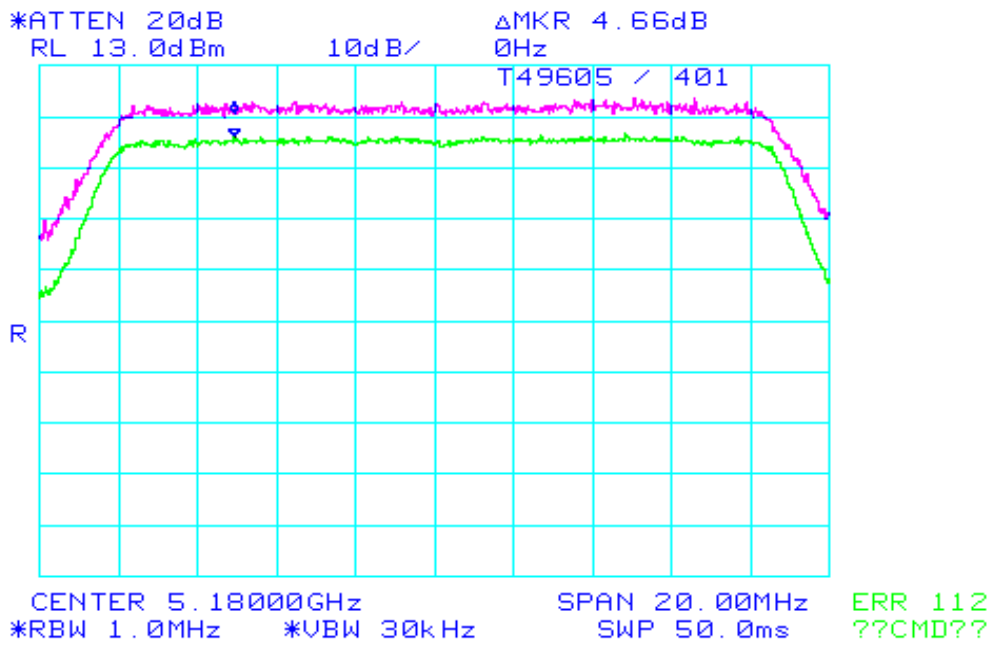


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

Peak Excursion = 5.34 dB.

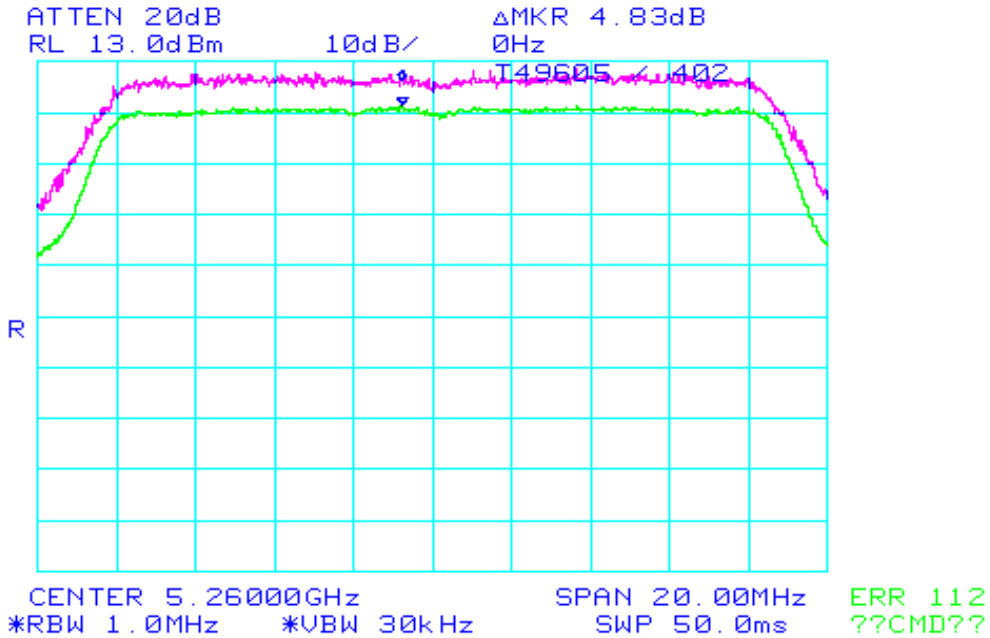

Peak Excursion = 5.17 dB.

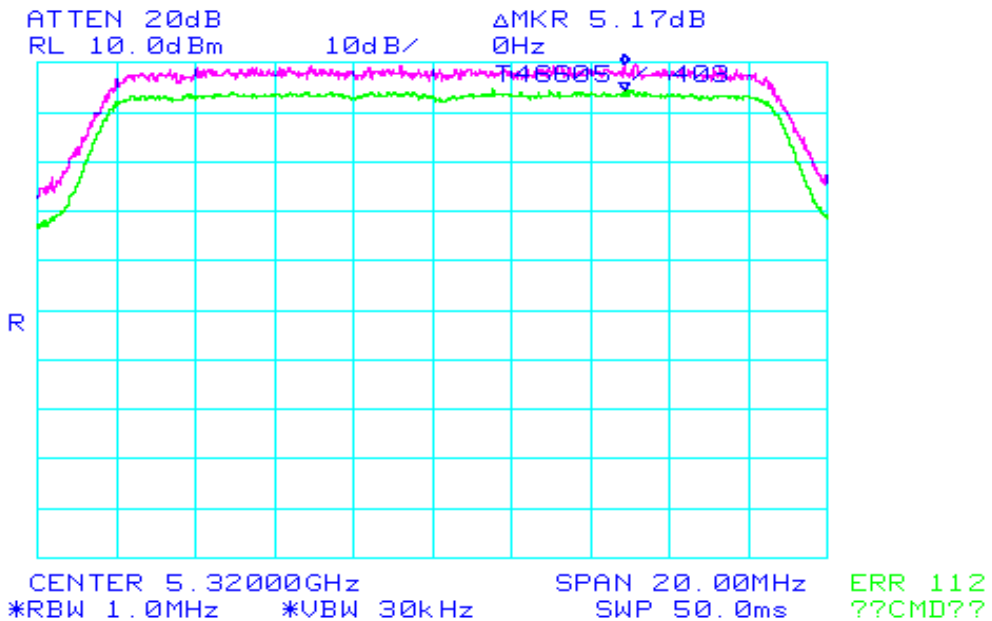



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #4: Peak Excursion Measurement Data Rate 6 MBp/s

### Plots Showing Peak Excursion


Trace A: RBW = VBW = 1MHz

Trace B: RBW = 1 MHz, VBW = 30kHz

13:28:37 DEC 20, 2002


ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKRΔ 0 Hz  
 5.16 dB

LOG REF 10.0 dBm

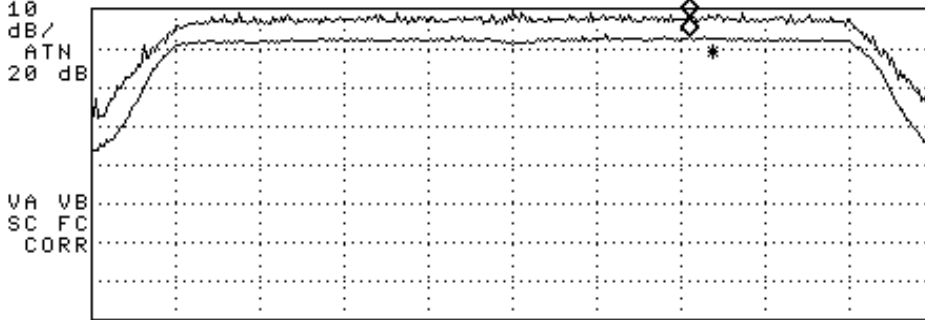

CENTER 5.18000 GHz SPAN 20.00 MHz  
 RL #IF BW 1.0 MHz #AVG BW 30 kHz SWP 20.0 msec

ATTEN 20dB ΔMKR 4.66dB  
 RL 13.0dBm 10dB/ 0Hz

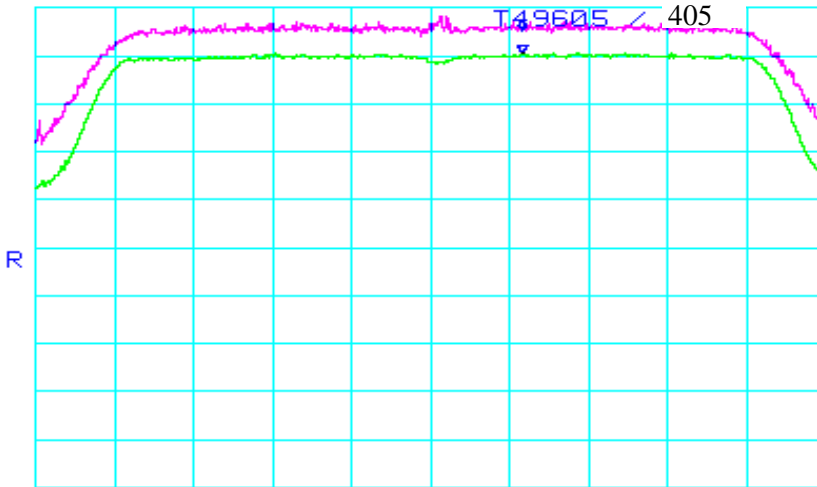


CENTER 5.26000GHz SPAN 20.00MHz ERR 112  
 \*RBW 1.0MHz \*VBW 30kHz SWP 50.0ms ??CMD??





# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

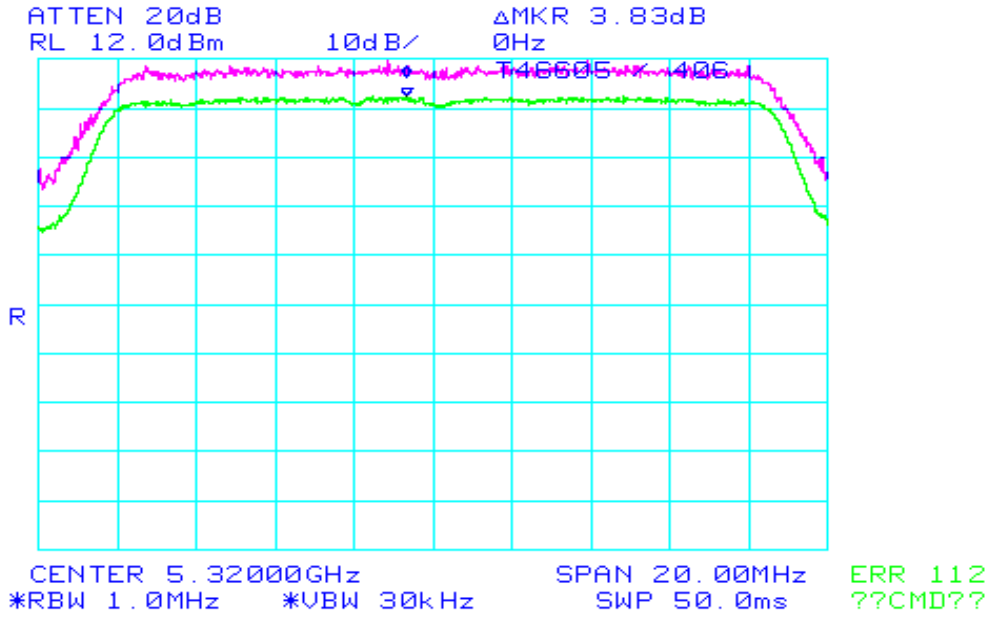



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #5a: Out Of Band Spurious Emissions - Antenna Conducted Data Rate 54Mb/s

The antenna gain of the radios integral antenna is 5.6 dBi. The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -32.6 dBm was, therefore, used for signals not in restricted bands and close to the intentional band with the assumption that the antenna gain was equal to 5.6 within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
36	5180	30 - 1000 MHz	Note 4	T49605/501
		1 to 5.15 GHz	-47 dBm @ 5150	T49605/502
		5.25 to 10 GHz	-34.3 dBm @ 6905	T49605/503
		10 GHz to 20 GHz	-40.8 dBm @ 10350	T49605/504
		20 GHz to 40 GHz	-42.2 dBm @ 36500	T49605/505
52	5260	30 - 1000 MHz	Note 4	T49605/506
		1 to 5.25 GHz	-53.8 dBm @ 3763	T49605/507
		5.35 to 10 GHz	-32.3 dB @ 7016	T49605/508
		10 GHz to 20 GHz	-49.7 dBm @ 13730	T49605/509
64	5320	20 GHz to 40 GHz	-43.2 dBm @ 37430	T49605/510
		30 - 1000 MHz	Note 4	T49605/511
		1 to 5.25 GHz	-51.7 dBm @ 5250	T49605/512
		5.35 to 10 GHz	-31.0 dBm @ 5350	T49605/513
		10 GHz to 20 GHz	-49.0 dBm @ 10630	T49605/514
		20 GHz to 40 GHz	-42.3 dBm @ 36900	T49605/515


Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)
Note 4:	All spurious signals in this frequency band measured during digital device radiated emissions test.



# EMC Test Data


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz) Data Rate 54

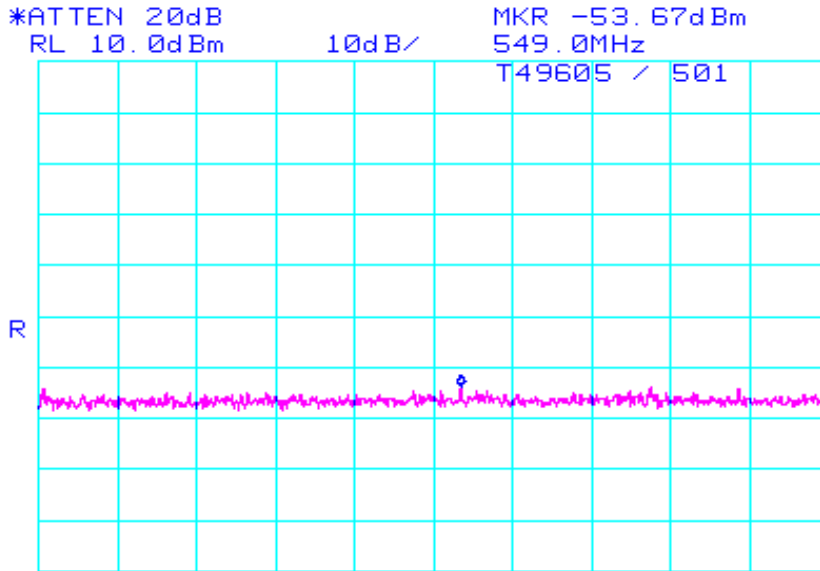

START 30.0MHz STOP 1.0000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 50.0ms

ERR 112  
??CMD??

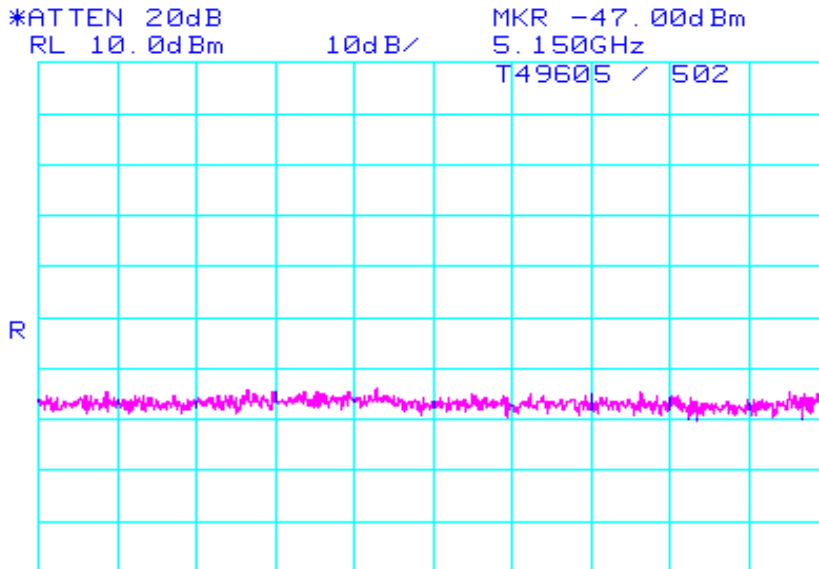


START 1.000GHz STOP 5.150GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 83.0ms

ERR 112  
??CMD??




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

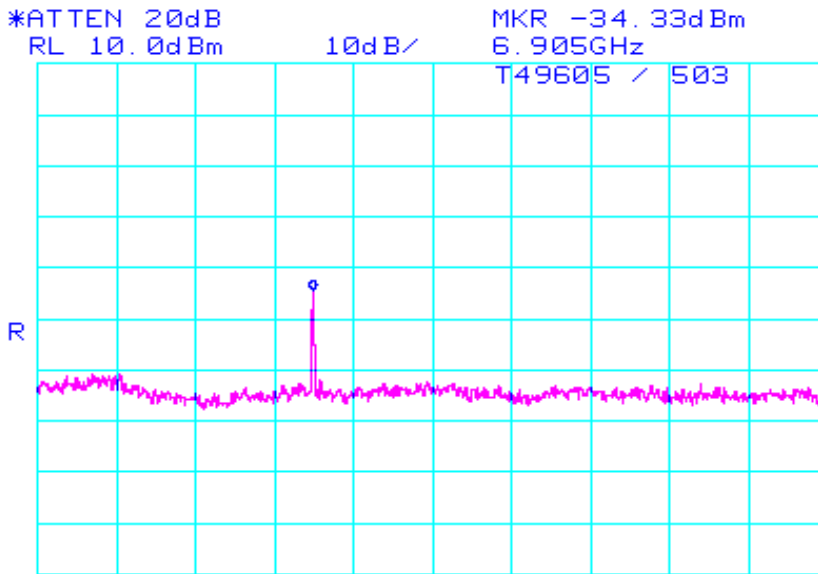

START 5.250GHz STOP 10.000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 95.0ms

ERR 112  
??CMD??

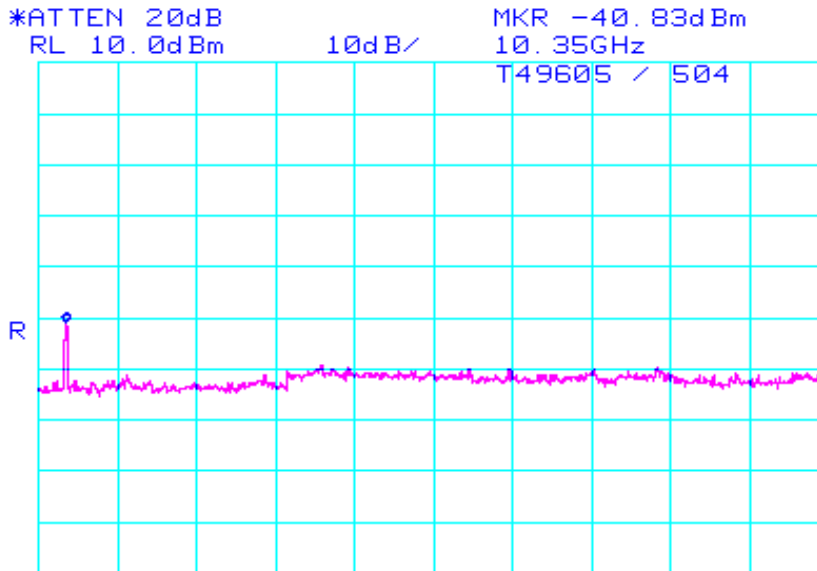



START 10.000GHz STOP 20.000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 200ms

ERR 112  
??CMD??



# EMC Test Data



Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

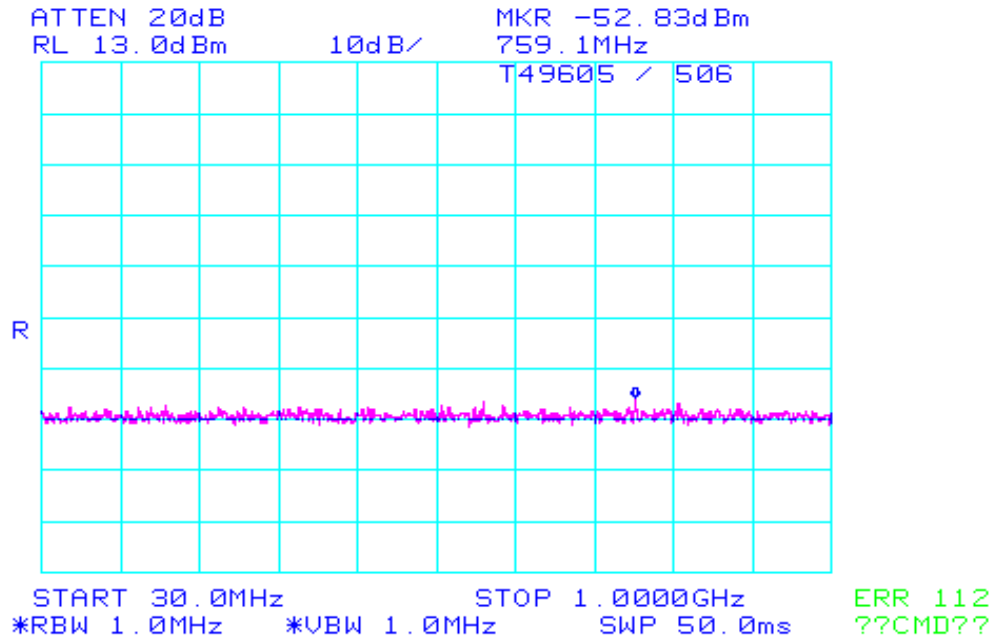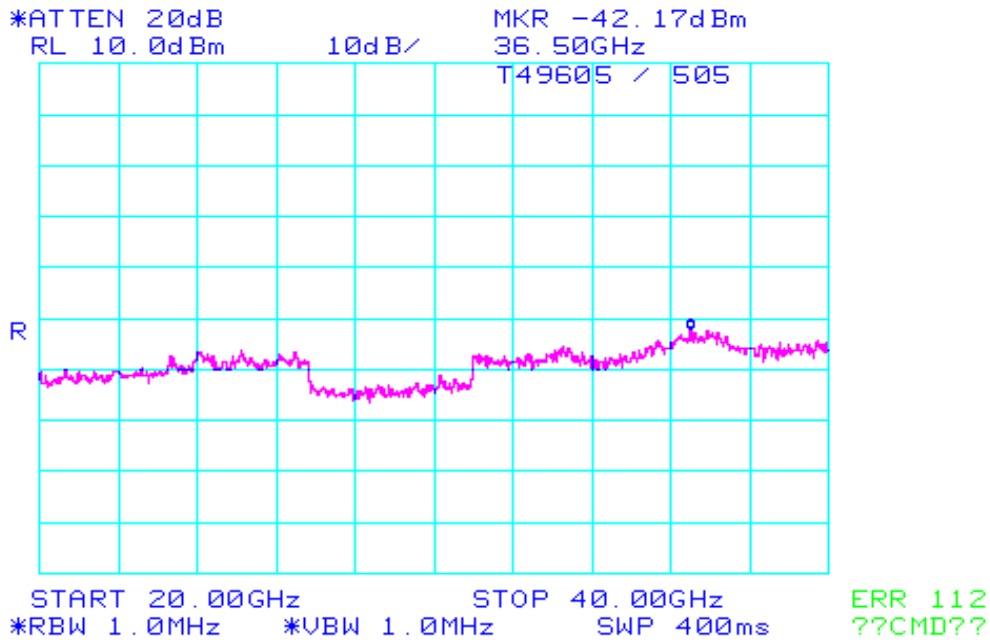



# EMC Test Data


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

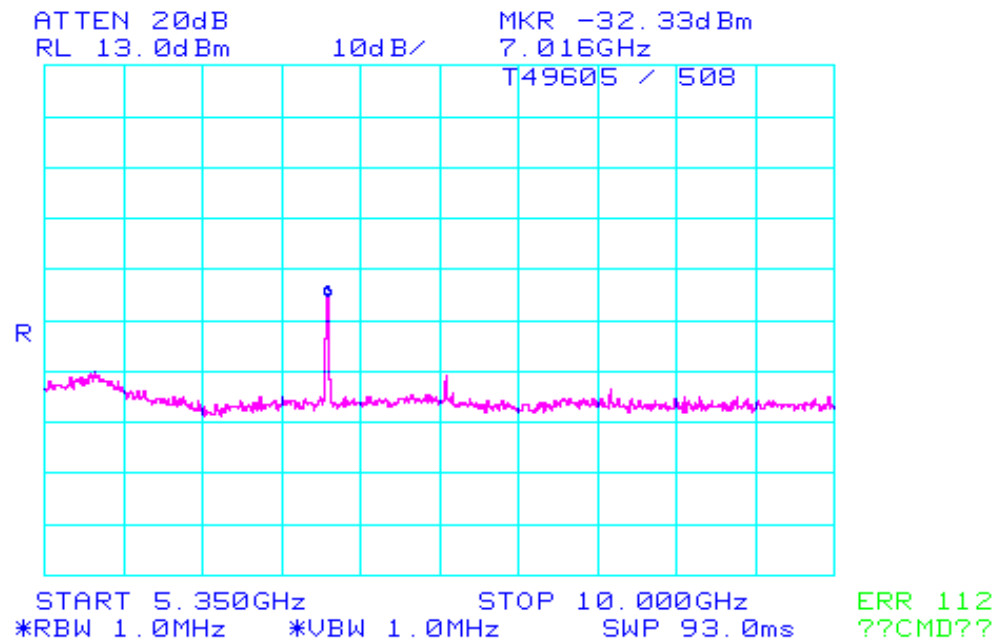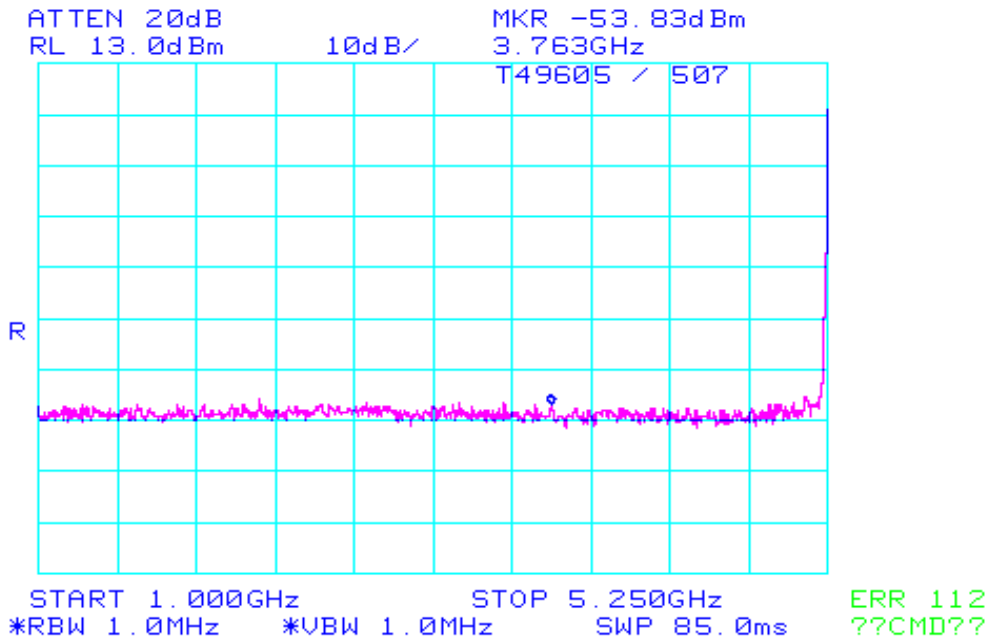




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

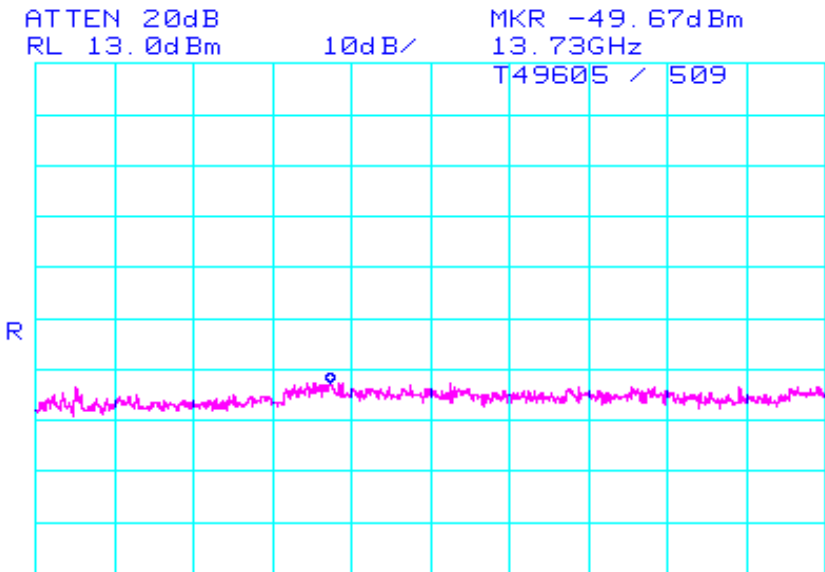

START 10.00GHz STOP 20.00GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 200ms

ERR 112  
??CMD??

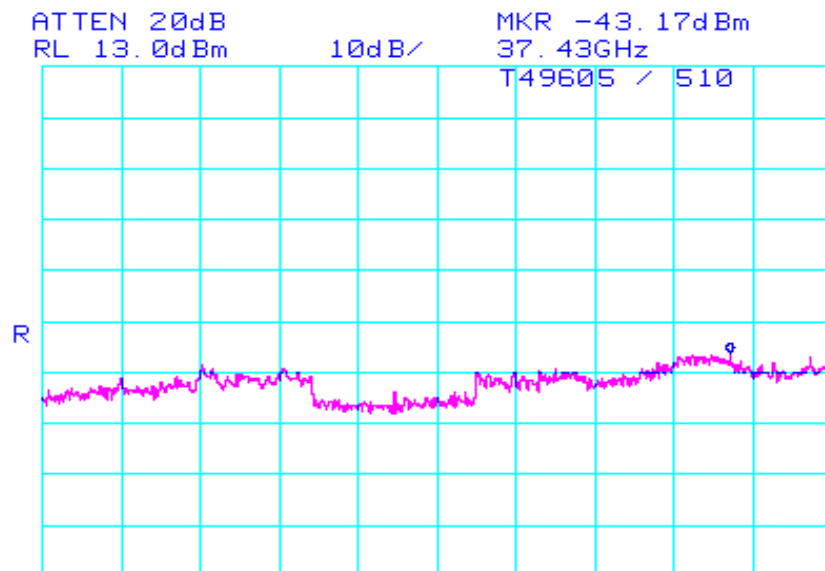



START 20.00GHz STOP 40.00GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 400ms

ERR 112  
??CMD??



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

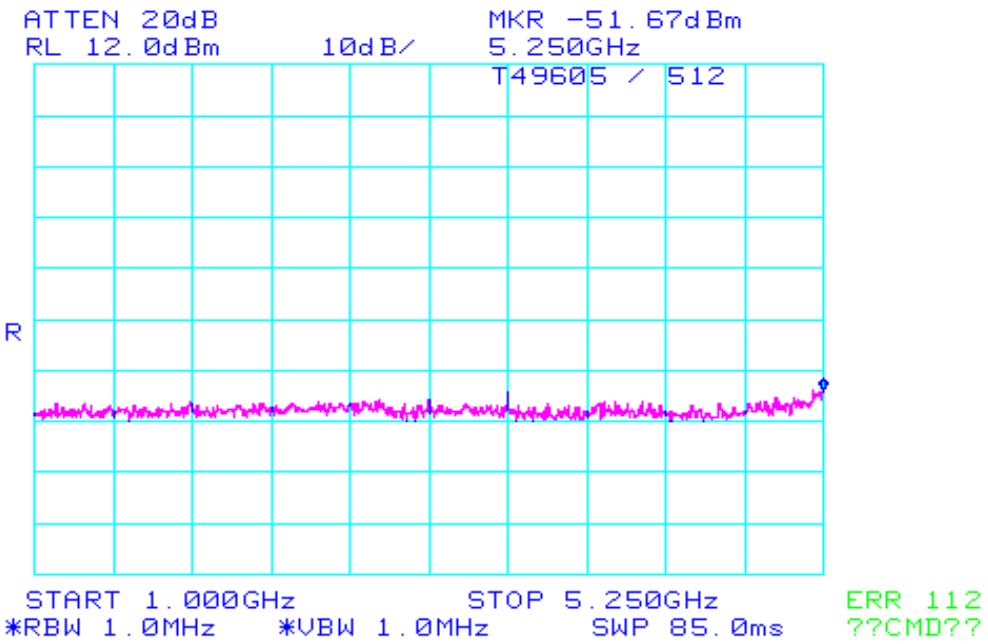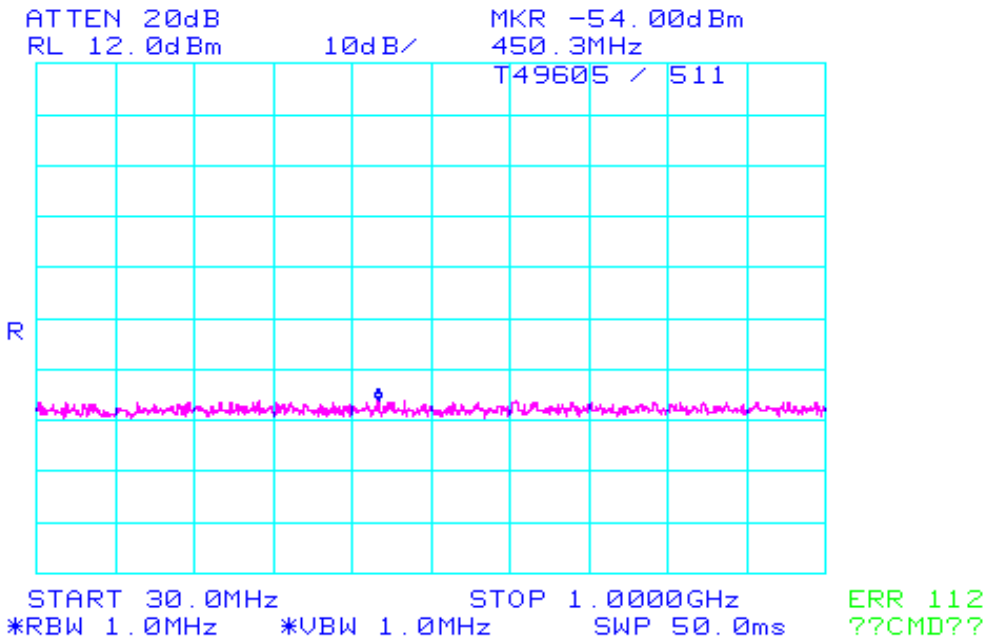







# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

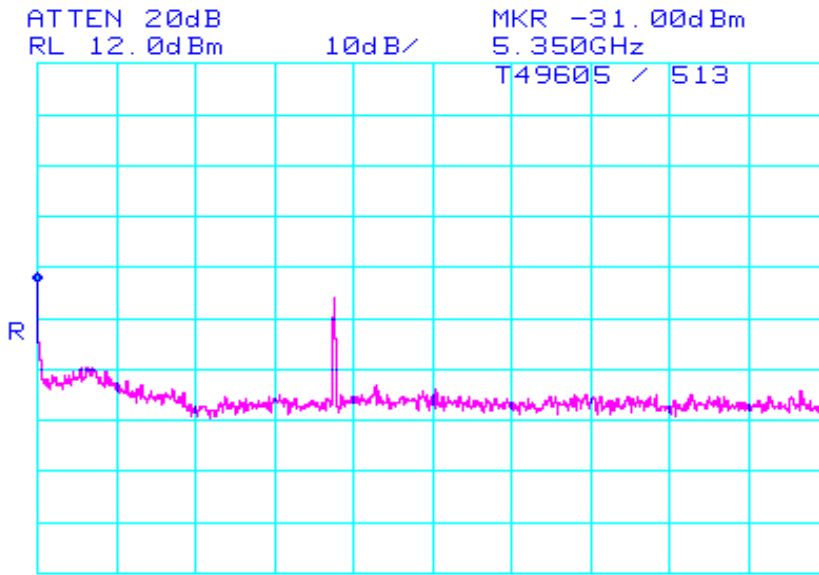

START 5.350GHz STOP 10.000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 93.0ms

ERR 112  
??CMD??

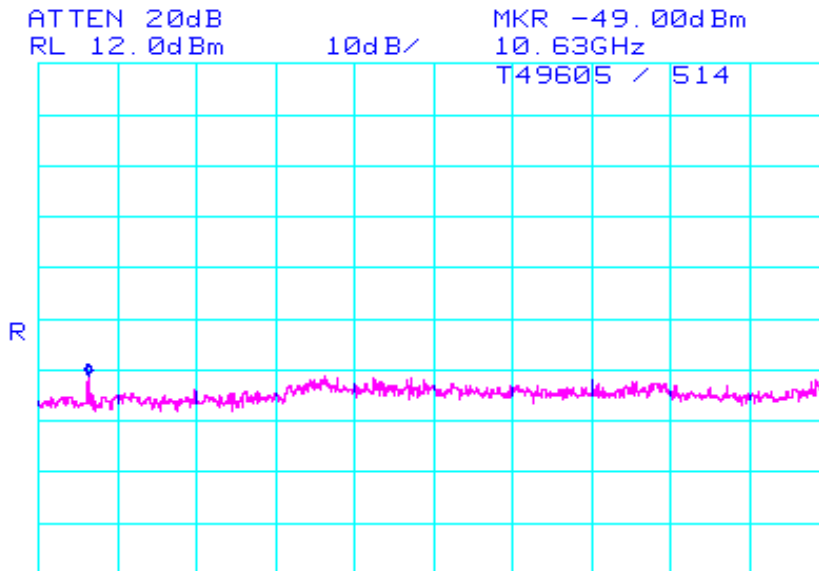


START 10.000GHz STOP 20.000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 200ms

ERR 112  
??CMD??



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

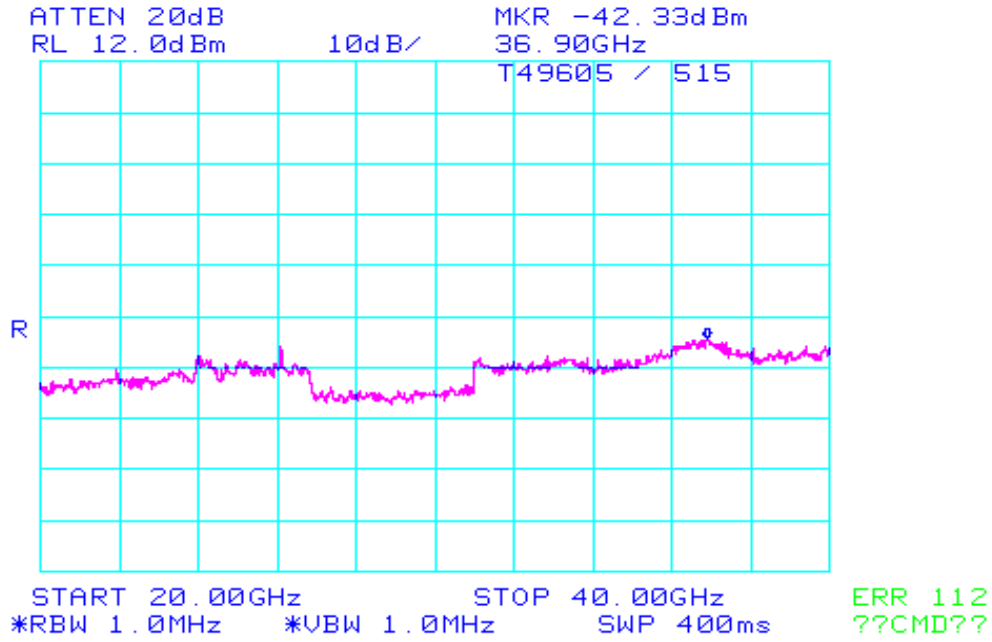



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #5b: Out Of Band Spurious Emissions - Antenna Conducted Data Rate 6Mb/s

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
36	5180	30 - 1000 MHz	Note 4	T49605/516
		1 to 5.15 GHz	-47.3 dBm @ 5150	T49605/517
		5.25 to 10 GHz	-35.3 dBm @ 6913	T49605/518
		10 GHz to 20 GHz	-46.7 dBm @ 10370	T49605/519
		20 GHz to 40 GHz	-41.8 dBm @ 36970	T49605/520
52	5260	30 - 1000 MHz	Note 4	T49605/521
		1 to 5.25 GHz	-52.2 dBm @ 3508	T49605/522
		5.35 to 10 GHz	-32.5 dBm @ 7016	T49605/523
		10 GHz to 20 GHz	-48.8 dBm @ 17830	T49605/524
		20 GHz to 40 GHz	-42.7 dBm @ 36930	T49605/525
64	5320	30 - 1000 MHz	Note 4	T49605/526
		1 to 5.25 GHz	-52.2 dBm @ 3550	T49605/527
		5.35 to 10 GHz	-32.0 dBm @ 5350	T49605/528
		10 GHz to 20 GHz	-45.8 dBm @ 10630	T49605/529
		20 GHz to 40 GHz	-41.8 dBm @ 36400	T49605/530


Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)
Note 4:	All spurious signals in this frequency band measured during digital device radiated emissions test.




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz) Data Rate 6

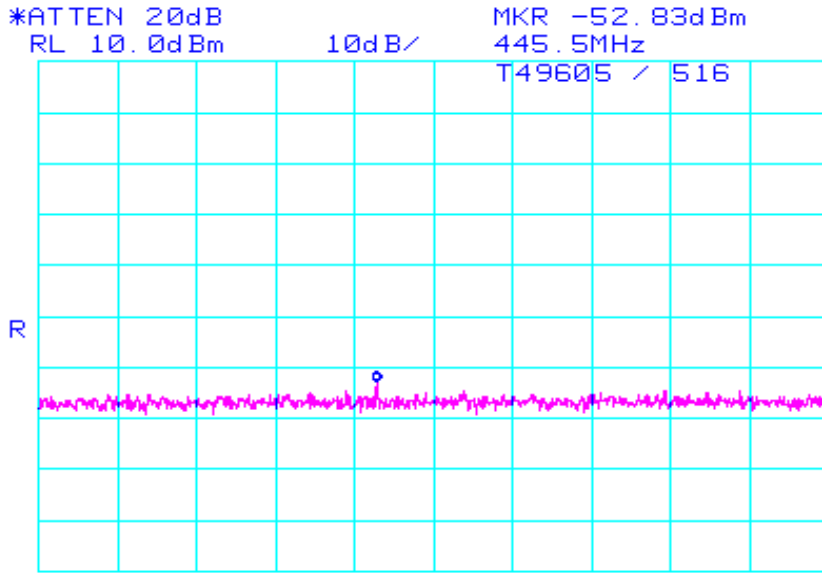

START 30.0MHz STOP 1.0000GHz ERR 112  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 50.0ms ??CMD??

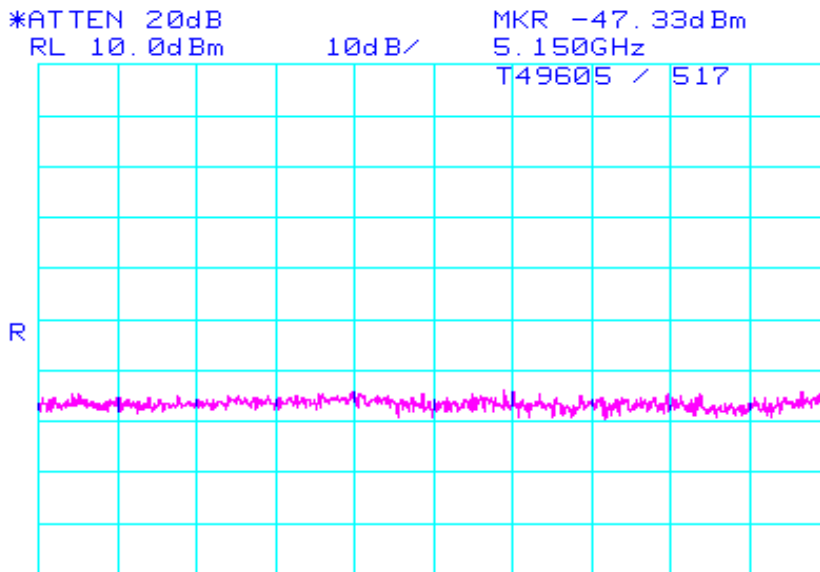


START 1.000GHz STOP 5.150GHz ERR 112  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 83.0ms ??CMD??




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

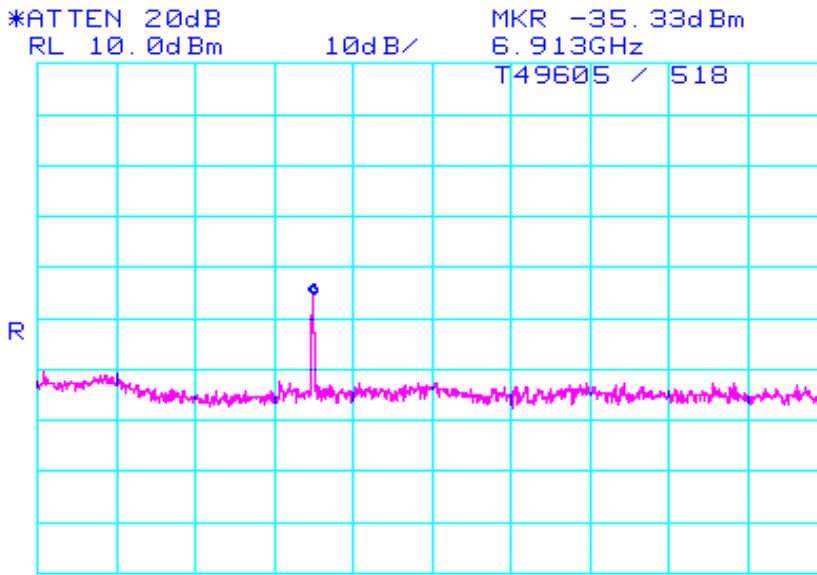

START 5.250GHz STOP 10.000GHz ERR 112  
\*RBW 1.0MHz \*UBW 1.0MHz SWP 95.0ms ??CMD??


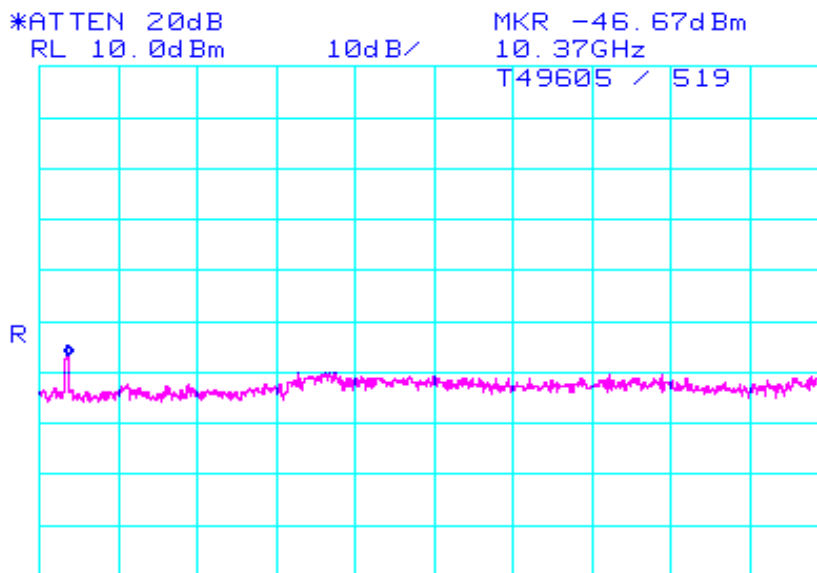


START 10.000GHz STOP 20.000GHz ERR 112  
\*RBW 1.0MHz \*UBW 1.0MHz SWP 200ms ??CMD??



# EMC Test Data



Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

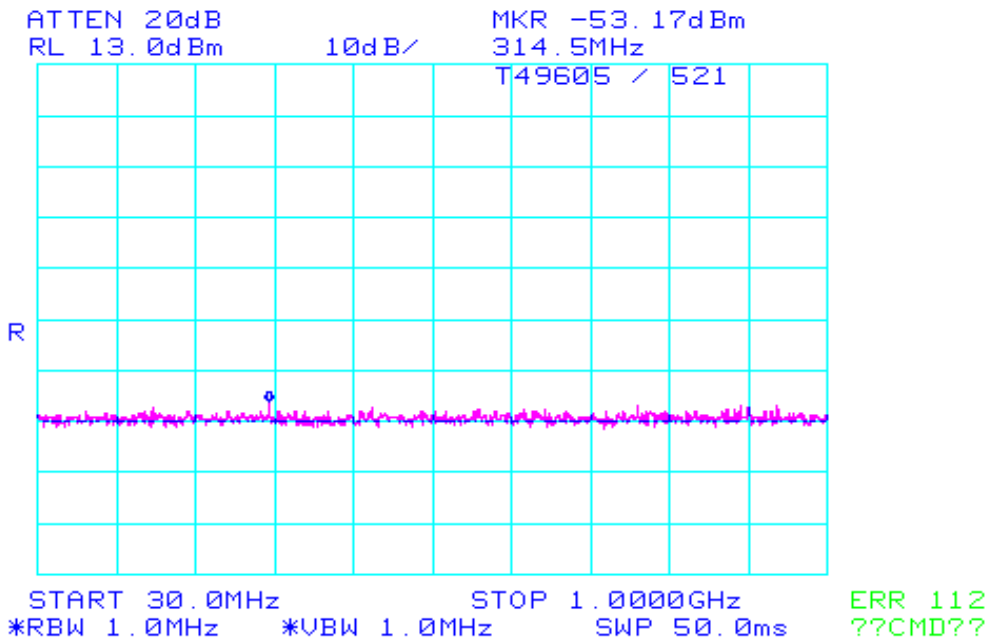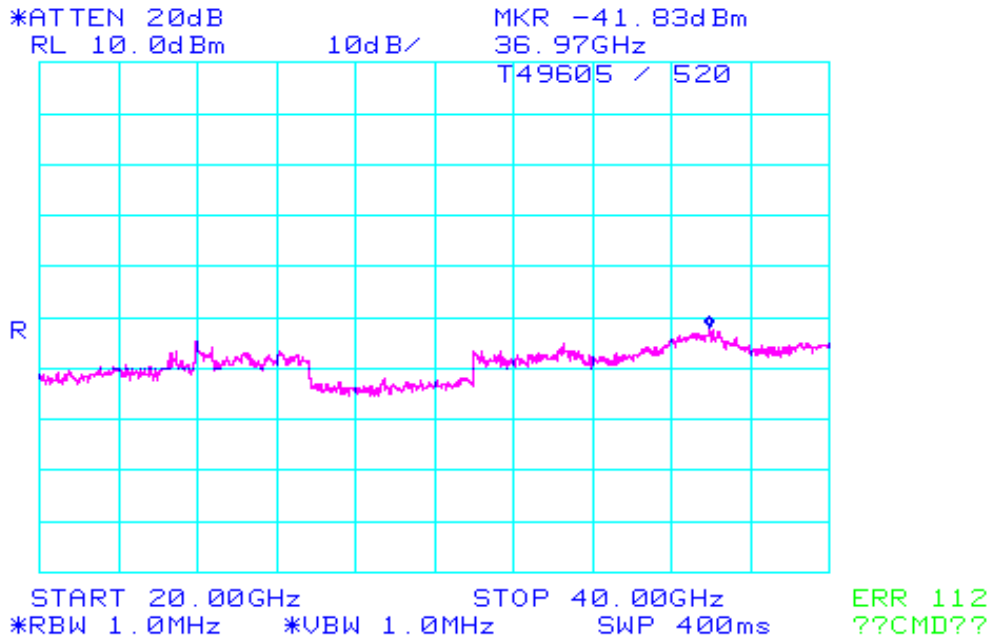



# EMC Test Data



Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

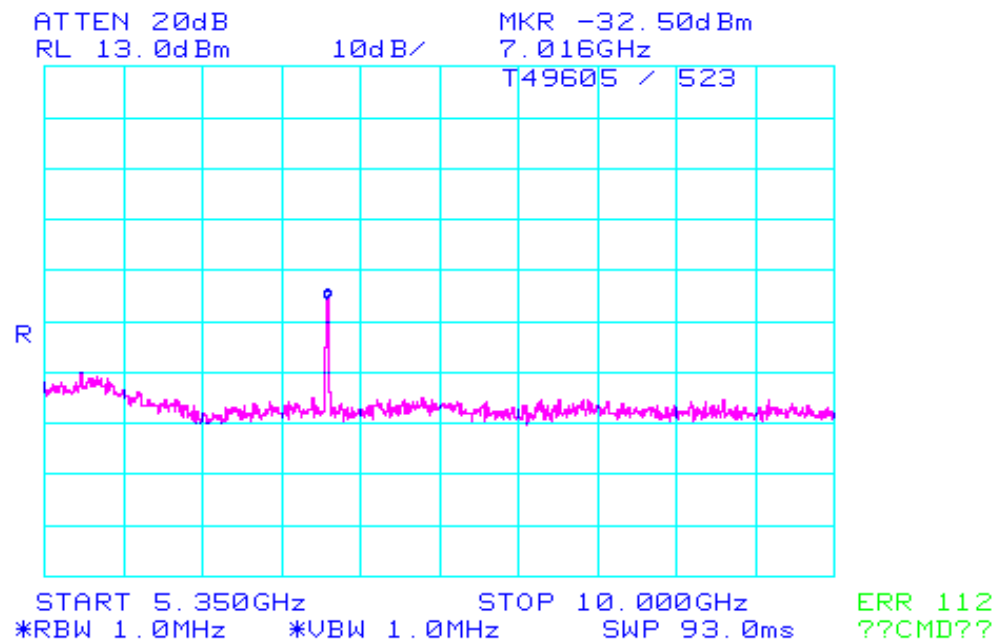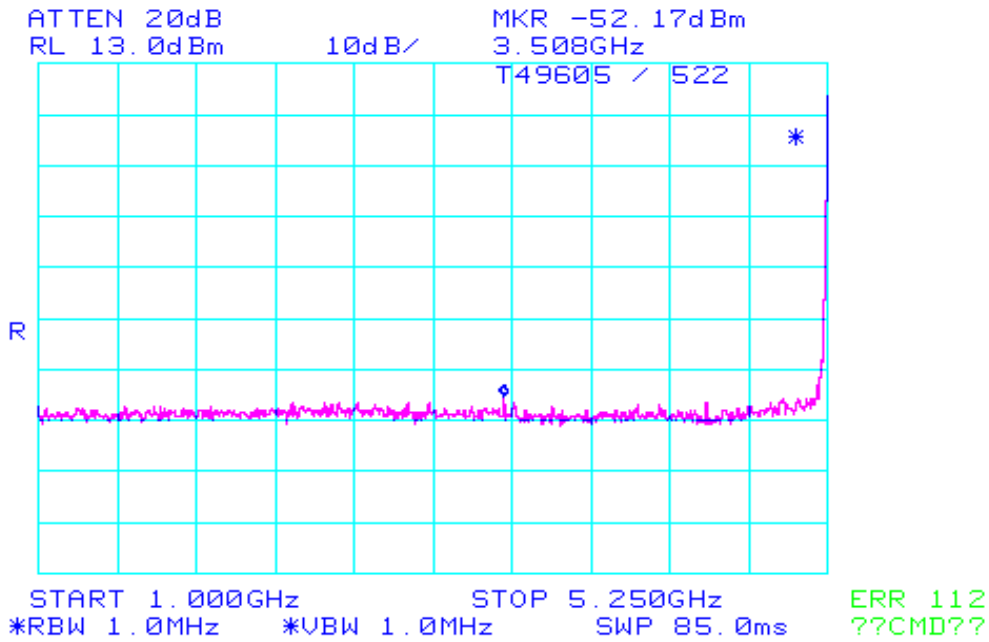



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

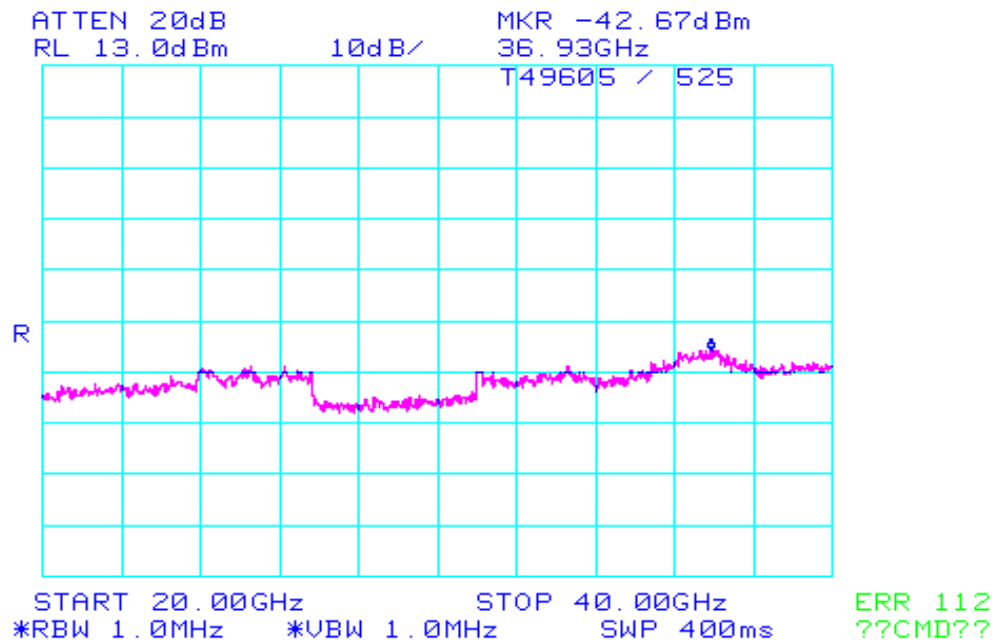
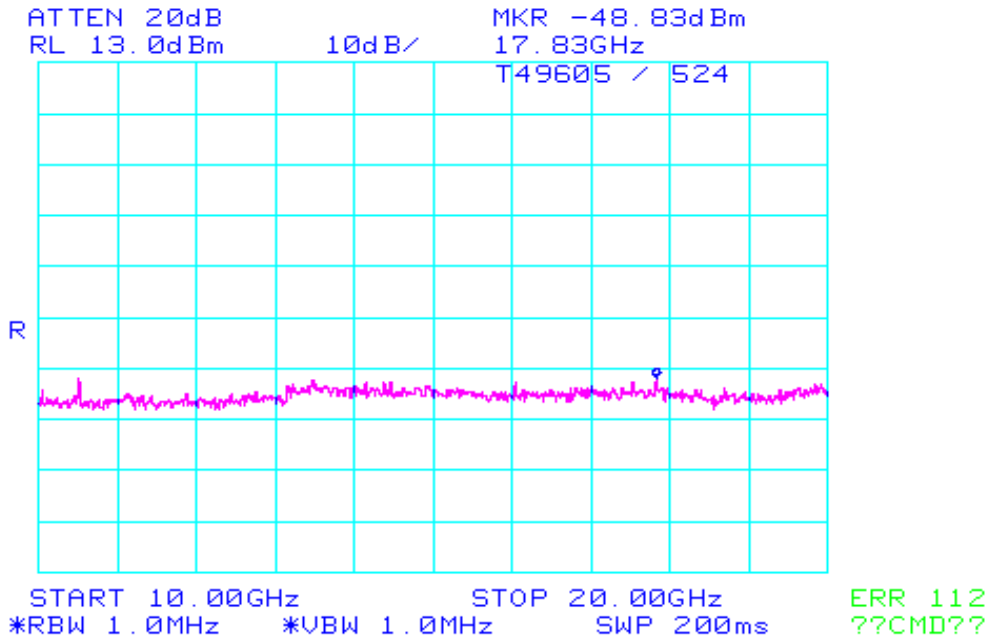






# EMC Test Data


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

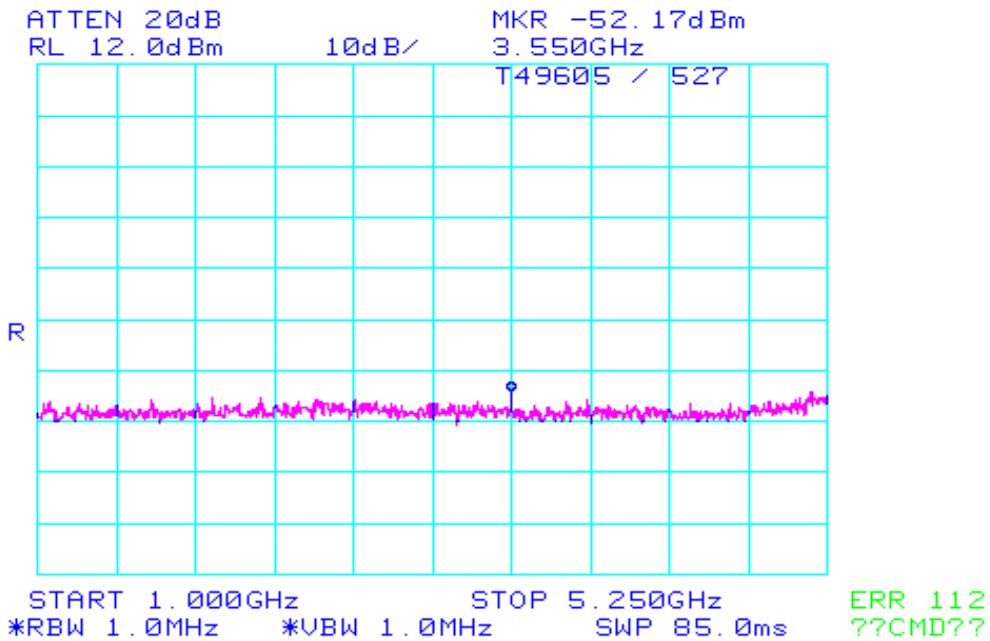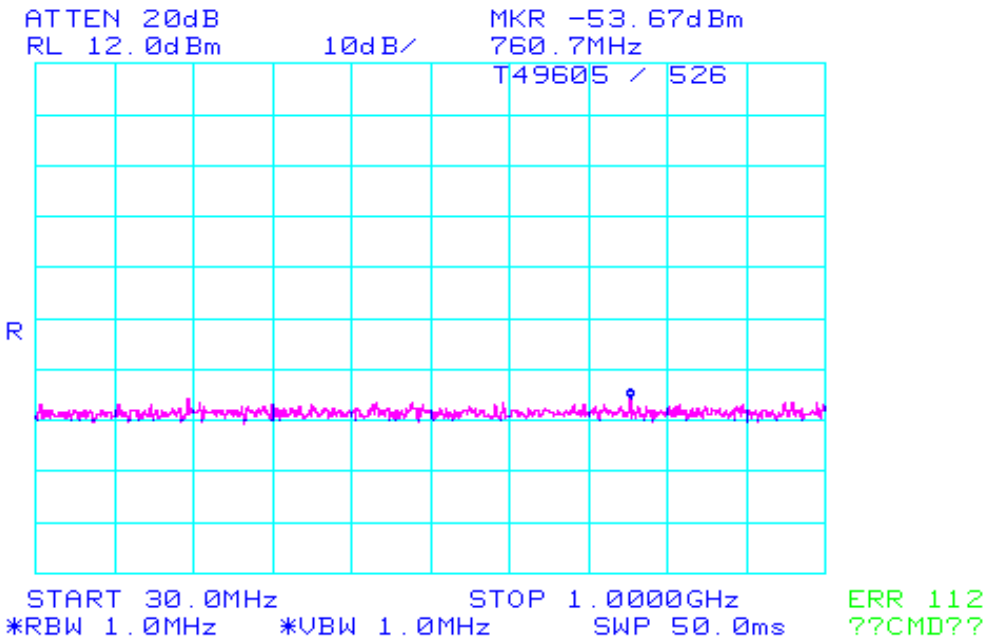




# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

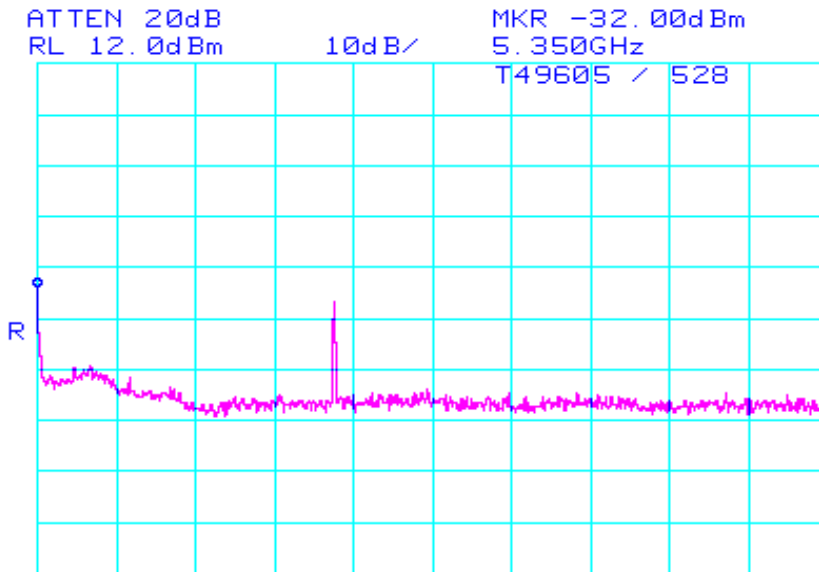

START 5.350GHz STOP 10.000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 93.0ms

ERR 112  
??CMD??

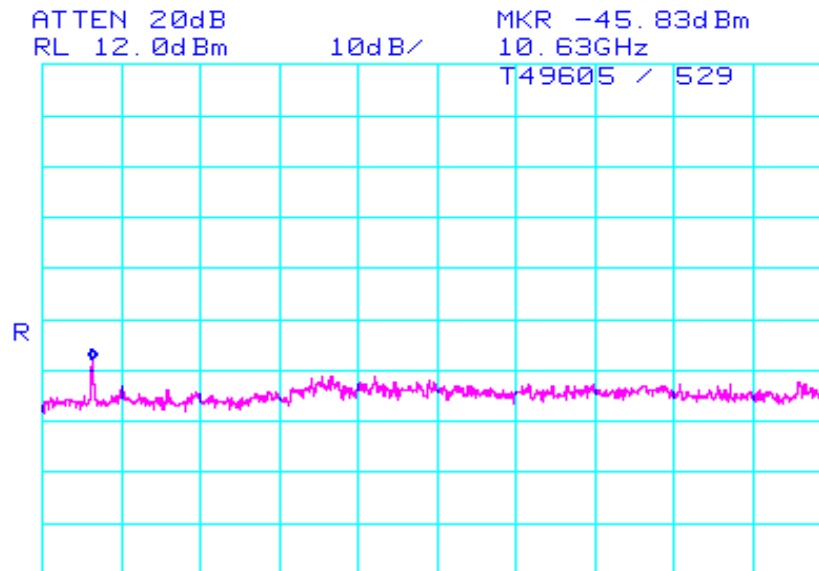


START 10.00GHz STOP 20.00GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 200ms

ERR 112  
??CMD??



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

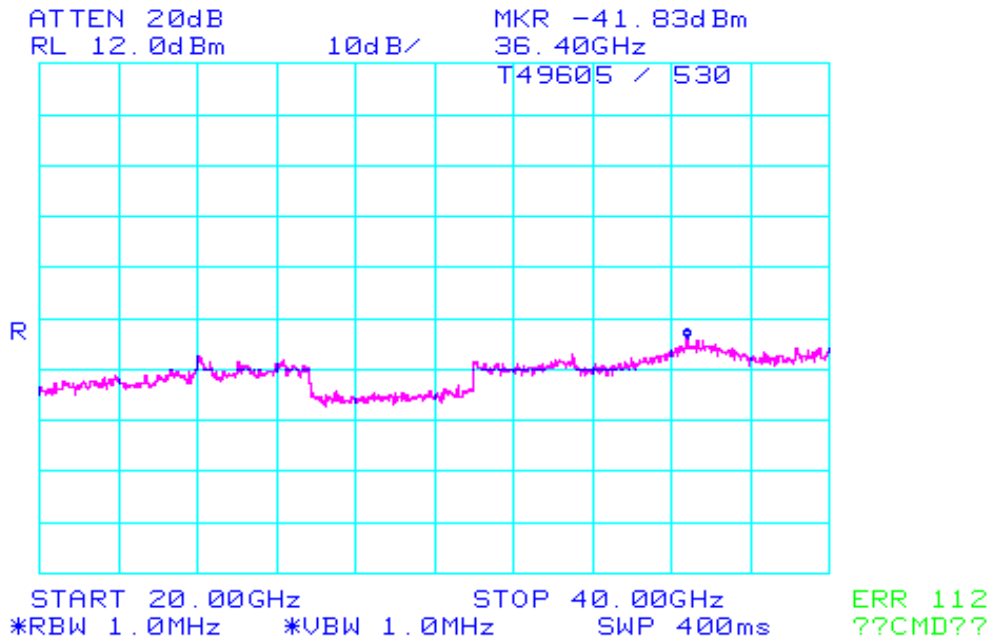



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A


## Run #6a: Band Edge Measurements

For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.


### Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

#### 5.15 GHz band edge, EUT operating on the lowest channel Data Rate 6


The highest signal within 50 MHz of the 5.15 GHz band edge was -53.3 dBc (Peak) / -54.0 dBc (Average)

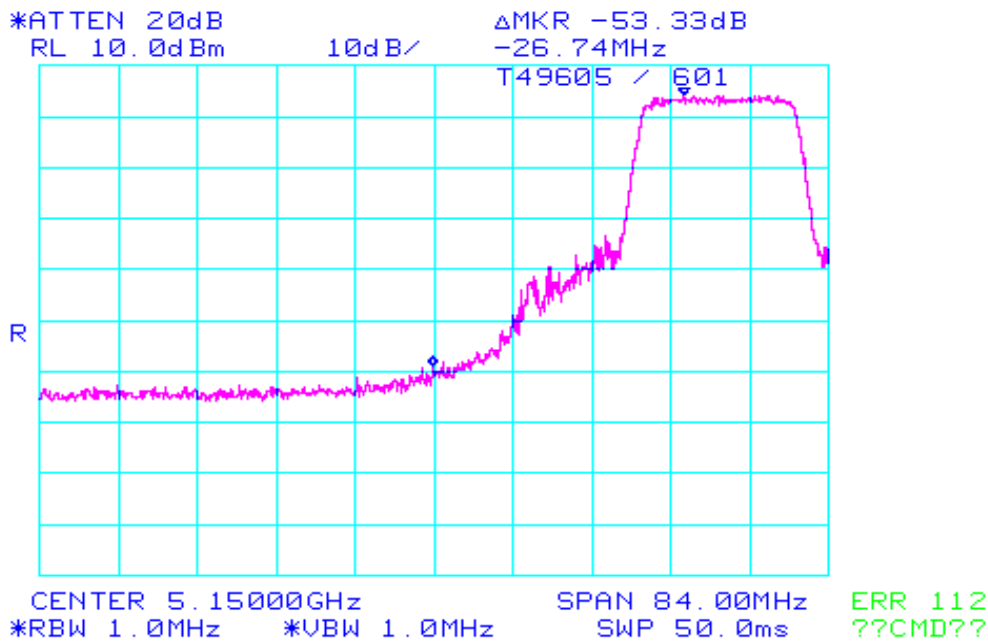

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

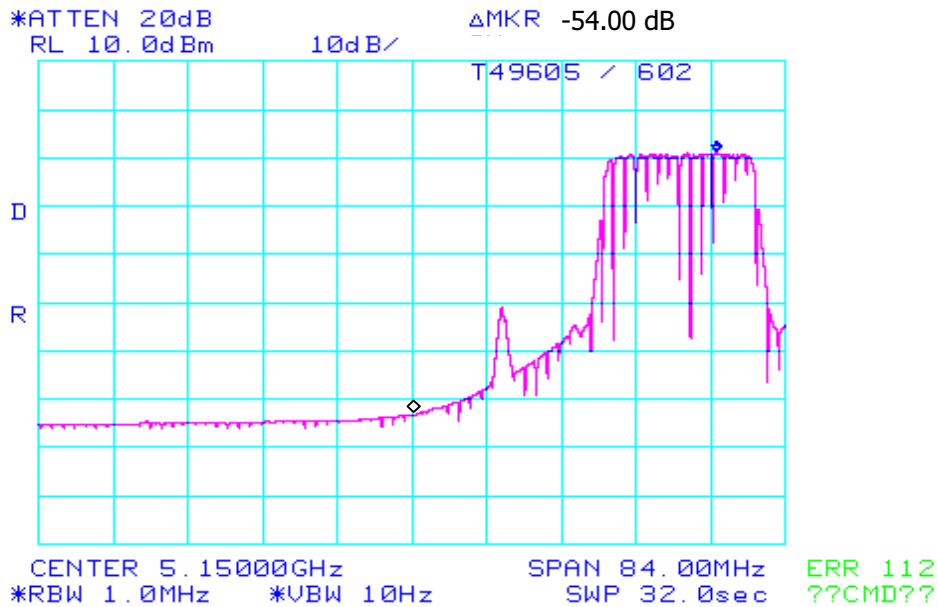


5.35 GHz band edge EUT operating on channel 64 (highest channel): 6MBp/s  
The highest signal in the 5.35 to 5.46 GHz band was -44.2 dBc (Peak) / -47.8 dBc (Average)

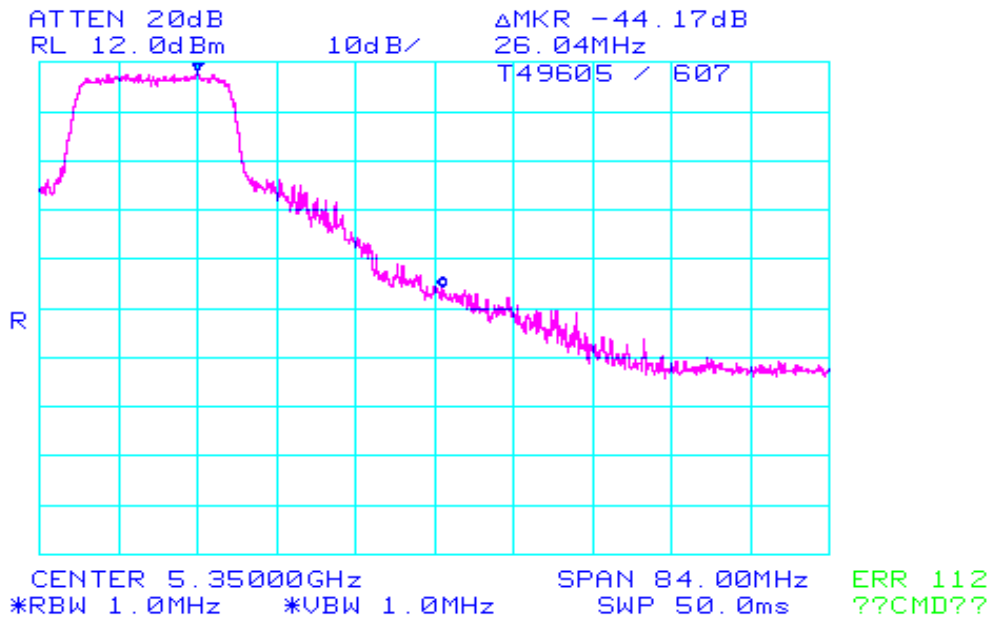



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

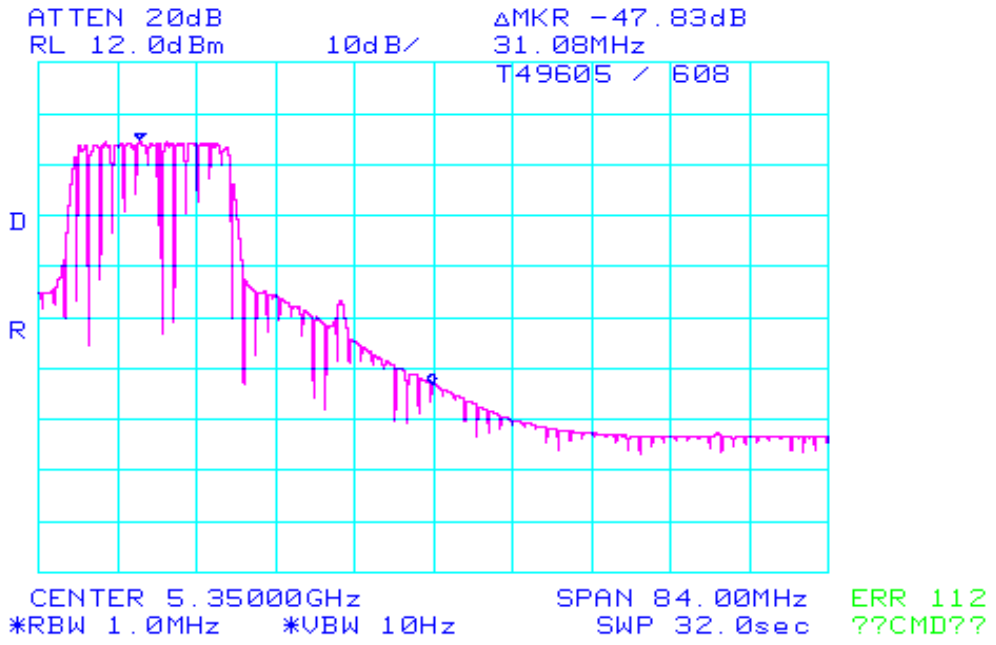



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

**Run #6b: Radiated Spurious Emissions, 30-40000 MHz. Low Channel @ 5180 MHz**  
**Rate = 6Mb/s, 15.3 dBm Avgpwr**

Bandedge Correction	LO	PK Avg	53.3dB		Bandedge	53.1 Pk		dBμV/m
			53.3dB	54.0dB		37.8 Avg		
Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5180.000	102.9	v	-	-	Pk	10	1.8	
5180.000	87.8	v	-	-	Avg	10	1.8	
5180.000	106.4	h	-	-	Pk	280	1.8	
5180.000	91.8	h	-	-	Avg	280	1.8	
15540.000	57.3	v	74.0	-16.7	Pk	0	1.0	
15540.000	44.6	v	54.0	-9.4	Avg	0	1.0	
15540.000	58.4	h	74.0	-15.6	Pk	15	1.0	
15540.000	45.1	h	54.0	-8.9	Avg	15	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set at -27dBm/MHz.

**Run #6c: Radiated Spurious Emissions, 30-40000 MHz. Center Channel @ 5260 MHz**  
**Rate = 6Mb/s, 15.3 dBm Avgpwr**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
			Limit	Margin				
15780.000	58.6	v	74.0	-15.4	Pk	260	1.3	
15780.000	45.8	v	54.0	-8.2	Avg	260	1.3	
15780.000	57.8	h	74.0	-16.2	Pk	0	1.3	
15780.000	45.2	h	54.0	-8.8	Avg	0	1.3	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set at -27dBm/MHz.



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

Run #6d: Radiated Spurious Emissions, 30-40000 MHz. High Channel @ 5320 MHz  
 Rate = 6Mb/s, 15.3 dBm Avgpwr

Bandedge	Hi	PK	44.2dB	Bandedge	64.8 Pk
Correction		Avg	47.8dB	Levels	49.9 Avg

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5320.000	107.7	v	-	-	Pk	240	1.4	
5320.000	97.5	v	-	-	Avg	240	1.4	
5320.000	109.0	h	-	-	Pk	100	2.1	
5320.000	97.7	h	-	-	Avg	100	2.1	
10640.000	60.3	v	74.0	-13.7	Pk	10	1.0	
10640.000	46.5	v	54.0	-7.5	Avg	10	1.0	
15960.000	58.4	v	74.0	-15.6	Pk	35	1.0	
15960.000	46.2	v	54.0	-7.8	Avg	35	1.0	
10640.000	60.5	h	74.0	-13.5	Pk	40	1.2	
10640.000	46.7	h	54.0	-7.3	Avg	40	1.2	
15960.000	59.2	h	74.0	-14.8	Pk	300	1.0	
15960.000	46.7	h	54.0	-7.3	Avg	300	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set at -27dBm/MHz.





## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Conducted Emissions

#### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/17/2002  
 Test Engineer: Chris Byleckie  
 Test Location: SVOATS #2

Config. Used: 1  
 Config Change:  
 EUT Voltage: 120V/60Hz

#### General Test Configuration

The EUT and all local support equipment were located on a table for spurious emissions testing.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators used.

**Ambient Conditions:** Temperature: 22°C  
 Rel. Humidity: 42%

#### Summary of Results

Run #	Test Performed	Limit	Result	Comment
1	CE, 30 - 24620 MHz - Spurious Emissions	FCC Part 15.209 / 15.247(c)	Pass	> 20 dBc
2	6dB Bandwidth	15.247(a)	Pass	> 10 MHz BW
3	Output Power	15.247(b)	Pass	17.6 dBm
4	Power Spectral Density (PSD)	15.247(d)	Pass	-8.1 dBm

#### Modifications Made During Testing:

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.




# EMC Test Data


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #1a: Out of Band (1Mb/s)


Low

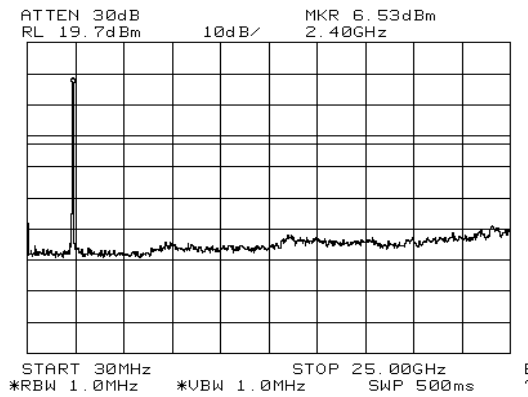

Middle

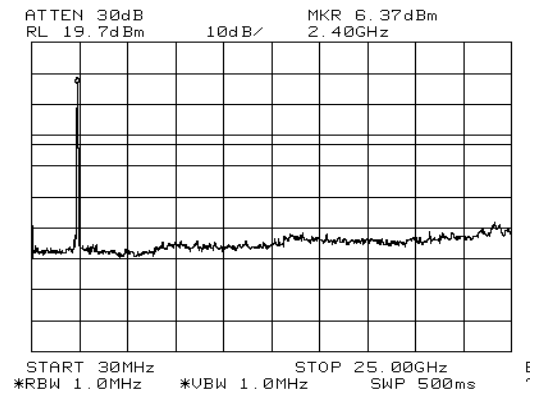

High

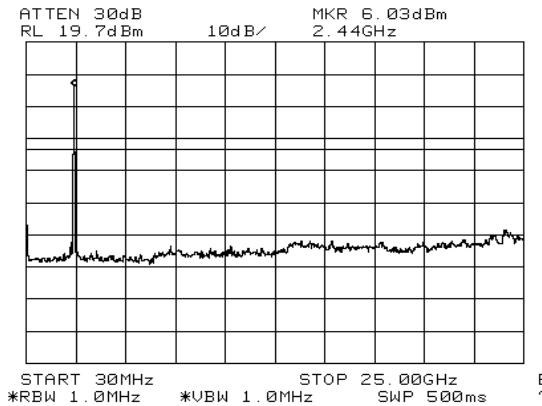




# EMC Test Data


Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #1b: Out of Band (11Mb/s)


Low

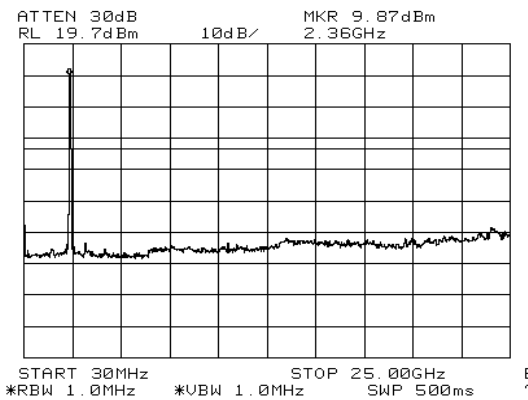

Middle

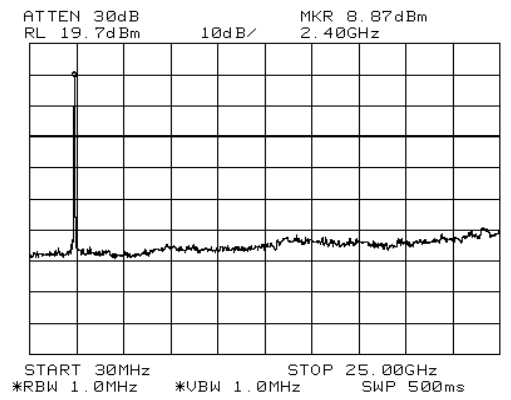

High

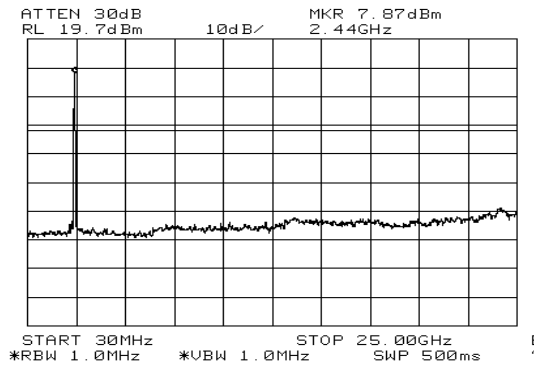






# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #2a: Signal Bandwidth (1Mb/s)

Channel	Frequency (MHz)	Resolution Bandwidth	6dB Signal Bandwidth	Graph reference #
Low	2412	100 kHz	10.37 MHz	See plots below
Mid	2437	100 kHz	10.33 MHz	See plots below
High	2462	100 kHz	10.30 MHz	See plots below

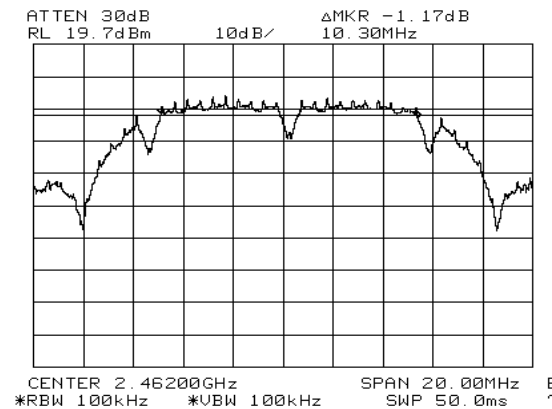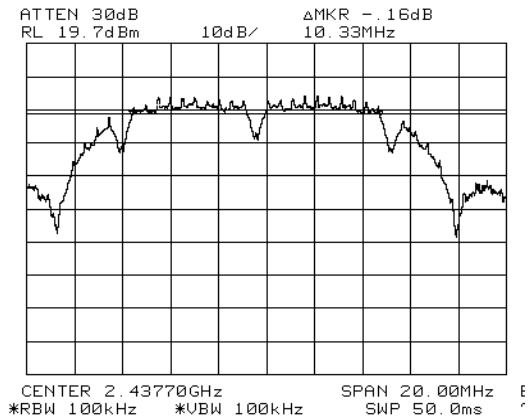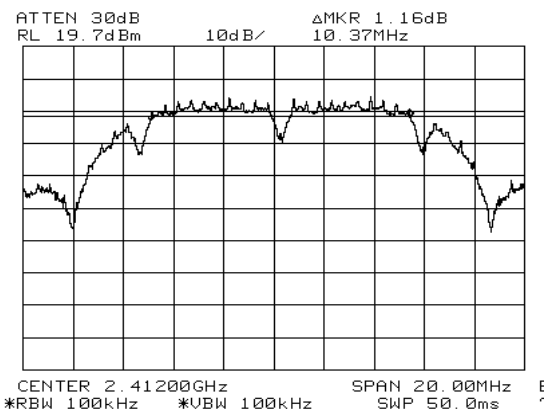






# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #2b: Signal Bandwidth (11Mb/s)

Channel	Frequency (MHz)	Resolution Bandwidth	6dB Signal Bandwidth	Graph reference #
Low	2412	100 kHz	10.47	See plots below
Mid	2437	100 kHz	11.73	See plots below
High	2462	100 kHz	11.63	See plots below

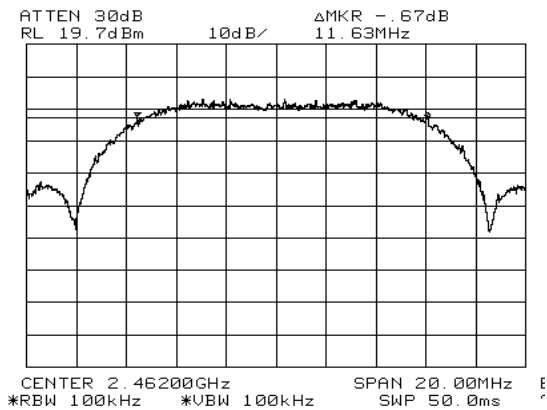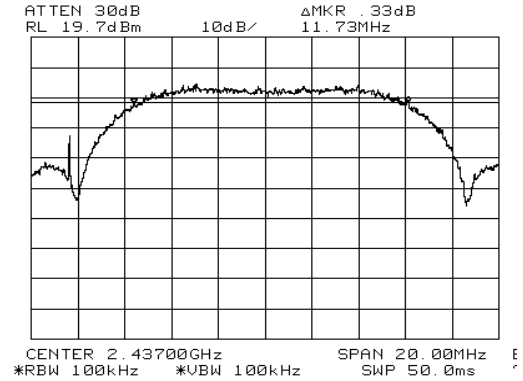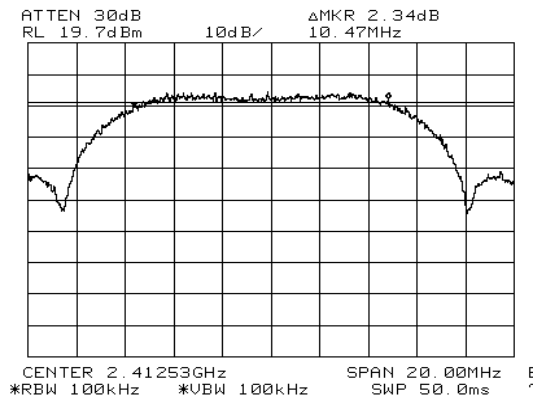



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
	Proj Eng: David Bare
Contact: David Moldy	
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #3a: Output Power 1Mb/s

Channel	Frequency (MHz)	Output Power	Graph reference #
Low	2412	17.3	None
Mid	2437	17.0	None
High	2462	16.4	None

### Run #3b: Output Power 11Mb/s

Channel	Frequency (MHz)	Output Power	Graph reference #
Low	2412	17.6	None
Mid	2437	17.3	None
High	2462	16.8	None

Note 1: Measured using peak power meter

Note 2: Meaximun ERP is  $17.6+1.45 = 19.05$  dBm.






## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

### Run #4a: Power Spectral Density 1 Mb/s

Channel	Frequency (MHz)	Res BW	P.S.D. dBm (averaged over 1 second in a 3kHz bandwidth)	Graph reference #
Low	2412	3.0 kHz	-8.97	see plots below
Mid	2437	3.0 kHz	-9.63	see plots below
High	2462	3.0 kHz	-9.30	see plots below

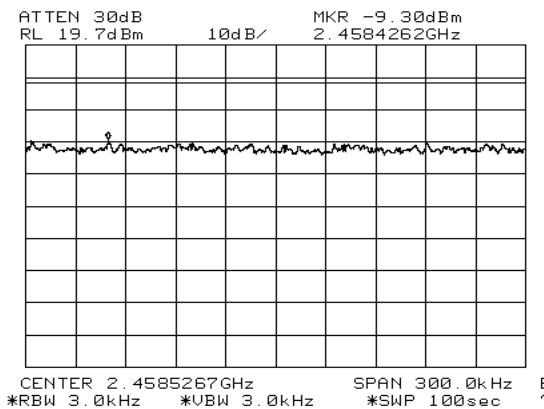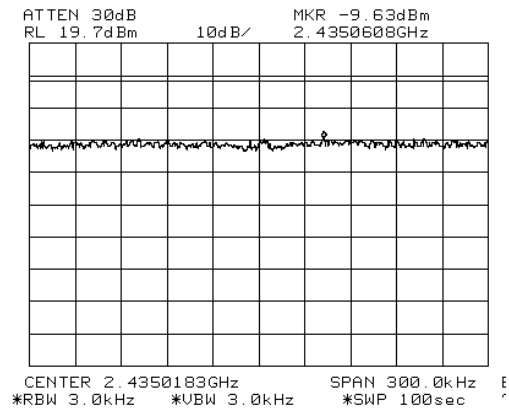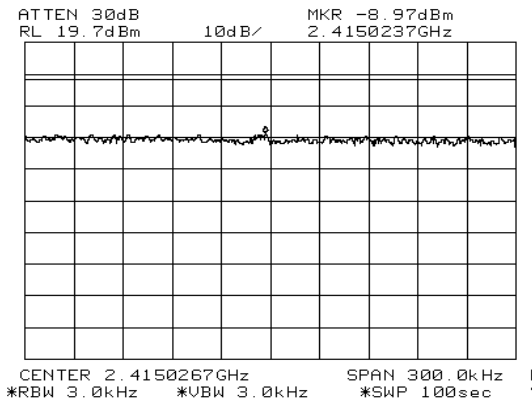






# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: N/A

## Run #4b: Power Spectral Density 11 Mb/s

Channel	Frequency (MHz)	Res BW	P.S.D. (averaged over 1 second in a 3kHz bandwidth)	Graph reference #
Low	2412	3.0 kHz	-8.13	see plots below
Mid	2437	3.0 kHz	-9.47	see plots below
High	2462	3.0 kHz	-10.3	see plots below

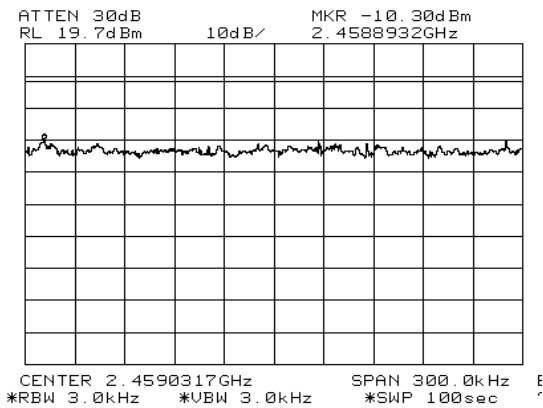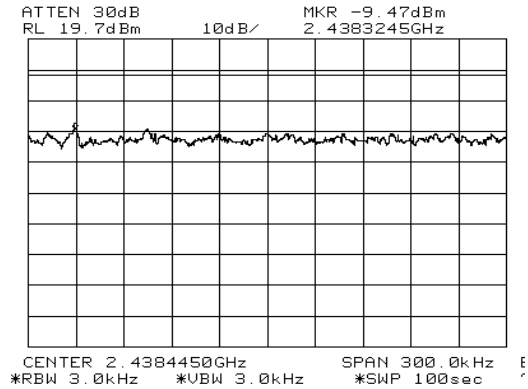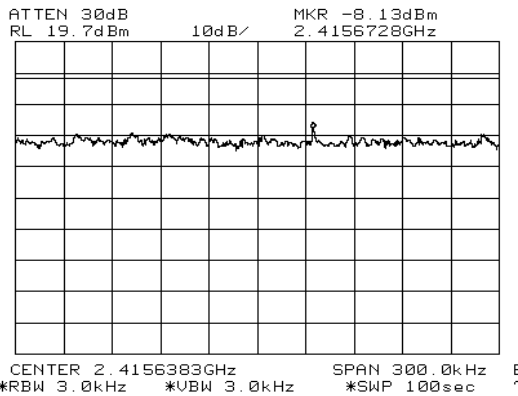





## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: -

### Conducted Emissions - Power Ports

#### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/16/2002  
 Test Engineer: Rod Wong  
 Test Location: CCA #1

Config. Used: 1  
 Config Change: None  
 EUT Voltage: Refer to individual run

#### General Test Configuration

For tabletop equipment, the EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment.

#### Ambient Conditions:

Temperature: 21°C  
 Rel. Humidity: 46%

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 230V/50Hz	FCC B	Pass	See individual runs
2	CE, AC Power 120V/60Hz	FCC B	Pass	See individual runs

#### Modifications Made During Testing:

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: -

### Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

Frequency MHz	Level dB $\mu$ V	AC Line	EN55022 B		Detector QP/Ave	Comments
			Limit	Margin		
0.591	46.7	Line 1	56.0	-9.3	QP	
0.211	40.4	Neutral	53.2	-12.8	AV	
0.586	42.9	Neutral	56.0	-13.1	QP	
0.591	32.1	Line 1	46.0	-13.9	AV	
0.165	49.3	Line 1	65.2	-15.9	QP	
0.586	30.0	Neutral	46.0	-16.0	AV	
0.211	45.9	Neutral	63.2	-17.3	QP	
0.240	41.1	Line 1	62.1	-21.0	QP	
0.640	30.3	Line 1	56.0	-25.7	QP	
0.820	26.4	Line 1	56.0	-29.6	QP	
5.779	30.1	Neutral	60.0	-29.9	QP	
0.790	25.2	Neutral	56.0	-30.8	QP	
0.640	14.0	Line 1	46.0	-32.0	AV	
5.779	17.5	Neutral	50.0	-32.5	AV	
0.165	22.6	Line 1	55.2	-32.6	AV	
0.240	19.3	Line 1	52.1	-32.8	AV	
0.820	12.3	Line 1	46.0	-33.7	AV	
0.790	11.4	Neutral	46.0	-34.6	AV	

### Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Frequency MHz	Level dB $\mu$ V	AC Line	EN55022 B		Detector QP/Ave	Comments
			Limit	Margin		
0.242	46.1	Neutral	62.1	-16.0	QP	
0.534	39.3	Neutral	56.0	-16.7	QP	
0.614	38.6	Line 1	56.0	-17.4	QP	
23.119	42.3	Neutral	60.0	-17.7	QP	
23.554	41.9	Line 1	60.0	-18.1	QP	
0.247	31.8	Line 1	51.9	-20.1	AV	
23.119	28.5	Neutral	50.0	-21.5	AV	
23.554	27.6	Line 1	50.0	-22.4	AV	
0.242	28.6	Neutral	52.1	-23.5	AV	
0.534	19.3	Neutral	46.0	-26.7	AV	
0.614	18.9	Line 1	46.0	-27.1	AV	
0.247	9.0	Line 1	61.9	-52.9	QP	



# EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: -

## Radiated Emissions

### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/16/2002  
Test Engineer: Rod Wong  
Test Location: SVOATS #4

Config. Used: 1  
Config Change: None  
EUT Voltage: 120V/60Hz

### General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing.

On the OATS, the measurement antenna was located 10 meters from the EUT for the measurement range 30 - 1000 MHz and 3m from the EUT for the frequency range 1 - 10 GHz.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Note, for testing above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

**Ambient Conditions:** Temperature: 15.6°C  
Rel. Humidity: 59%

### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	RE, Preliminary Scan 30 - 1000 MHz	FCC B	Eval	Refer to individual runs
2	RE, 30 - 1000MHz - Maximized Emissions	FCC B	Pass	-1.7dB @ 138.100MHz

### Modifications Made During Testing:

No modifications were made to the EUT during testing

### Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Preliminary Radiated Emissions, 30-1000 MHz



## EMC Test Data

Client: Broadcom	Job Number: J49585
Model: BCM94309MP	T-Log Number: T49605
Contact: David Moldy	Proj Eng: David Bare
Spec: FCC Part 15 B, C & E, RSS-210	Class: -

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
138.100	39.7	V	43.5	-3.8	QP	231	1.0	
153.300	36.1	H	43.5	-7.4	QP	0	1.9	
167.980	29.9	V	43.5	-13.6	QP	293	1.5	
239.996	30.4	V	46.0	-15.6	QP	98	1.9	
63.984	24.3	V	40.0	-15.7	QP	142	2.4	
138.100	25.4	H	43.5	-18.1	QP	89	2.2	
455.980	26.6	H	46.0	-19.4	QP	327	2.0	
164.843	24.0	H	43.5	-19.5	QP	98	2.9	
360.000	23.8	H	46.0	-22.2	QP	0	2.5	
263.996	23.7	V	46.0	-22.3	QP	230	1.2	

### Run #2: Maximized Readings From Run #1

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
138.100	41.8	V	43.5	-1.7	QP	231	1.0	
153.300	37.0	H	43.5	-6.5	QP	0	1.9	
63.984	26.5	V	40.0	-13.5	QP	142	2.4	
167.980	29.9	V	43.5	-13.6	QP	293	1.5	
138.100	28.7	H	43.5	-14.8	QP	89	2.2	
239.996	30.4	V	46.0	-15.6	QP	98	1.9	

### ***EXHIBIT 3: Test Configuration Photographs***

Uploaded as a separate attachment

***EXHIBIT 4: Proposed FCC ID Label & Label Location***

Uploaded as a separate attachment

## ***EXHIBIT 5: Detailed Photographs***

Uploaded as a separate attachment

***EXHIBIT 6: OEM Manual***

Uploaded as a separate attachment



## ***EXHIBIT 7: Block Diagram***

Uploaded as a separate attachment

## ***EXHIBIT 8: Schematic Diagrams***

Uploaded as a separate attachment

***EXHIBIT 9: Theory of Operation***

Uploaded as a separate attachment

***EXHIBIT 11: RF Exposure Information***

Uploaded as a separate attachment

***EXHIBIT 12: Modular Approval Justification***

Uploaded as a separate attachment