

Test Laboratory: Compliance Certification Services

File Name: [1\\_EUT Setup Configuration 1 \(Main antenna\)1.da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 1\_EUT Setup Configuration 1 (Main antenna)**  
**Ambient Temp.: 25 deg. C; Liquid Temp.: 23 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5180 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5180$  MHz;  $\sigma = 5.33$  mho/m;  $\epsilon_r = 47.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.83, 4.83, 4.83); Calibrated: 7/18/2004

- Sensor-Surface: 1.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn500; Calibrated: 12/23/2003

- Phantom: SAM 2; Type: SAM 2; Serial: 1050

- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_L-ch/Area Scan (12x17x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 2.48 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.123 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_L-ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 2.48 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.141 mW/g

Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.031 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

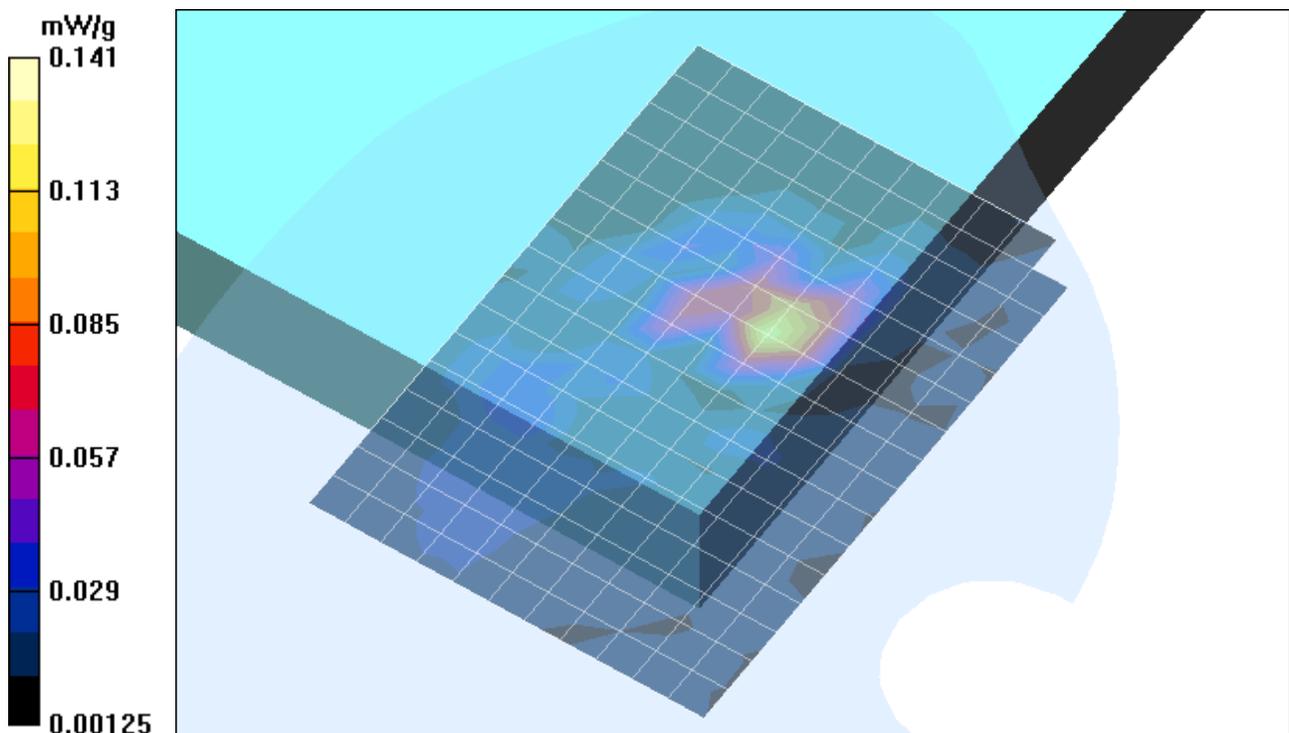

Test Laboratory: Compliance Certification Services

File Name: [1\\_EUT Setup Configuration 1 \(Main antenna\)1.da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 1\_EUT Setup Configuration 1 (Main antenna)**  
**Ambient Temp.: 25 deg. C; Liquid Temp.: 23 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5260$  MHz;  $\sigma = 5.49$  mho/m;  $\epsilon_r = 47.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.83, 4.83, 4.83); Calibrated: 7/18/2004
- Sensor-Surface: 1.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_M-ch/Area Scan (15x17x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 2.23 V/m; Power Drift = 0.19 dB

Maximum value of SAR (measured) = 0.180 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_M-ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 2.23 V/m; Power Drift = 0.19 dB

Maximum value of SAR (measured) = 0.198 mW/g

Peak SAR (extrapolated) = 0.675 W/kg

**SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.037 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

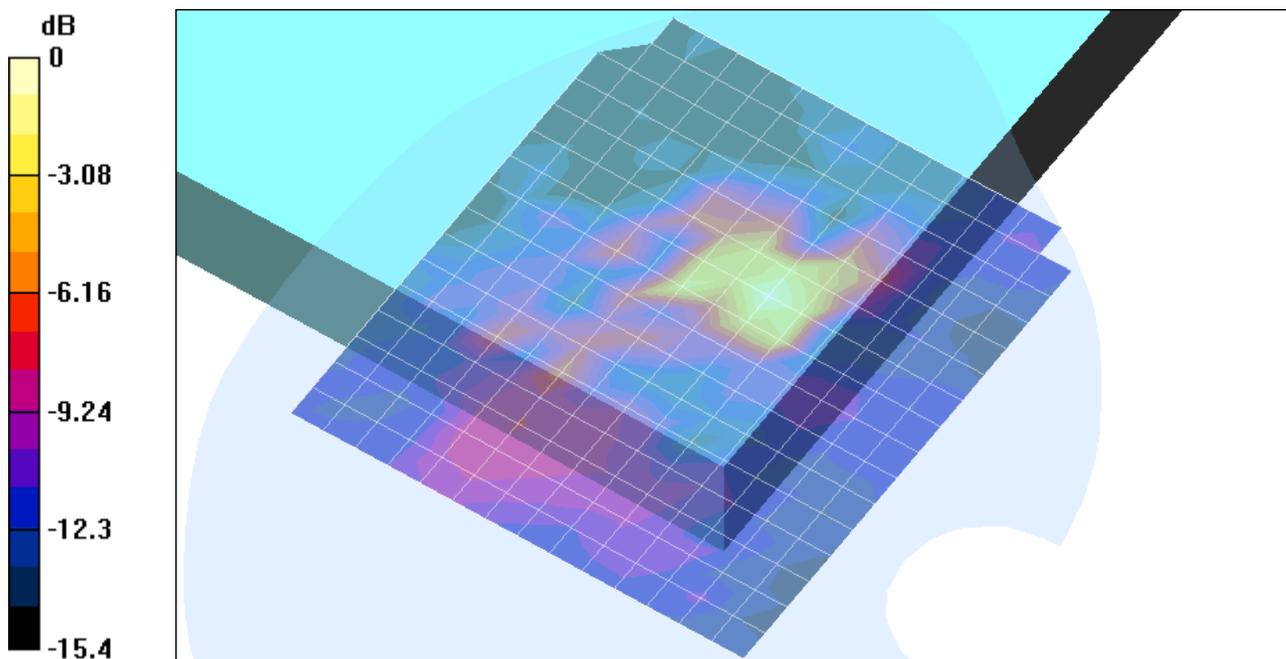

0 dB = 0.198mW/g

Test Laboratory: Compliance Certification Services

File Name: [1\\_EUT Setup Configuration 1 \(Main antenna\)1.da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 1\_EUT Setup Configuration 1 (Main antenna)**  
**Ambient Temp.: 25 deg. C; Liquid Temp.: 23 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5320 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5320$  MHz;  $\sigma = 5.55$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.83, 4.83, 4.83); Calibrated: 7/18/2004

- Sensor-Surface: 1.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn500; Calibrated: 12/23/2003

- Phantom: SAM 2; Type: SAM 2; Serial: 1050

- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_H-ch/Area Scan (12x17x1):** Measurement grid: dx=10mm, dy=10mm

**11a\_H-ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.91 V/m; Power Drift = 0.18 dB

Maximum value of SAR (measured) = 0.116 mW/g

Peak SAR (extrapolated) = 0.477 W/kg

**SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.023 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_H-ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 1.91 V/m; Power Drift = 0.18 dB

Maximum value of SAR (measured) = 0.093 mW/g

Peak SAR (extrapolated) = 0.931 W/kg

**SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.019 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

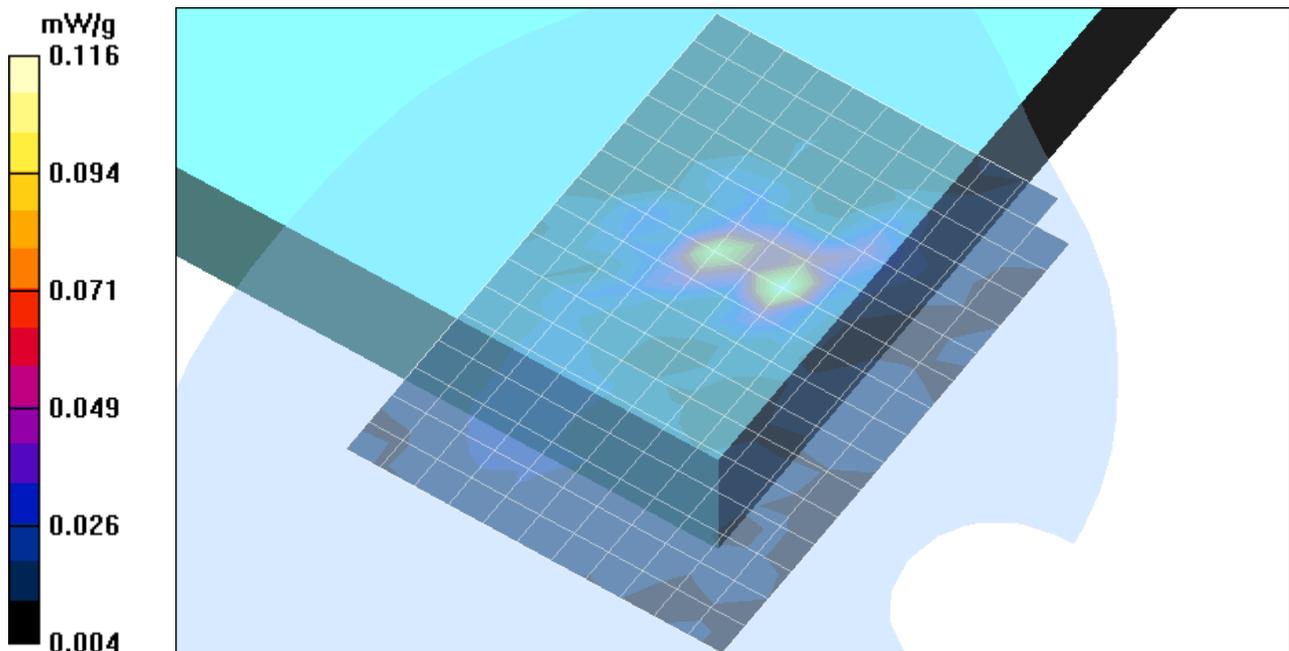

Test Laboratory: Compliance Certification Services

File Name: [1\\_EUT Setup Configuration 1 \(Main antenna\)1.da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 1\_EUT Setup Configuration 1 (Main antenna)**  
**Ambient Temp.: 25 deg. C; Liquid Temp.: 23 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5785$  MHz;  $\sigma = 6.19$  mho/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.64, 4.64, 4.64); Calibrated: 7/18/2004

- Sensor-Surface: 1.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn500; Calibrated: 12/23/2003

- Phantom: SAM 2; Type: SAM 2; Serial: 1050

- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_M-ch 2/Area Scan (13x19x1):** Measurement grid: dx=10mm, dy=10mm

**11a\_M-ch 2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.04 V/m; Power Drift = 0.15 dB

Maximum value of SAR (measured) = 0.076 mW/g

Peak SAR (extrapolated) = 2.36 W/kg

**SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.014 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_M-ch 2/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 3.04 V/m; Power Drift = 0.15 dB

Maximum value of SAR (measured) = 0.081 mW/g

Peak SAR (extrapolated) = 0.743 W/kg

**SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.022 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

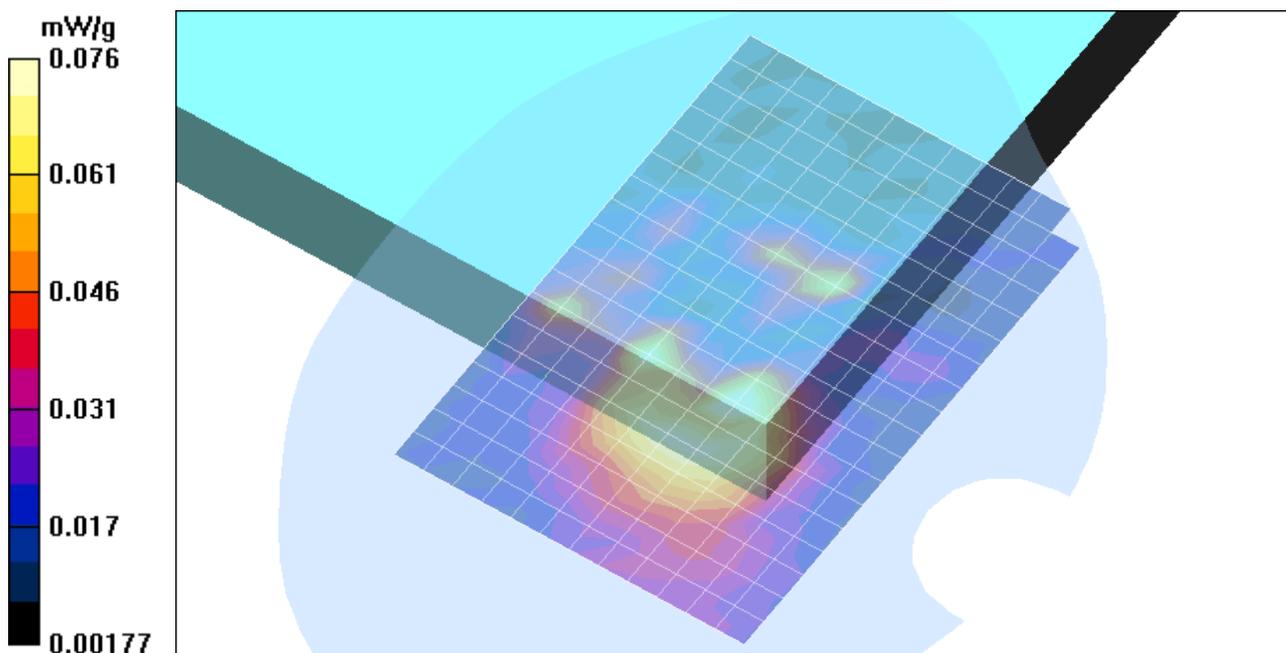

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**  
**Ambient Temp.: 25.5 deg. C; Liquid Temp.: 24.0 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5260$  MHz;  $\sigma = 5.53$  mho/m;  $\epsilon_r = 48$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.83, 4.83, 4.83); Calibrated: 7/18/2004
- Sensor-Surface: 1.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_M-ch/Area Scan (13x17x1):** Measurement grid: dx=10mm, dy=10mm

**11a\_M-ch/Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 2.23 V/m; Power Drift = 0.18 dB

Maximum value of SAR (measured) = 0.088 mW/g

Peak SAR (extrapolated) = 1537.2 W/kg

**SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.023 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_M-ch/Zoom Scan (7x7x8)/Cube 1:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm


Reference Value = 2.23 V/m; Power Drift = 0.18 dB

Maximum value of SAR (measured) = 0.049 mW/g

Peak SAR (extrapolated) = 174975.7 W/kg

**SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.012 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

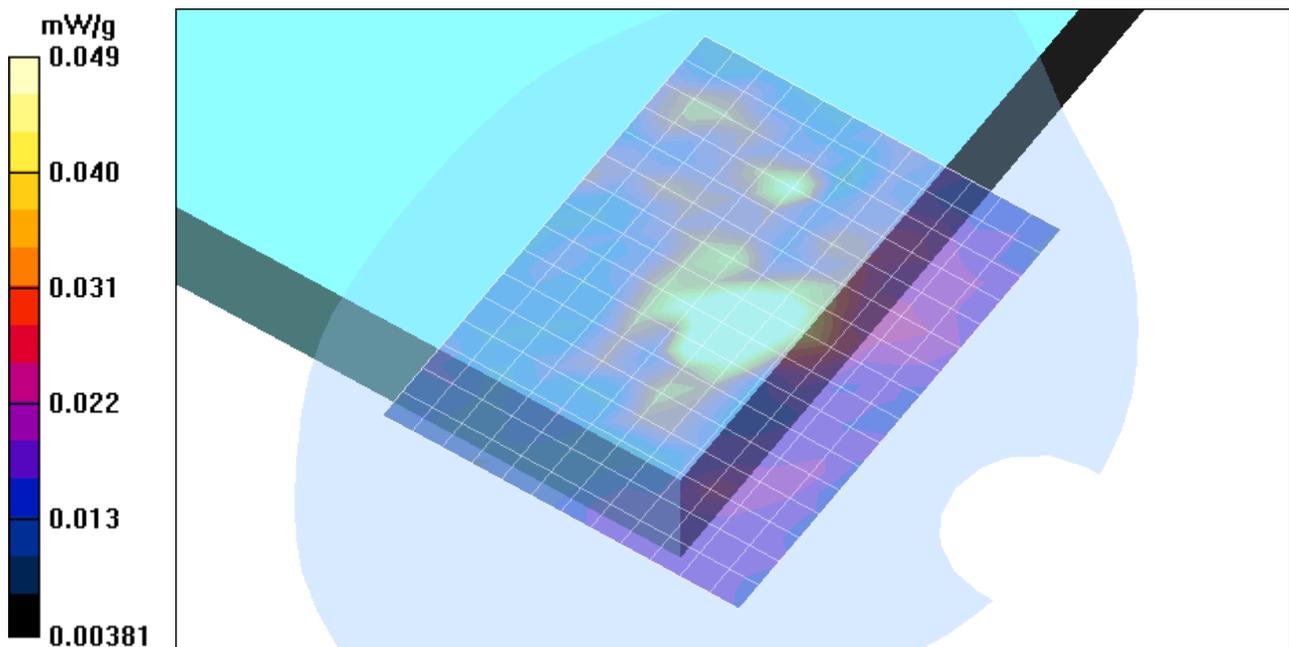

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**

Communication System: 5.2-5.8 GHz; Frequency: 5260 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5260$  MHz;  $\sigma = 5.53$  mho/m;  $\epsilon_r = 48$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Phantom section: Flat Section

**11a\_M-ch/Z Scan (1x1x34):** Measurement grid: dx=20mm, dy=20mm, dz=3mm

Reference Value = 2.23 V/m; Power Drift = 0.17 dB

Maximum value of SAR (measured) = 0.050 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

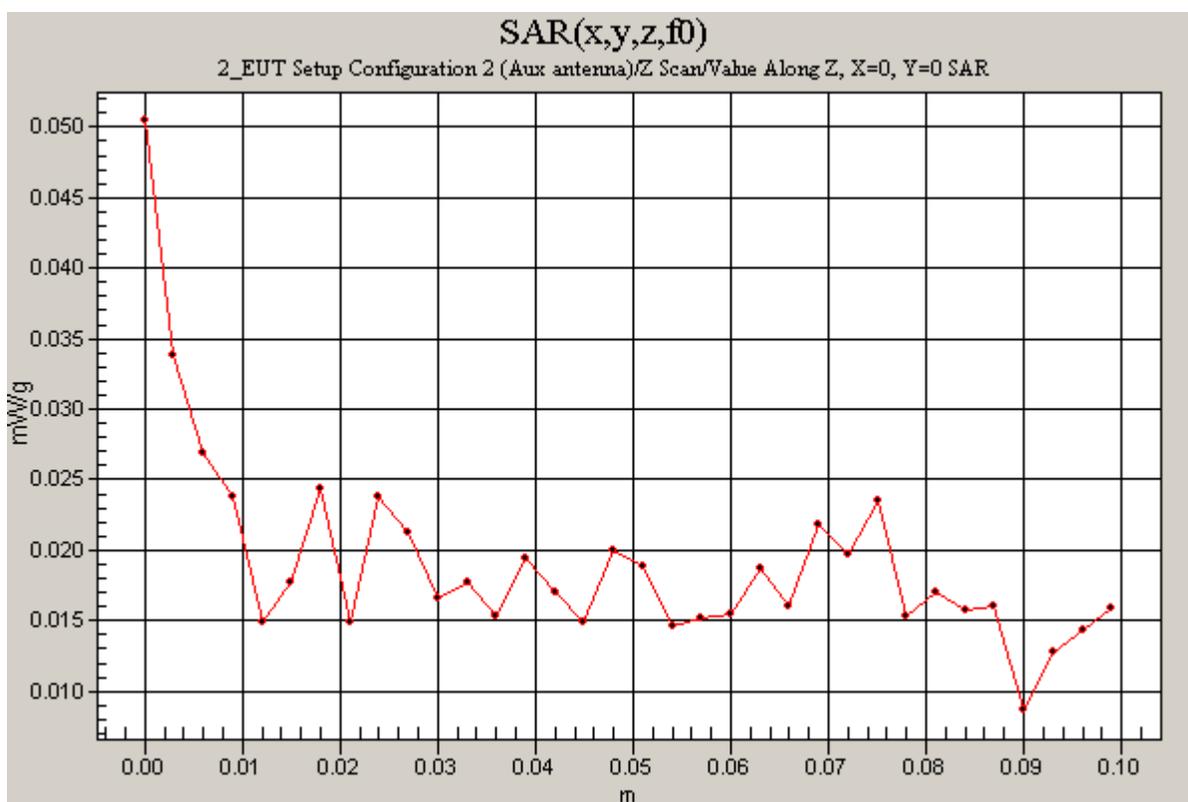

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**  
**Ambient Temp.: 25.5 deg. C; Liquid Temp.: 24.0 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 6.18$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.64, 4.64, 4.64); Calibrated: 7/18/2004
- Sensor-Surface: 1.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_L-ch/Area Scan (12x15x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 2.79 V/m; Power Drift = 0.14 dB

Maximum value of SAR (measured) = 0.120 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_L-ch/Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm


Reference Value = 2.79 V/m; Power Drift = 0.14 dB

Maximum value of SAR (measured) = 0.138 mW/g

Peak SAR (extrapolated) = 12.7 W/kg

**SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.031 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

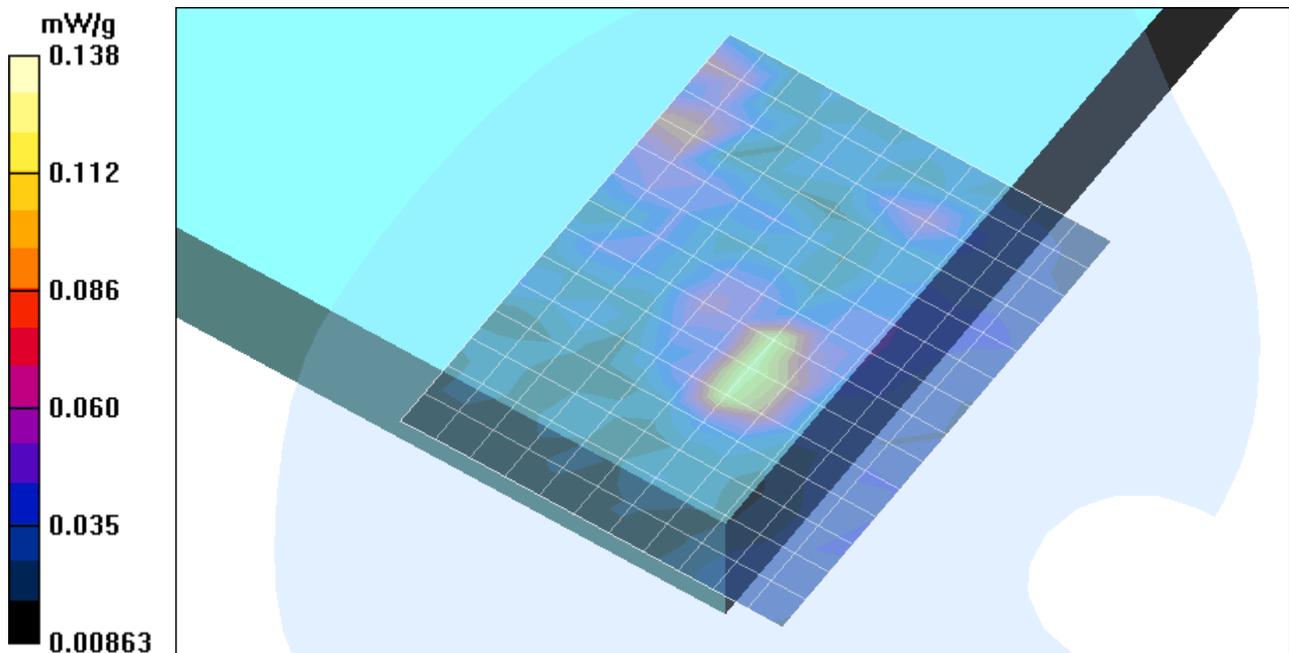

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**

Communication System: 5.2-5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 6.18$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Phantom section: Flat Section

**11a\_L-ch/Z Scan (1x1x34):** Measurement grid: dx=20mm, dy=20mm, dz=3mm

Reference Value = 2.79 V/m; Power Drift = 0.17 dB

Maximum value of SAR (measured) = 0.071 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

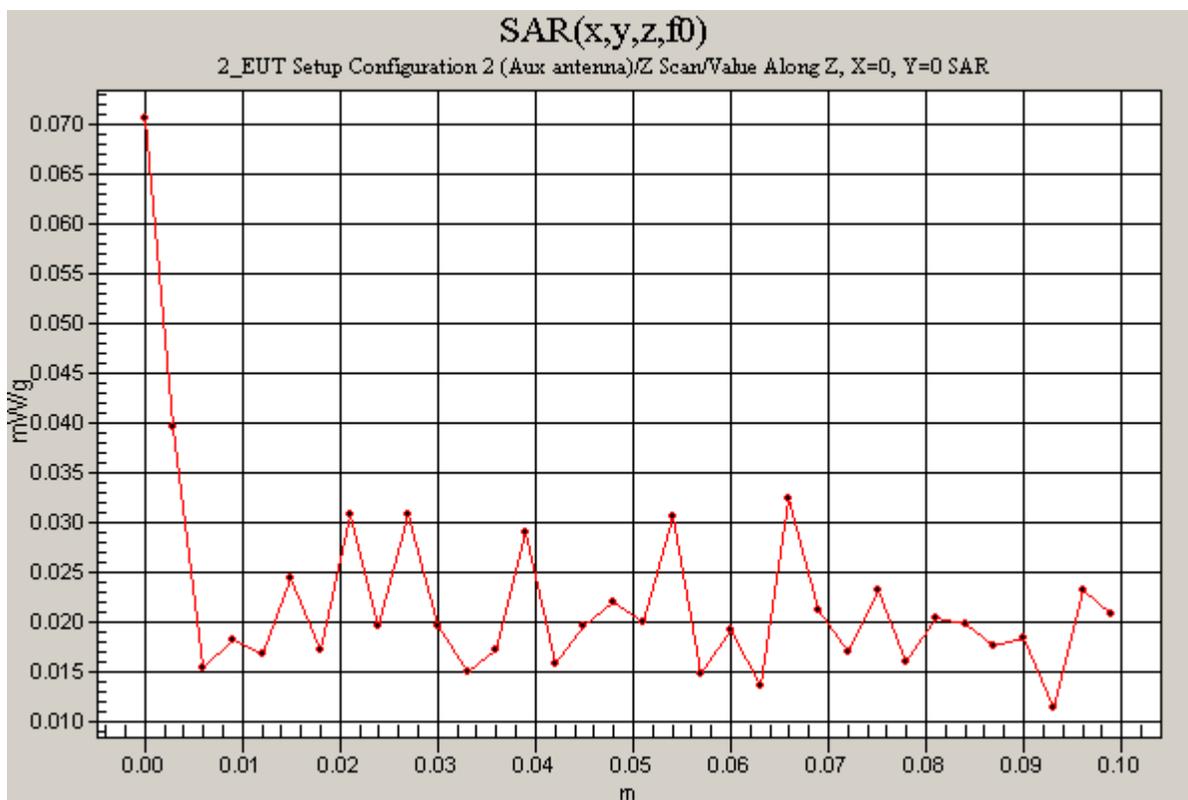

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**  
**Ambient Temp.: 25.5 deg. C; Liquid Temp.: 24.0 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 6.18$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.64, 4.64, 4.64); Calibrated: 7/18/2004
- Sensor-Surface: 1.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**Co-location\_11a\_L-ch/Area Scan (12x15x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.06 V/m; Power Drift = 0.16 dB

Maximum value of SAR (measured) = 0.121 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**Co-location\_11a\_L-ch/Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm


Reference Value = 3.06 V/m; Power Drift = 0.16 dB

Maximum value of SAR (measured) = 0.138 mW/g

Peak SAR (extrapolated) = 0.647 W/kg

**SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.031 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

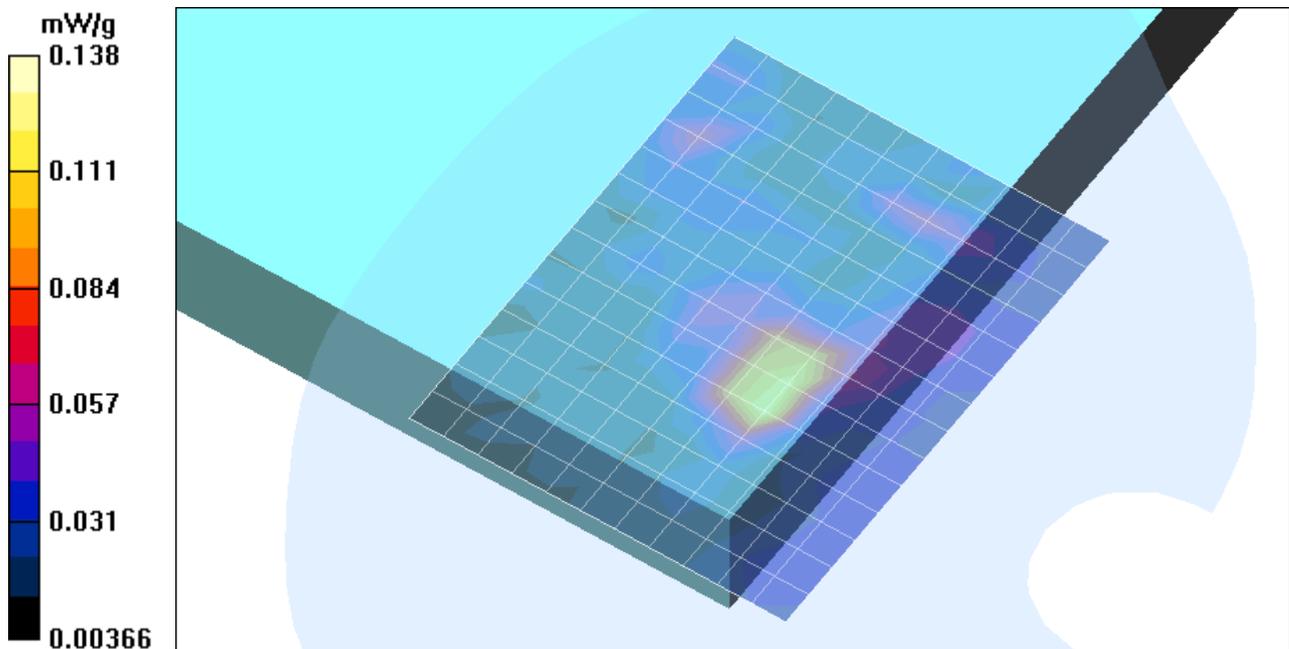

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**  
**Ambient Temp.: 25.5 deg. C; Liquid Temp.: 24.0 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5785$  MHz;  $\sigma = 6.24$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.64, 4.64, 4.64); Calibrated: 7/18/2004
- Sensor-Surface: 1.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_M-ch 2/Area Scan (13x17x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 2.75 V/m; Power Drift = -0.14 dB

Maximum value of SAR (measured) = 0.128 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_M-ch 2/Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm


Reference Value = 2.75 V/m; Power Drift = -0.14 dB

Maximum value of SAR (measured) = 0.120 mW/g

Peak SAR (extrapolated) = 27387.4 W/kg

**SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.028 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

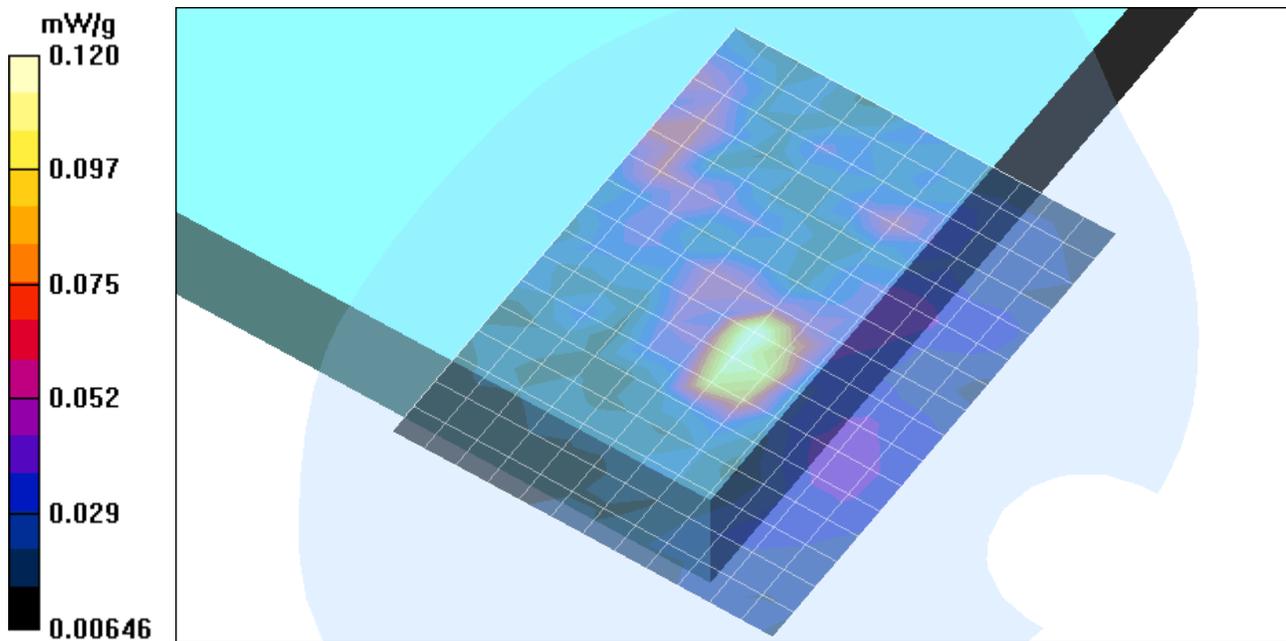

Test Laboratory: Compliance Certification Services

File Name: [2\\_EUT Setup Configuration 2 \(Aux antenna\).da4](#)

**DUT: Broadcom; Type: BCM94309MPC0; Serial: N/A**  
**Program Name: 2\_EUT Setup Configuration 2 (Aux antenna)**  
**Ambient Temp.: 25.5 deg. C; Liquid Temp.: 24.0 deg. C**

Communication System: 5.2-5.8 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1.053

Medium parameters used (interpolated):  $f = 5825$  MHz;  $\sigma = 6.29$  mho/m;  $\epsilon_r = 47$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(4.64, 4.64, 4.64); Calibrated: 7/18/2004
- Sensor-Surface: 1.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**11a\_H-ch/Area Scan (12x15x1):** Measurement grid: dx=10mm, dy=10mm

**11a\_H-ch/Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 2.53 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.109 mW/g

Peak SAR (extrapolated) = 16.1 W/kg

**SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.022 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

**11a\_H-ch/Zoom Scan (7x7x8)/Cube 1:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 2.53 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.087 mW/g

Peak SAR (extrapolated) = 14.1 W/kg

**SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.017 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation!](#)

