



# FCC Test Report

Test report no.: EMC\_797FCC15.247\_2004\_5745\_5825\_PP14L

**FCC Part 15.247 / CANADA RSS-210**

**EUT: WLAN            Model: BCM94309MP**  
**HOST: Dell Laptop    Model: PP14L**  
**FCC ID: QDS-BRCM1015**  
**IC ID: 4324B-94309MP**  
**(This test report covers freq. 5745-5825MHz)**



**TTI-P-G 081/94-A0**

Accredited according to **ISO/IEC 17025**



**Bluetooth Qualification  
Test Facility  
(BQTF)**



**FCC listed # 101450**

**IC recognized # 3925**

## **CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686  
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

## Table of Contents

- 1        **General information**
- 1.1     **Notes**
- 1.2     **Testing laboratory**
- 1.3     **Details of applicant**
- 1.4     **Application details**
- 1.5     **Test item**
- 1.6     **Test standards**
- 2        **Technical test**
- 2.1     **Summary of test results**
- 2.2     **Test report**
- 1        **General information**
- 1.1     **Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

### **TEST REPORT PREPARED BY:**

**EMC Engineer: Harpreet Sidhu**

**1.2        Testing laboratory**  
**CETECOM Inc.**  
**411 Dixon Landing Road, Milpitas, CA-95035, USA**  
**Phone: +1 408 586 6200    Fax: +1 408 586 6299**  
**E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)**  
**Internet: [www.cetecom.com](http://www.cetecom.com)**

**1.3 Details of applicant**

**Name** : **Broadcom corporation**  
**Street** : **190 Mathilda Place**  
**City / Zip Code** : **Sunnyvale, CA 94086**  
**Country** : **USA**  
**Contact** : **Dan Lawless**  
**Telephone** : **408-922-5870**  
**Tele-fax** : **408-543-3399**  
**e-mail** : [dlawless@broadcom.com](mailto:dlawless@broadcom.com)

**1.4 Application details**

Date of receipt test item : 2004-11-15  
Date of test : 2003-11-19, 2004-11-15, 2005-02-01

**1.5 Test item**

**Manufacturer** : Applicant  
**Model No. (EUT)** : BCM94309MP  
**Model No. (Host)** : PP14L (Dell Laptop)  
**Description** : WLAN MiniPCI Multiband card incorporating 2.4GHz and 5GHz radios  
**FCC ID** : QDS-BRCM1015  
**IC ID** : 4324B-94309MP

**Additional information**

**Frequency** : 5745-5825MHz  
**Type of modulation** : DSSS / OFDM (orthogonal frequency division multiplexing)  
**Number of channels** : 13 for 5GHz band  
**Antenna** : Hitachi Stamped metal sheet antenna 5.1dBi for 5GHz band  
**Power supply** : 3.3 VDC from Host  
**Output power** : 20.5dBm (112.2mW) conducted peak power  
**Extreme temp. Tolerance** : 0°C to +70°C

**1.6 Test standards:** **FCC Part 15 §15.247 / CANADA RSS-210**  
**Measurements done as per DA 02-2138 / FCC04-165**

**PROJECT OVERVIEW:**

BCM94309MP is WLAN MiniPCI Multiband card incorporating 2.4GHz and 5GHz radios. This test report carries all measurements required as per FCC 15.247 on WLAN mini PCI card tested in worst-case laptop & antenna combination in freq. range 5745-5825MHz. **Please note measurement procedure as per DA 02-2138 is used as directed by FCC 04-165.**

WLAN was tested for spurious emissions in both DSSS & OFDM modes at different data rates (1, 2, 5.5, 6, 11, and 54) to ensure compliance of the whole device. Test report shows only worst-case test results of all data rates.

All radiated measurements were done on following worst-case antenna platform;  
**PP14L with Hitachi stamped metal sheet ant. with max gain 5.1dBi (5745-5825MHz)**


BCM94309MP antenna list						
No	Dell Model (Internal Name)	Supplier	Antenna Type	Model number	Max Peak gain 2.4GHz/dBi	Max Peak Gain 5GHz/dBi
1	Dell PP09L	Hitachi	PIFA stamped Metal	HFT08-DL-AS (Antenna side) HFT08-DL-MS (Module side)	2.9 (Aux)	2.8 (Main)
2	Dell PP14L	Hitachi	PIFA stamped Metal	HFT17-DL03	Main 1.5 (H)	Main 5.1 (V)

**2 Technical test**


**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only "passed" if all single measurements are "passed")	<b>Passed</b>

**Technical responsibility for area of testing:**

<b>2005-02-17</b>	<b>EMC &amp; Radio</b>	<b>Lothar Schmidt (Manager)</b>	
<b>Date</b>	<b>Section</b>	<b>Name</b>	<b>Signature</b>

**Responsible for test report and project leader:**

<b>2005-02-17</b>	<b>EMC &amp; Radio</b>	<b>Harpreet Sidhu (EMC Engineer)</b>	
<b>Date</b>	<b>Section</b>	<b>Name</b>	<b>Signature</b>

**2.2 Test report**

**TEST REPORT**

**Test report no.: EMC\_797FCC15.247\_2004\_5745\_5825\_PP14L**

**TEST REPORT REFERENCE**

<b>LIST OF MEASUREMENTS</b>		<b>PAGE</b>
<b>SPECTRUM BANDWIDTH OF DSSS SYSTEM</b>	§15.247(a) (2)	8
<b>OUTPUT POWER</b>	§ 15.247 (b) (3)	12
<b>POWER SPECTRAL DENSITY</b>	§15.247 (e)	14
<b>EMISSION LIMITATIONS (Conducted)</b>	§ 15.247 (d)	15
<b>EMISSION LIMITATIONS (Radiated)</b>	§ 15.247 (d)	19
<b>CONDUCTED EMISSIONS</b>	§ 15.107/207	30
<b>RECEIVER SPURIOUS RADIATION</b>	§ 15.209	31
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>		38
<b>BLOCK DIAGRAMS</b>		39

**SPECTRUM BANDWIDTH OF DSSS SYSTEM**

**§15.247(a) (2)**

**6 dB bandwidth  
(Data rate – 54Mbps)**

<b>TEST CONDITIONS</b>		<b>6 dB BANDWIDTH (MHz)</b>		
<b>Frequency (MHz)</b>		<b>5745</b>	<b>5805</b>	<b>5825</b>
<b>T<sub>nom</sub>(23)°C</b>	<b>V<sub>nom</sub>(3.3) VDC</b>	<b>16.48</b>	<b>16.43</b>	<b>16.43</b>

**LIMIT**

**SUBCLAUSE §15.247(a) (2)**

**The minimum 6dB bandwidth shall be at least 500 KHz**



SPECTRUM BANDWIDTH OF DSSS SYSTEM

§15.247(a) (2)

6 dB bandwidth  
(Data rate – 54Mbps)

Lowest Channel: 5745MHz



Delta 1 [T1]


RBW 100 kHz RF Att 40 dB

Ref Lvl -0.50 dB

VBW 1 MHz

10.4 dBm 16.48296593 MHz

SWT 6.5 ms Unit dBm

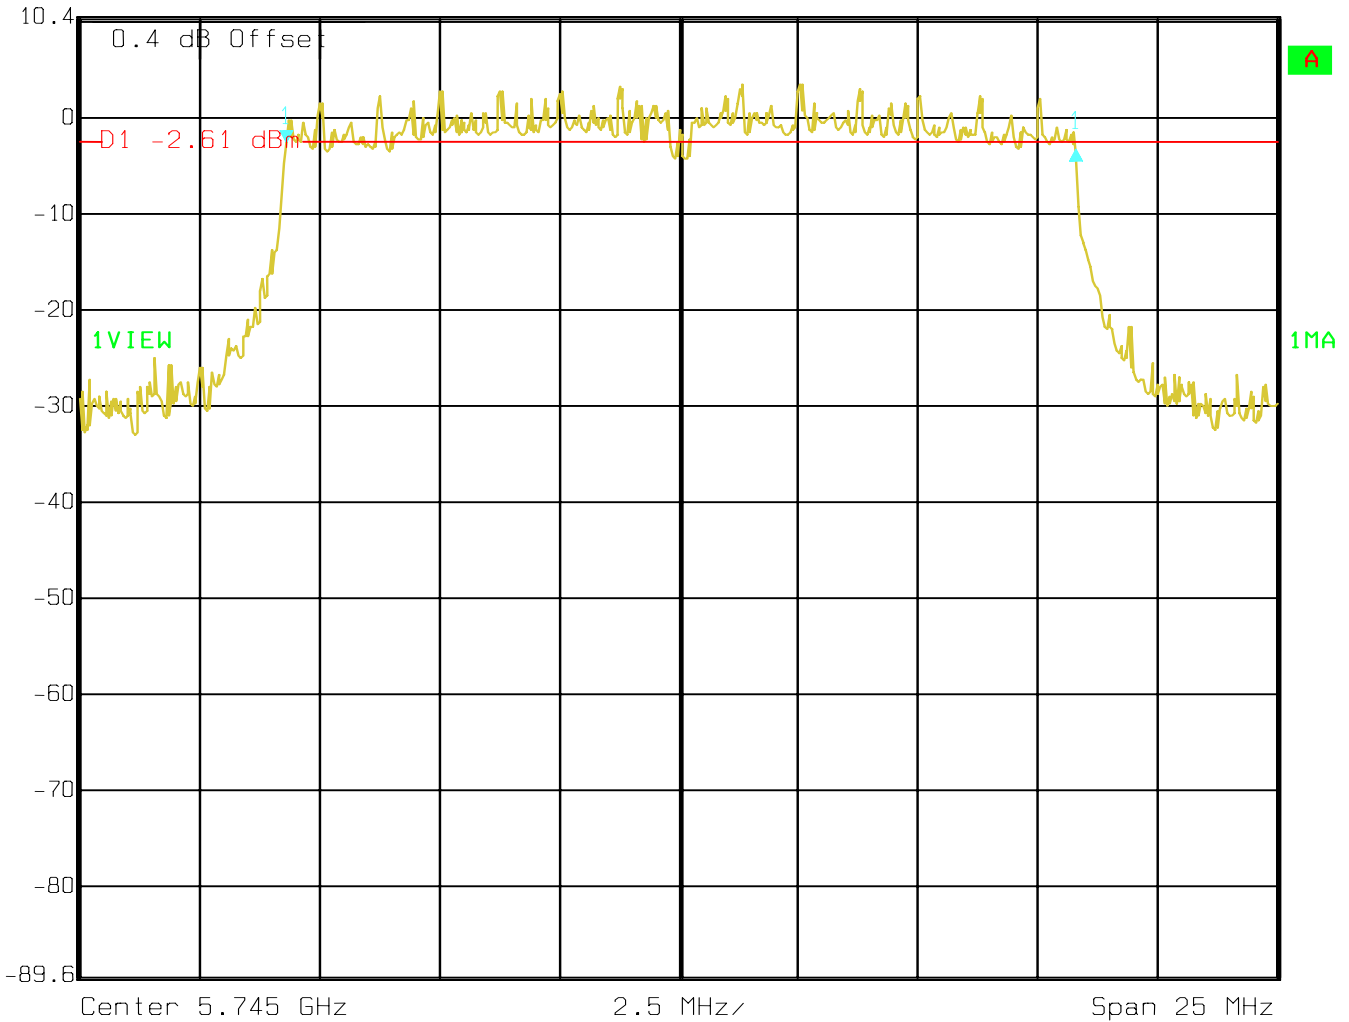

Date: 14.FEB.2005 13:50:44

**SPECTRUM BANDWIDTH OF DSSSS SYSTEM §15.247(a) (2)**

**6 dB bandwidth  
(Data rate – 54Mbps)**

**Mid Channel: 5805MHz**



Delta 1 [T1]


RBW 100 kHz RF Att 40 dB

Ref Lvl 0.88 dB

VBW 1 MHz

10.4 dBm 16.43286573 MHz

SWT 6.5 ms Unit dBm

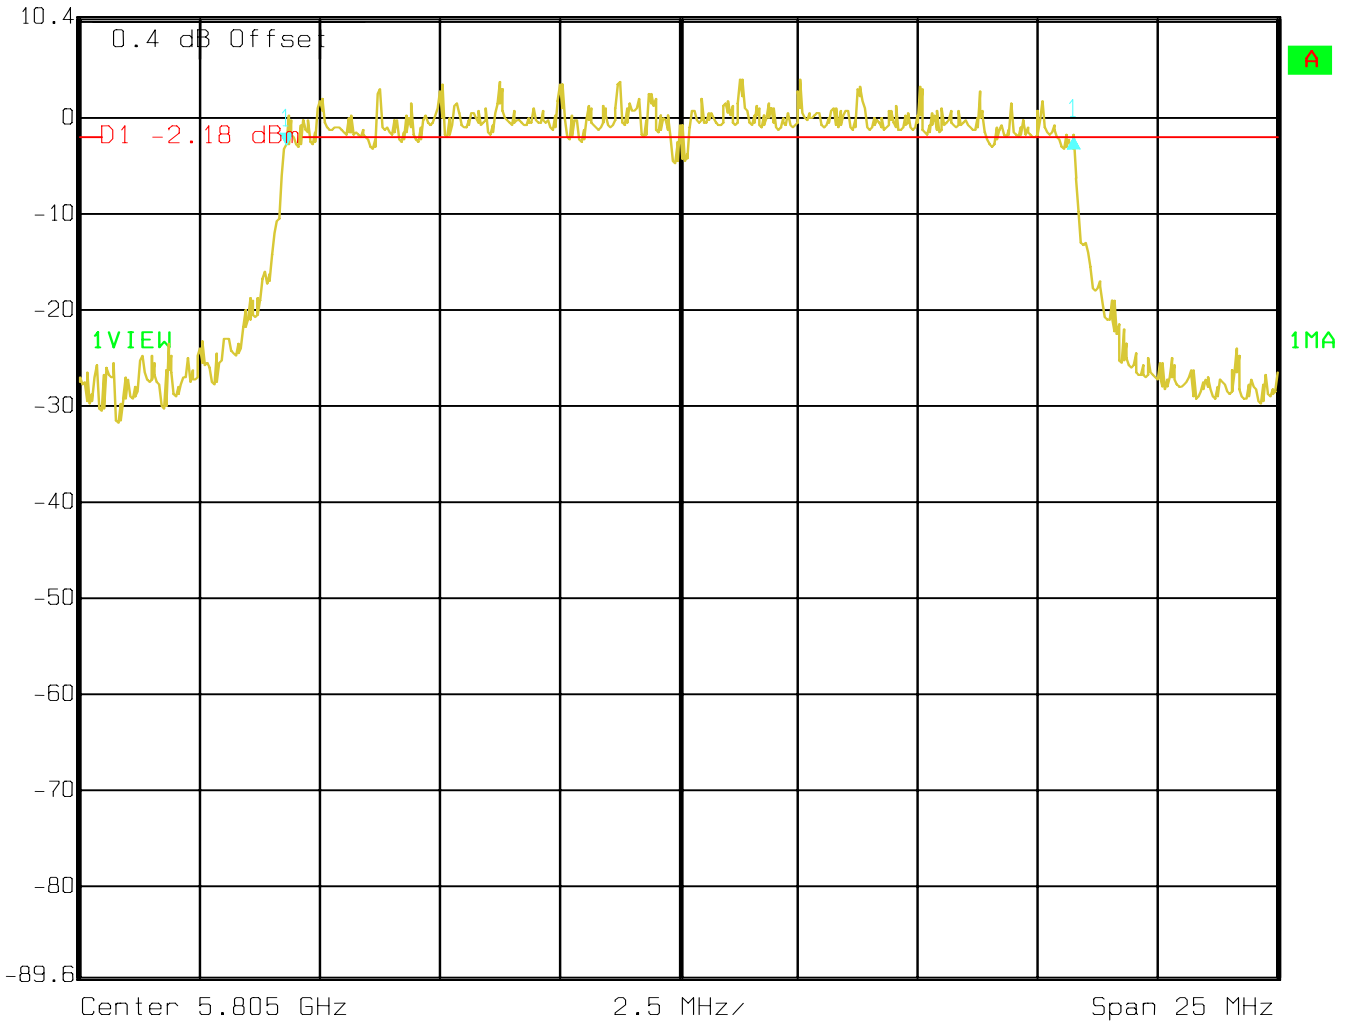


Date: 14.FEB.2005 13:54:36

SPECTRUM BANDWIDTH OF DSSS SYSTEM

§15.247(a) (2)

6 dB bandwidth  
(Data rate – 54Mbps)

Highest Channel: 5825MHz

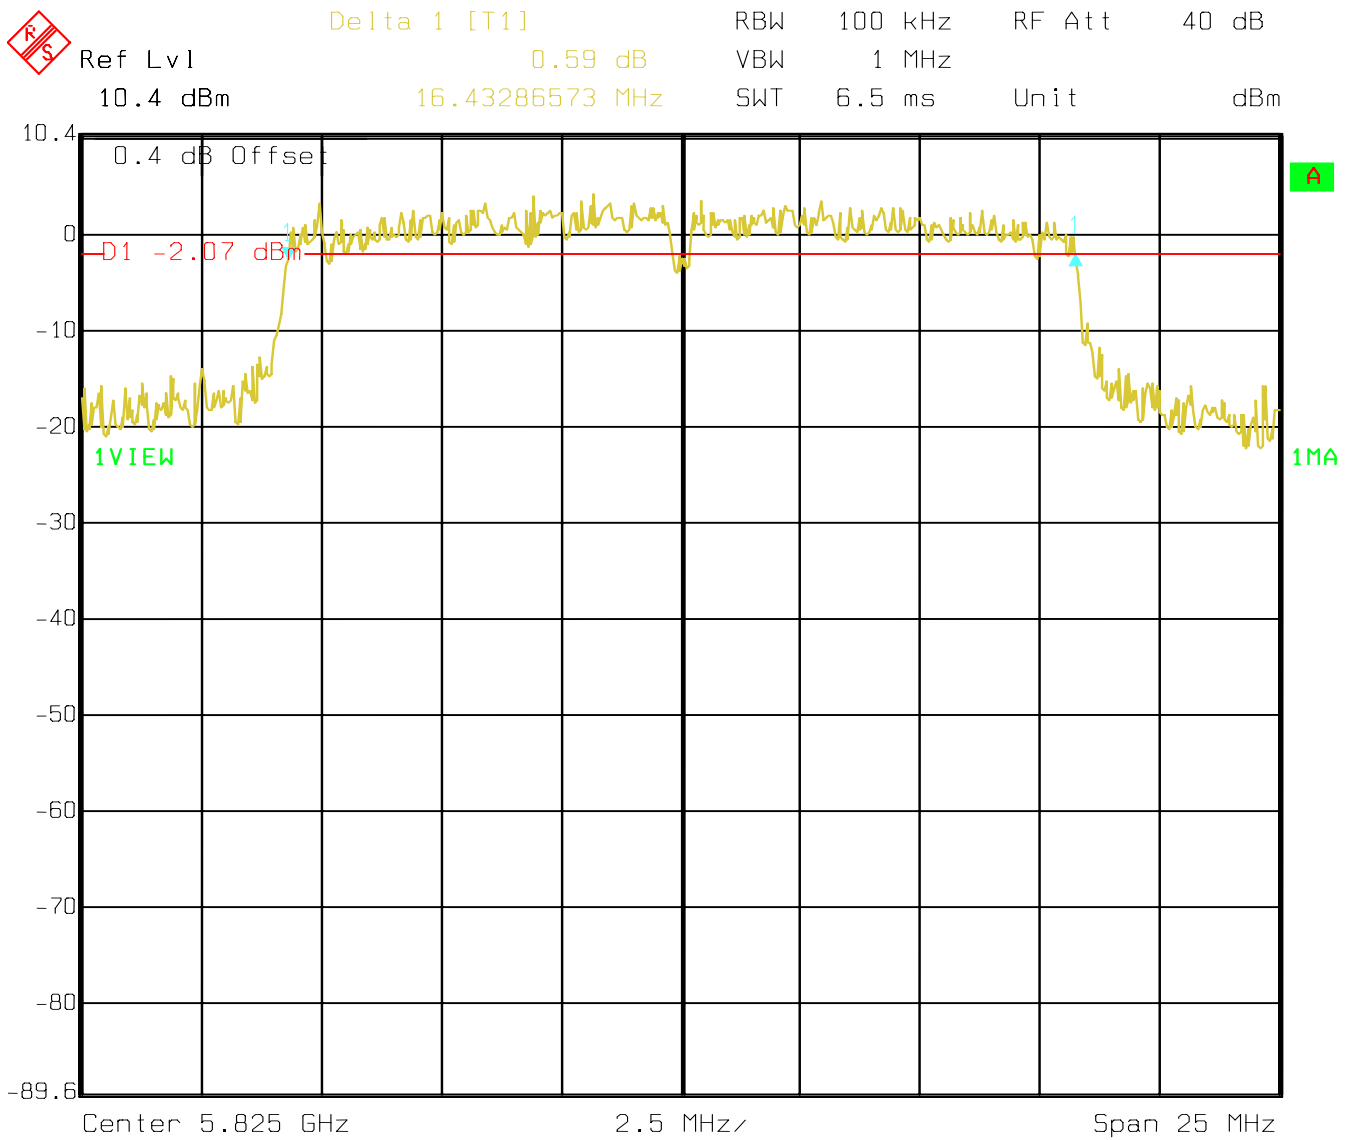

Date: 14.FEB.2005 13:52:39

**OUTPUT POWER** § 15.247 (b) (3)  
 (Conducted)

Measurement procedure as per DA 02-2138 is used as directed by FCC 04-165.

TEST CONDITIONS		OUTPUT POWER (dBm)			
Frequency (MHz)		5745		5805	5825
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.3) VDC	Av	20.5	20.45	16.92
Measurement uncertainty		±0.5dBm			

**LIMIT** SUBCLAUSE § 15.247 (b) (3)

Frequency range	RF power output
5725-5850 MHz	1.0 Watt / 30dBm

**OUTPUT POWER (RADIATED) § 15.247 (b) (3)**

Measurement procedure as per DA 02-2138 is used as directed by FCC 04-165.

**EIRP:**

TEST CONDITIONS		OUTPUT POWER EIRP(dBm)		
		5745	5805	5825
Frequency (MHz)				
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.3) VDC	25.6	25.55	22.02
Measurement uncertainty		±0.5dBm		

\*Note: EIRP is calculated based on 5.1dBi antenna gain and conducted power measurements.

**LIMIT SUBCLAUSE § 15.247 (b) (3)**

Frequency range	RF power output
5725-5850 MHz	30dBm on Conducted

**POWER SPECTRAL DENSITY** §15.247 (e)  
Measurement procedure as per DA 02-2138 is used as directed by FCC 04-165.

TEST CONDITIONS		POWER SPECTRAL DENSITY (dBm)		
		5745	5805	5825
Frequency (MHz)				
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.3) VDC	5.08	4.64	2.2

**LIMIT**

**SUBCLAUSE §15.247(e)**

**The peak power spectral density shall not be greater than 8dBm in any 3 kHz band**

**ANALYZER SETTINGS: RBW=1MHz, VBW=3MHz**

**EMISSION LIMITATIONS (Conducted)**

**§ 15.247 (d)**


**LIMITS**

**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

Lowest Channel (5745MHz): 30MHz – 25GHz



Delta 1 [T1] RBW 100 kHz RF Att 40 dB  
 Ref Lvl -45.14 dB VBW 100 kHz  
 10 dBm 1.95156313 GHz SWT 6.4 s Unit dBm

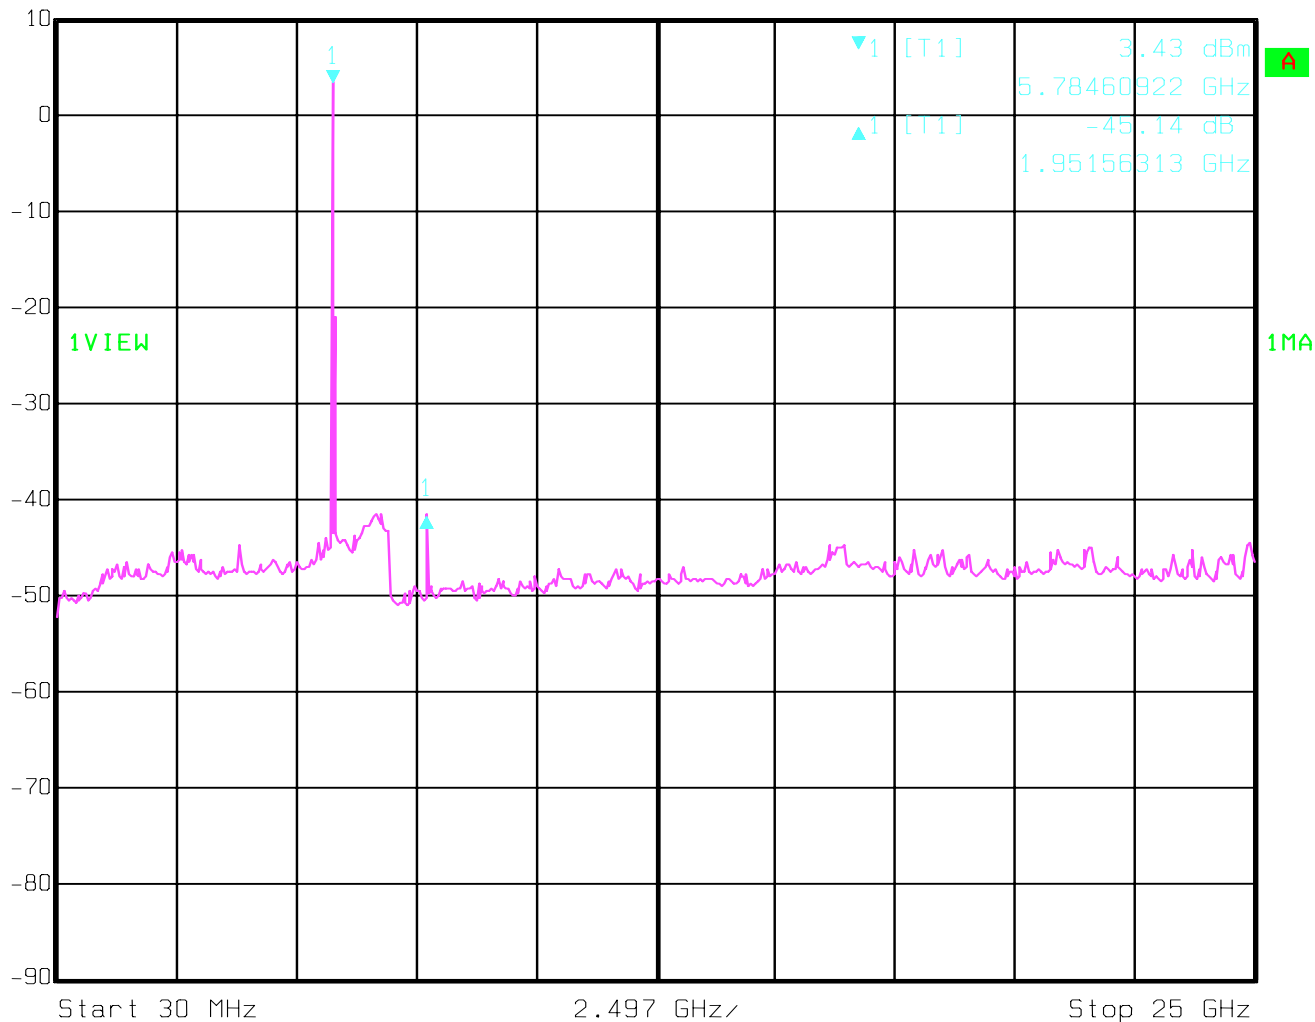


Date: 02.MAR.2005 14:00:50



Middle Channel (5805MHz): 30MHz – 25GHz



Delta 1 [T1] RBW 100 kHz RF Att 40 dB  
Ref Lvl -44.33 dB VBW 100 kHz  
10 dBm 1.05084168 GHz SWT 6.4 s Unit dBm

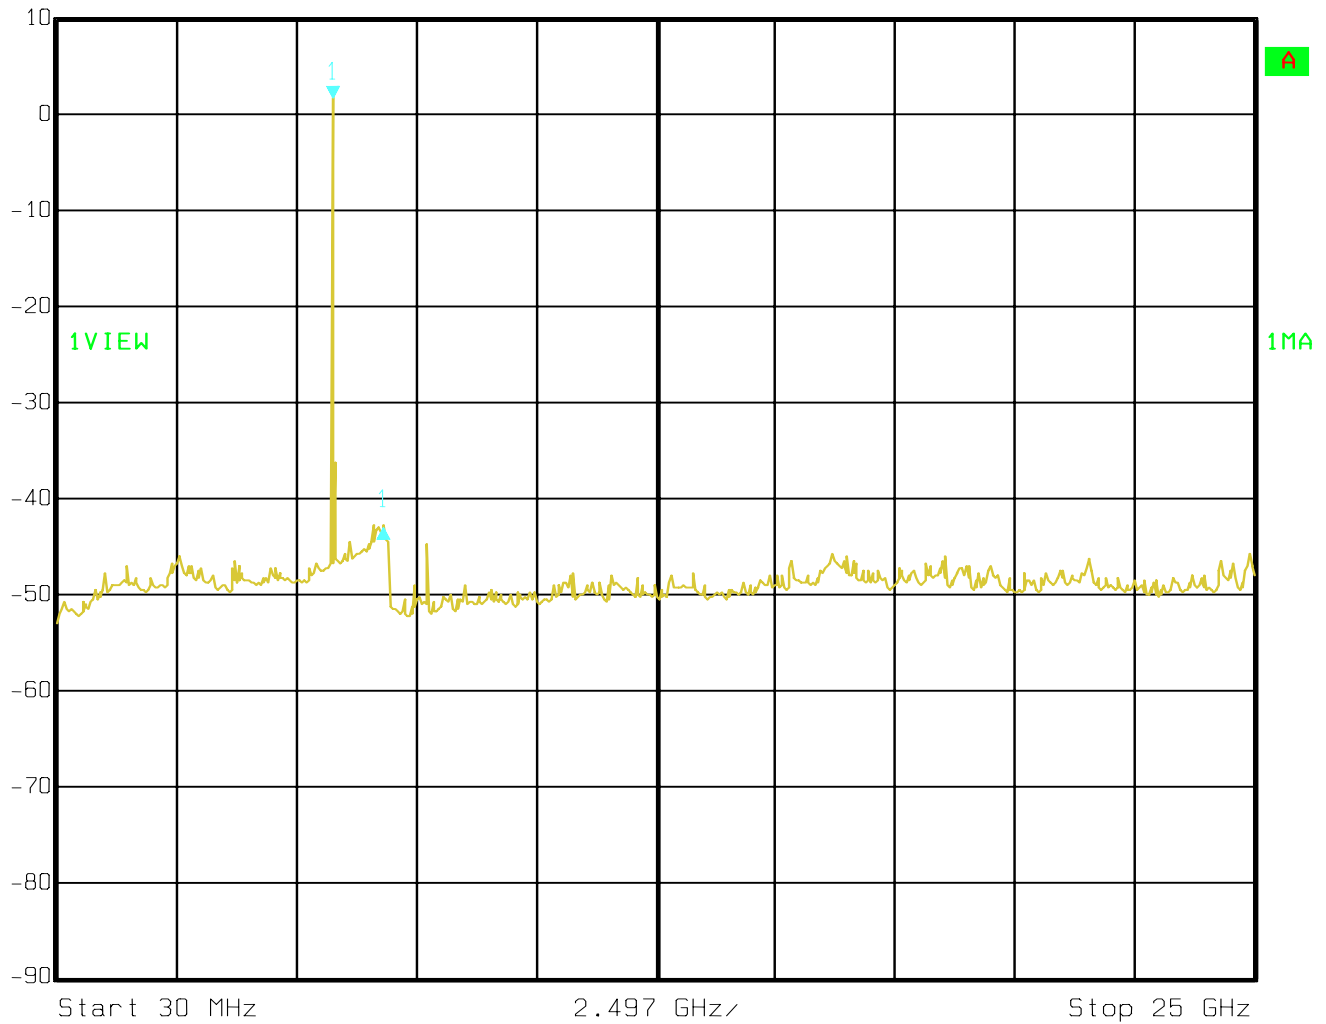


Date: 14.FEB.2005 14:28:59

Highest Channel (5825MHz): 30MHz – 25GHz



Delta 1 [T1] RBW 100 kHz RF Att 40 dB  
 Ref Lvl -44.70 dB VBW 100 kHz  
 10 dBm 1.90152305 GHz SWT 6.4 s Unit dBm

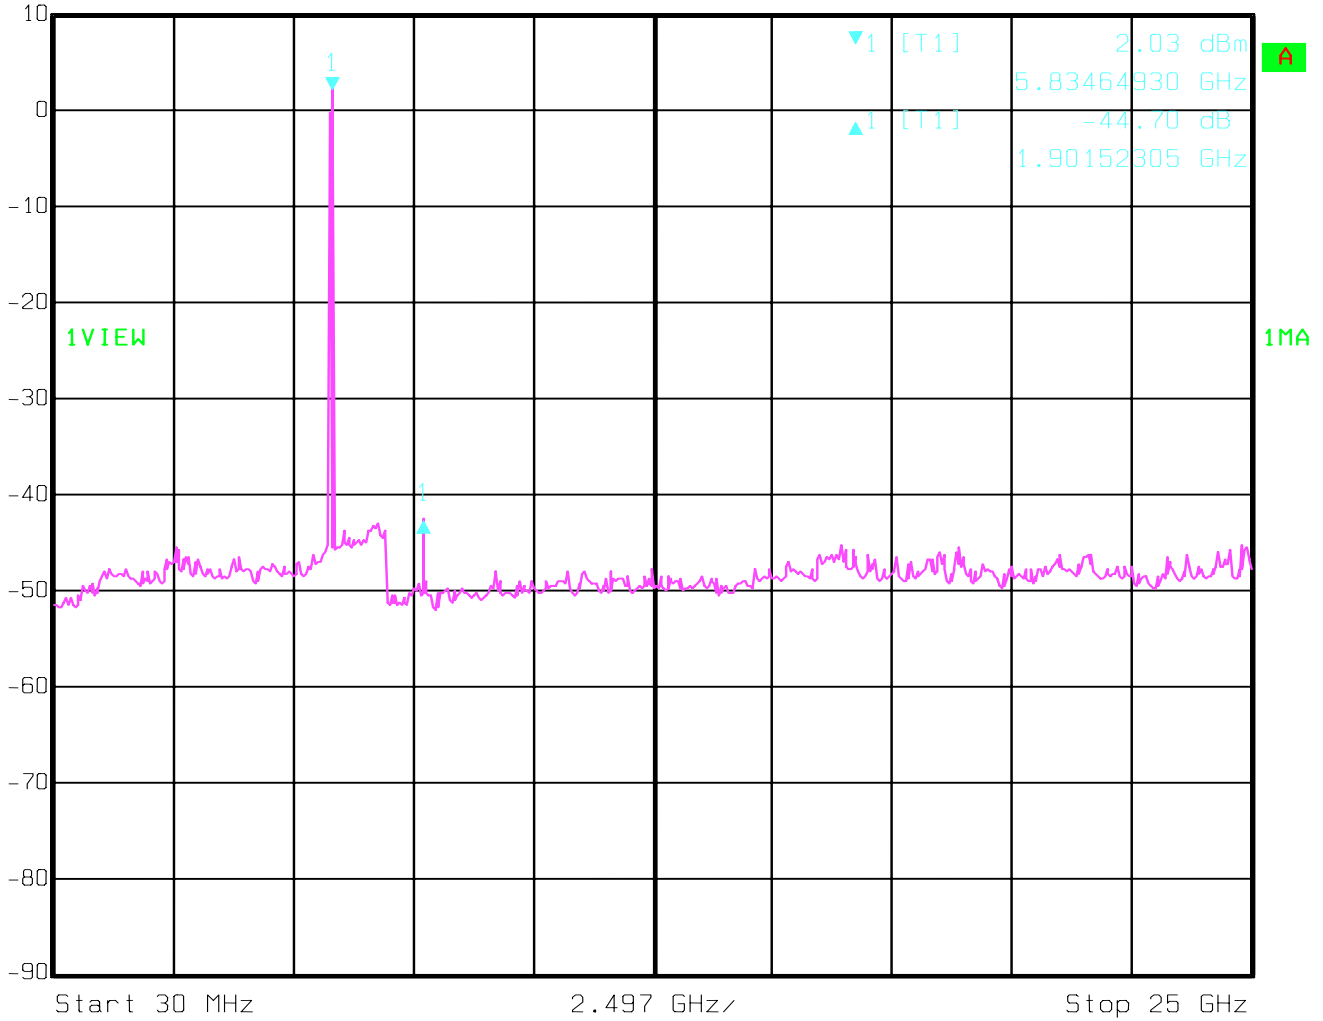

Date: 02.MAR.2005 14:02:14

**EMISSION LIMITATIONS (Radiated)  
Transmitter**

**§ 15.247 (d)**

**LIMITS**

**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode unless specified with the plots.

**Results for the radiated measurements below 30MHz according § 15.33**

<b>Frequency</b>	<b>Measured values</b>	<b>Remarks</b>
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels


**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (d)**  
**30MHz – 1GHz**

Antenna: Vertical  
 EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low, mid, high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 30-1G\_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz		3141-#1186

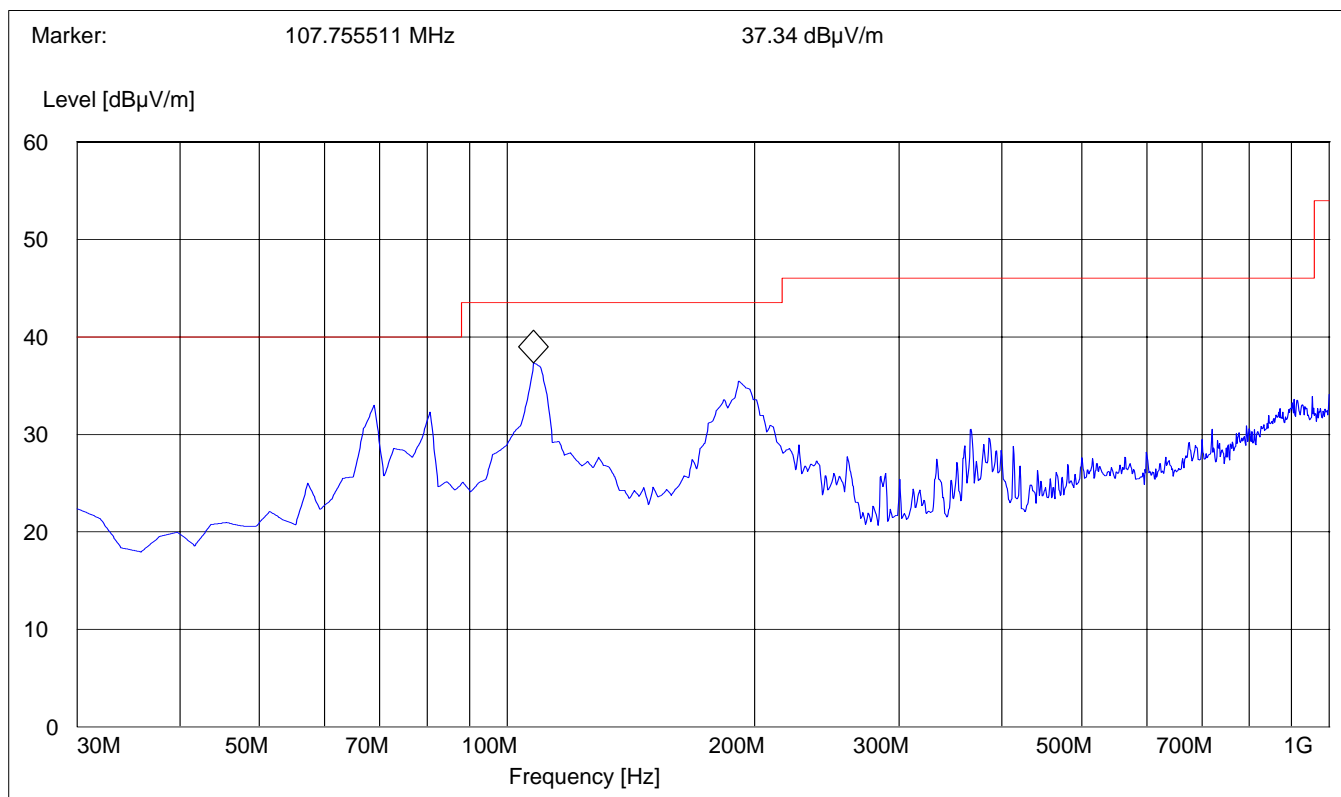


**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (d)**  
**30MHz – 1GHz**

Antenna: Horizontal  
 EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low, mid, high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 30-1G\_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz		3141-#1186

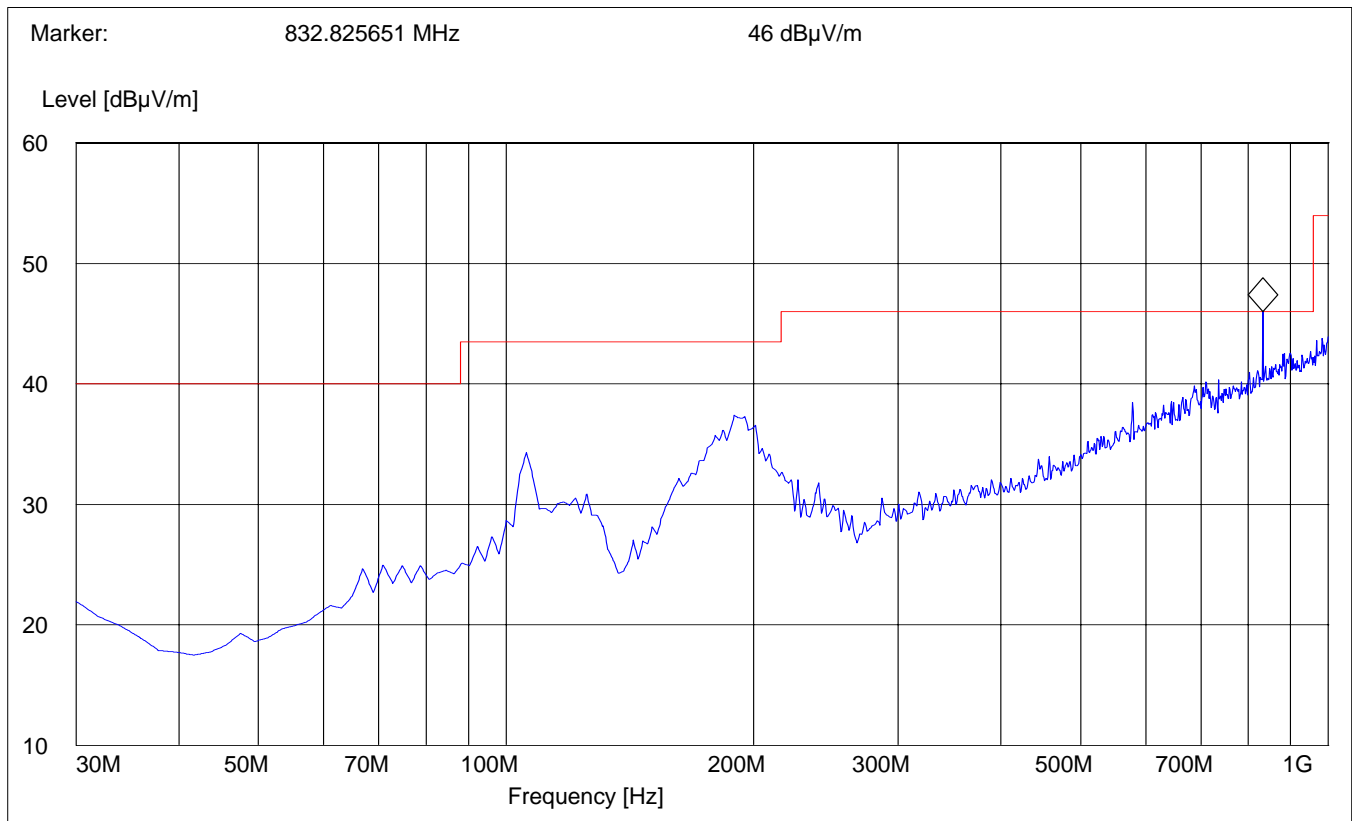


**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (d)**

**Lowest Channel (5745MHz): 1GHz – 7GHz**  
 (Average)

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE:		"FCC 15.407 1-7G"				
Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

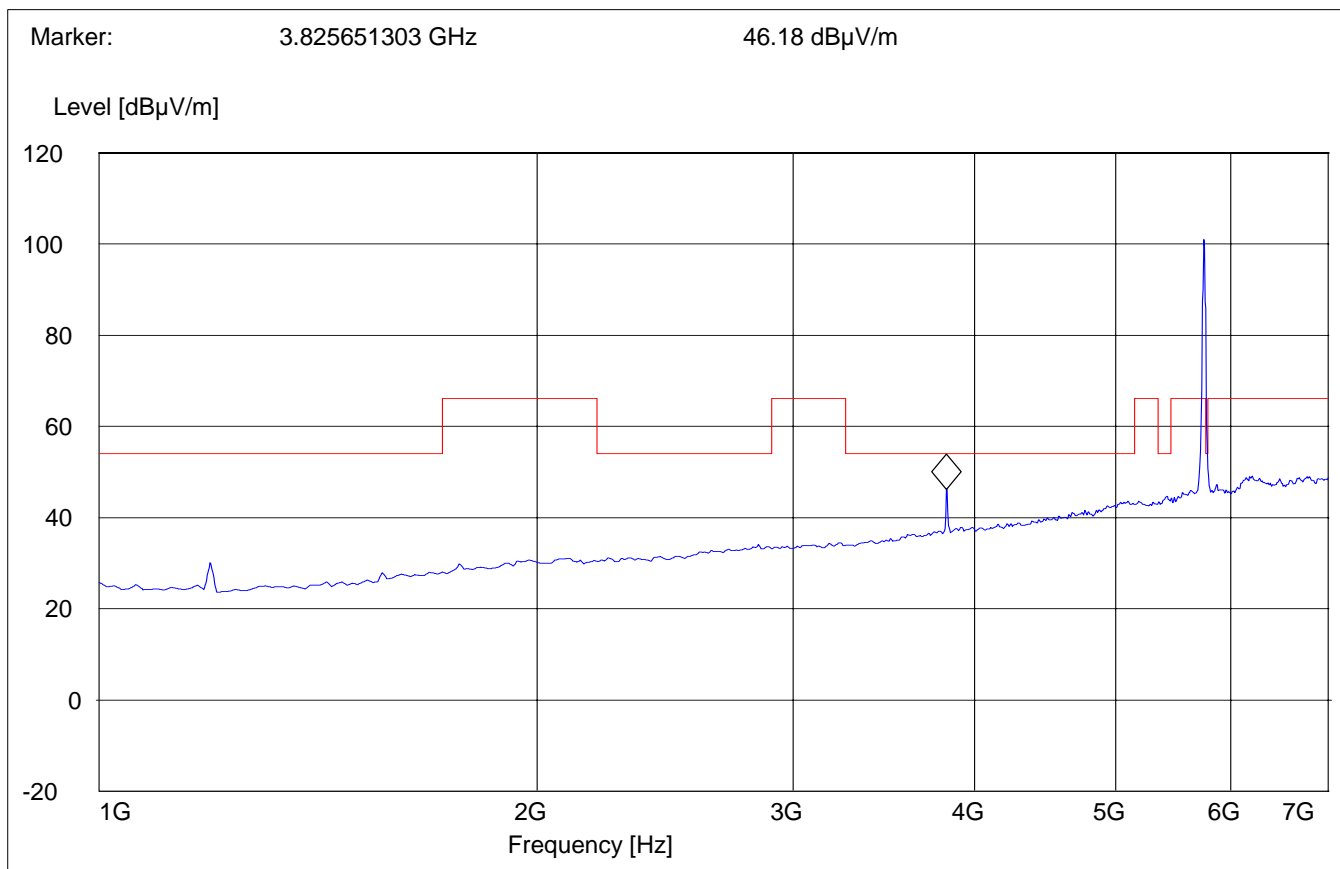

**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (d)**


**Lowest Channel (5745MHz): 7GHz – 18GHz**

Average

Antenna: Horizontal  
 EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "FCC 15.407 7-18G"

Start	Stop	Detector	Meas. Time	RBW	VBW	Transducer
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

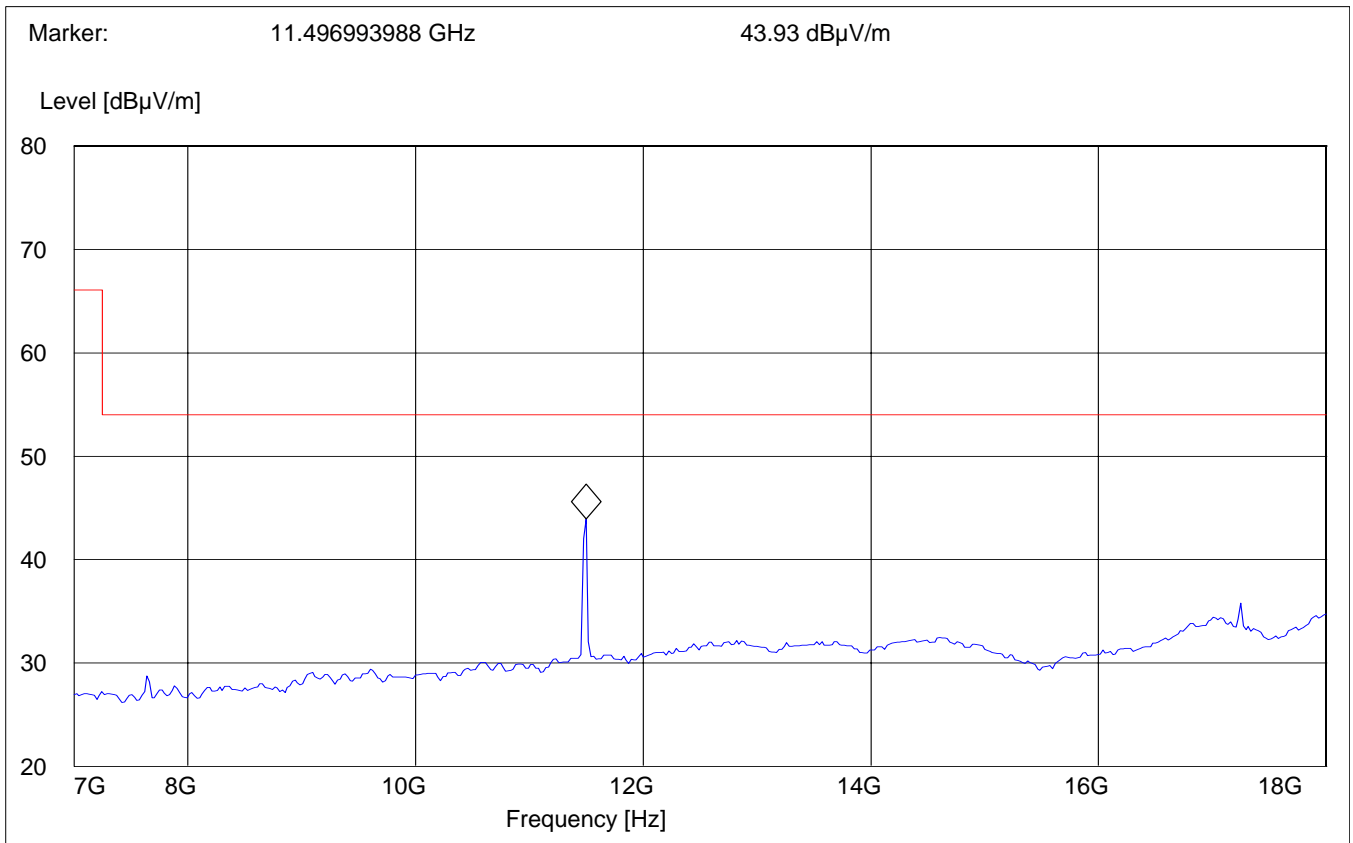


**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (d)**  
**Highest Channel (5805MHz): 1GHz – 7GHz**  
 (Average)

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE:		"FCC 15.407 1-7G"				
Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

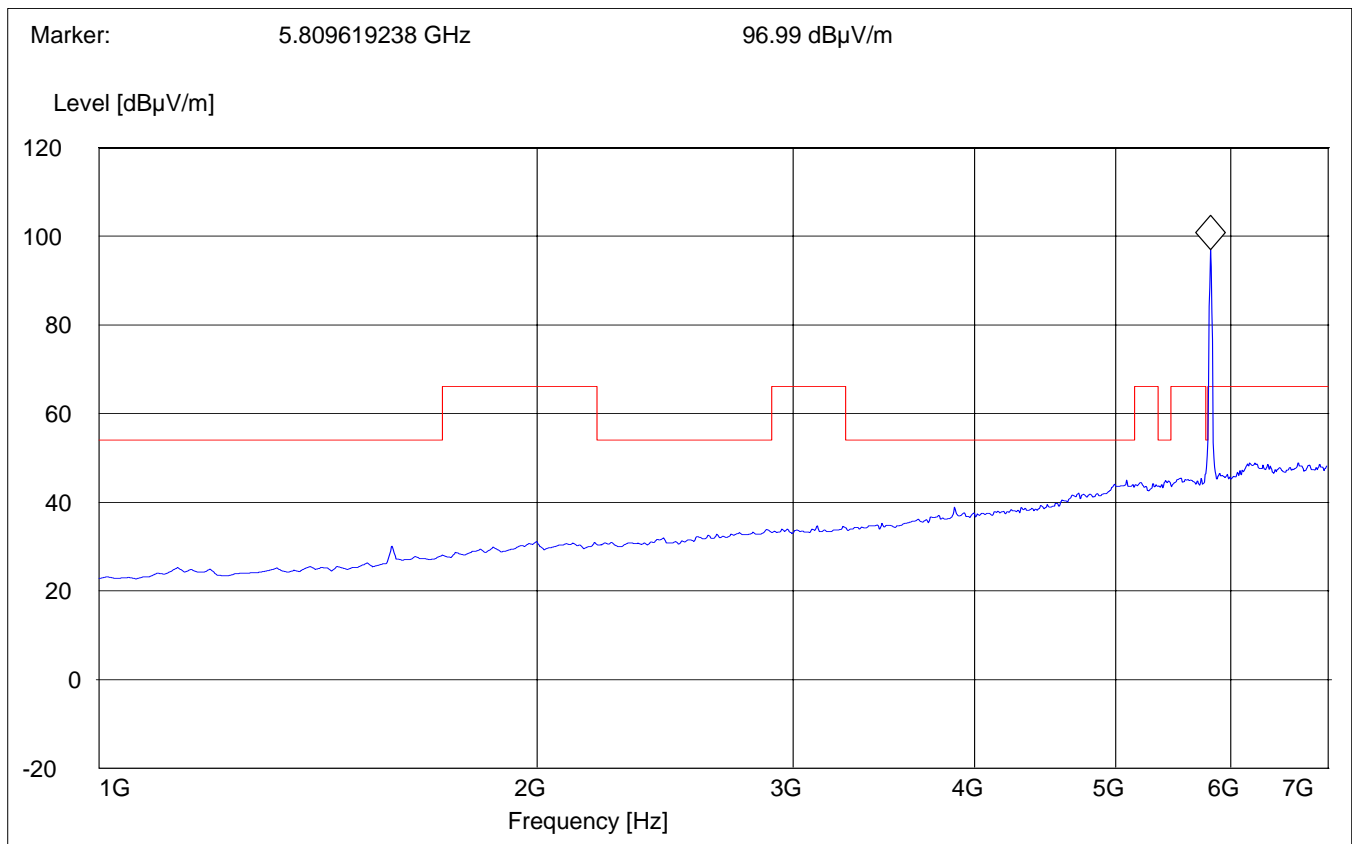




**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (d)**

**Highest Channel (5805MHz): 7GHz – 18GHz**

**Average**

**Antenna: Horizontal**  
**EUT plane: Horizontal with screen vertical @ 90°**

SWEEP TABLE:		"FCC 15.407 7-18G"					Transducer
Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW		
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn	

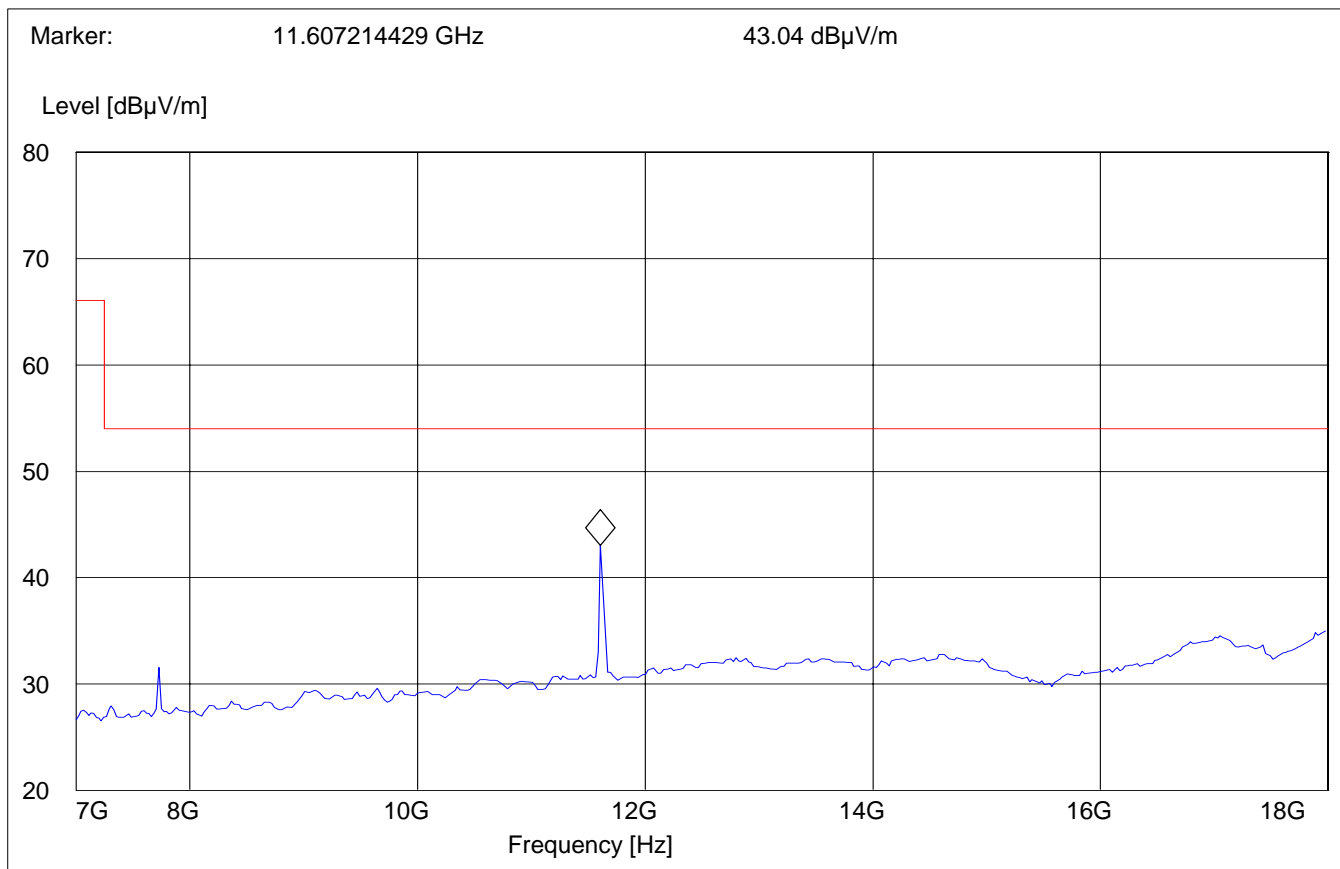


**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**(5825MHz): 1GHz – 7GHz**  
 (Average)

§ 15.247 (d)

**Antenna:**                            **Horizontal**  
**EUT plane:**                        **Horizontal with screen vertical @ 90°**

**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE:		"FCC 15.407 1-7G"				
Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

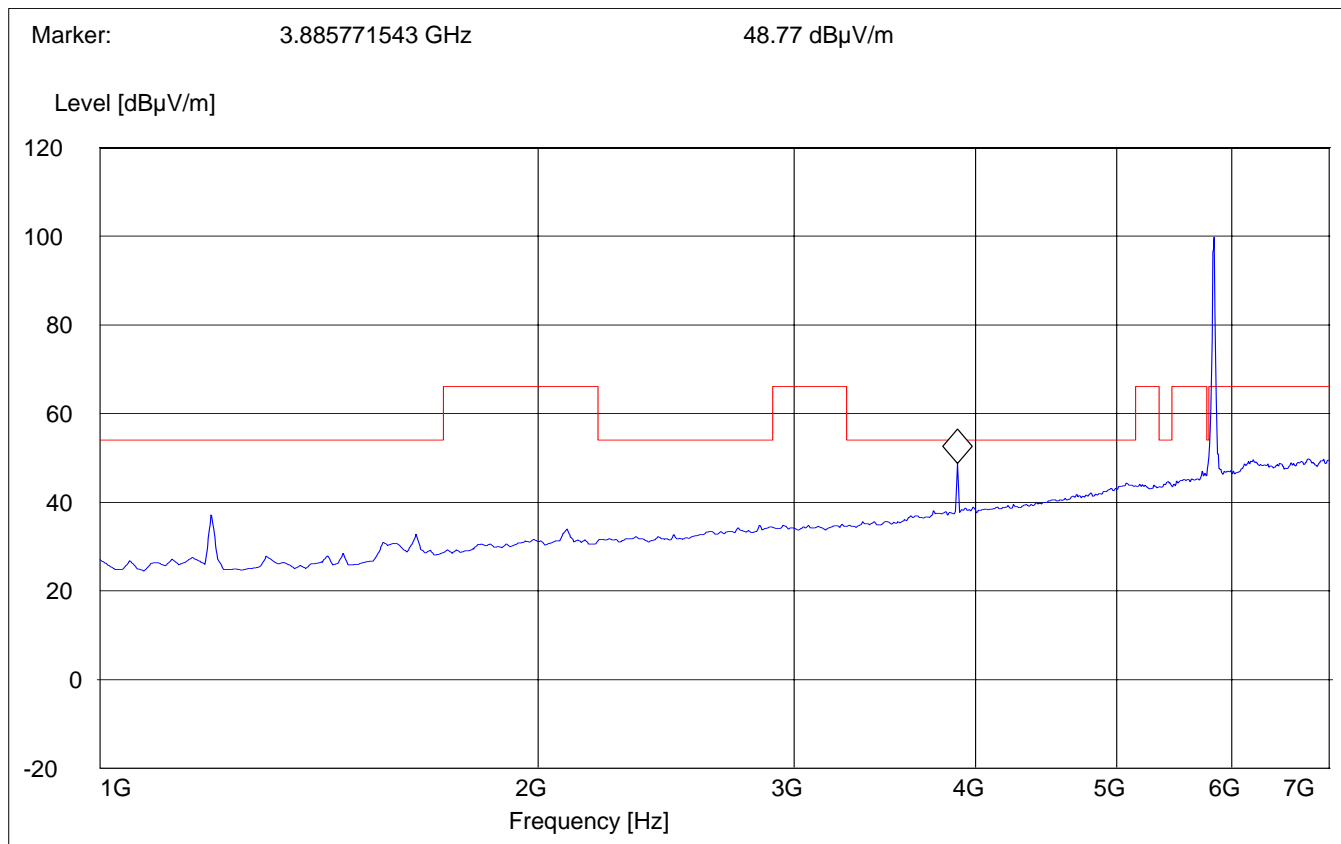

**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**(5825MHz): 7GHz – 18GHz**


§ 15.247 (d)

**Average**

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

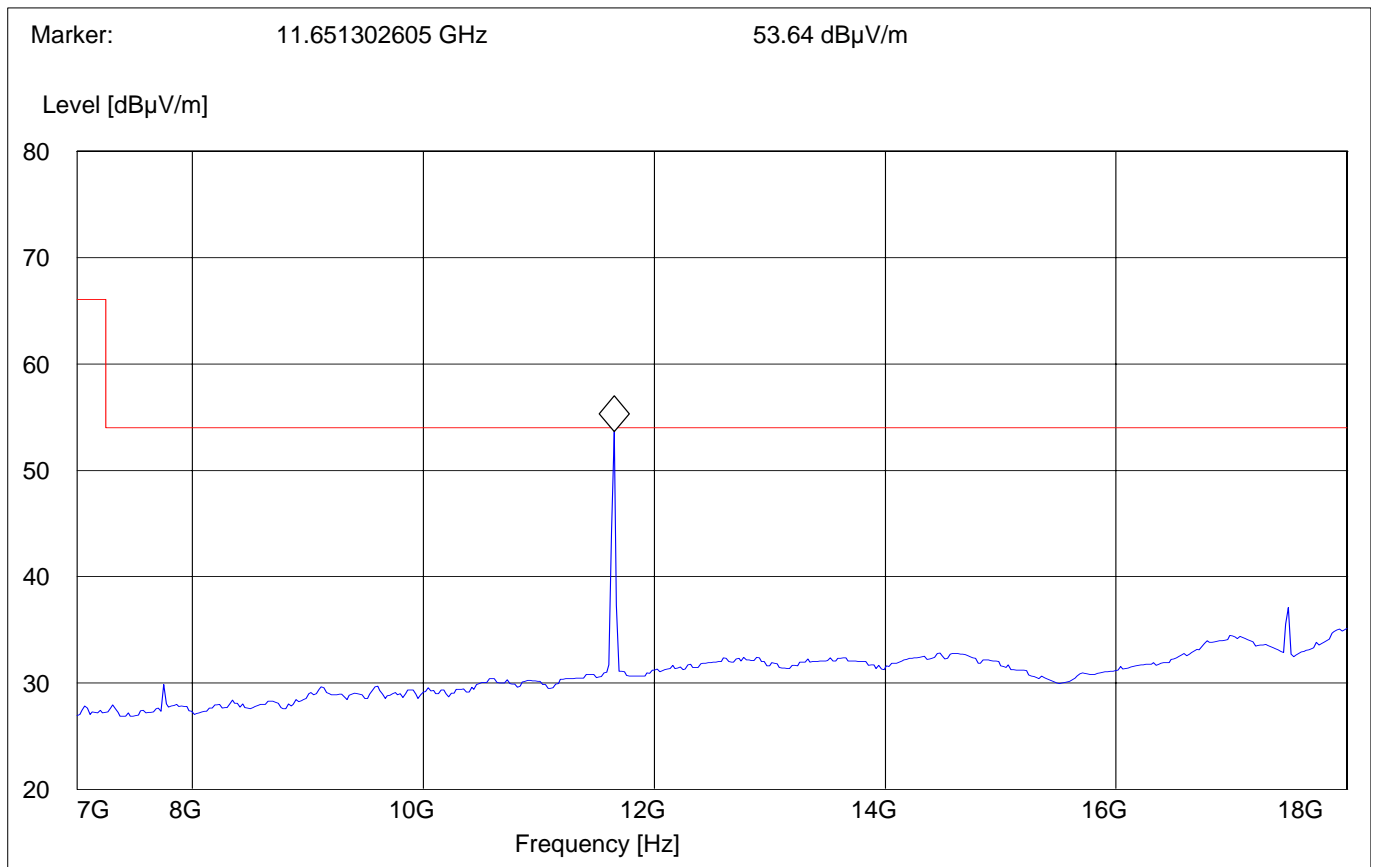


**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**18GHz – 26.5GHz**

§ 15.247 (d)

Antenna: Horizontal  
 EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low & high channels (worst-case plot)**

Start	Stop	Detector	Meas. Time	RBW	VBW	Transducer
18GHz	26.5 GHz	MaxPeak	Coupled	1MHz		3160-09 horn

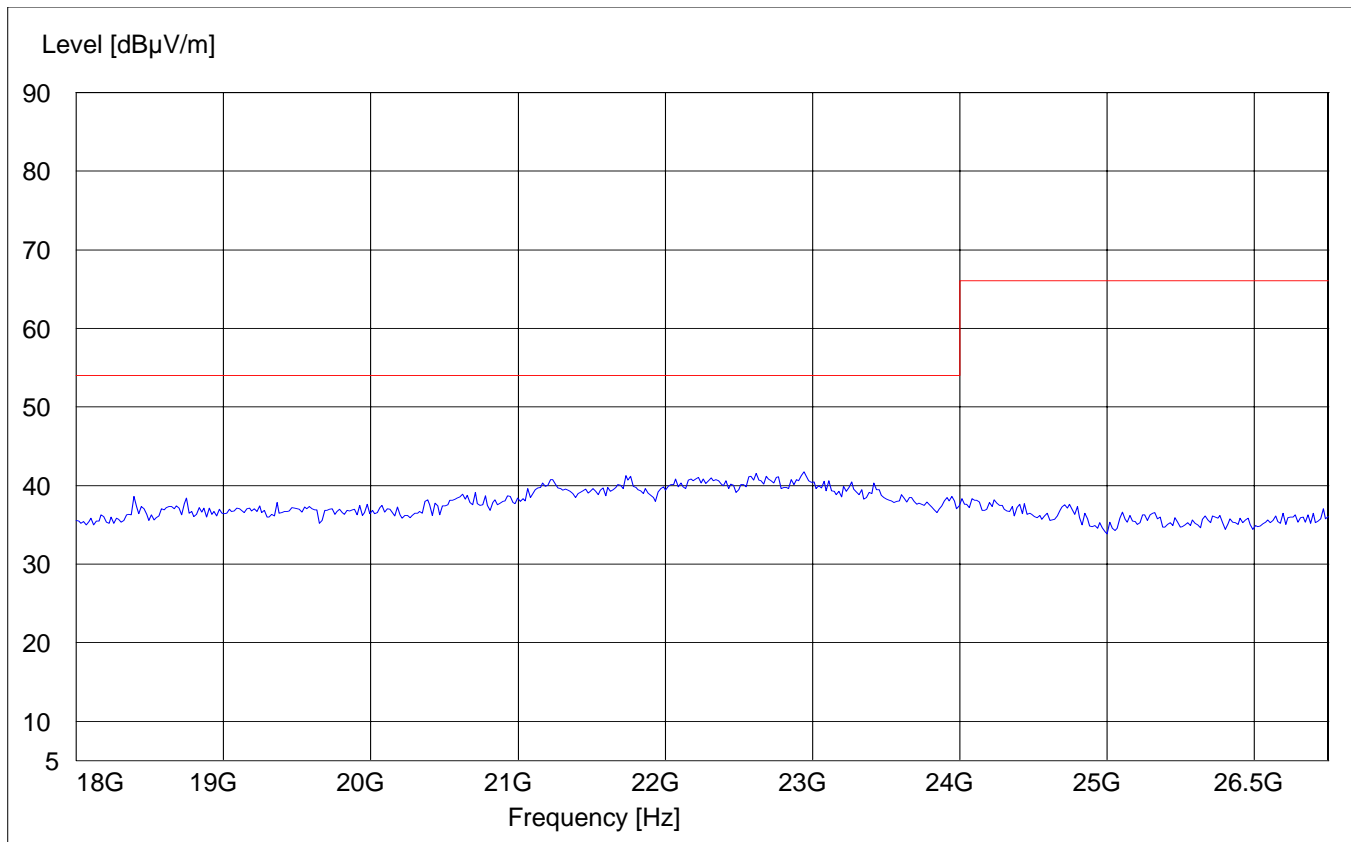

**EMISSION LIMITATIONS - Radiated (Transmitter)**

§ 15.247 (d)


**26.5GHz – 40GHz**

Antenna: Horizontal  
EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low & high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
26.5GHz	40 GHz	MaxPeak	Coupled	1MHz		3160-10 horn

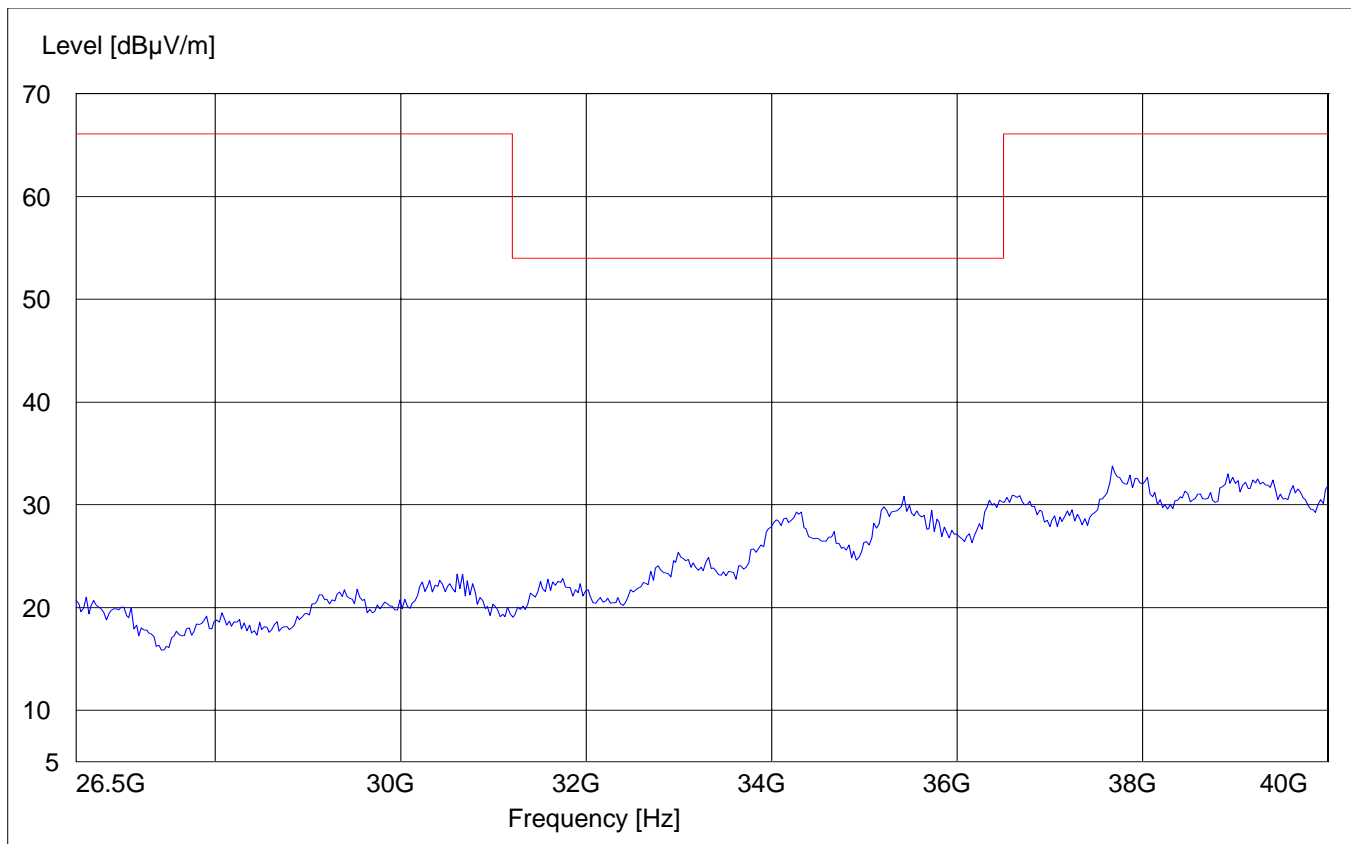

**CONDUCTED EMISSIONS**

§ 15.107/207

Measured with AC/DC power adapter

SWEEP TABLE: "55022 cond"

Short Description:		EN 55022 for 150KHz-30MHz			
Start	Stop	Detector	Meas	IF	Transducer
Frequency	Frequency		Time	Bandw.	
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None


Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

**Limit**

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz

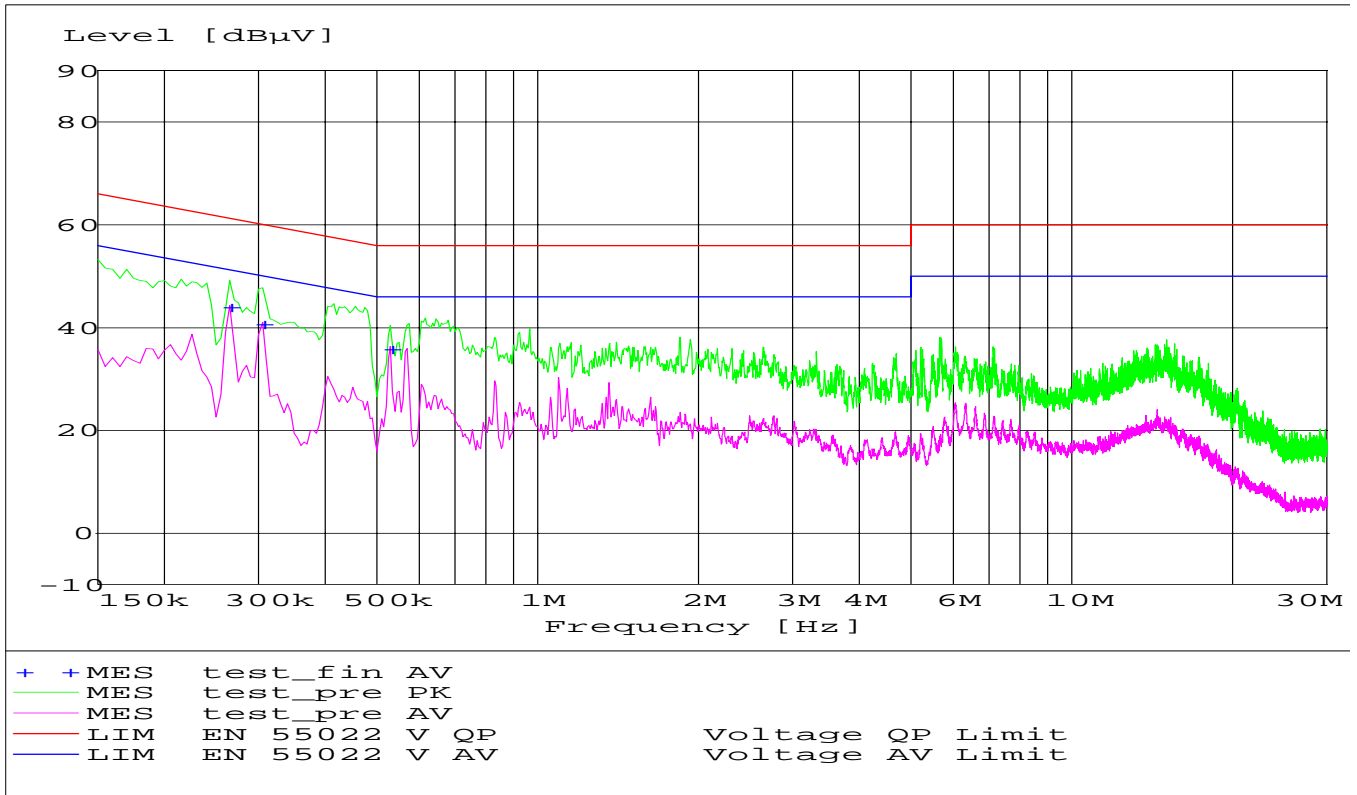

**RECEIVER SPURIOUS RADIATION****§ 15.209****Limits**

<b>Frequency (MHz)</b>	<b>Field strength (<math>\mu\text{V/m}</math>)</b>	<b>Measurement distance (m)</b>
<b>0.009 - 0.490</b>	<b>2400/F (kHz)</b>	<b>300</b>
<b>0.490 - 1.705</b>	<b>24000/F (kHz)</b>	<b>30</b>
<b>1.705 - 30.0</b>	<b>30</b>	<b>30</b>
<b>30 - 88</b>	<b>100</b>	<b>3</b>
<b>88 - 216</b>	<b>150</b>	<b>3</b>
<b>216 - 960</b>	<b>200</b>	<b>3</b>
<b>above 960</b>	<b>500</b>	<b>3</b>

**NOTE:**

The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40 GHz very short cable connections to the antenna was used to minimize the noise level.


**RECEIVER SPURIOUS RADIATION**  
**30MHz – 1GHz**

§ 15.209

**Antenna:** Vertical  
**EUT plane:** Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 30-1G"

Start	Stop	Detector	Meas. Time	RBW	VBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz		3141-#1186

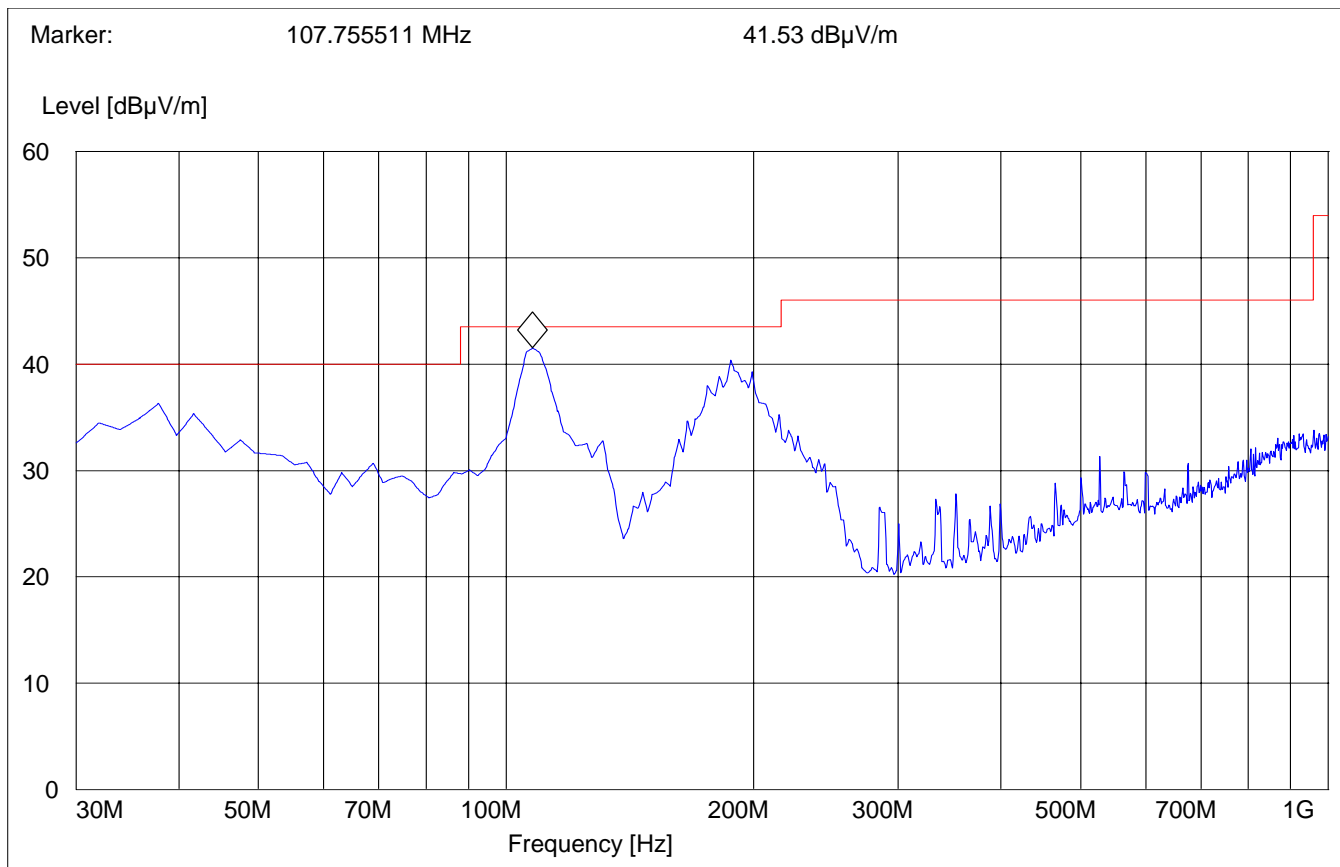




**RECEIVER SPURIOUS RADIATION**  
**30MHz – 1GHz**

§ 15.209

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 30-1G"

Start	Stop	Detector	Meas. Time	RBW	VBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz		3141-#1186

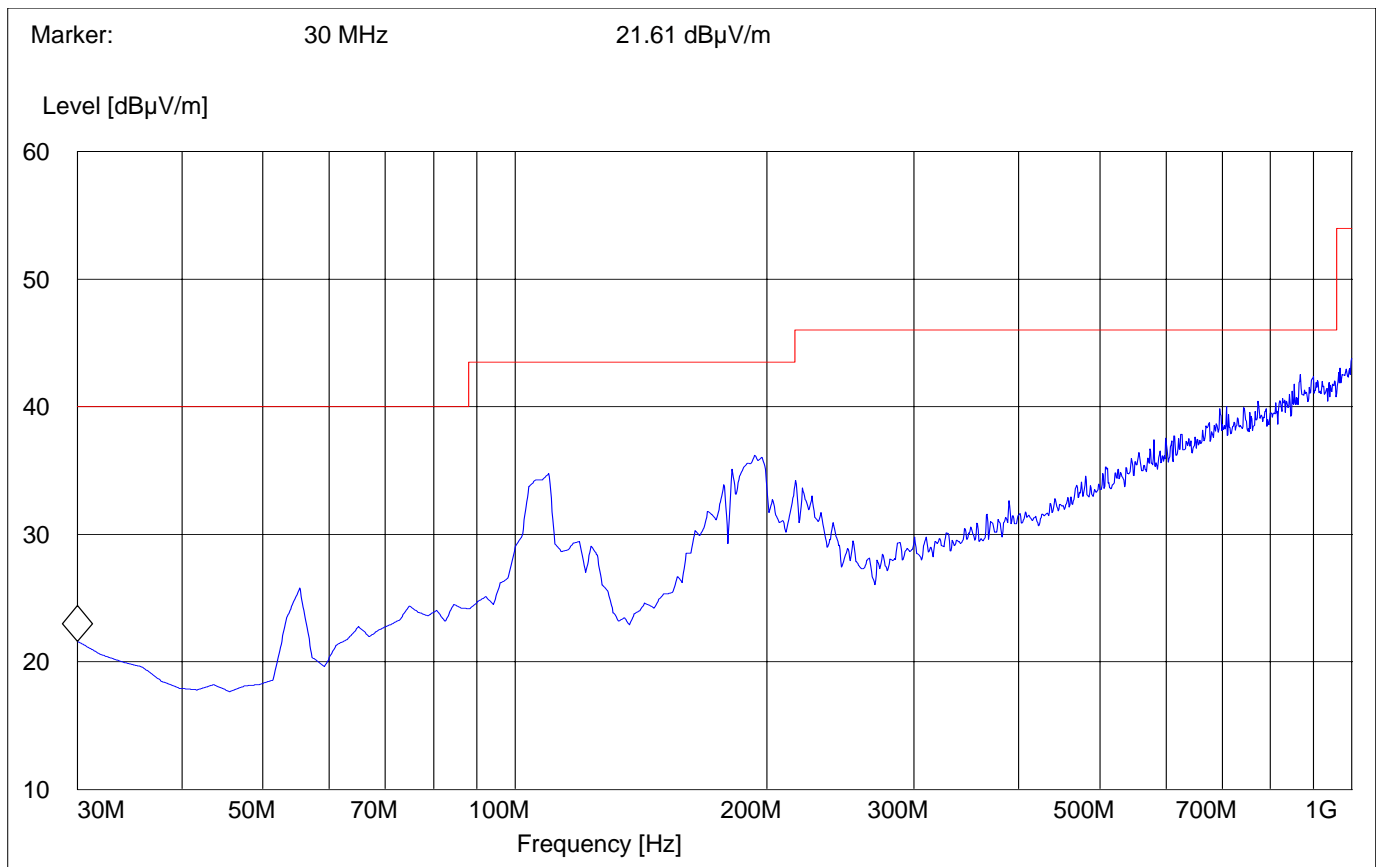

RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 7GHz

Average

Antenna:

Horizontal


EUT plane:

Horizontal with screen vertical @ 90°

SWEEP TABLE:

"WLAN Spuri hi 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

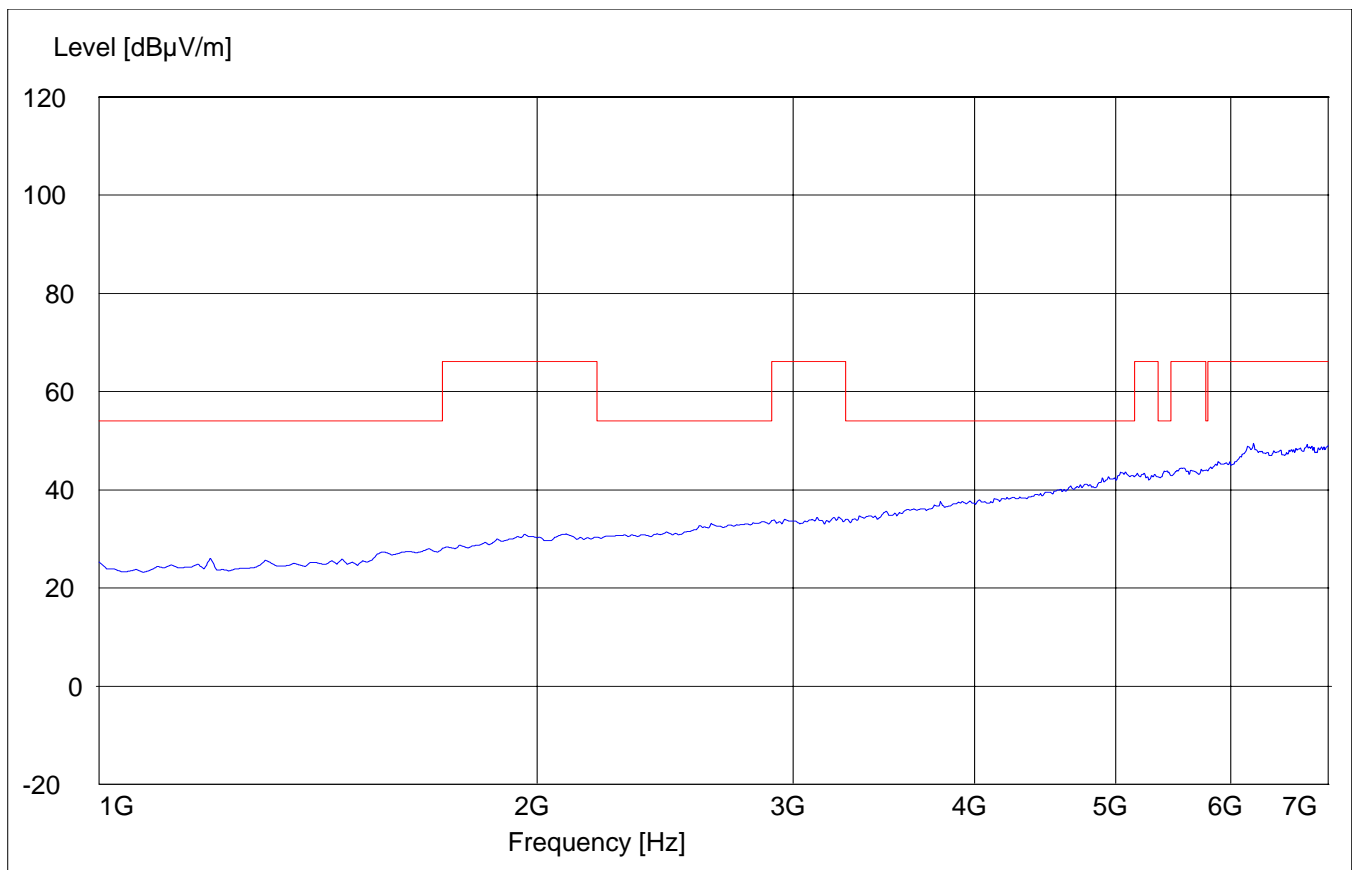


**RECEIVER SPURIOUS RADIATION**  
**7GHz – 18GHz**

§ 15.209

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 7-18G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
7.0 GHz	18 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

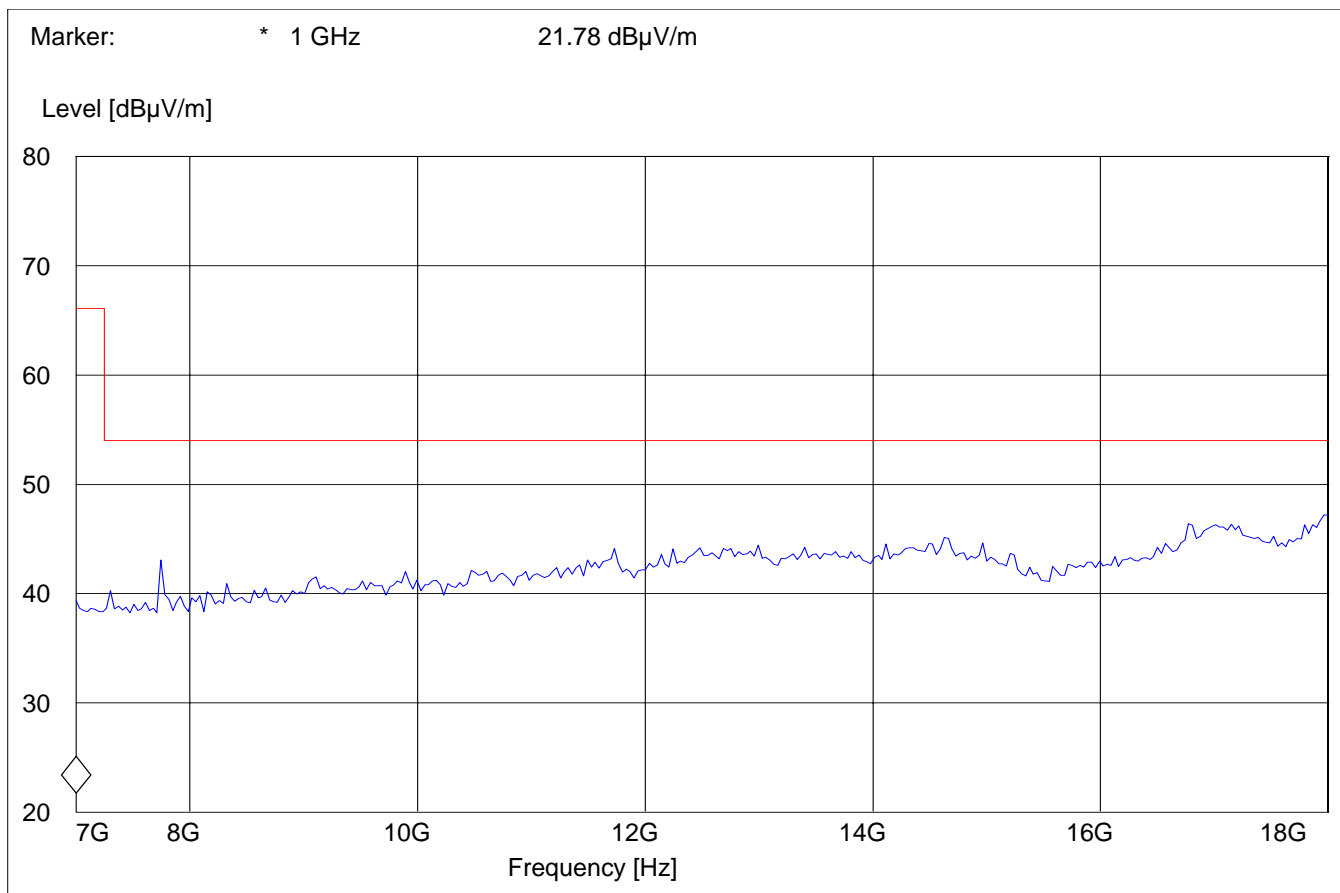


**RECEIVER SPURIOUS RADIATION**  
**18GHz – 26.5GHz**

§ 15.209

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 18-26.5G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

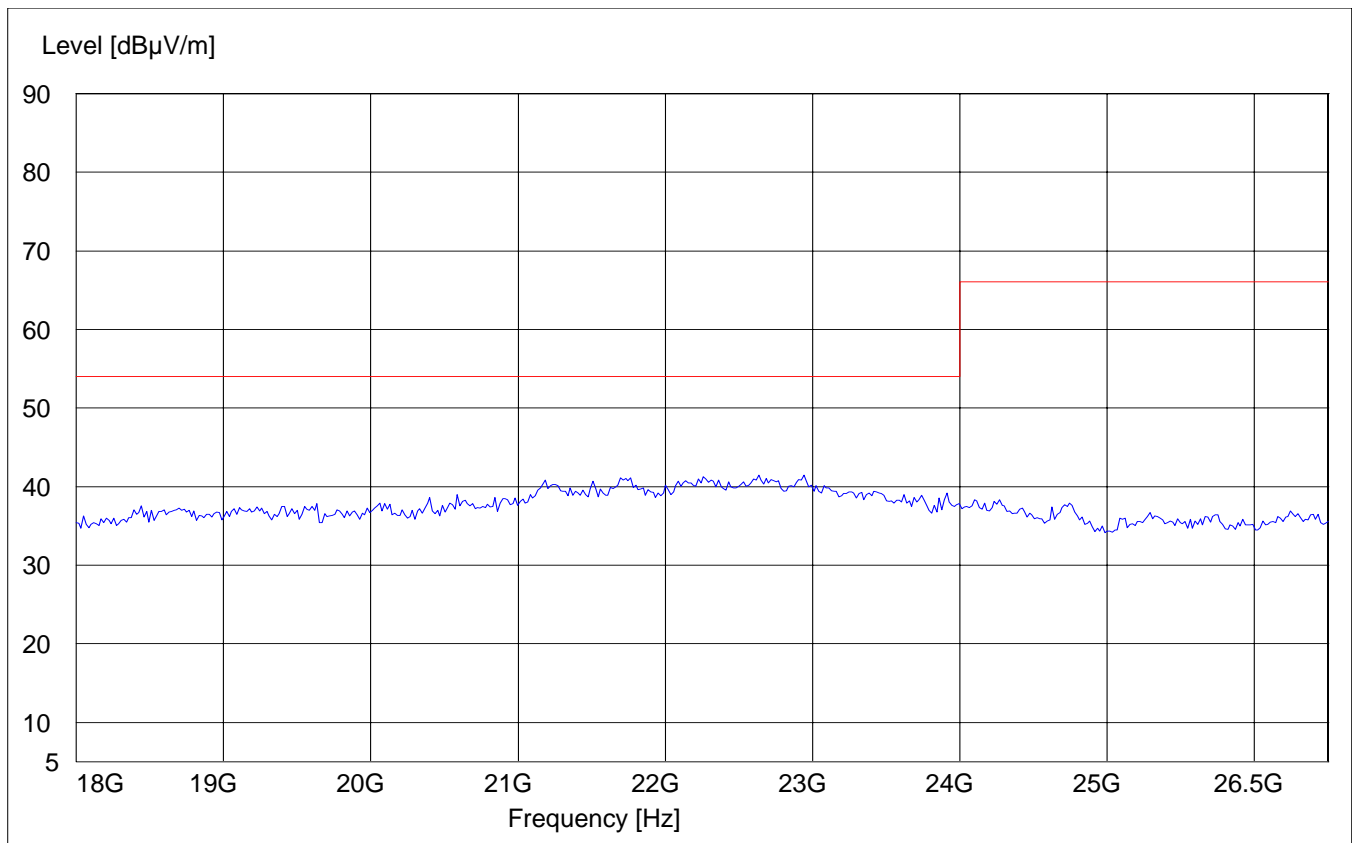


**RECEIVER SPURIOUS RADIATION**  
**26.5GHz – 40GHz**

§ 15.209

**Antenna:** Horizontal  
**EUT plane:** Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 26.5-40G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
26.5 GHz	40 GHz	MaxPeak	Coupled	1 MHz	3160-10 horn

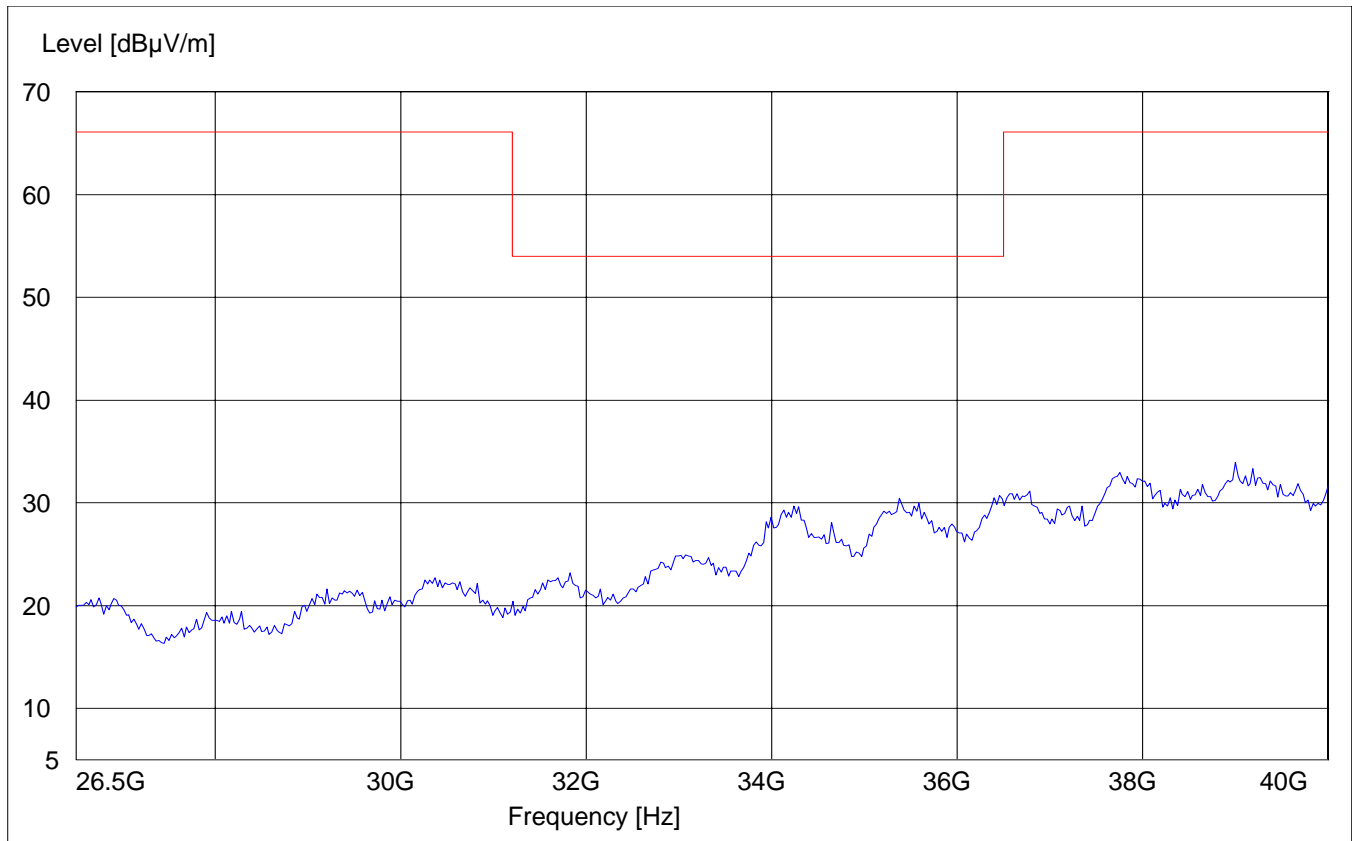

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

<b>No</b>	<b>Instrument/Ancillary</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Serial No.</b>
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
<b>03</b>	Biconilog Antenna	3141	EMCO	0005-1186
<b>04</b>	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
<b>05</b>	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
<b>06</b>	2-3GHz Band reject filter	BRM50701	Microtronics	6
<b>07</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
<b>08</b>	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
<b>09</b>	Pre-Amplifier	JS4-00102600	Miteq	00616

**BLOCK DIAGRAMS**  
**Radiated Testing**

**ANECHOIC CHAMBER**

