




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/28/2005 11:34:44 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BRCM94318MPG	Relative Permittivity:	51.21
Relative Humidity:	50%	Conductivity:	1.923
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	21.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-159.00 mm
Antenna Configuration:	integral	Max E Field:	18.09 V/m
Test Frequency:	2437MHz	SAR 1g:	0.481 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.236 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.123 W/kg
Type of Modulation:		SAR End:	0.123 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

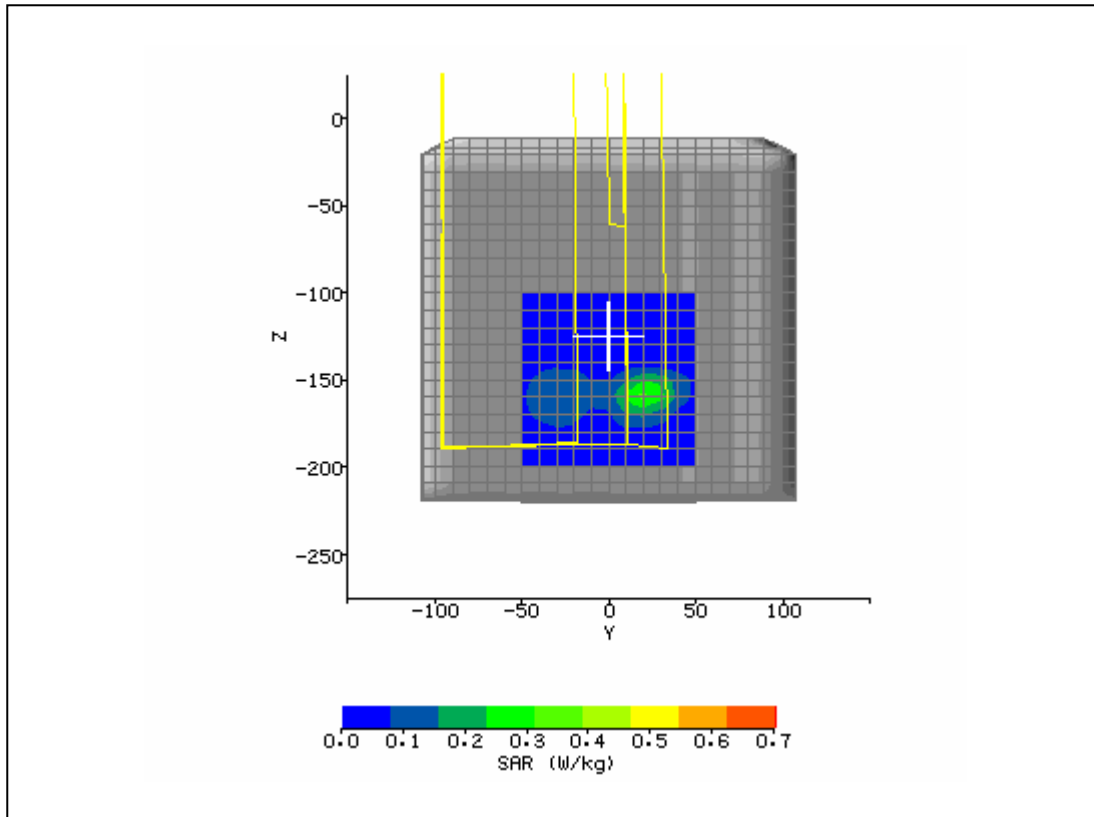

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/28/2005 11:03:02 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BRCM94318MPG	Relative Permittivity:	51.21
Relative Humidity:	50%	Conductivity:	1.923
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-136.00 mm
Antenna Configuration:	integral	Max E Field:	13.57 V/m
Test Frequency:	2437MHz	SAR 1g:	0.262 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.136 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.066 W/kg
Type of Modulation:		SAR End:	0.066 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

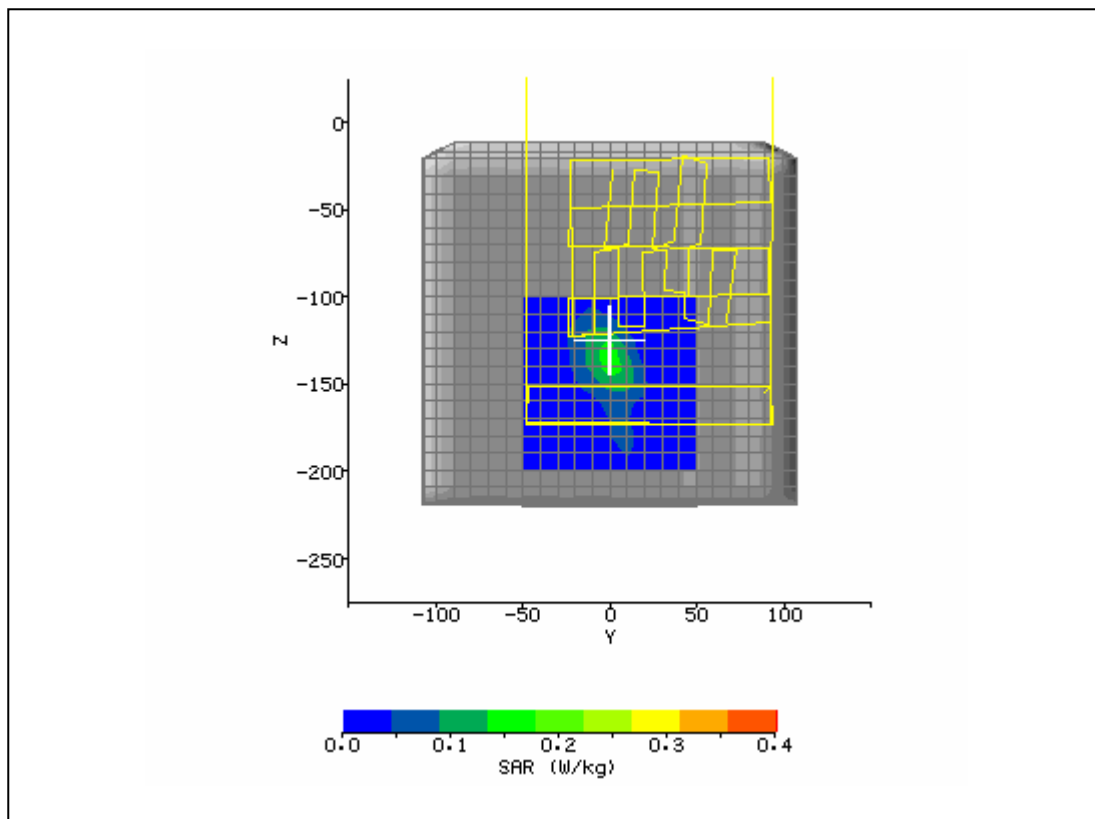

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/28/2005 12:05:06 PM	DUT Battery Model/No:	
Filename:	byst2437_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BRCM94318MPG	Relative Permittivity:	51.12
Relative Humidity:	50%	Conductivity:	1.899
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	22.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-158.00 mm
Antenna Configuration:	integral	Max E Field:	19.21 V/m
Test Frequency:	2412MHz	SAR 1g:	0.521 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.252 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.131 W/kg
Type of Modulation:		SAR End:	0.131 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

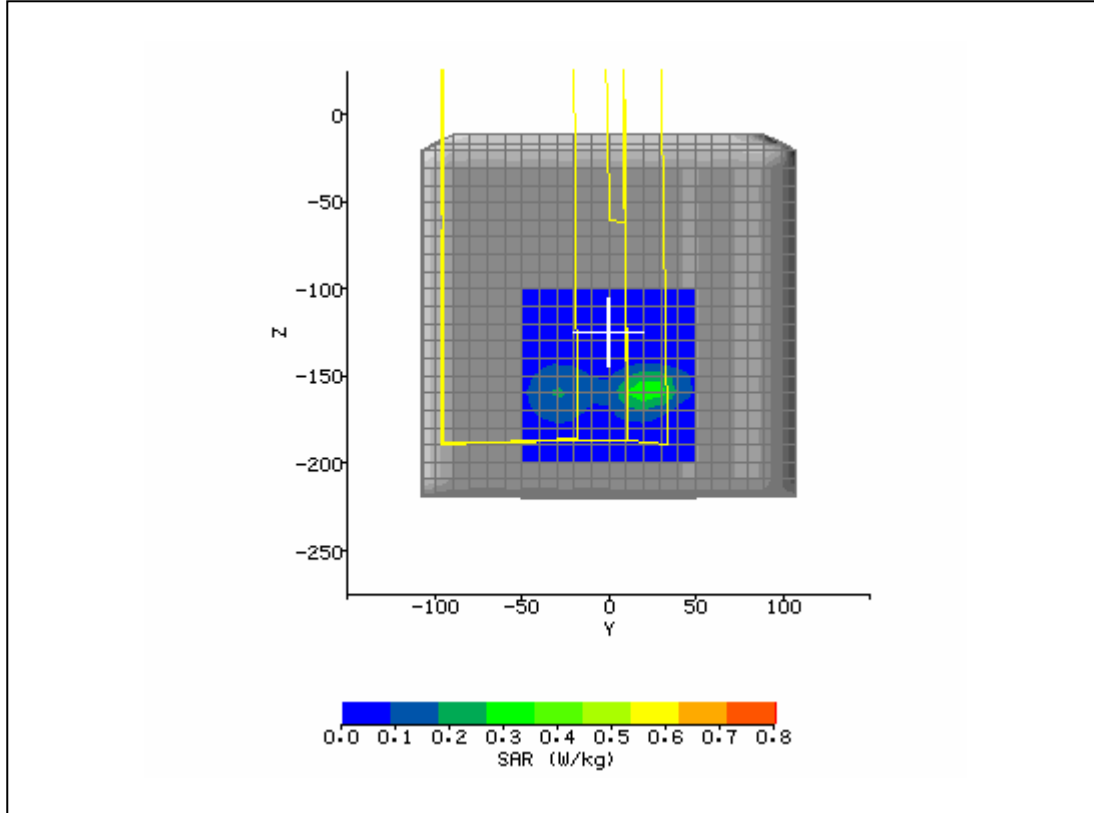

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/28/2005 12:35:30 PM	DUT Battery Model/No:	
Filename:	byst2412_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BRCM94318MPG	Relative Permittivity:	51.19
Relative Humidity:	50%	Conductivity:	1.952
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	22.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-159.00 mm
Antenna Configuration:	integral	Max E Field:	18.78 V/m
Test Frequency:	2462MHz	SAR 1g:	0.528 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.255 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.121 W/kg
Type of Modulation:		SAR End:	0.126 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.18 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

