




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/9/2005 9:56:38 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	50.99
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.904
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-34.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-141.00 mm
<b>Antenna Configuration:</b>	main normal configuration	<b>Max E Field:</b>	6.87 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.068 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.039 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.018 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.018 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

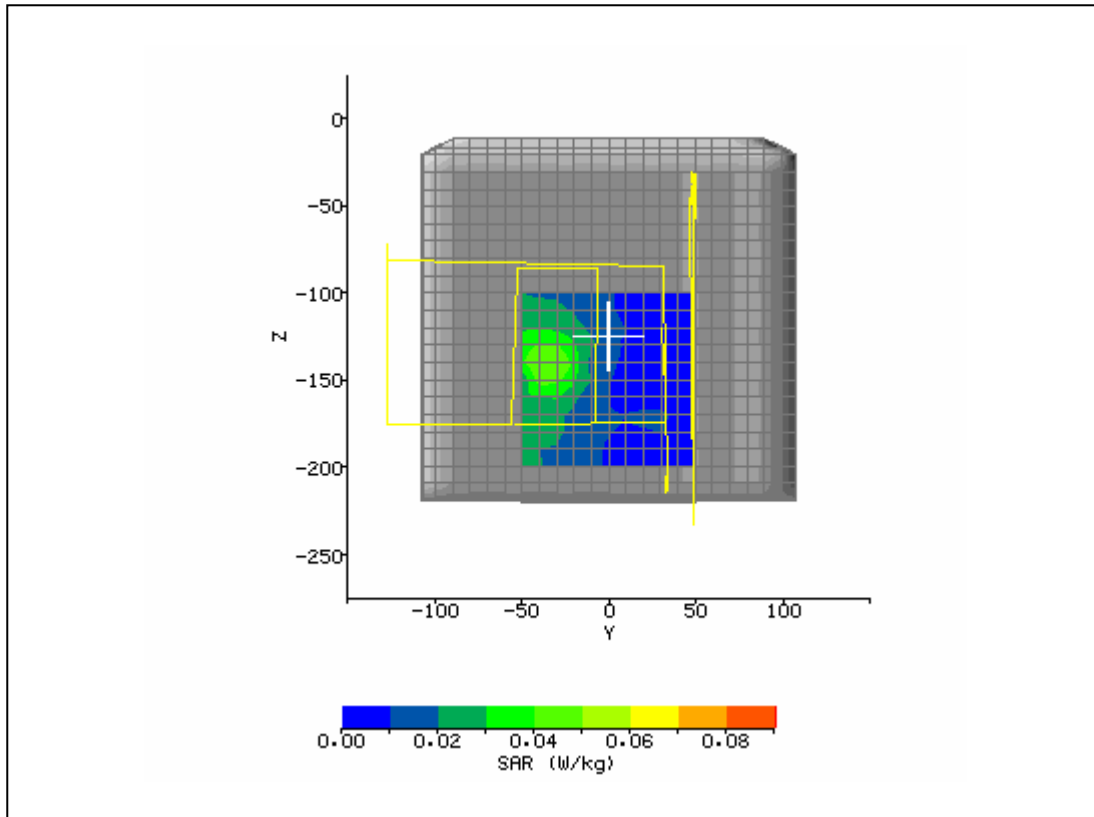


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/9/2005 11:19:41 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	normlap6_2mbs_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	50.99
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.904
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-2.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-122.00 mm
<b>Antenna Configuration:</b>	main tablet configuration	<b>Max E Field:</b>	5.38 V/m
<b>Test Frequency:</b>	2437 1Mb/SMHz	<b>SAR 1g:</b>	0.045 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.026 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.018 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.018 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

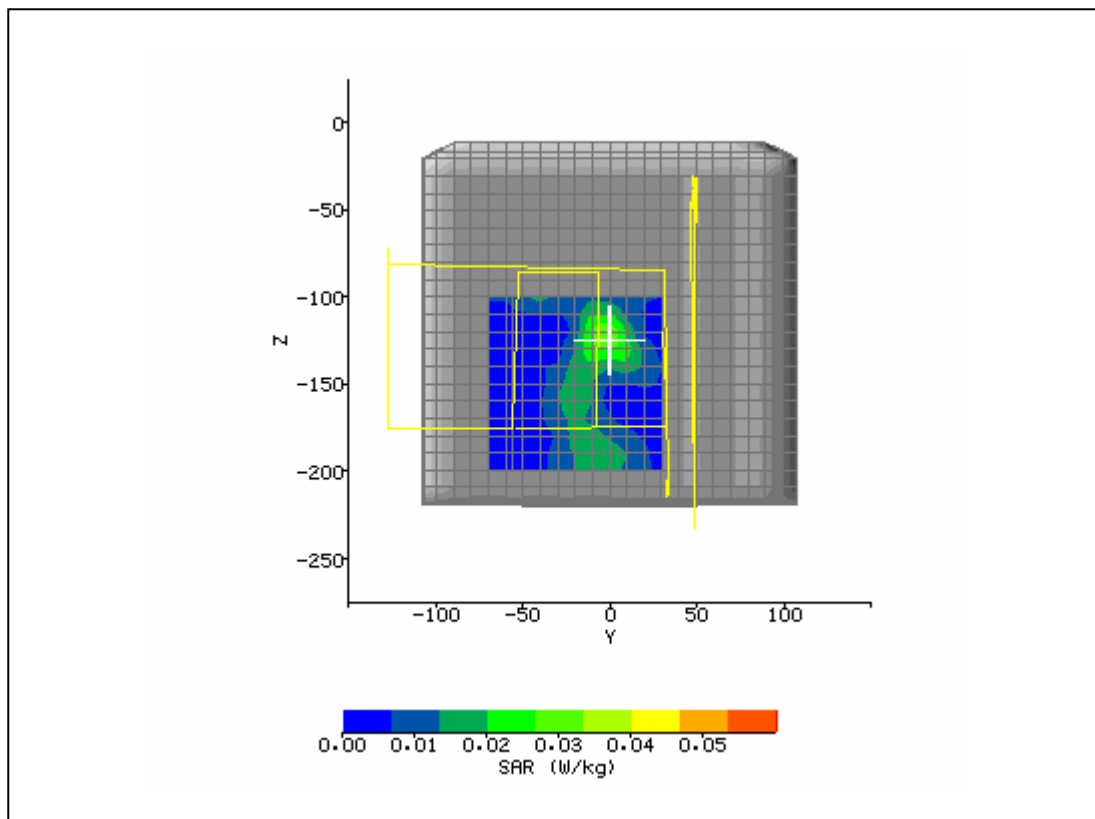

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/9/2005 12:06:57 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main6lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	50.99
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.904
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	13.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-184.00 mm
<b>Antenna Configuration:</b>	Aux tablet configuration	<b>Max E Field:</b>	7.26 V/m
<b>Test Frequency:</b>	2437 1Mb/SMHz	<b>SAR 1g:</b>	0.077 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.040 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.022 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.023 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.15 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

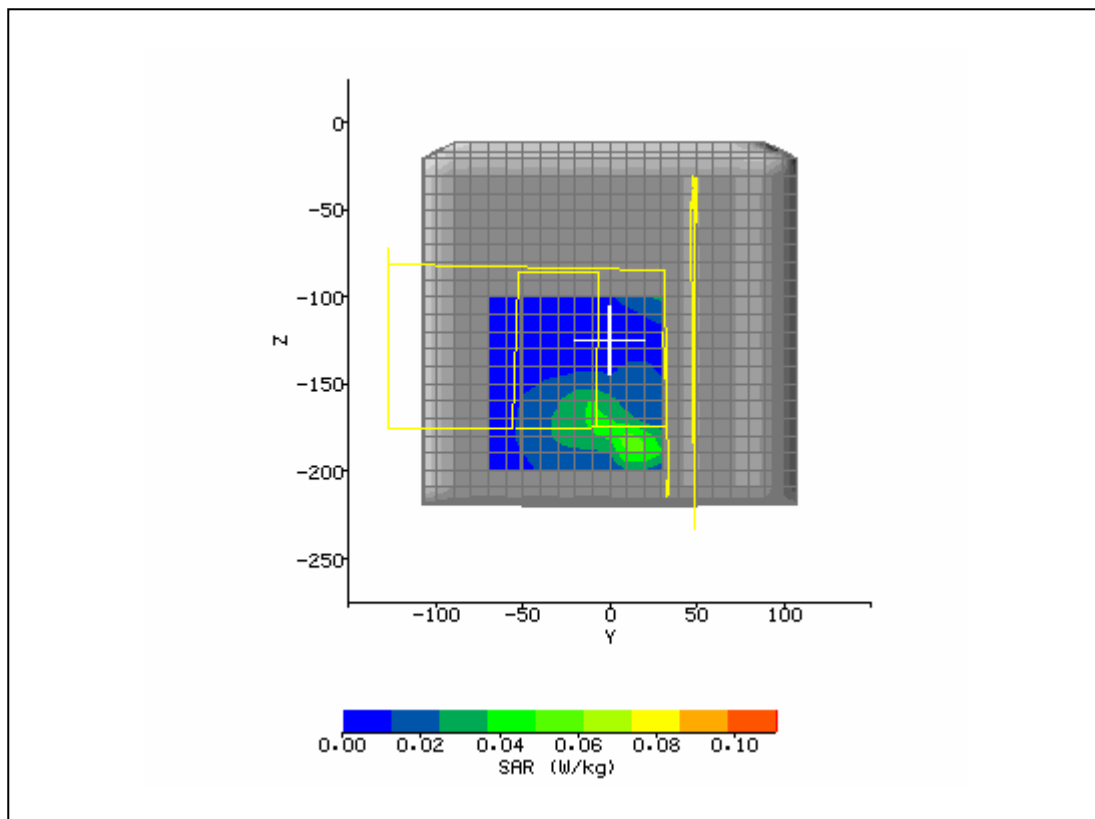

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/9/2005 12:52:22 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_aux6lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	51.01
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.862
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	3.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-186.00 mm
<b>Antenna Configuration:</b>	Aux tablet configuration	<b>Max E Field:</b>	7.36 V/m
<b>Test Frequency:</b>	2412 1Mb/SMHz	<b>SAR 1g:</b>	0.075 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.040 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.023 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.023 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

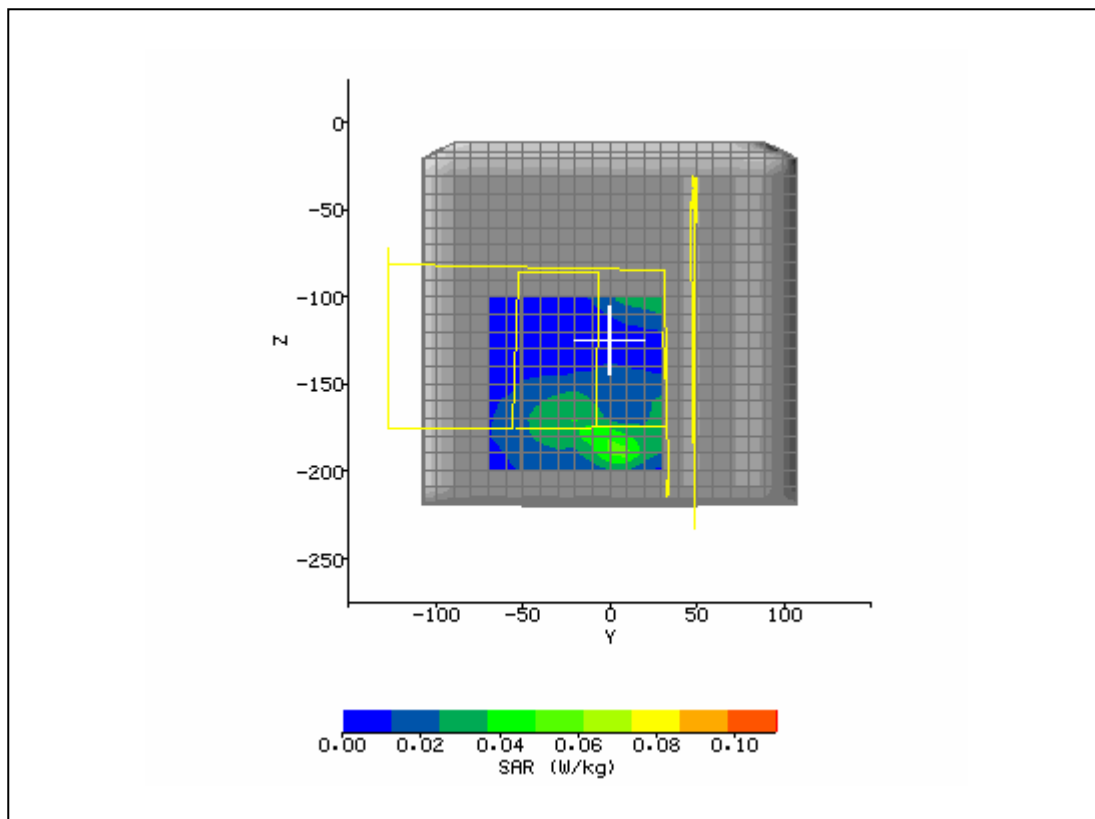

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/9/2005 1:24:49 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_aux1lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	50.85
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.941
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-182.00 mm
<b>Antenna Configuration:</b>	Aux tablet configuration	<b>Max E Field:</b>	7.14 V/m
<b>Test Frequency:</b>	2462 1Mb/SMHz	<b>SAR 1g:</b>	0.077 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.041 W/kg
<b>Conversion Factors:</b>	0.705 / 0.705 / 0.705	<b>SAR Start:</b>	0.022 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.022 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.13 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

