




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 3:12:11 PM	DUT Battery Model/No:	
Filename:	byst5320_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	47.71
Relative Humidity:	50%	Conductivity:	5.459
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	34.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-163.00 mm
Antenna Configuration:	integral	Max E Field:	20.23 V/m
Test Frequency:	5260MHz	SAR 1g:	1.414 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	1.463 W/kg
Type of Modulation:		SAR End:	1.463 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

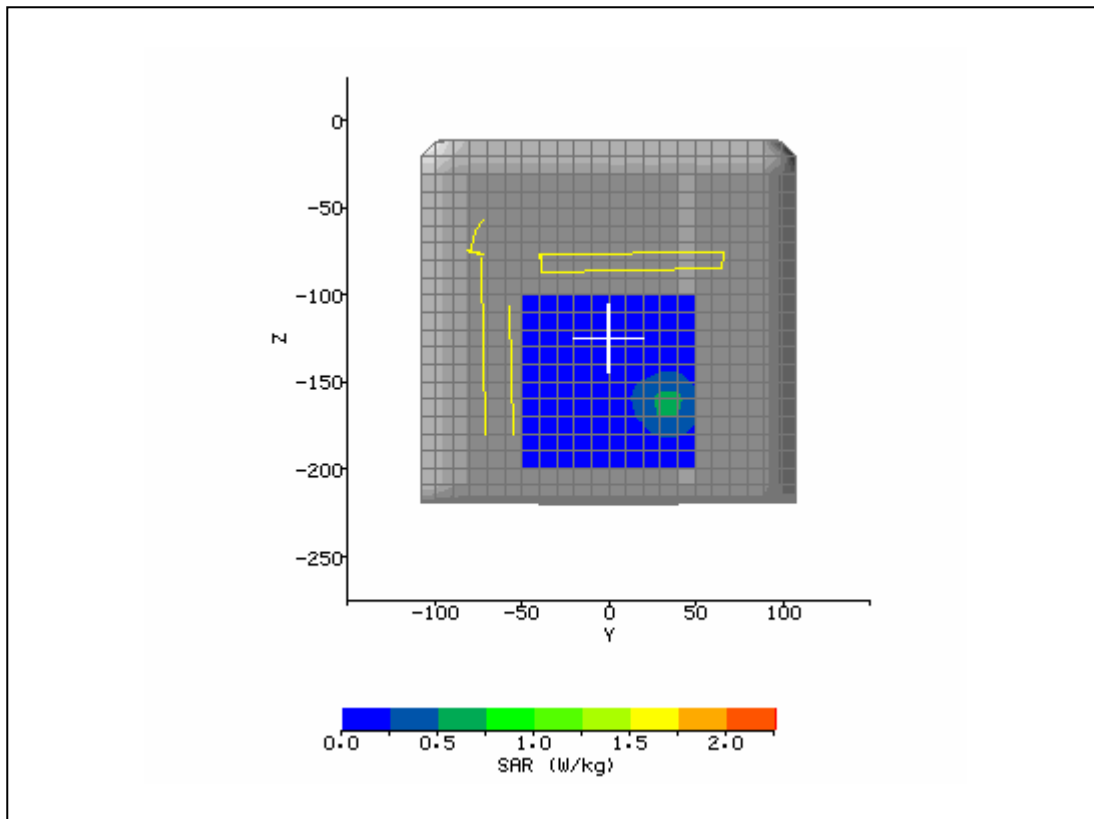


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 3:39:50 PM	DUT Battery Model/No:	
Filename:	lap5260_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	47.71
Relative Humidity:	50%	Conductivity:	5.459
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.67 mm
DUT Position:	lap	Max SAR Z-axis Location:	-141.00 mm
Antenna Configuration:	integral	Max E Field:	9.11 V/m
Test Frequency:	5260MHz	SAR 1g:	0.130 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.354 W/kg
Type of Modulation:		SAR End:	0.351 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.04 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

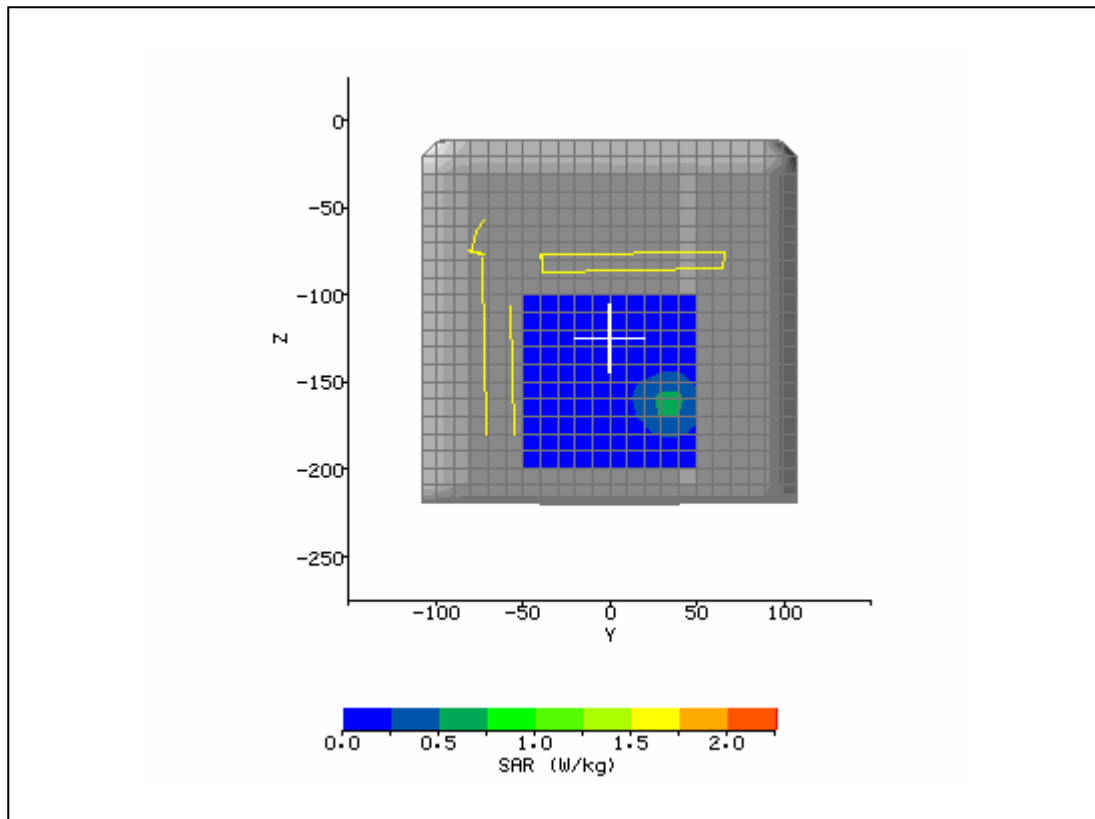


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 4:07:58 PM	DUT Battery Model/No:	
Filename:	lap5260_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	48.12
Relative Humidity:	50%	Conductivity:	5.399
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	39.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-160.00 mm
Antenna Configuration:	integral	Max E Field:	16.88 V/m
Test Frequency:	5180MHz	SAR 1g:	0.954 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.952 W/kg
Type of Modulation:		SAR End:	0.952 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

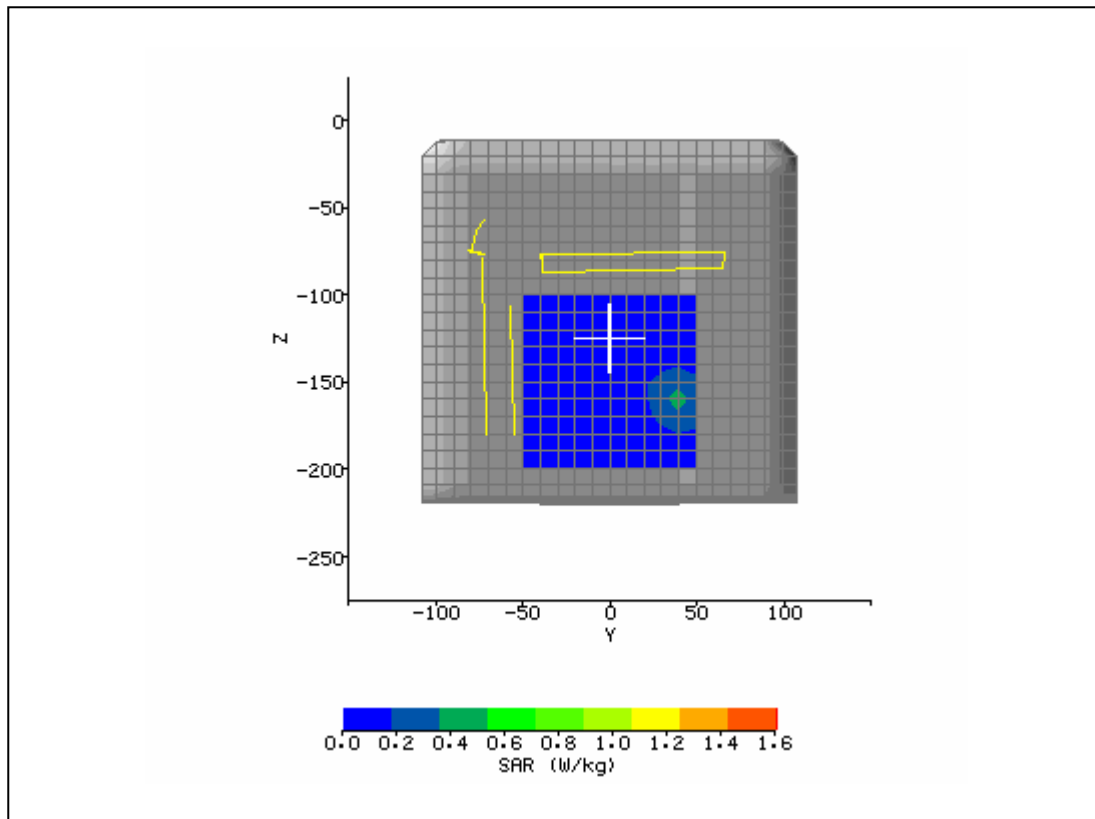


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/8/2005 10:47:35 AM	DUT Battery Model/No:	
Filename:	byst5320_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	47.63
Relative Humidity:	50%	Conductivity:	5.467
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	26.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-155.00 mm
Antenna Configuration:	integral	Max E Field:	17.11 V/m
Test Frequency:	5320MHz	SAR 1g:	1.086 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	1.554 W/kg
Type of Modulation:		SAR End:	1.554 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

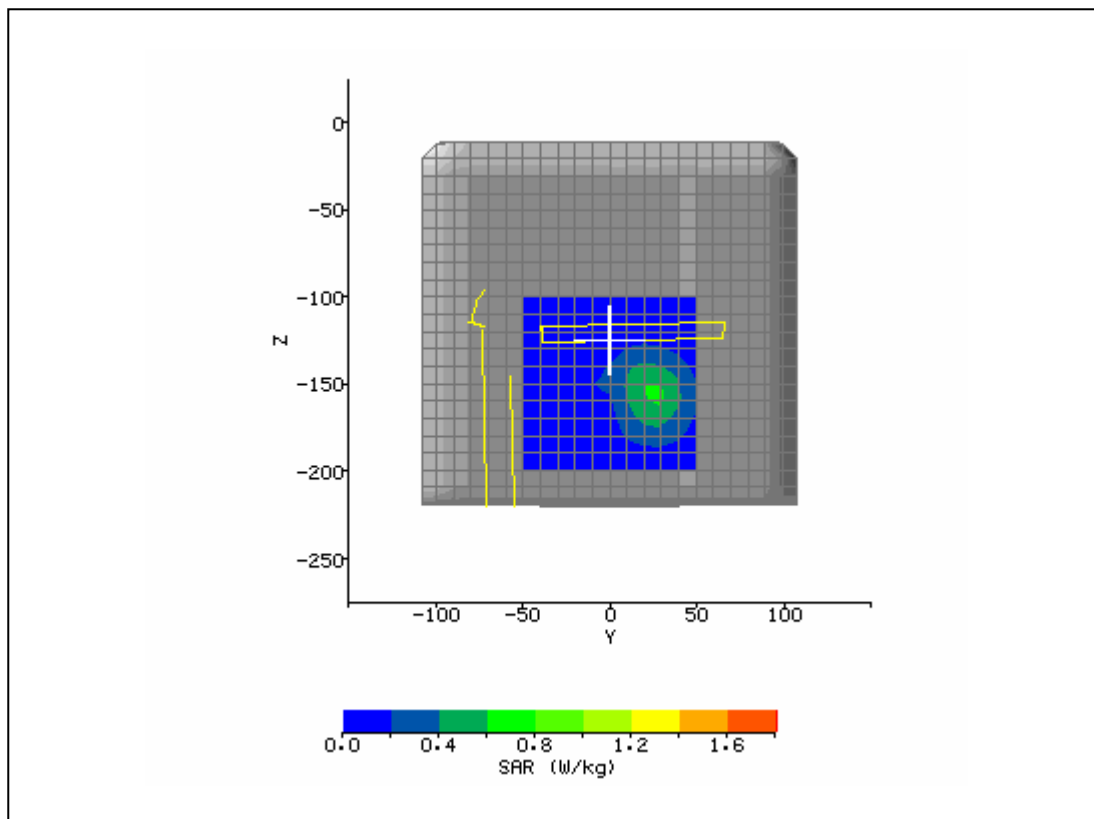


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/8/2005 11:43:41 AM	DUT Battery Model/No:	
Filename:	byst5805_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	46.97
Relative Humidity:	50%	Conductivity:	6.427
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	13.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-163.00 mm
Antenna Configuration:	integral	Max E Field:	20.55 V/m
Test Frequency:	5805MHz	SAR 1g:	1.336 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	1.696 W/kg
Type of Modulation:		SAR End:	1.707 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

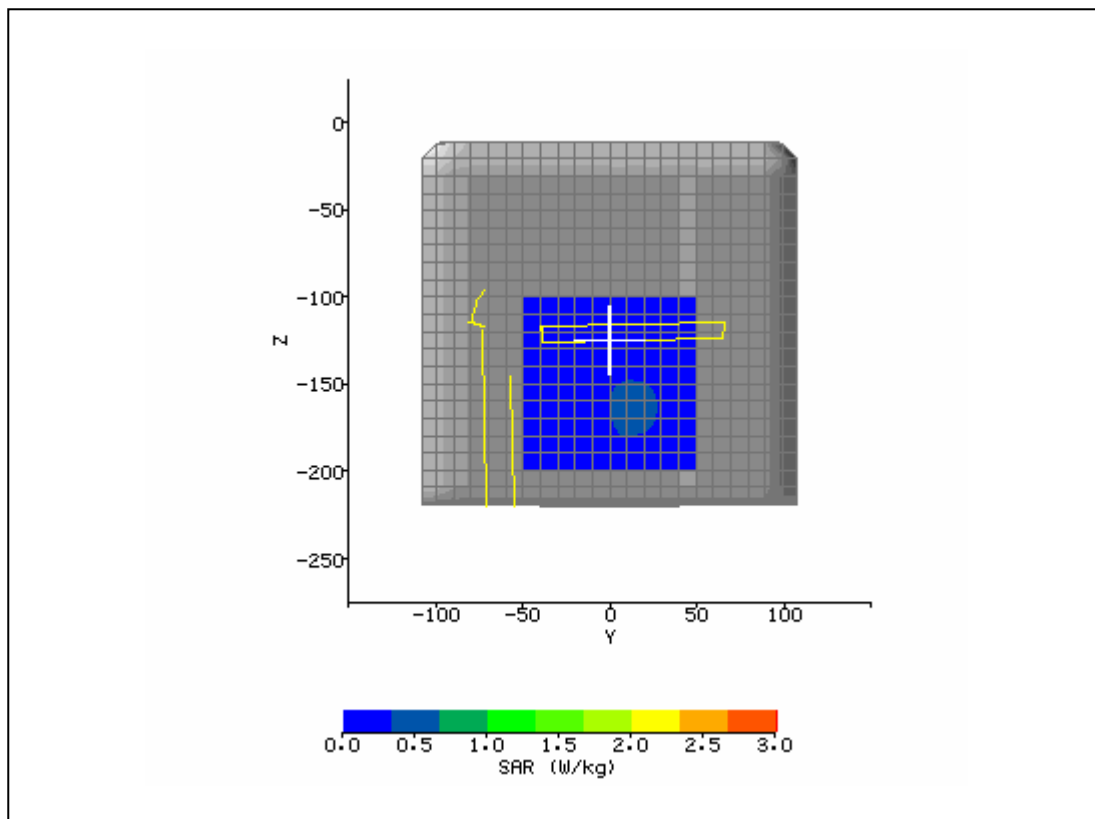

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/8/2005 12:10:49 PM	DUT Battery Model/No:	
Filename:	byst5805_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	46.97
Relative Humidity:	50%	Conductivity:	6.427
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-147.00 mm
Antenna Configuration:	integral	Max E Field:	12.51 V/m
Test Frequency:	5805MHz	SAR 1g:	0.259 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.977 W/kg
Type of Modulation:		SAR End:	0.977 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

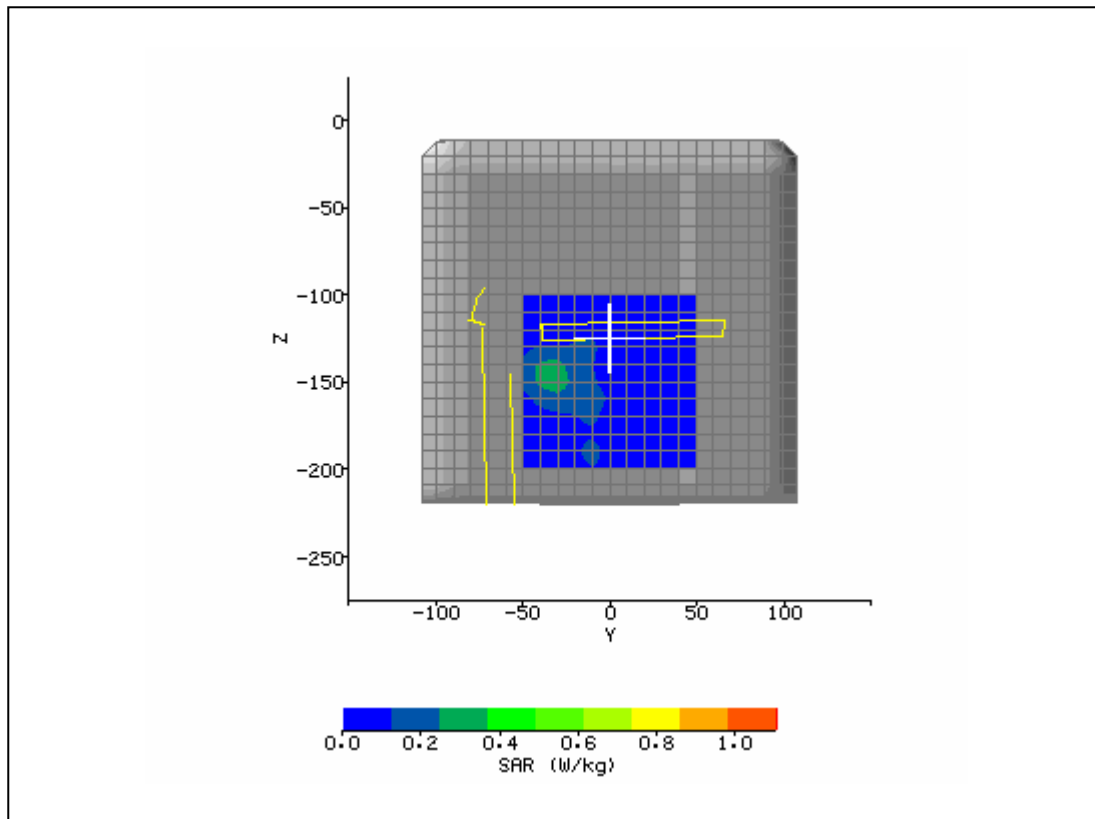

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/8/2005 1:39:27 PM	DUT Battery Model/No:	
Filename:	lap5805_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	47.41
Relative Humidity:	50%	Conductivity:	6.424
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-167.00 mm
Antenna Configuration:	integral	Max E Field:	20.75 V/m
Test Frequency:	5745MHz	SAR 1g:	1.254 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	1.951 W/kg
Type of Modulation:		SAR End:	1.951 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

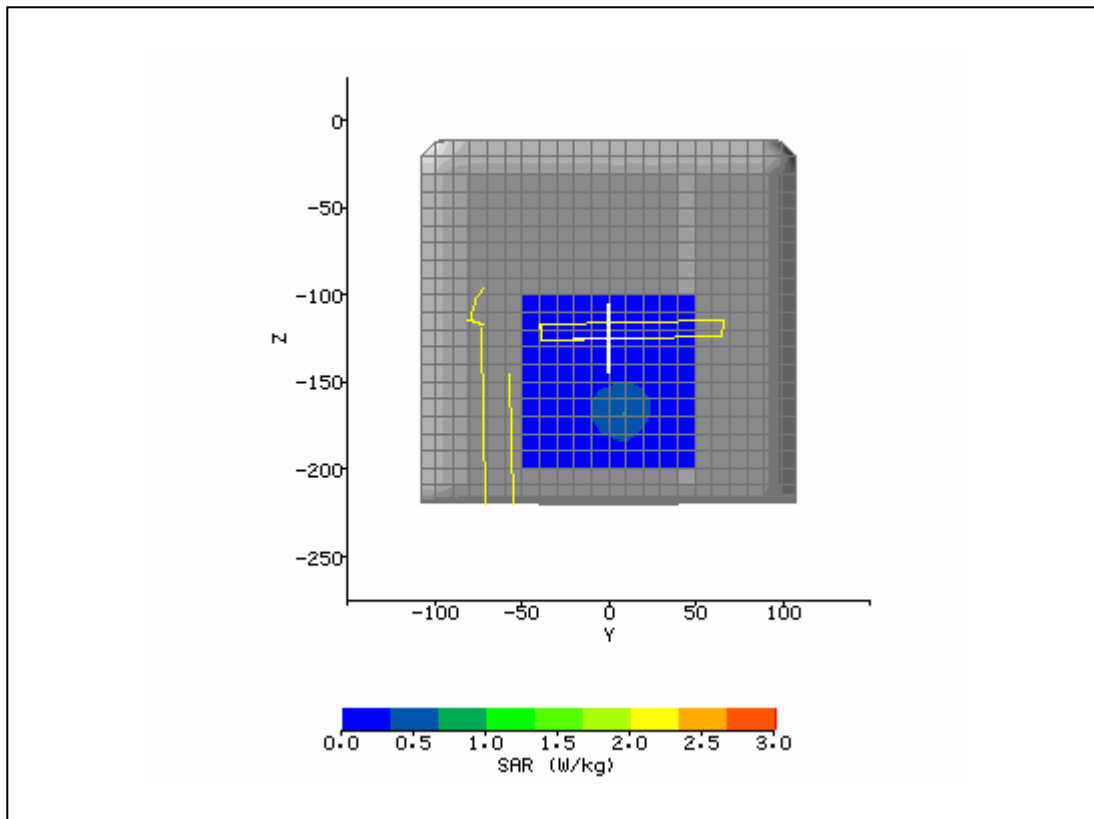

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/8/2005 2:16:17 PM	DUT Battery Model/No:	
Filename:	byst5745_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	46.91
Relative Humidity:	50%	Conductivity:	6.428
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	20.00 mm
DUT Position:	bystander 5mm	Max SAR Z-axis Location:	-166.00 mm
Antenna Configuration:	integral	Max E Field:	20.29 V/m
Test Frequency:	5825MHz	SAR 1g:	1.514 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.000 W/kg
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	1.752 W/kg
Type of Modulation:		SAR End:	1.752 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

