




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/15/2005 3:57:09 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main149lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Broadcom Bcm94318MPAGH	<b>Relative Permittivity:</b>	47.66
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.462
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-182.40 mm
<b>Antenna Configuration:</b>	Main normal configuration	<b>Max E Field:</b>	2.11 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.033 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.008 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

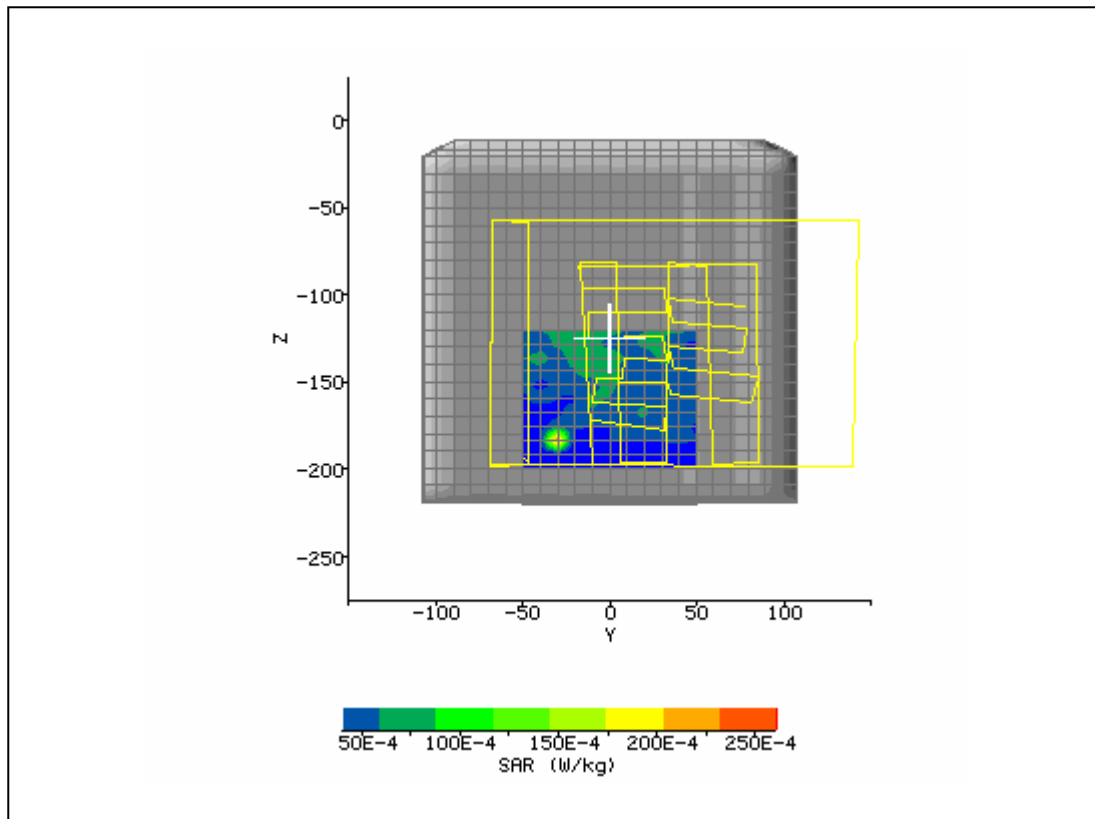


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/13/2005 11:42:45 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_Aux13lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	47.66
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.462
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-150.40 mm
<b>Antenna Configuration:</b>	Main tablet configuration	<b>Max E Field:</b>	4.20 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.090 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.058 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.058 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

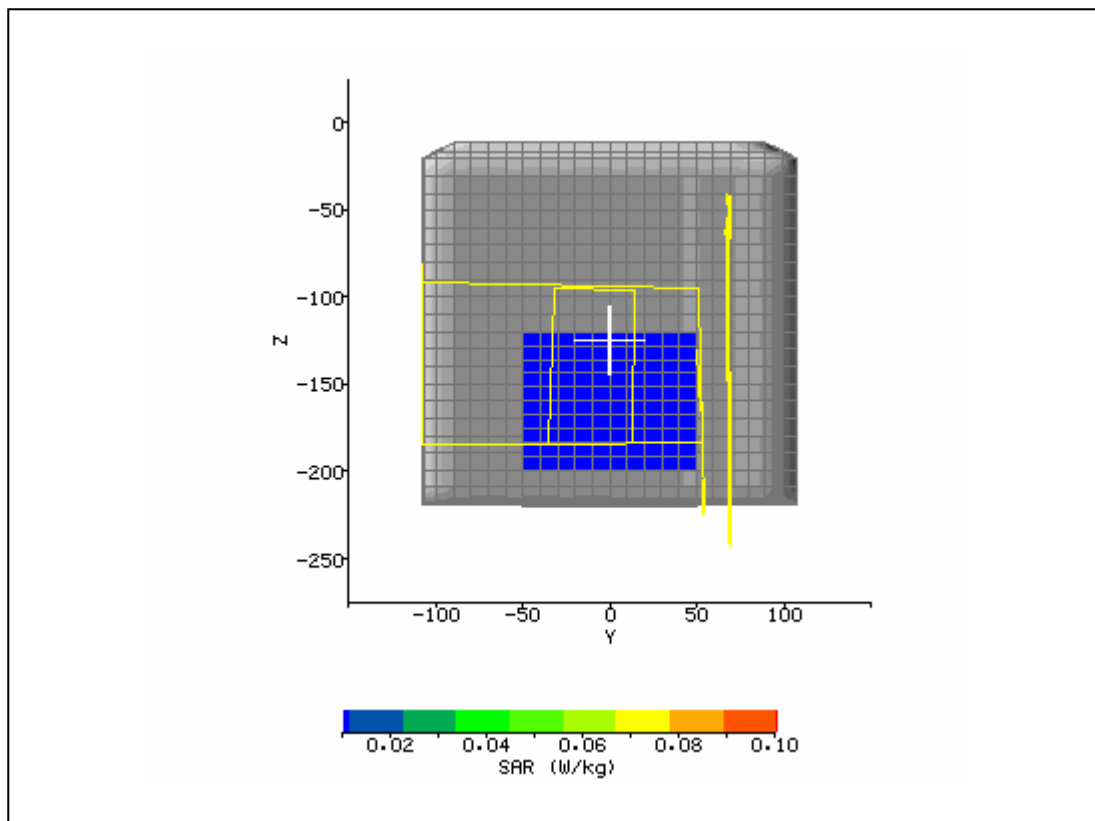


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/13/2005 12:57:12 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main52lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	47.66
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.462
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	1.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-120.00 mm
<b>Antenna Configuration:</b>	Aux tablet configuration	<b>Max E Field:</b>	2.05 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.028 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.012 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.012 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

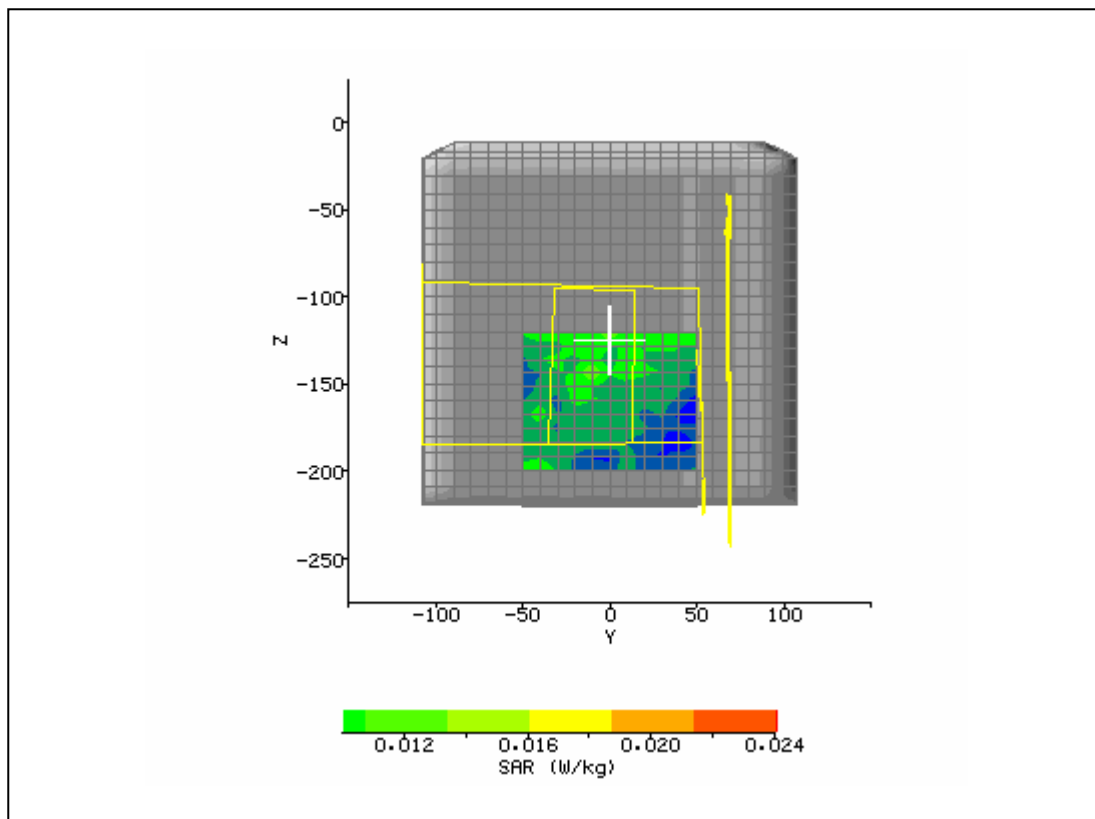


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/13/2005 3:43:25 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_aux52lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.393
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-147.20 mm
<b>Antenna Configuration:</b>	Main tablet configuration	<b>Max E Field:</b>	4.34 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.090 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.071 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.071 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

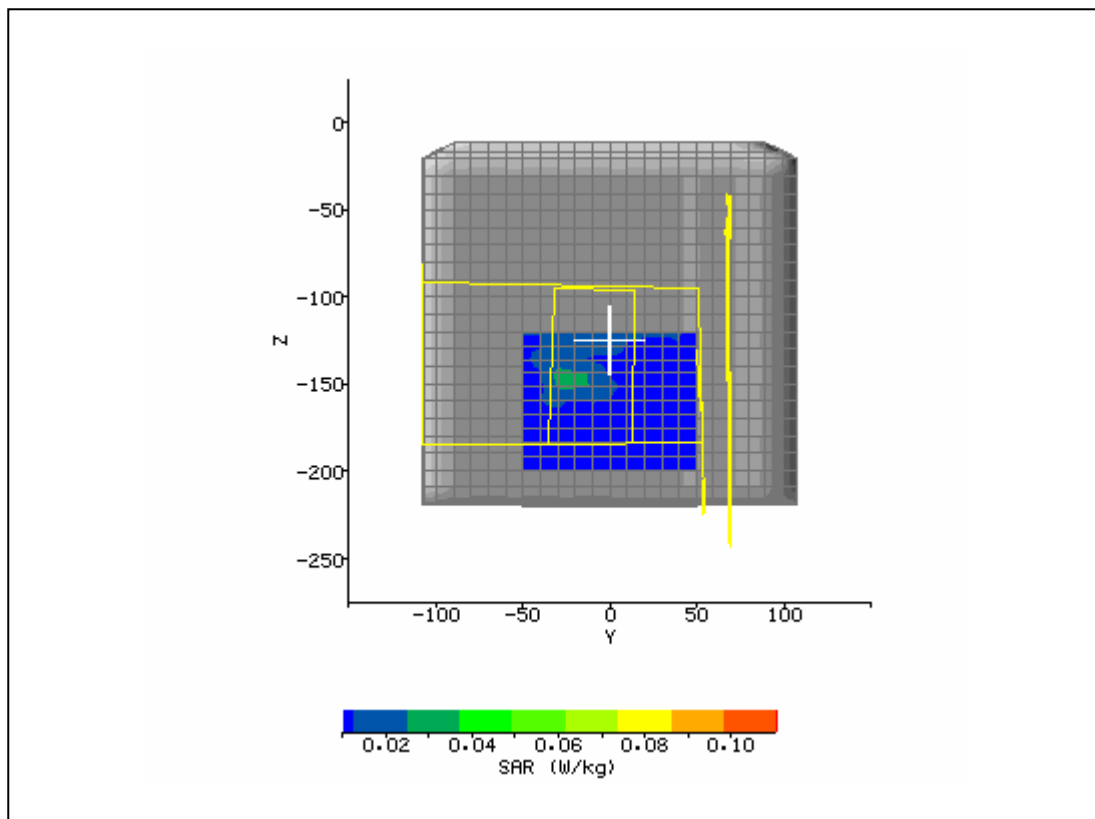


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/13/2005 4:12:39 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main36lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Broadcom	<b>Relative Permittivity:</b>	47.70
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	5.470
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-4.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Z-axis Location:</b>	-148.80 mm
<b>Antenna Configuration:</b>	Main tablet configuration	<b>Max E Field:</b>	4.08 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.077 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.840 / 0.840 / 0.840	<b>SAR Start:</b>	0.073 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.073 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

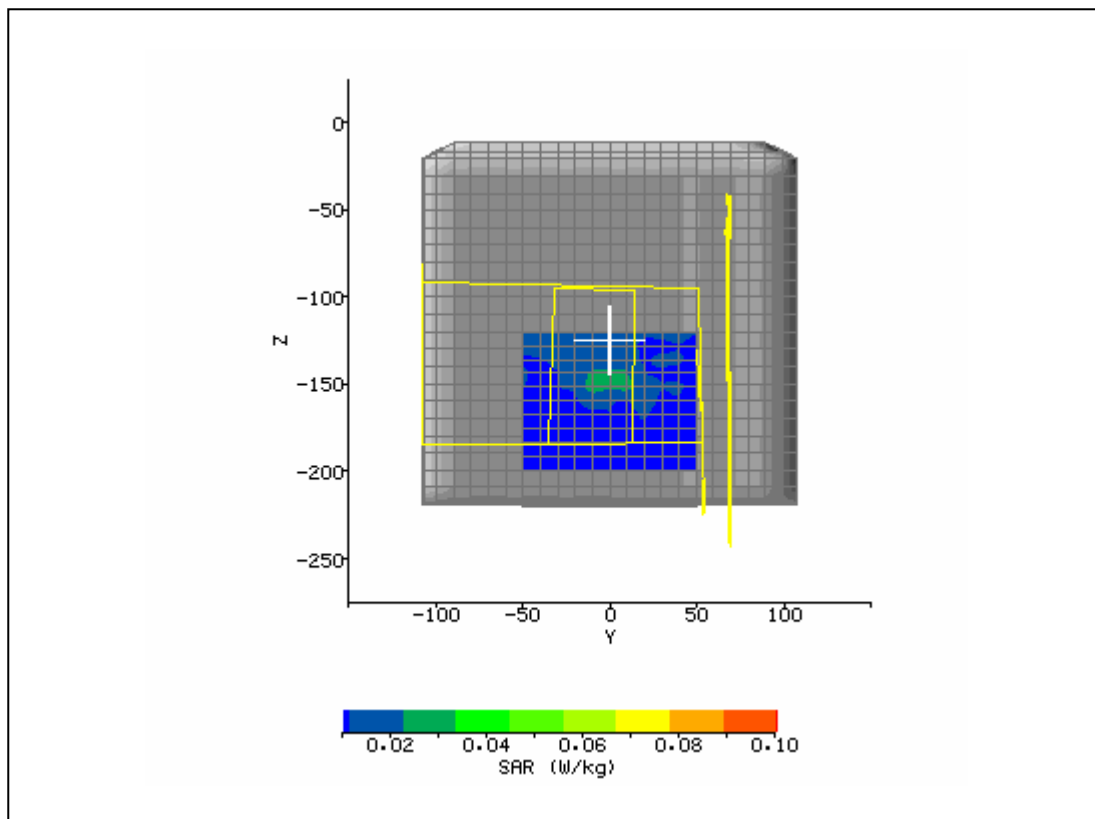


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/15/2005 8:21:33 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Broadcom Bcm94318MPAGH	<b>Relative Permittivity:</b>	47.01
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	6.431
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	12.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-188.80 mm
<b>Antenna Configuration:</b>	main normal configuration	<b>Max E Field:</b>	3.50 V/m
<b>Test Frequency:</b>	5765MHz	<b>SAR 1g:</b>	0.078 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.750 / 0.750 / 0.750	<b>SAR Start:</b>	0.057 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.055 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.15 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

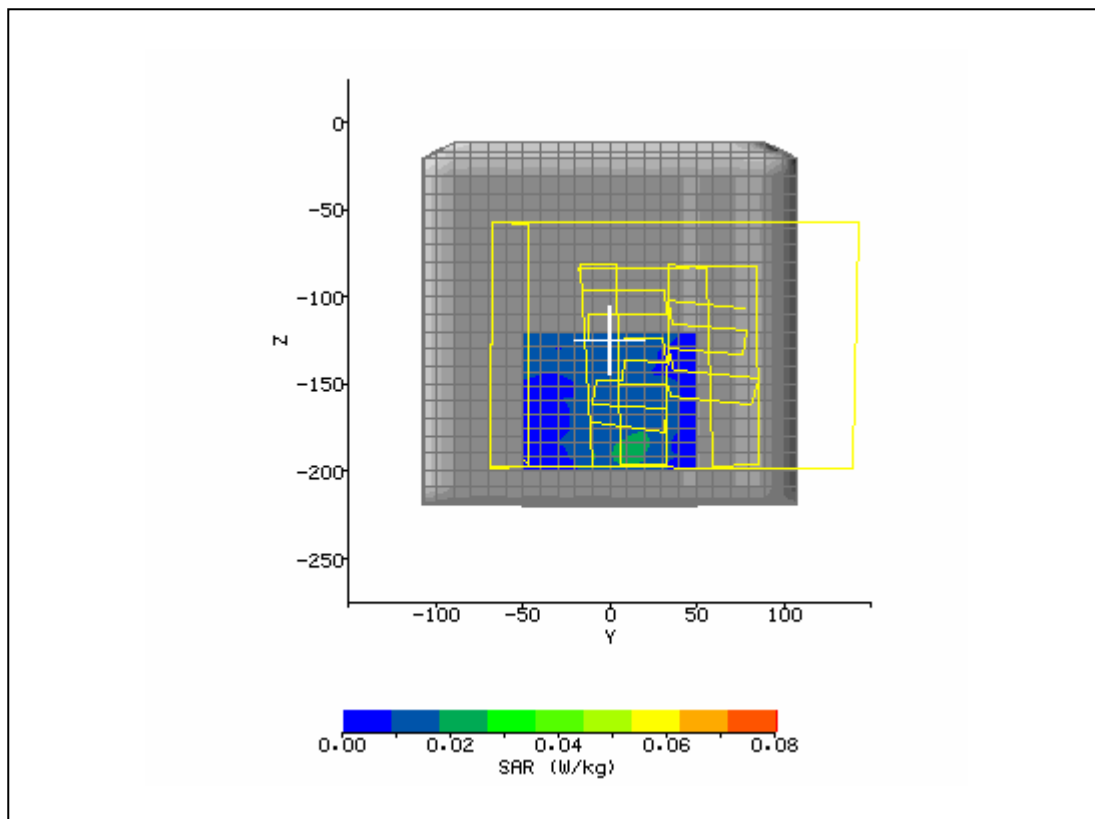

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/15/2005 8:56:59 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	norm_main153lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Broadcom Bcm94318MPAGH	<b>Relative Permittivity:</b>	47.01
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	6.431
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-41.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-177.50 mm
<b>Antenna Configuration:</b>	main tablet configuration	<b>Max E Field:</b>	4.38 V/m
<b>Test Frequency:</b>	5765MHz	<b>SAR 1g:</b>	0.091 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.750 / 0.750 / 0.750	<b>SAR Start:</b>	0.070 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.071 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.06 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

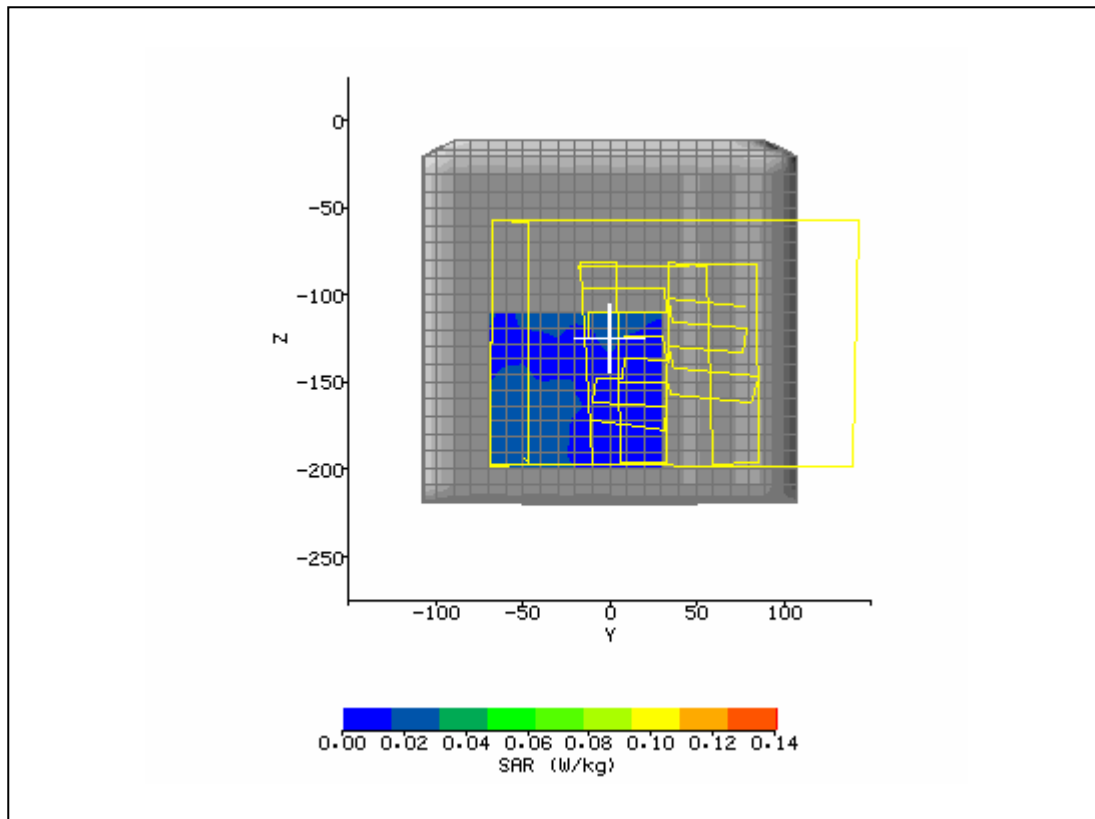


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/15/2005 10:02:13 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main153lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Broadcom Bcm94318MPAGH	<b>Relative Permittivity:</b>	47.01
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	6.431
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	12.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-140.00 mm
<b>Antenna Configuration:</b>	Aux tablet configuration	<b>Max E Field:</b>	3.28 V/m
<b>Test Frequency:</b>	5765MHz	<b>SAR 1g:</b>	0.057 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.750 / 0.750 / 0.750	<b>SAR Start:</b>	0.013 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.013 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.03 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

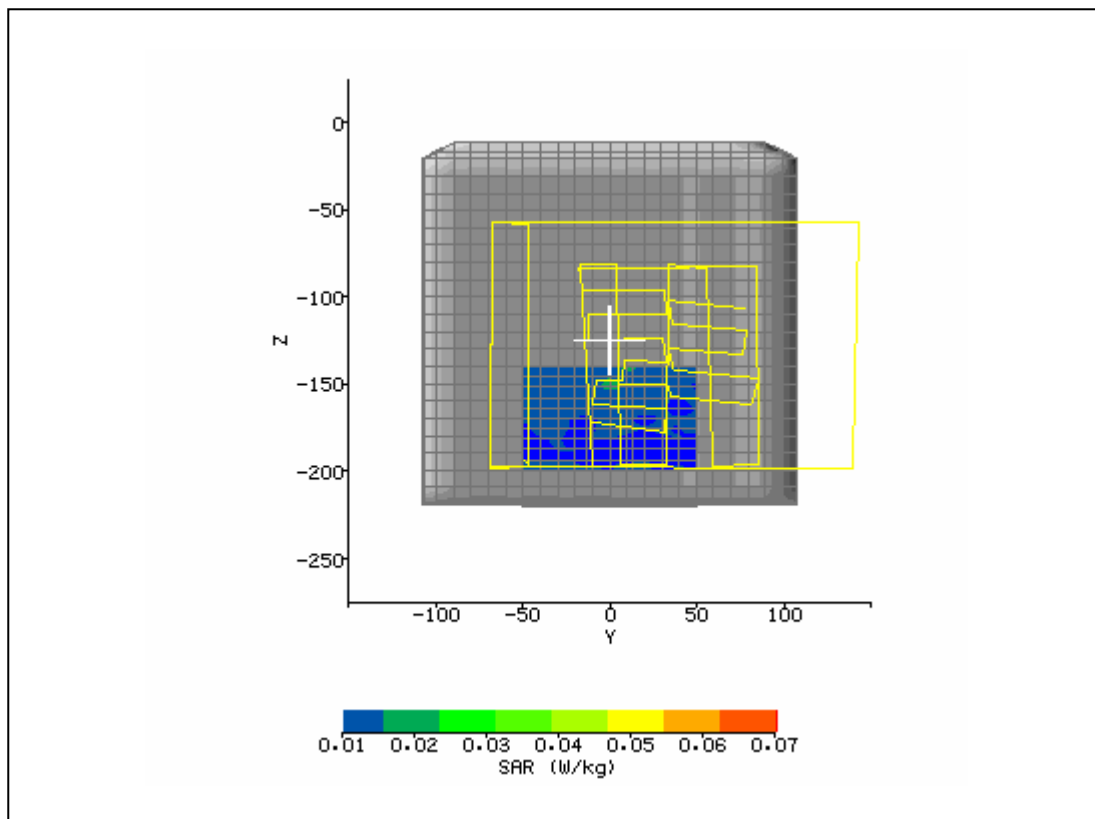



<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/15/2005 2:19:27 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main165lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Broadcom Bcm94318MPAGH	<b>Relative Permittivity:</b>	47.39
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	6.435
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-22.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-168.00 mm
<b>Antenna Configuration:</b>	Main tablet configuration	<b>Max E Field:</b>	3.48 V/m
<b>Test Frequency:</b>	5745MHz	<b>SAR 1g:</b>	0.062 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.750 / 0.750 / 0.750	<b>SAR Start:</b>	0.039 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.038 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.11 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

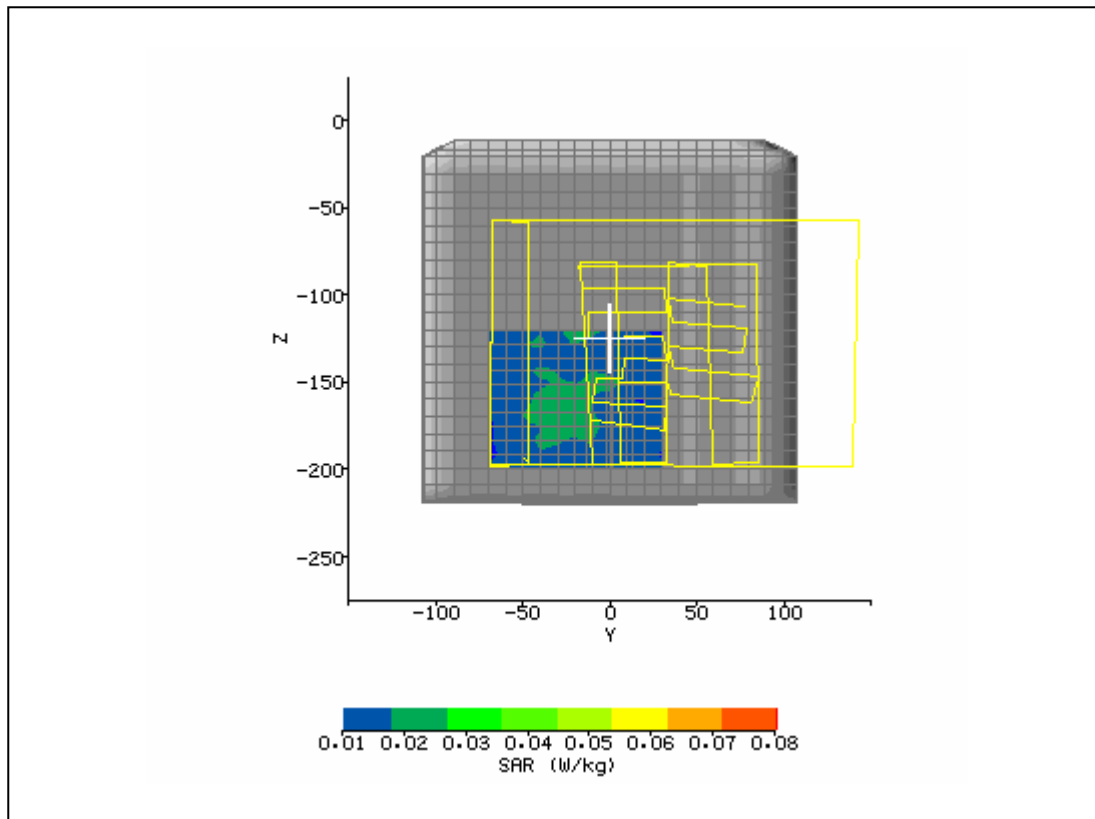

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/15/2005 1:39:34 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	tab_main149lap_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Broadcom Bcm94318MPAGH	<b>Relative Permittivity:</b>	46.91
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	6.433
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-42.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-160.00 mm
<b>Antenna Configuration:</b>	Main tablet configuration	<b>Max E Field:</b>	4.31 V/m
<b>Test Frequency:</b>	5825MHz	<b>SAR 1g:</b>	0.095 W/kg
<b>Air Factors:</b>	346 / 318 / 386		
<b>Conversion Factors:</b>	0.750 / 0.750 / 0.750	<b>SAR Start:</b>	0.056 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.056 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	5/27/05
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

