




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/29/2006 2:24:02 PM	DUT Battery Model/No:	
Filename:	5320auxside_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom Heavenly	Relative Permittivity:	48.21
Relative Humidity:	30%	Conductivity:	5.44
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	side contact	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Aux	Max E Field:	6.38 V/m
Test Frequency:	5180MHz	SAR 1g:	0.642 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.249 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.065 W/kg
Type of Modulation:		SAR End:	0.064 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.54 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

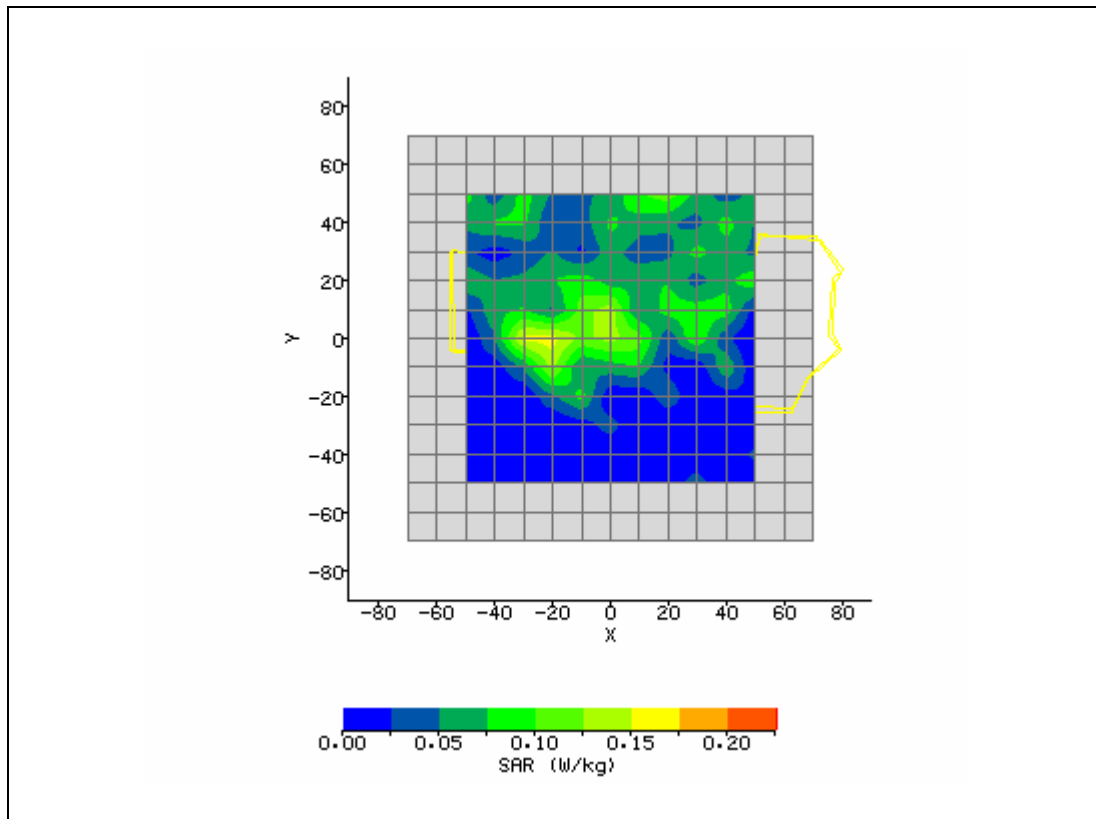


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/29/2006 3:13:23 PM	DUT Battery Model/No:	
Filename:	5180auxside_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom Heavenly	Relative Permittivity:	47.86
Relative Humidity:	30%	Conductivity:	5.502
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	side contact	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	Aux	Max E Field:	6.77 V/m
Test Frequency:	5260MHz	SAR 1g:	0.672 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.251 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.070 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.78 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

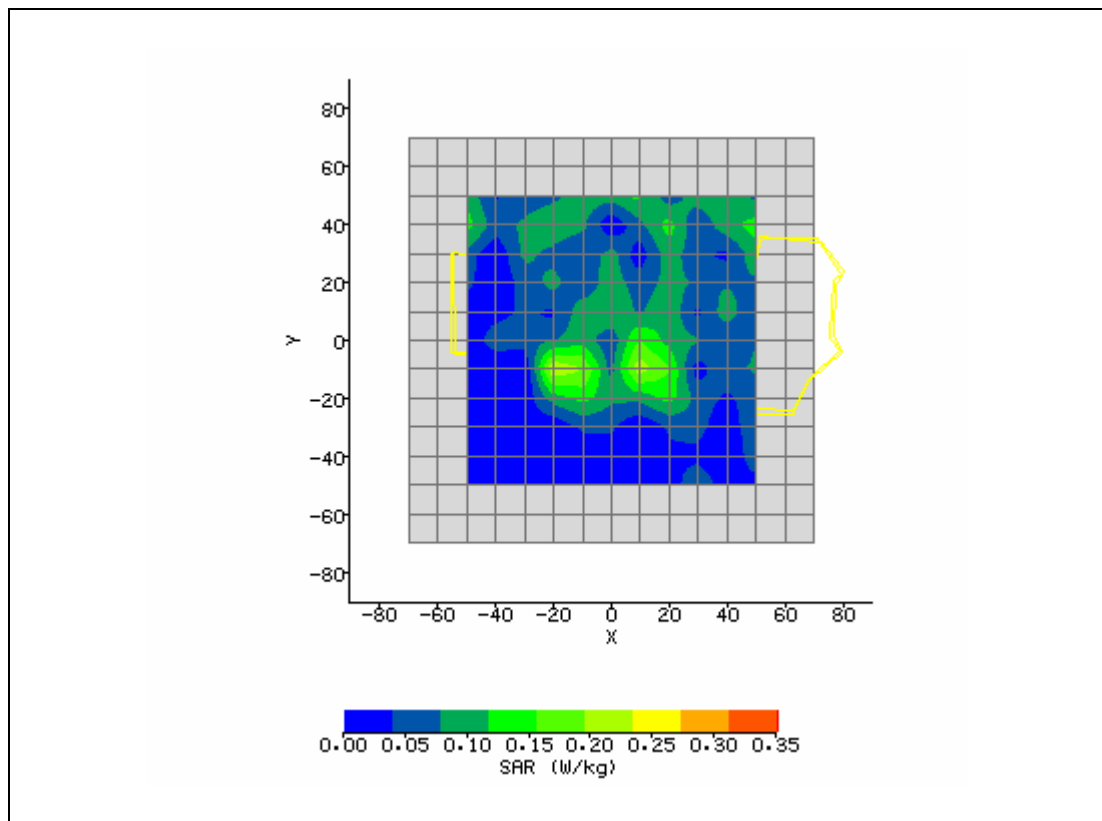


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/29/2006 2:05:21 PM	DUT Battery Model/No:	
Filename:	5320auxside_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom Heavenly	Relative Permittivity:	47.93
Relative Humidity:	30%	Conductivity:	5.499
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-36.00 mm
DUT Position:	side contact	Max SAR Y-axis Location:	4.00 mm
Antenna Configuration:	Aux & BT	Max E Field:	7.01 V/m
Test Frequency:	5320MHz & BT 2402	SAR 1g:	0.715 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.249 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.060 W/kg
Type of Modulation:		SAR End:	0.061 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

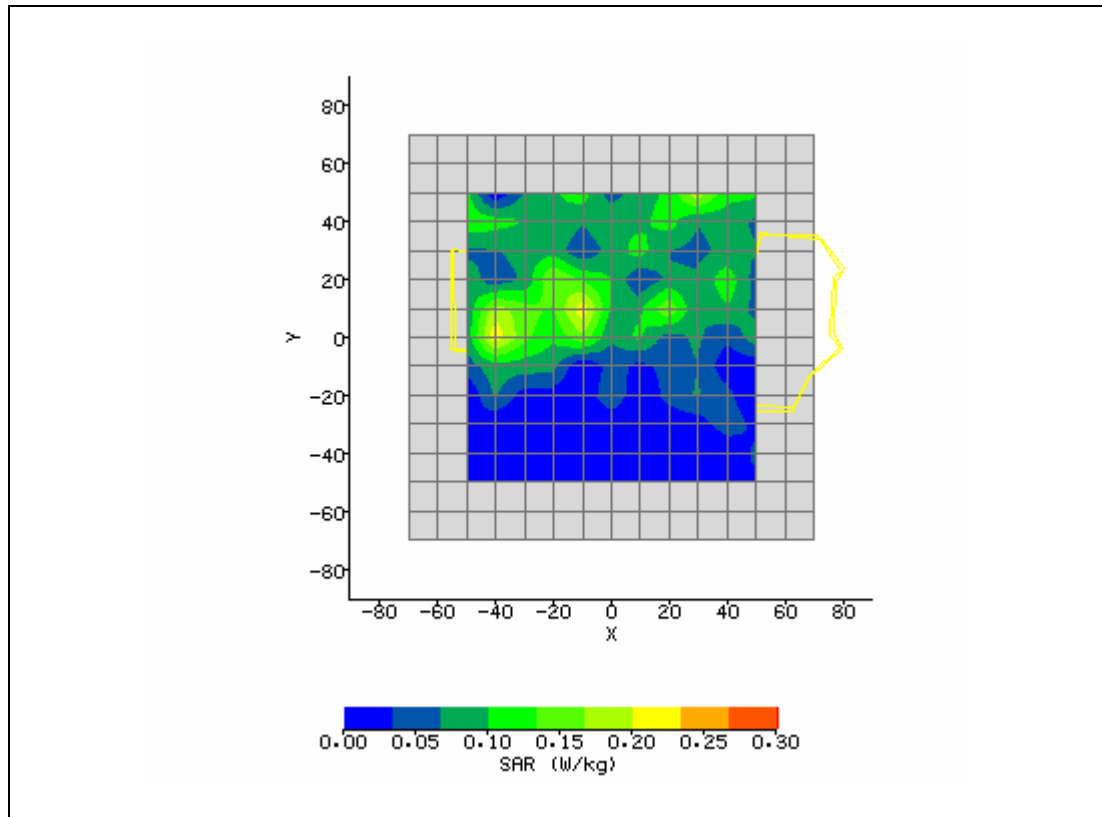


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/30/2006 1:37:35 PM	DUT Battery Model/No:	
Filename:	3_30_06_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom heavenly	Relative Permittivity:	47.41
Relative Humidity:	30%	Conductivity:	6.461
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-34.00 mm
DUT Position:	side contact	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	Aux & BT	Max E Field:	6.14 V/m
Test Frequency:	5745MHz & BT 2402	SAR 1g:	1.025 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.344 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.031 W/kg
Type of Modulation:		SAR End:	0.031 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

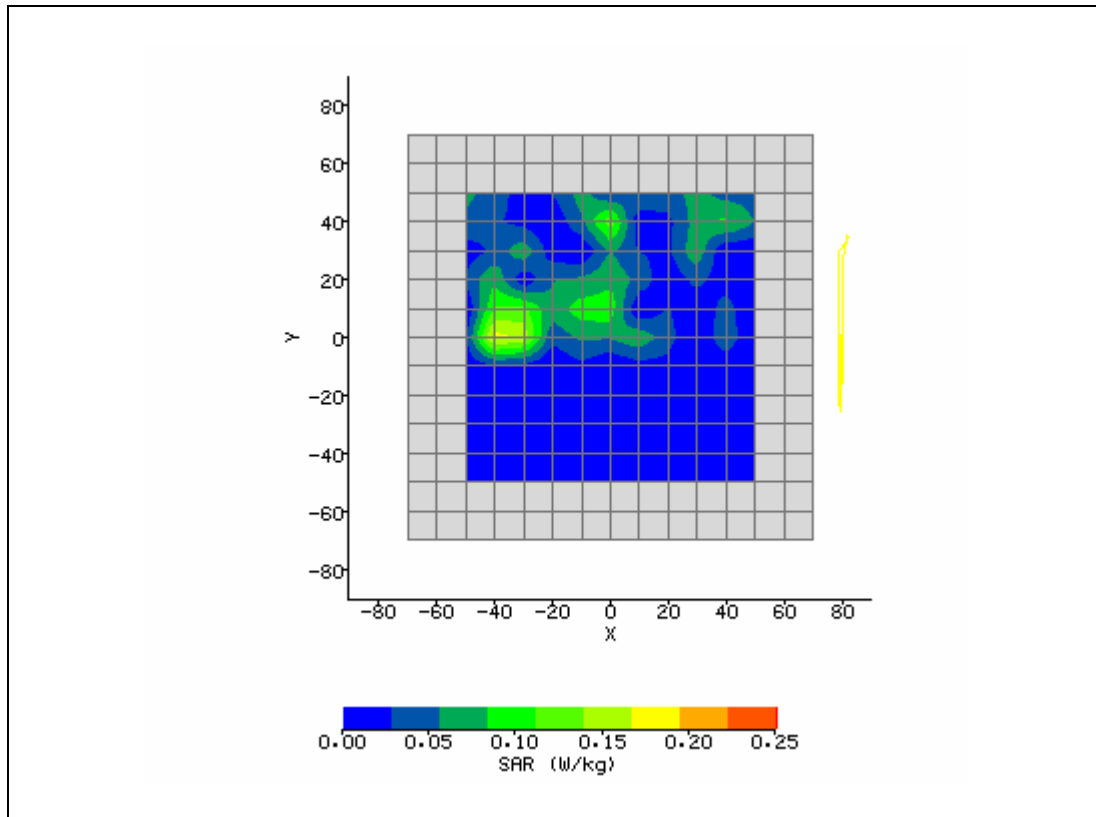


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/30/2006 1:58:36 PM	DUT Battery Model/No:	
Filename:	5745auxside_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom heavenly	Relative Permittivity:	47.11
Relative Humidity:	30%	Conductivity:	6.456
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-33.00 mm
DUT Position:	side contact	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	Aux	Max E Field:	5.91 V/m
Test Frequency:	5765MHz	SAR 1g:	0.875 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.330 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.028 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

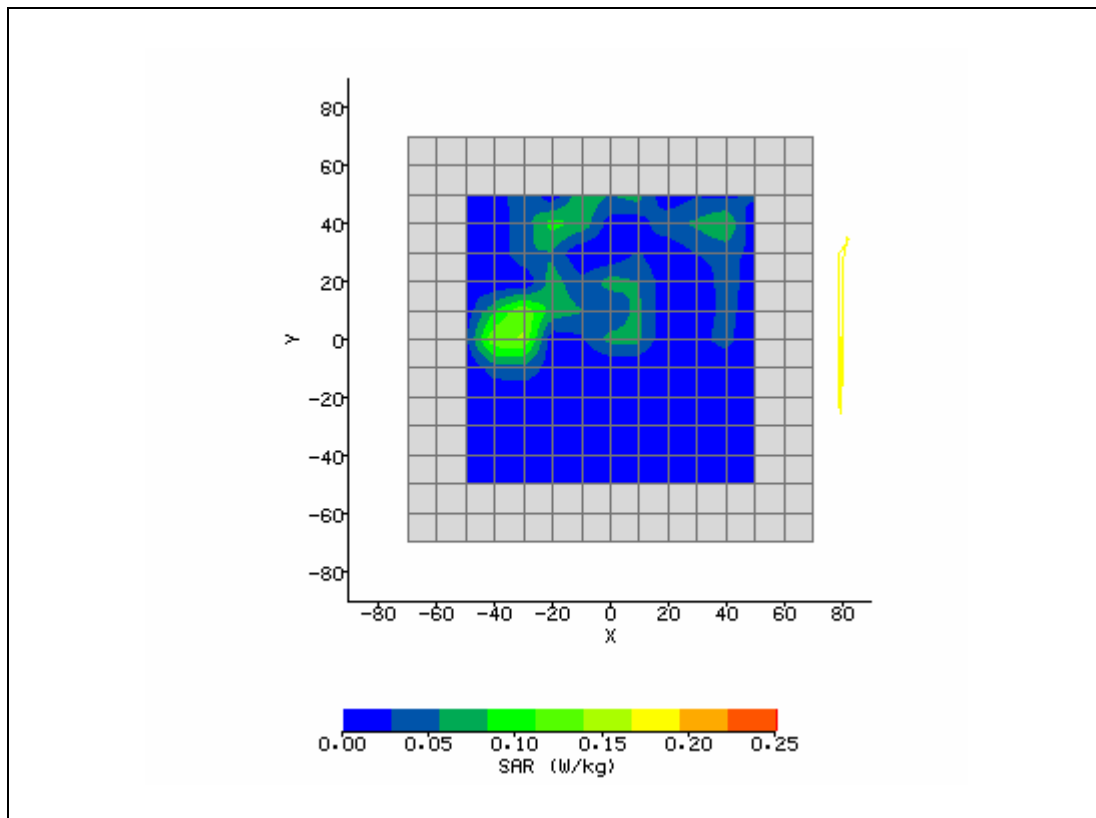

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/30/2006 2:20:23 PM	DUT Battery Model/No:	
Filename:	5765auxside_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom heavenly	Relative Permittivity:	47.02
Relative Humidity:	30%	Conductivity:	6.451
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-33.00 mm
DUT Position:	side contact	Max SAR Y-axis Location:	4.00 mm
Antenna Configuration:	Aux	Max E Field:	6.04 V/m
Test Frequency:	5825MHz	SAR 1g:	0.896 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.290 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.014 W/kg
Type of Modulation:		SAR End:	0.014 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.12 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

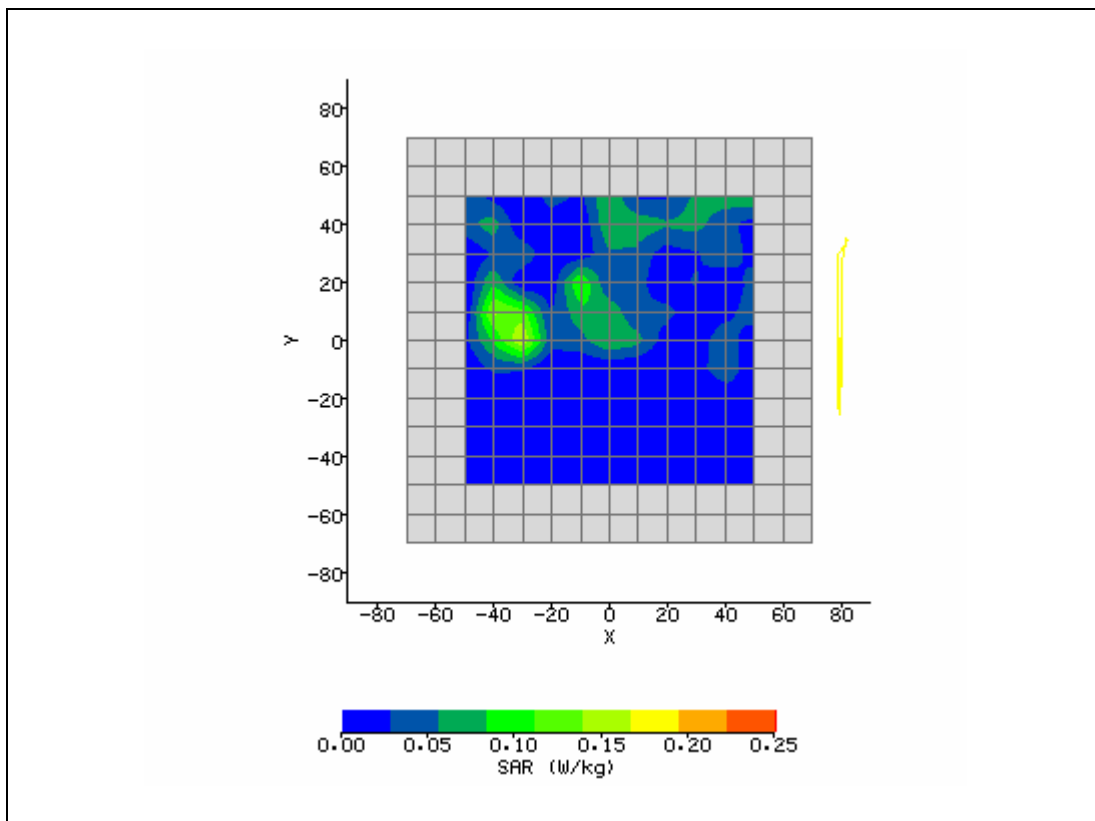

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/29/2006 11:27:01 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	System Verification	Relative Permittivity:	36.42
Relative Humidity:	30%	Conductivity:	4.71
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	5.60 mm
DUT Position:	verification	Max SAR Y-axis Location:	-9.20 mm
Antenna Configuration:	dipole	Max E Field:	83.56 V/m
Test Frequency:	5250MHz	SAR 1g:	118.960 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	55.202 W/kg
Conversion Factors:	.351 / .351 / .351	SAR Start:	4.784 W/kg
Type of Modulation:		SAR End:	4.703 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	1 Watt	Extrapolation:	poly4

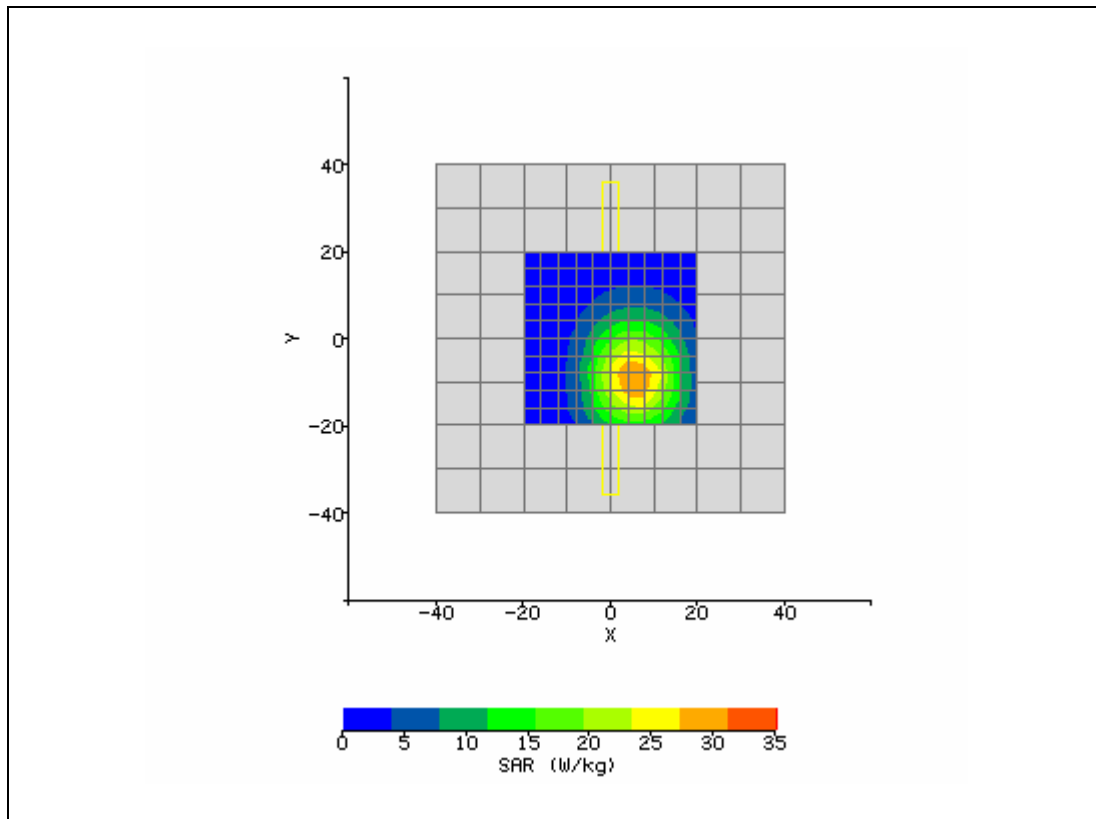

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/30/2006 12:33:25 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System Verification	Relative Permittivity:	35.81
Relative Humidity:	30%	Conductivity:	5.487
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-5.20 mm
DUT Position:	verification	Max SAR Y-axis Location:	-13.60 mm
Antenna Configuration:	dipole	Max E Field:	76.25 V/m
Test Frequency:	5775MHz	SAR 1g:	126.701 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	55.225 W/kg
Conversion Factors:	.336 / .336 / .336	SAR Start:	4.720 W/kg
Type of Modulation:		SAR End:	4.742 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.45 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	1 watt	Extrapolation:	poly4

