




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/25/2007 2:02:01 PM	DUT Battery Model/No:	
Filename:	Lap11_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DELL - BRCM_2	Relative Permittivity:	50.92
Relative Humidity:	30%	Conductivity:	1.908
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	33.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	4.43 V/m
Test Frequency:	2412MHz	SAR 1g:	0.051 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.006 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.94 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/07
Input Power Level:	max	Extrapolation:	poly4

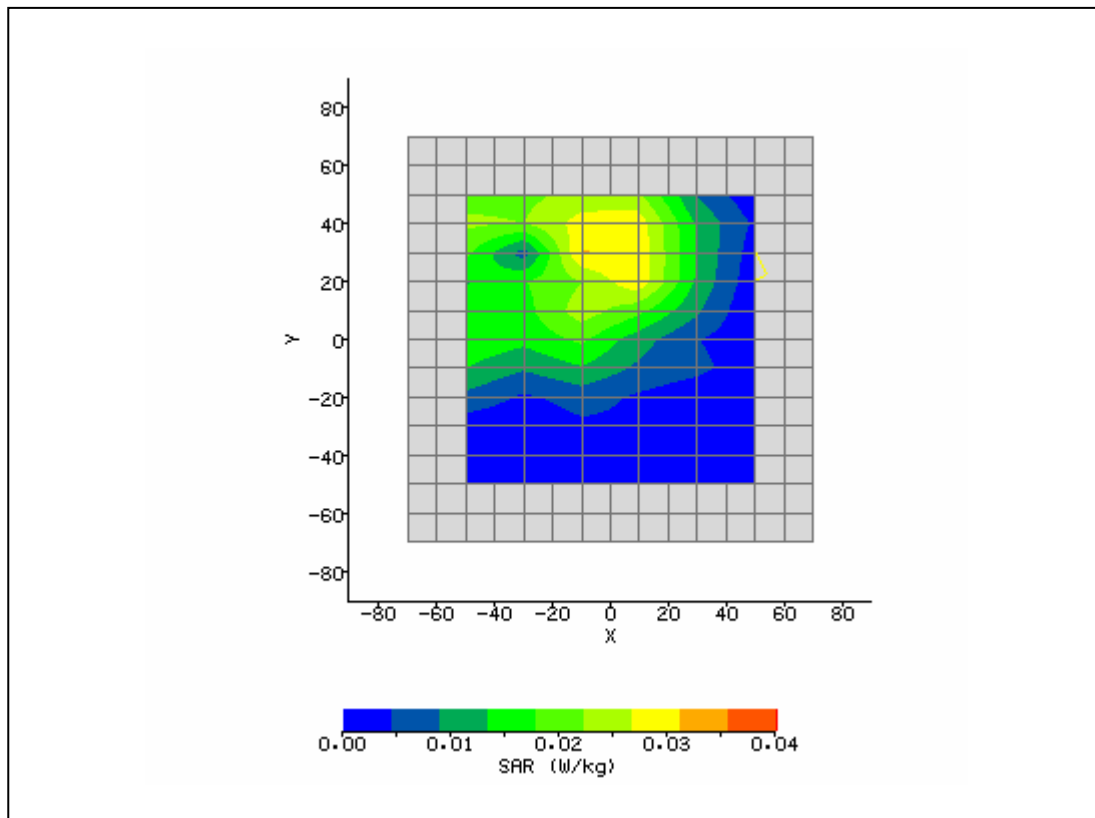


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/25/2007 4:09:11 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DELL - BRCM_2	Relative Permittivity:	51.01
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	3.98 V/m
Test Frequency:	2437MHz	SAR 1g:	0.041 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/07
Input Power Level:	max	Extrapolation:	poly4

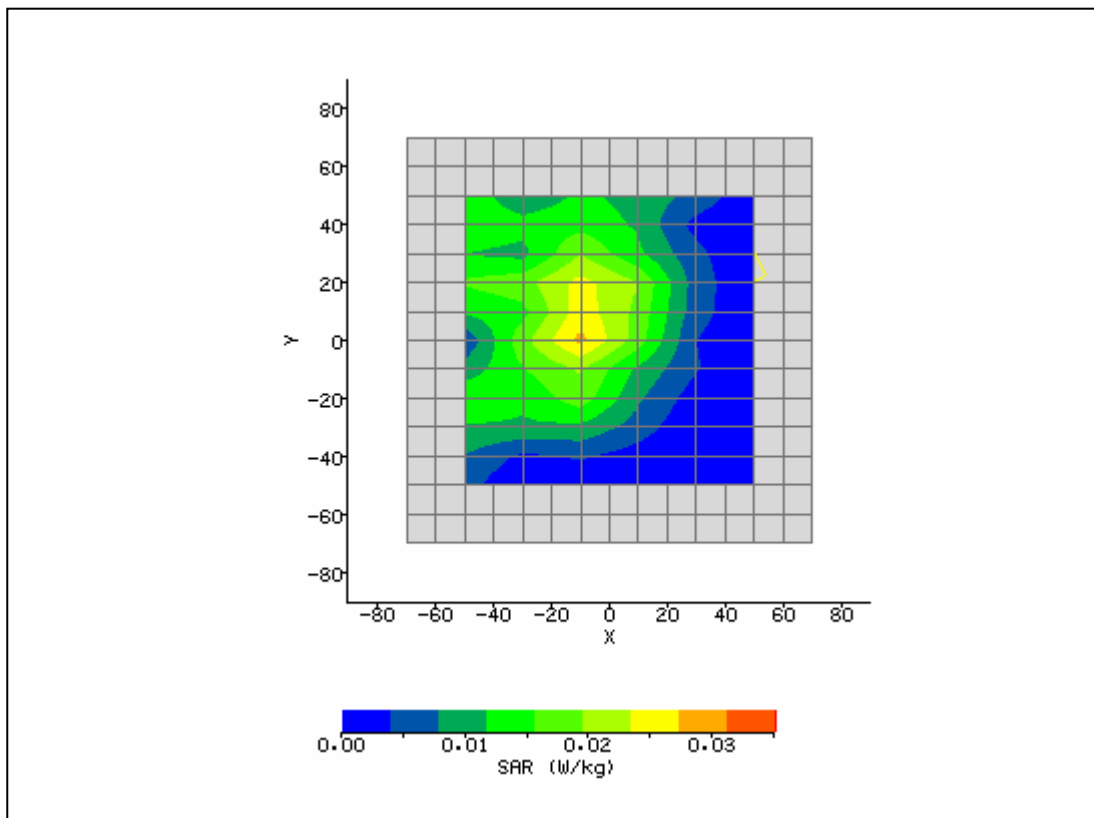


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/25/2007 4:47:51 PM	DUT Battery Model/No:	
Filename:	Lap6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DELL - BRCM_2	Relative Permittivity:	51.09
Relative Humidity:	30%	Conductivity:	1.921
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	15.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	4.55 V/m
Test Frequency:	2462MHz	SAR 1g:	0.053 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.006 W/kg
Type of Modulation:		SAR End:	0.007 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/07
Input Power Level:	max	Extrapolation:	poly4

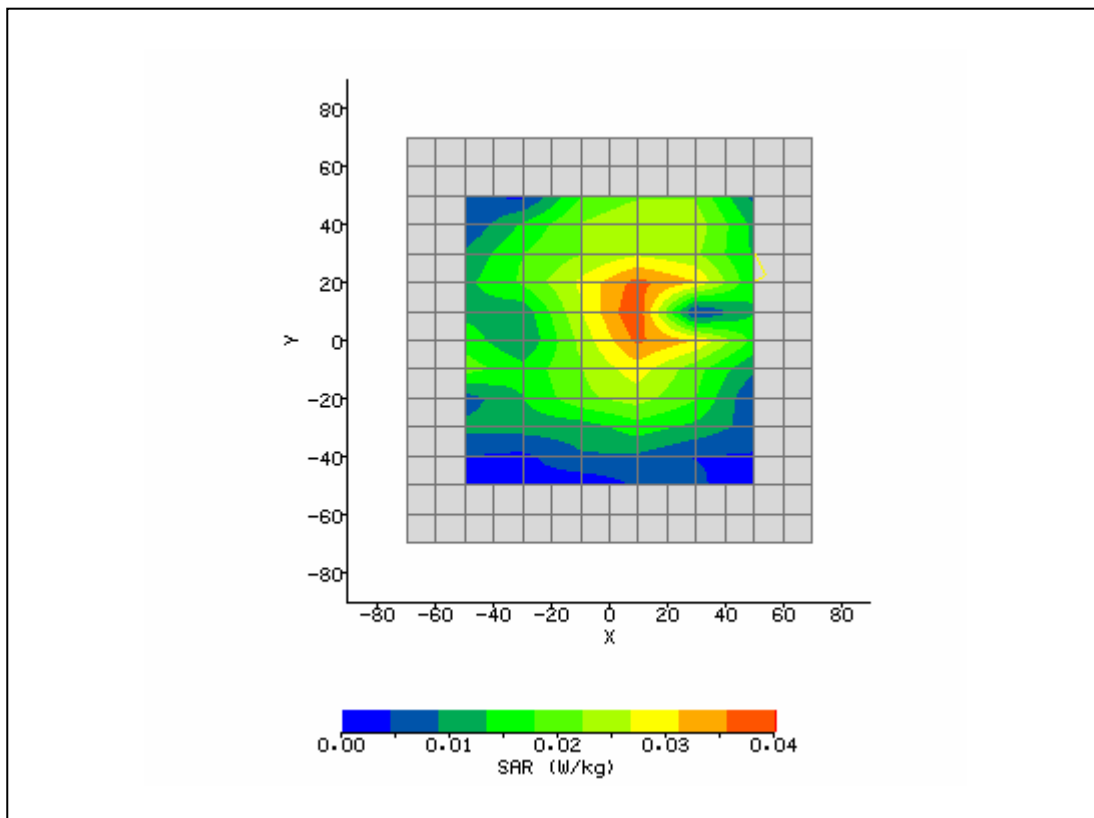


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/10/2007 2:52:09 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	48.22
Relative Humidity:	30%	Conductivity:	5.223
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	40.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	-40.00 mm
Antenna Configuration:	Integral	Max E Field:	5.29 V/m
Test Frequency:	5180MHz	SAR 1g:	0.055 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.063 W/kg
Type of Modulation:		SAR End:	0.064 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/10/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

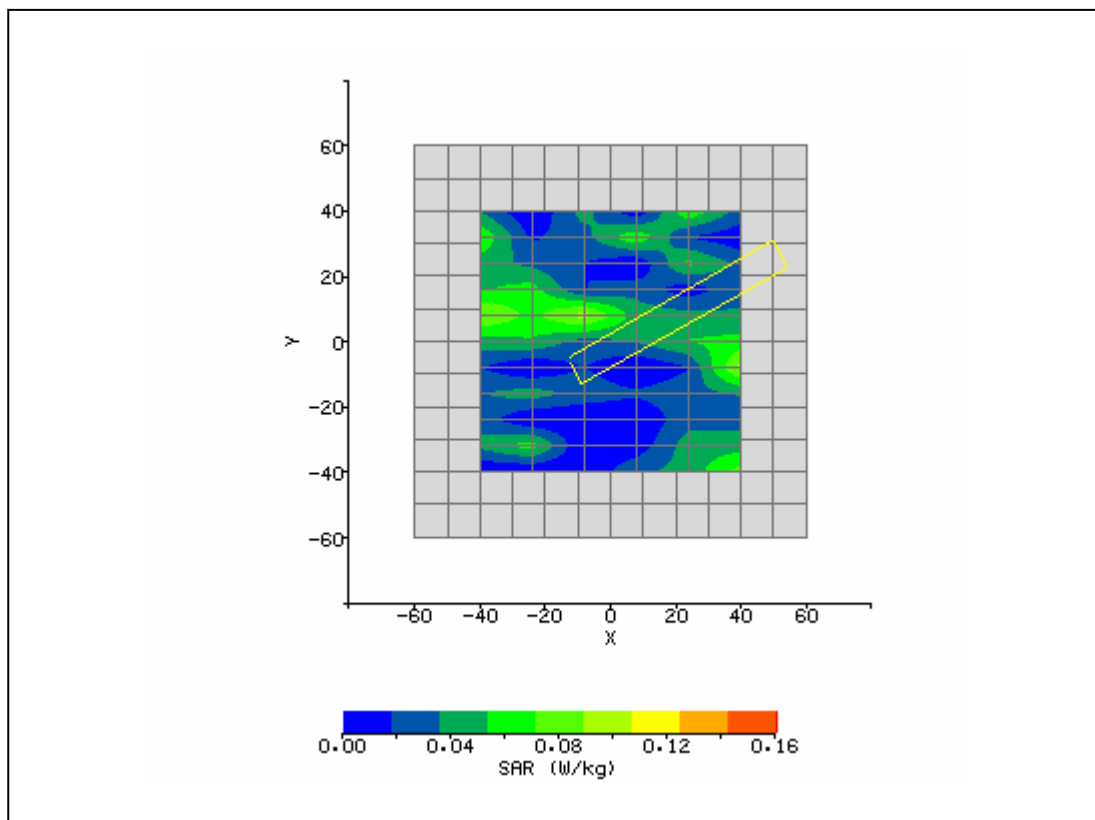


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/10/2007 3:21:05 PM	DUT Battery Model/No:	
Filename:	Lap_36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	48.16
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	40.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	11.20 mm
Antenna Configuration:	Integral	Max E Field:	5.98 V/m
Test Frequency:	5240MHz	SAR 1g:	0.112 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.077 W/kg
Type of Modulation:		SAR End:	0.075 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/10/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

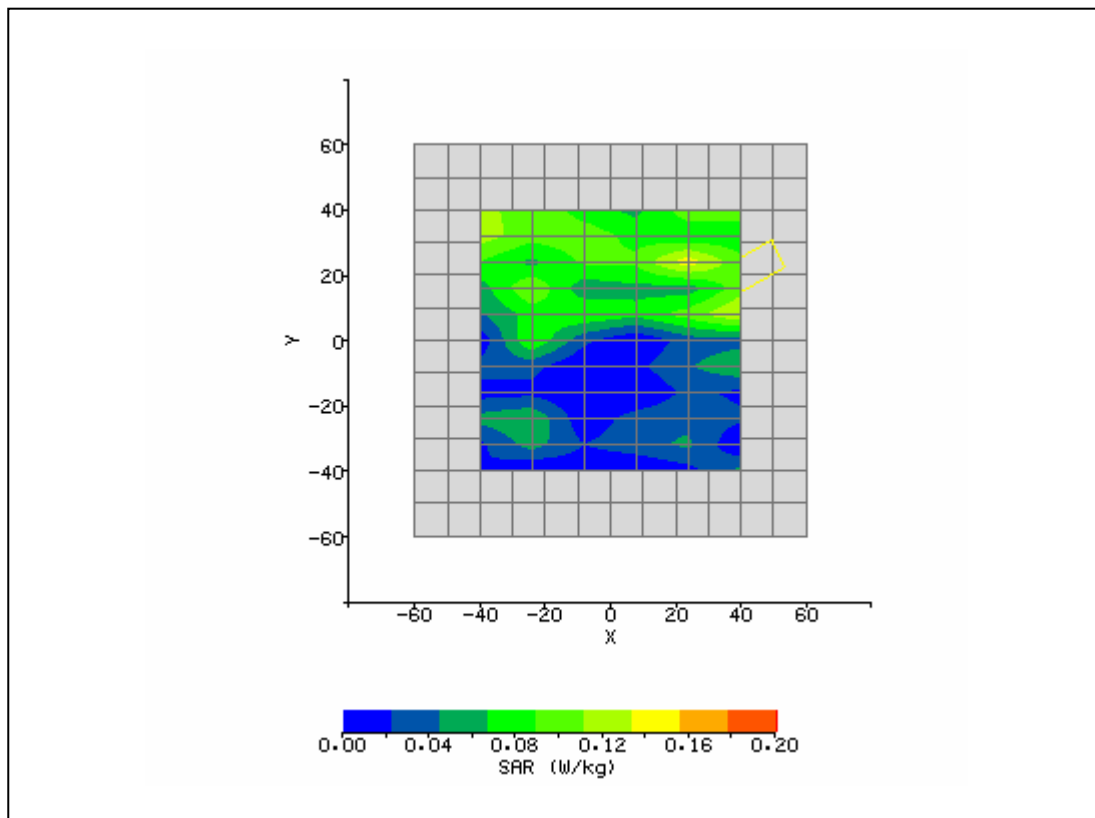


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/10/2007 4:31:36 PM	DUT Battery Model/No:	
Filename:	Lap_48_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	48.07
Relative Humidity:	30%	Conductivity:	5.211
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	40.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	-7.20 mm
Antenna Configuration:	Integral	Max E Field:	4.71 V/m
Test Frequency:	5260MHz	SAR 1g:	0.027 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.025 W/kg
Type of Modulation:		SAR End:	0.026 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/10/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

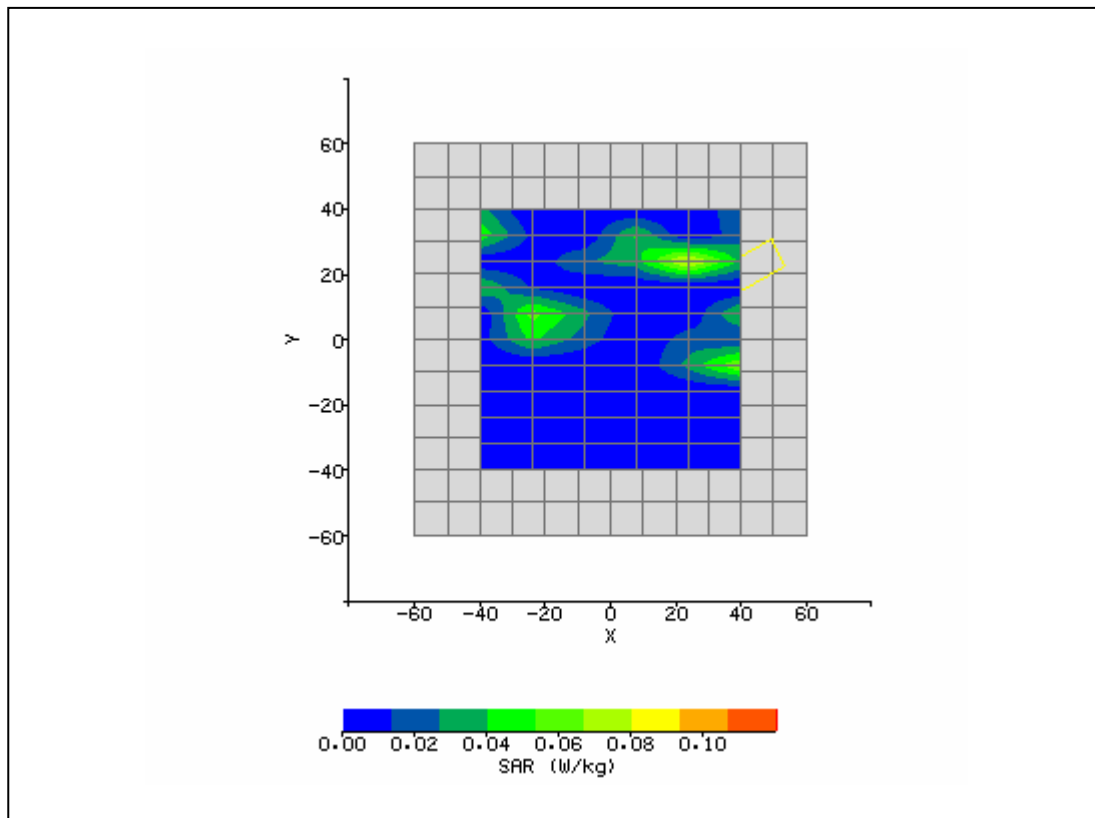


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/10/2007 4:50:23 PM	DUT Battery Model/No:	
Filename:	Lap_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	47.96
Relative Humidity:	30%	Conductivity:	5.181
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-36.80 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	14.40 mm
Antenna Configuration:	Integral	Max E Field:	4.51 V/m
Test Frequency:	5320MHz	SAR 1g:	0.075 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.054 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/10/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

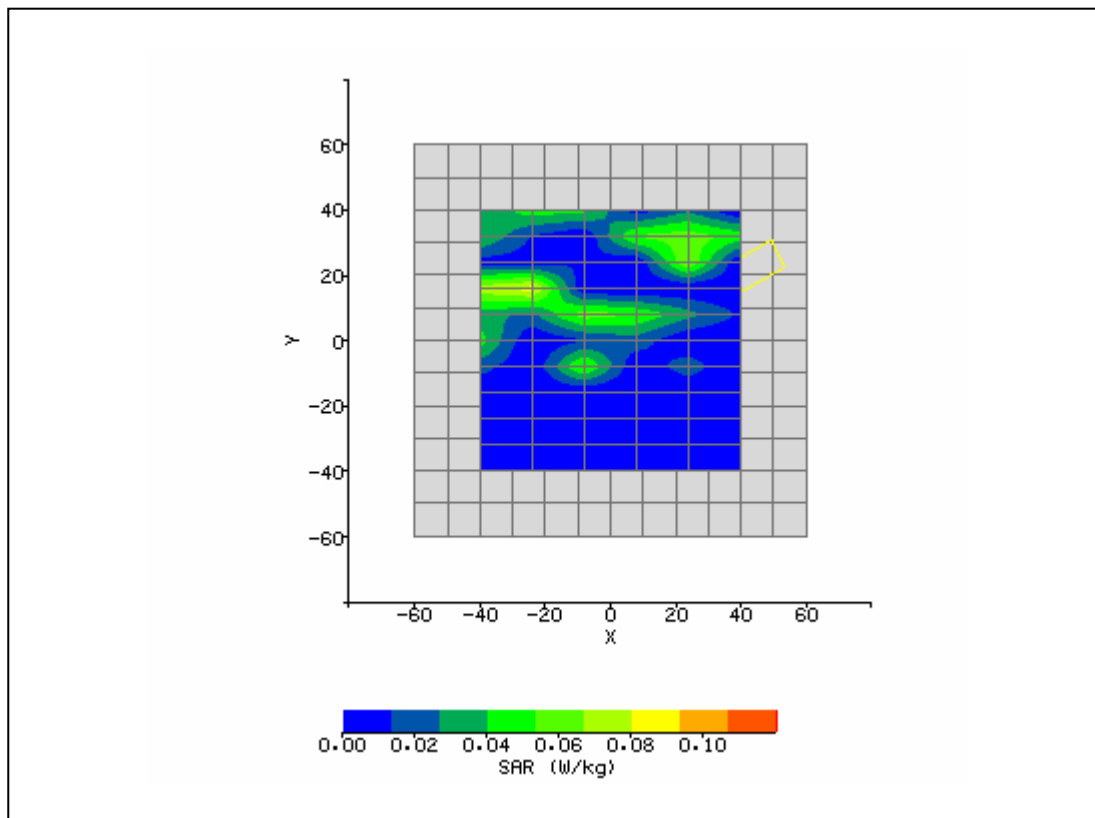


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/16/2007 9:00:38 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	48.21
Relative Humidity:	30%	Conductivity:	5.989
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.80 mm
DUT Position:	Lap	Max SAR Y-axis Location:	8.80 mm
Antenna Configuration:	Integral	Max E Field:	13.84 V/m
Test Frequency:	5745MHz	SAR 1g:	0.978 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.203 W/kg
Type of Modulation:		SAR End:	0.201 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.99 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/16/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

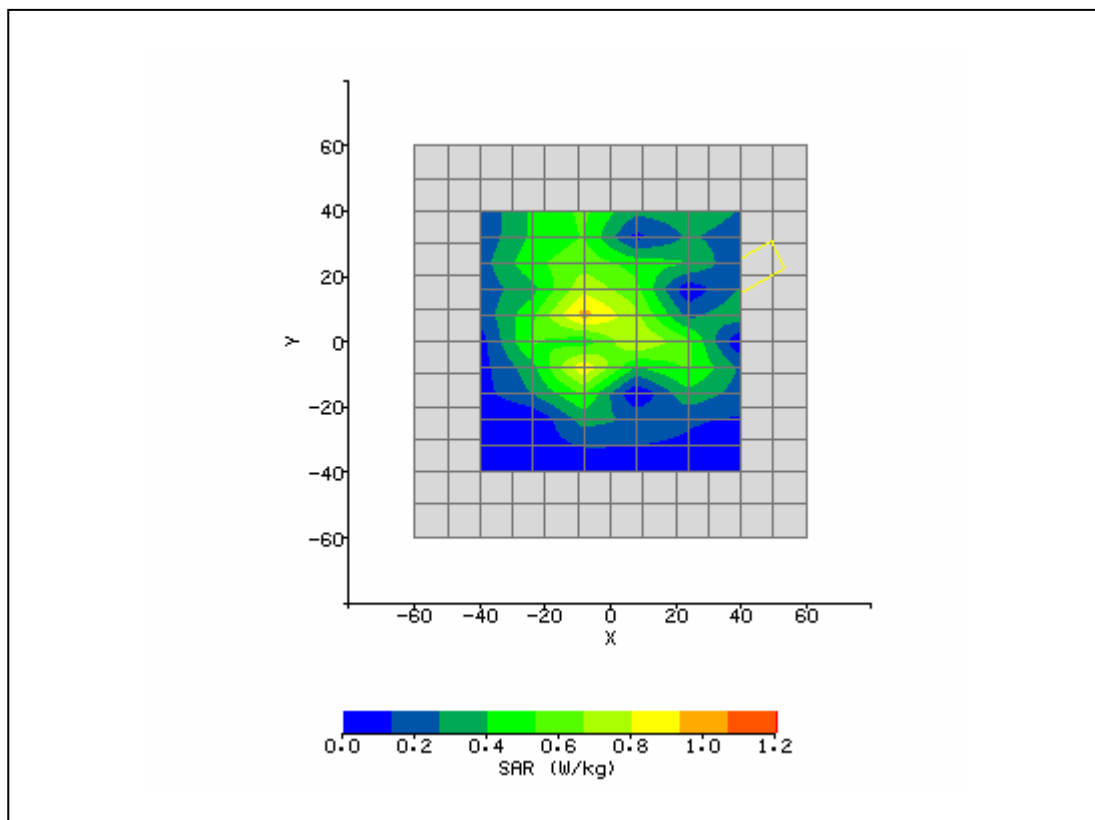


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/16/2007 11:55:43 AM	DUT Battery Model/No:	
Filename:	Lap_149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-40.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	4.80 mm
Antenna Configuration:	Integral	Max E Field:	11.42 V/m
Test Frequency:	5785MHz	SAR 1g:	0.445 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.103 W/kg
Type of Modulation:		SAR End:	0.101 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.98%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/16/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

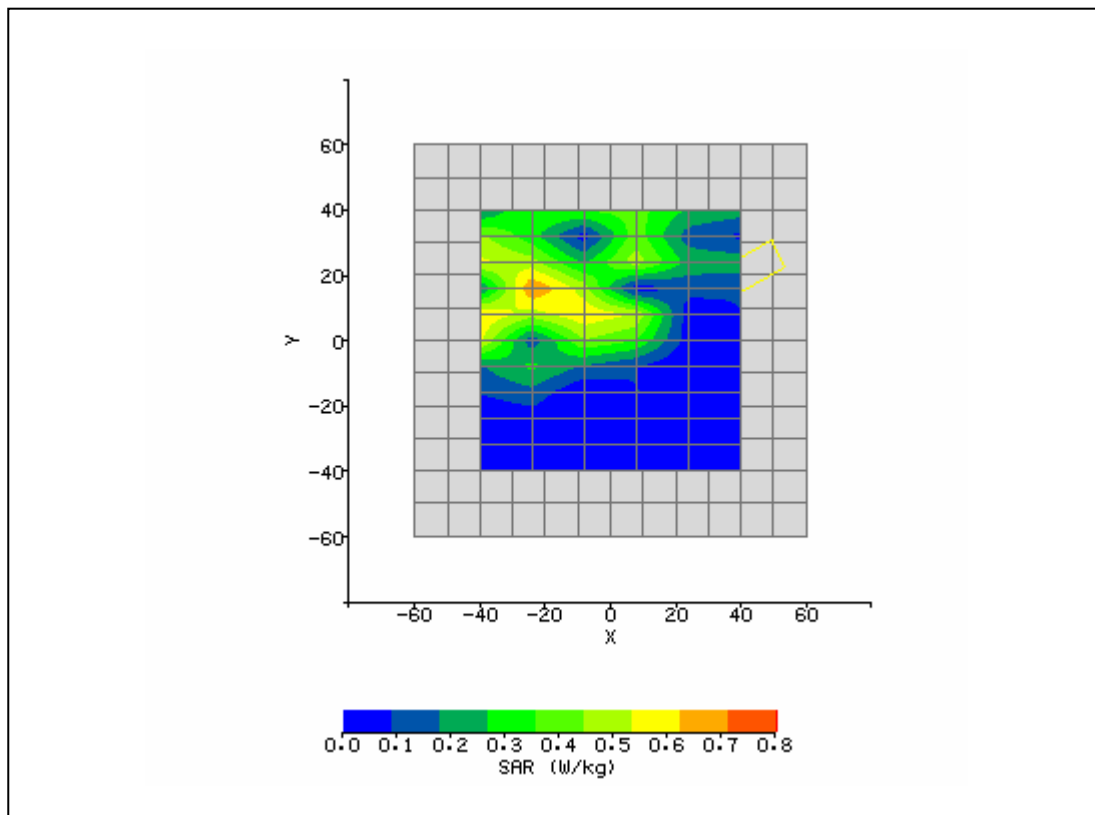


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/16/2007 12:13:04 PM	DUT Battery Model/No:	
Filename:	Lap_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Dell_BRCM94311MCA G	Relative Permittivity:	47.14
Relative Humidity:	30%	Conductivity:	6.112
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-11.20 mm
Antenna Configuration:	Integral	Max E Field:	13.65 V/m
Test Frequency:	5825MHz	SAR 1g:	0.767 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.153 W/kg
Type of Modulation:		SAR End:	0.150 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.96 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/16/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

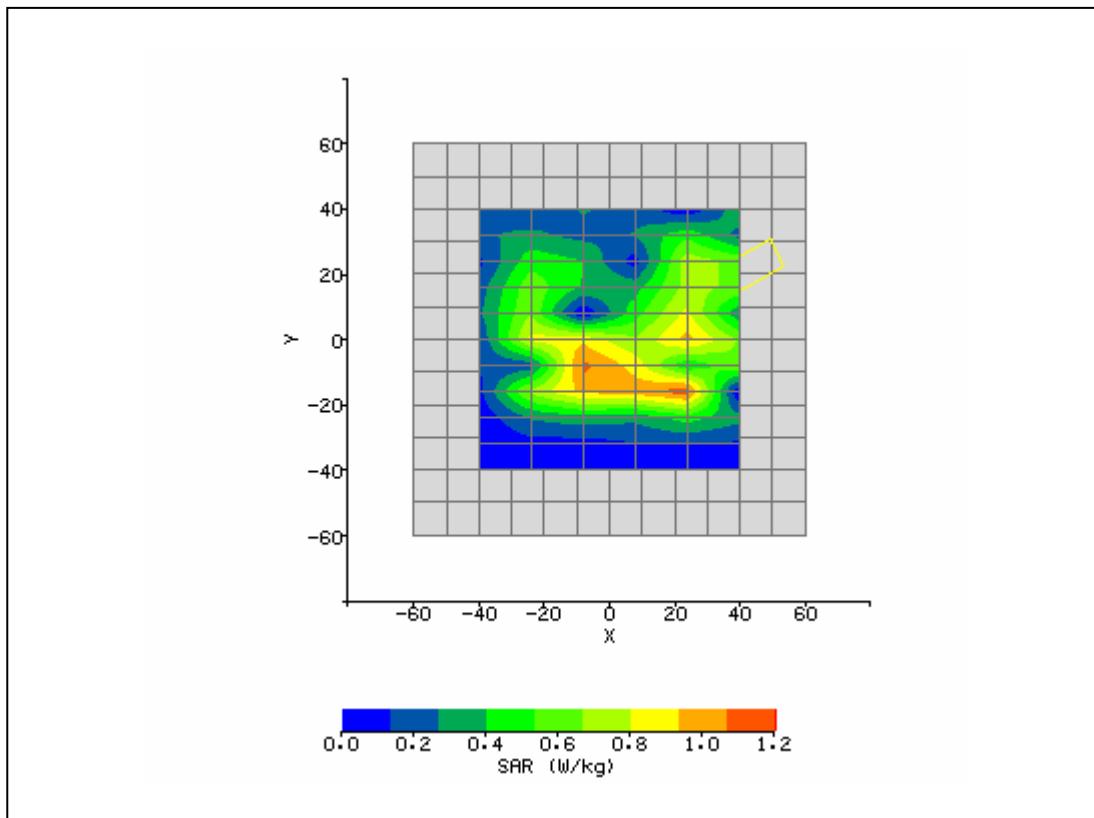

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	06/25/2007 12:06:49 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System verification	Relative Permittivity:	39.86
Relative Humidity:	30%	Conductivity:	1.861
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	dipole	Max E Field:	142.82 V/m
Test Frequency:	2450MHz	SAR 1g:	50.278 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	22.968 W/kg
Conversion Factors:	.613 / .613 / .613	SAR Start:	4.031 W/kg
Type of Modulation:	CW	SAR End:	4.042 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/2007
Input Power Level:	max	Extrapolation:	poly4

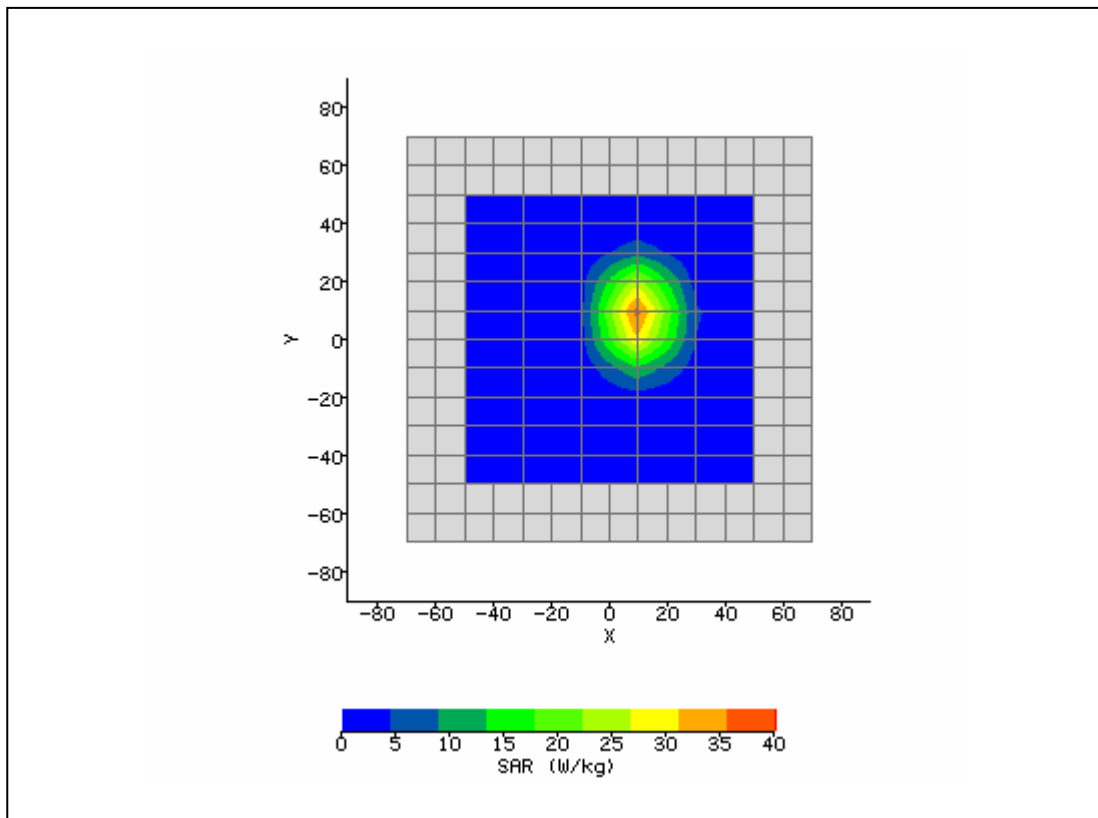

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/10/2007 8:12:19 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	36.48
Relative Humidity:	30%	Conductivity:	4.81
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-1.20 mm
DUT Position:	verification	Max SAR Y-axis Location:	-0.60 mm
Antenna Configuration:	waveguide	Max E Field:	26.34 V/m
Test Frequency:	5200MHz	SAR 1g:	3.835 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	3.002 W/kg
Conversion Factors:	.390 / .390 / .390	SAR Start:	0.724 W/kg
Type of Modulation:		SAR End:	0.692 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	7/10/07
Input Power Level:	100 mW	Extrapolation:	poly4

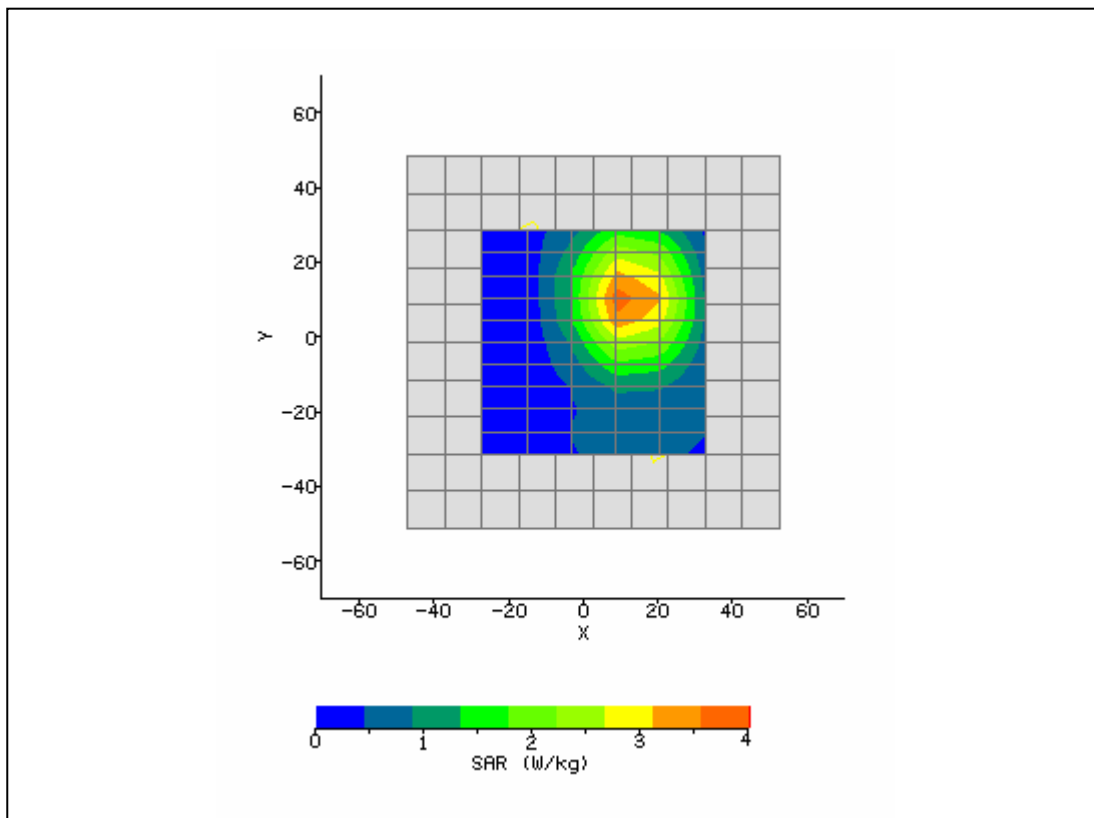

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/16/2007 9:34:49 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	36.89
Relative Humidity:	30%	Conductivity:	5.489
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-17.60 mm
DUT Position:	8mm.	Max SAR Y-axis Location:	6.40 mm
Antenna Configuration:	WG - 5800	Max E Field:	45.28 V/m
Test Frequency:	5800MHz	SAR 1g:	4.311 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	2.031 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.639 W/kg
Type of Modulation:		SAR End:	0.661 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.45 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/16/2007
Input Power Level:	100mW	Extrapolation:	poly4

