




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 3:55:28 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	50.97
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.80 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-16.80 mm
Antenna Configuration:	Integral Main	Max E Field:	17.41 V/m
Test Frequency:	2437MHz	SAR 1g:	0.673 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.162 W/kg
Type of Modulation:		SAR End:	0.163 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

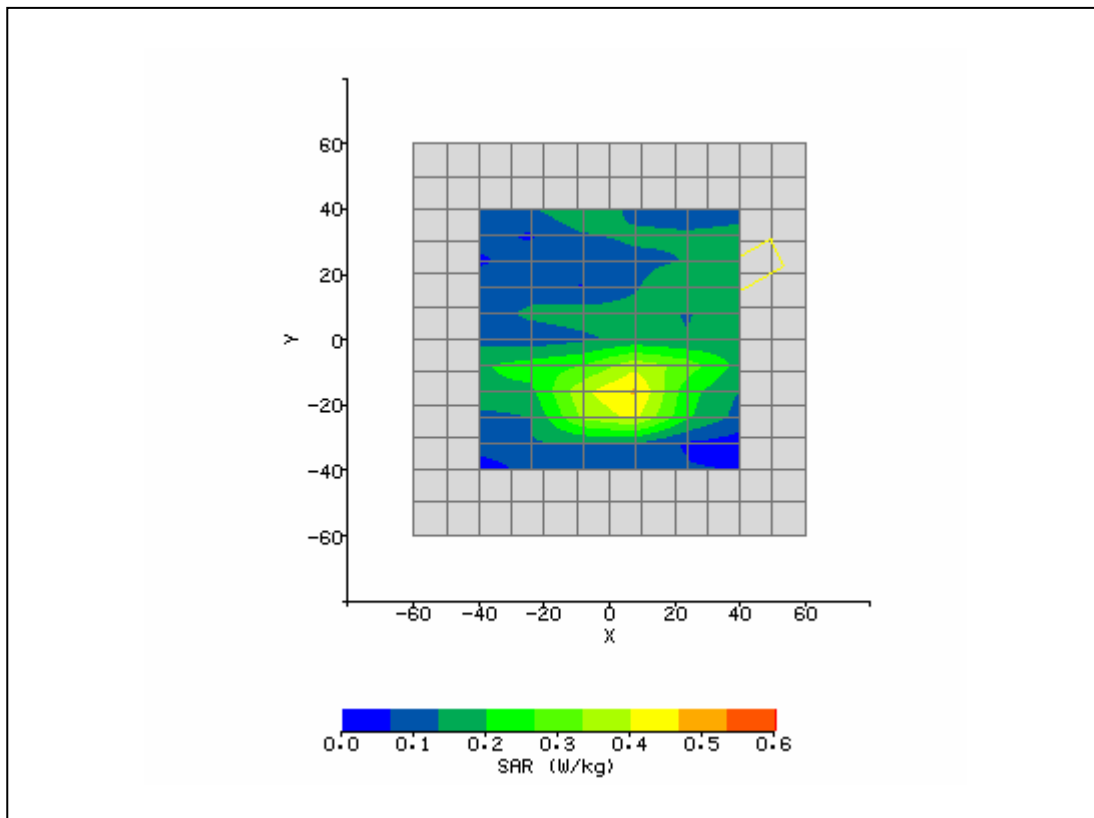


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 4:09:42 PM	DUT Battery Model/No:	
Filename:	Main_Top_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	50.97
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.80 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral Main	Max E Field:	11.31 V/m
Test Frequency:	2437MHz	SAR 1g:	0.301 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.169 W/kg
Type of Modulation:		SAR End:	0.174 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.96 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

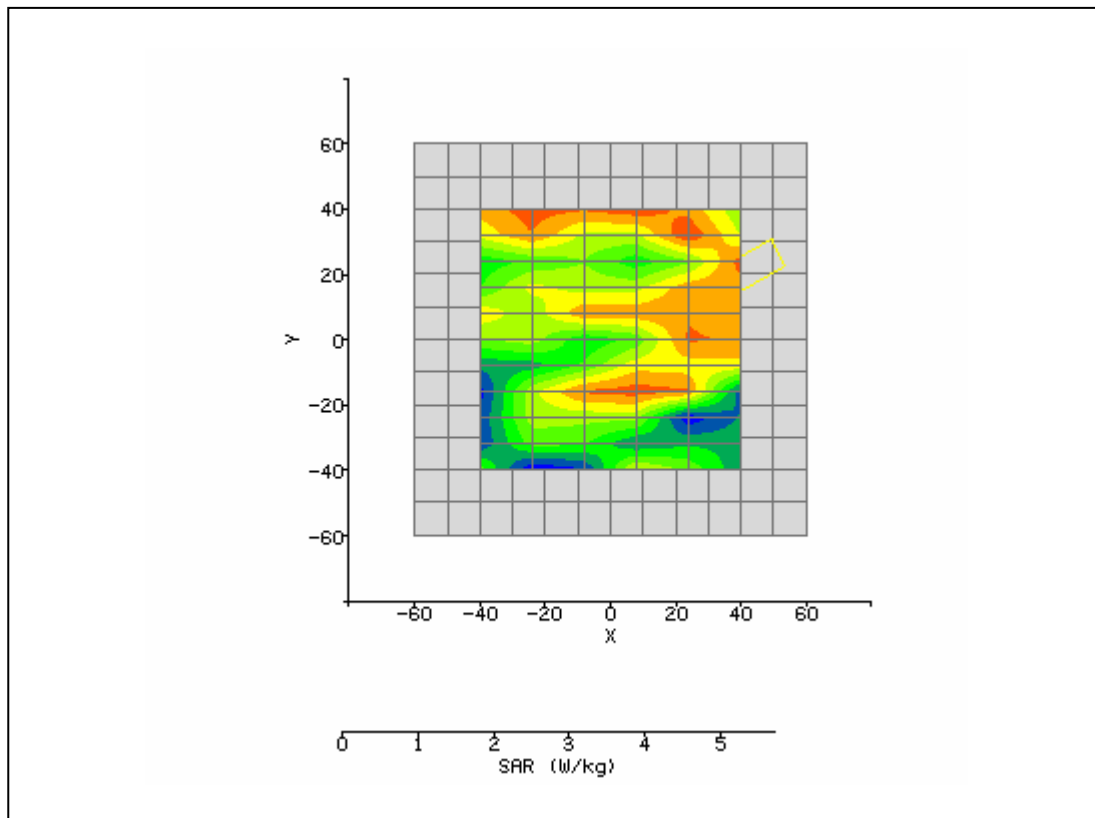


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 4:23:17 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	50.97
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	1.60 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	3.20 mm
Antenna Configuration:	Integral Main	Max E Field:	11.17 V/m
Test Frequency:	2437MHz	SAR 1g:	0.240 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.137 W/kg
Type of Modulation:		SAR End:	0.133 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.91 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

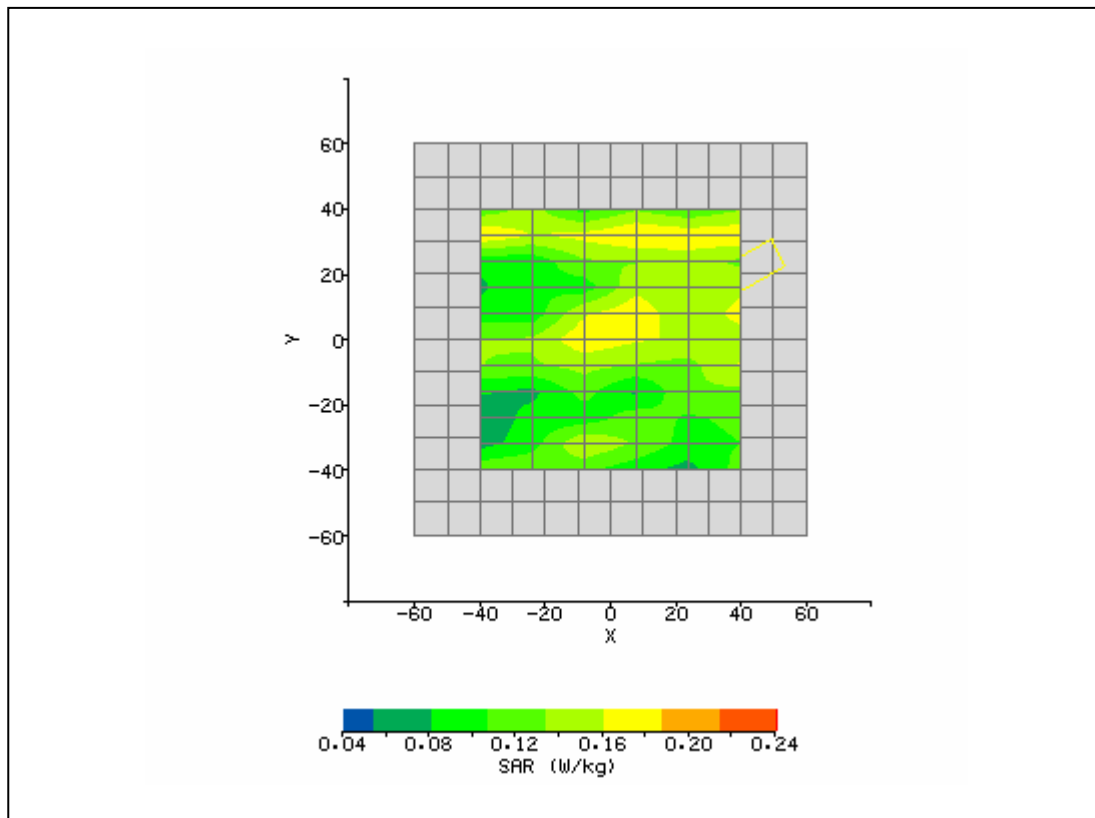


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 4:56:28 PM	DUT Battery Model/No:	
Filename:	Main_Top_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	50.93
Relative Humidity:	30%	Conductivity:	1.863
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	9.60 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-31.73 mm
Antenna Configuration:	Integral Main	Max E Field:	13.80 V/m
Test Frequency:	2412MHz	SAR 1g:	0.482 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.134 W/kg
Type of Modulation:		SAR End:	0.139 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.73 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

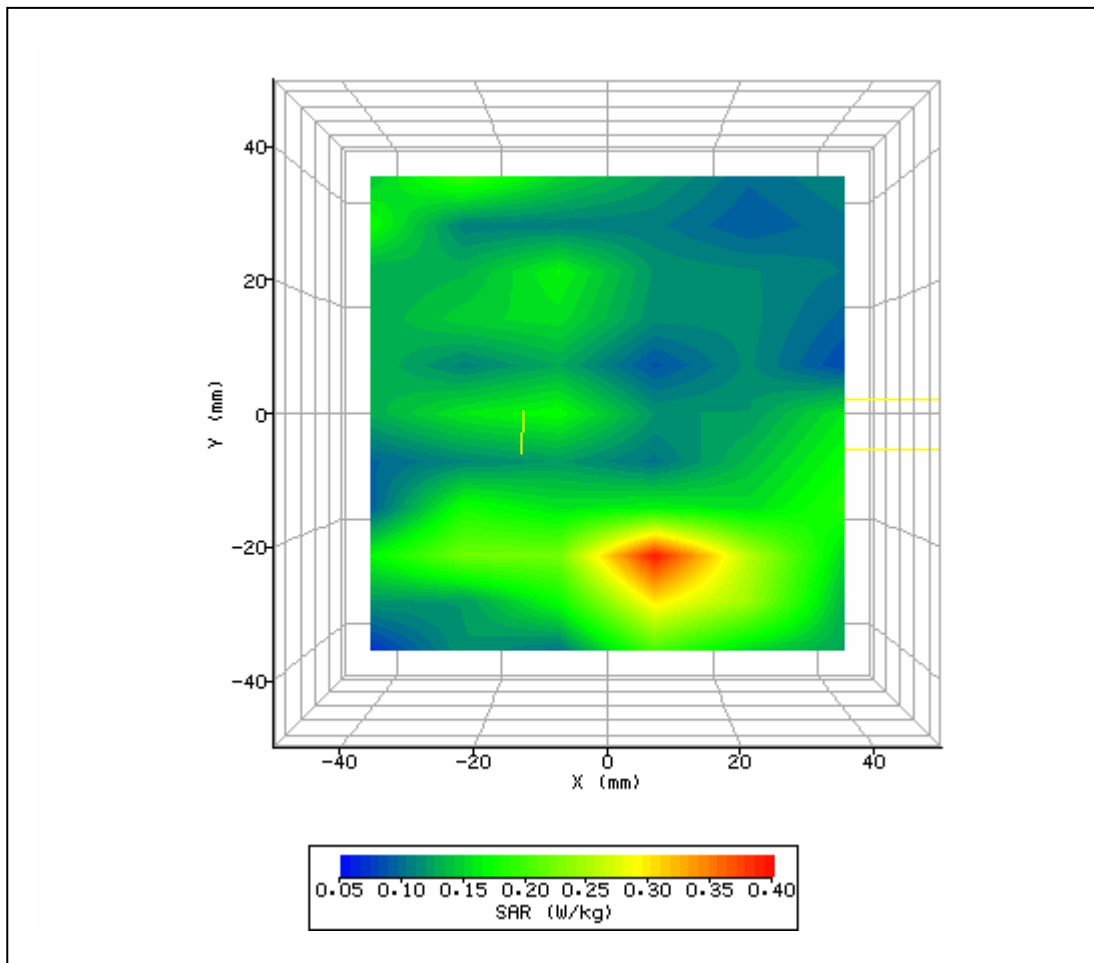


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 5:13:51 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	50.78
Relative Humidity:	30%	Conductivity:	1.964
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-11.20 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-17.60 mm
Antenna Configuration:	Integral Main	Max E Field:	17.21 V/m
Test Frequency:	2462MHz	SAR 1g:	0.734 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.109 W/kg
Type of Modulation:		SAR End:	0.111 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

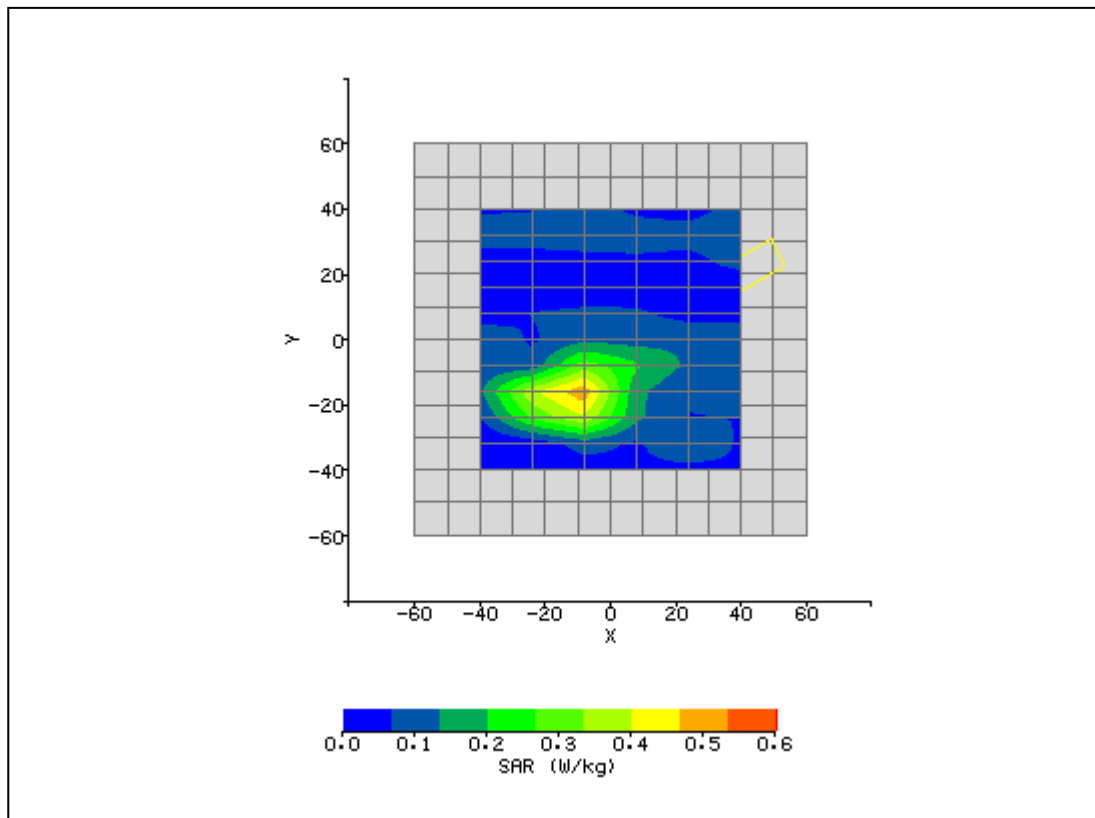


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 4:39:08 PM	DUT Battery Model/No:	
Filename:	Main_Side_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	50.97
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	9.60 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-12.80 mm
Antenna Configuration:	Integral Aux	Max E Field:	13.84 V/m
Test Frequency:	2437MHz	SAR 1g:	0.499 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.147 W/kg
Type of Modulation:		SAR End:	0.146 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

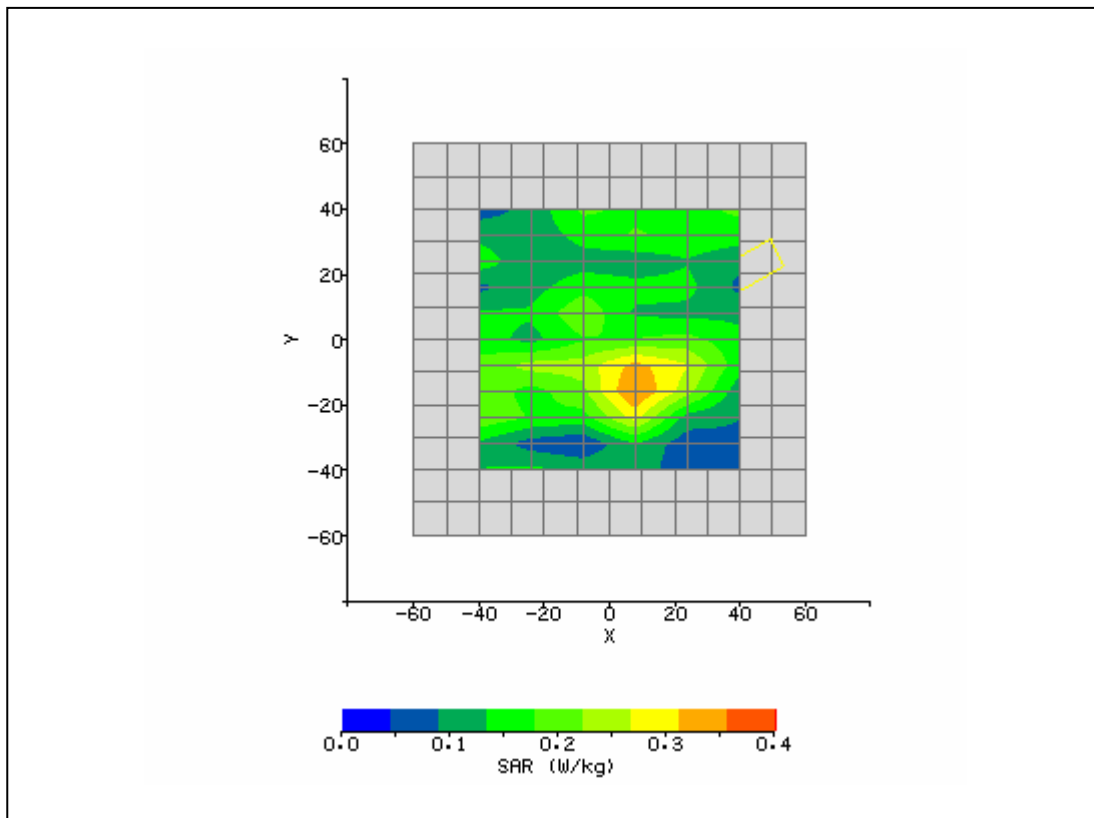


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 12:16:53 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG + DW360BT	Relative Permittivity:	50.78
Relative Humidity:	30%	Conductivity:	1.964
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-11.20 mm
DUT Position:	Top	Max SAR Y-axis Location:	-8.00 mm
Antenna Configuration:	Integral - ACON Main	Max E Field:	18.34 V/m
Test Frequency:	2462MHz	SAR 1g:	0.879 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.119 W/kg
Type of Modulation:		SAR End:	0.118 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.85 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/3/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

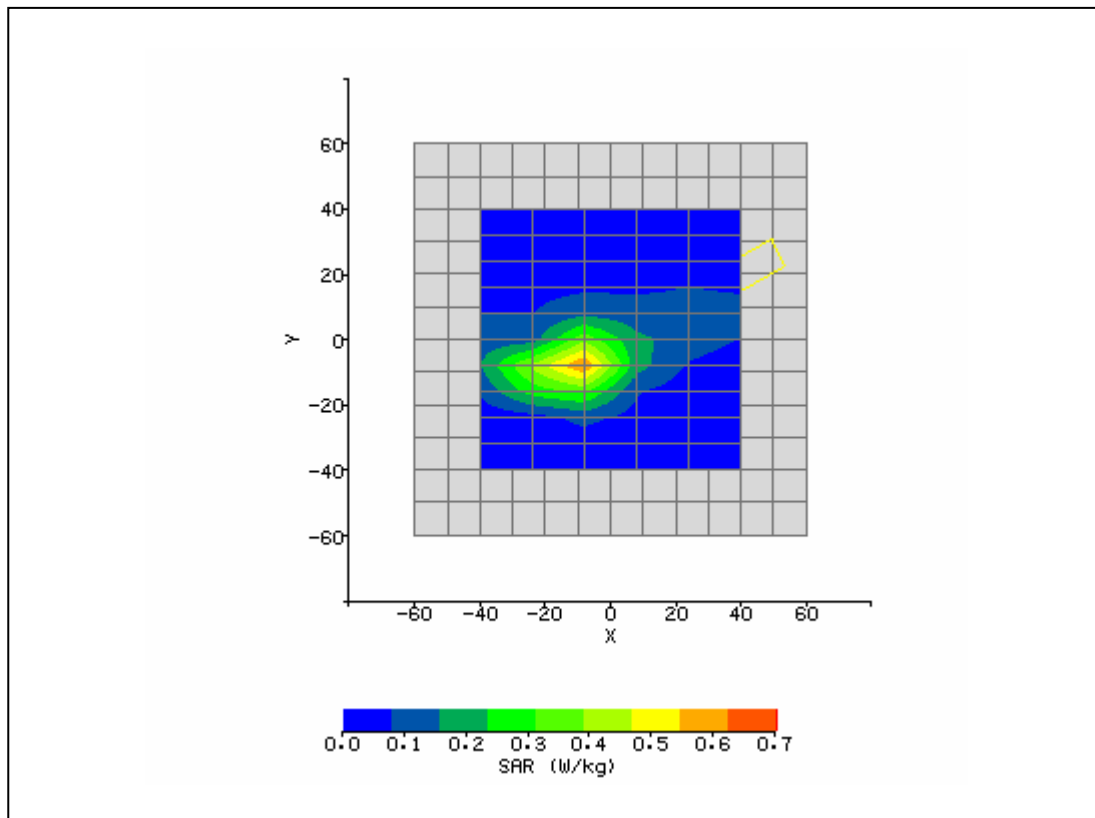


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 2:42:53 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.468
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	1.00 mm
Antenna Configuration:	Integral Main	Max E Field:	20.15 V/m
Test Frequency:	5260MHz	SAR 1g:	1.183 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.056 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

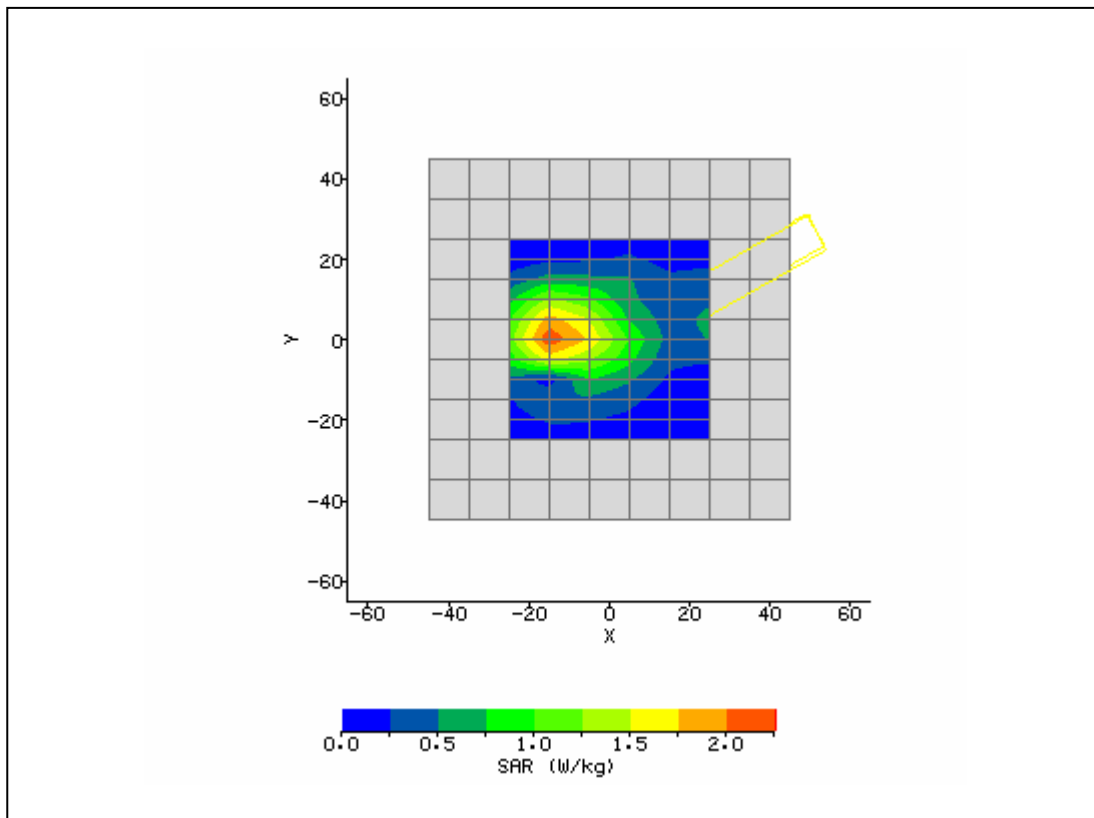


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 3:28:18 PM	DUT Battery Model/No:	
Filename:	Main_Top_52.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.468
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	-1.50 mm
Antenna Configuration:	Integral Main	Max E Field:	4.92 V/m
Test Frequency:	5260MHz	SAR 1g:	0.049 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.036 W/kg
Type of Modulation:		SAR End:	0.034 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

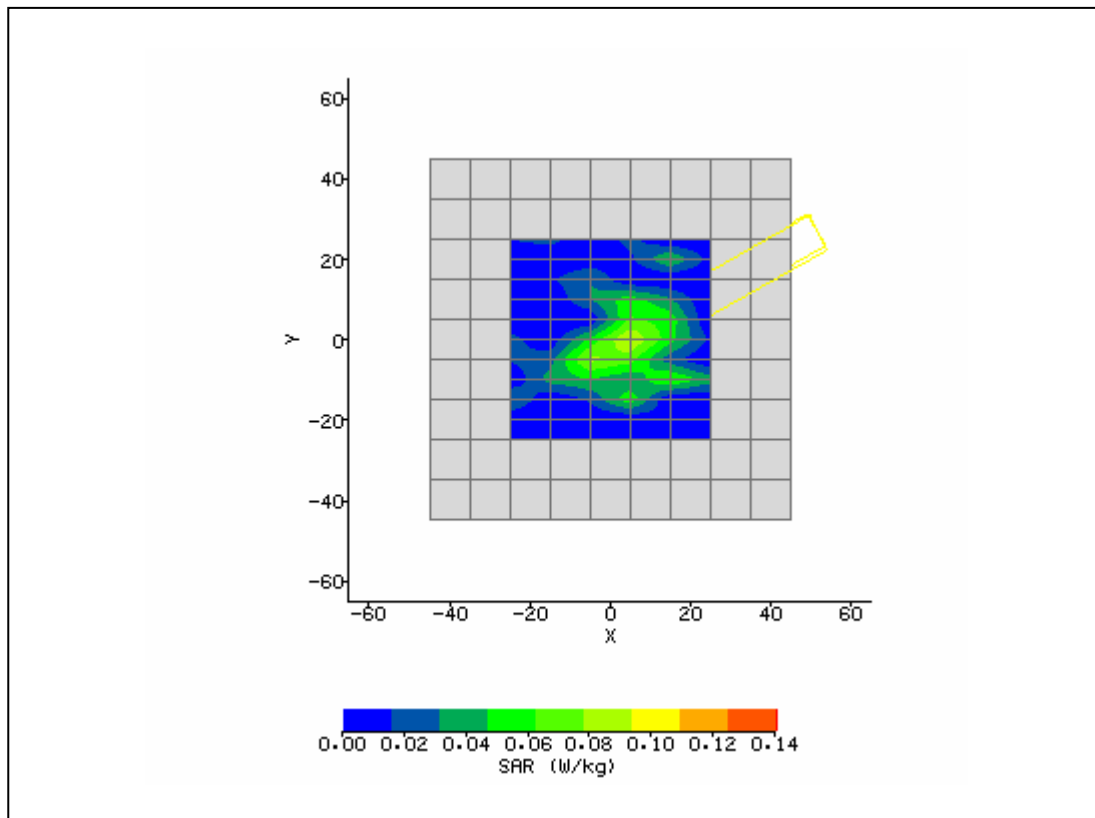


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 3:51:24 PM	DUT Battery Model/No:	
Filename:	Main_Lap_52_3D.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.468
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-4.50 mm
Antenna Configuration:	Integral Main	Max E Field:	4.60 V/m
Test Frequency:	5260MHz	SAR 1g:	0.065 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.014 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

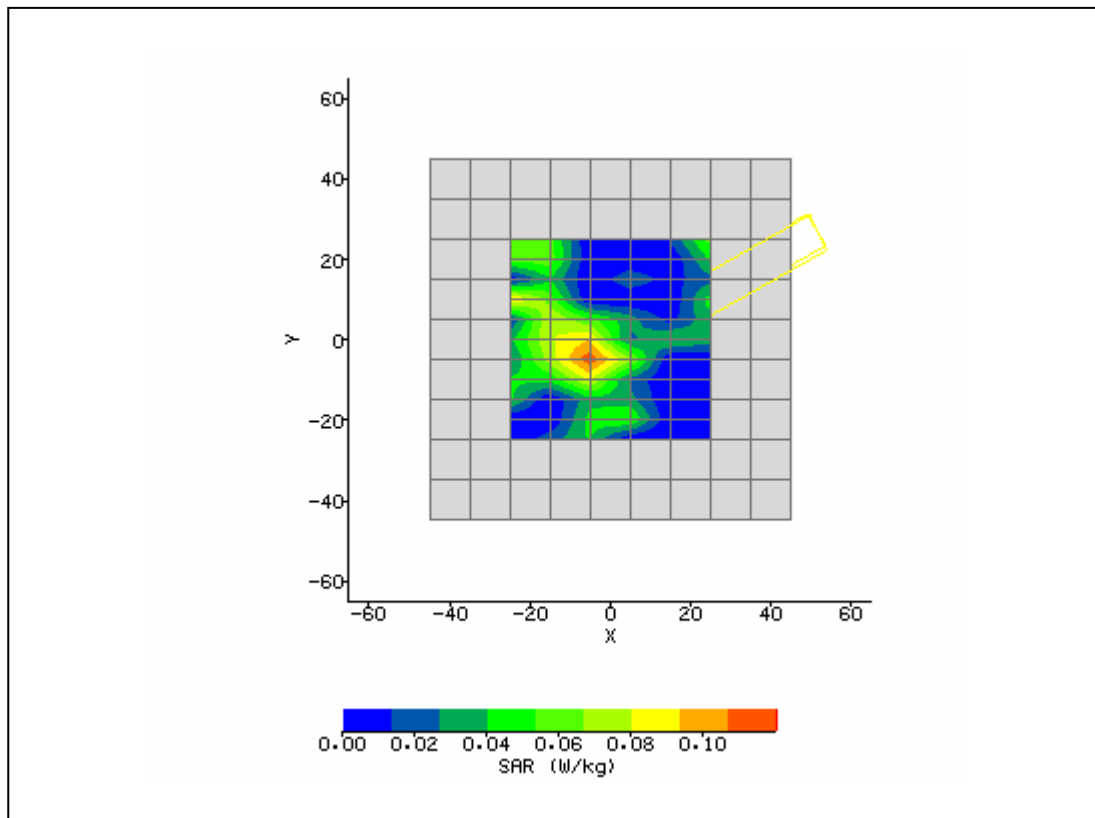


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 5:19:52 PM	DUT Battery Model/No:	
Filename:	Main_Top_64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.468
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-5.50 mm
Antenna Configuration:	Integral Aux	Max E Field:	20.28 V/m
Test Frequency:	5260MHz	SAR 1g:	1.165 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.028 W/kg
Type of Modulation:		SAR End:	0.027 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

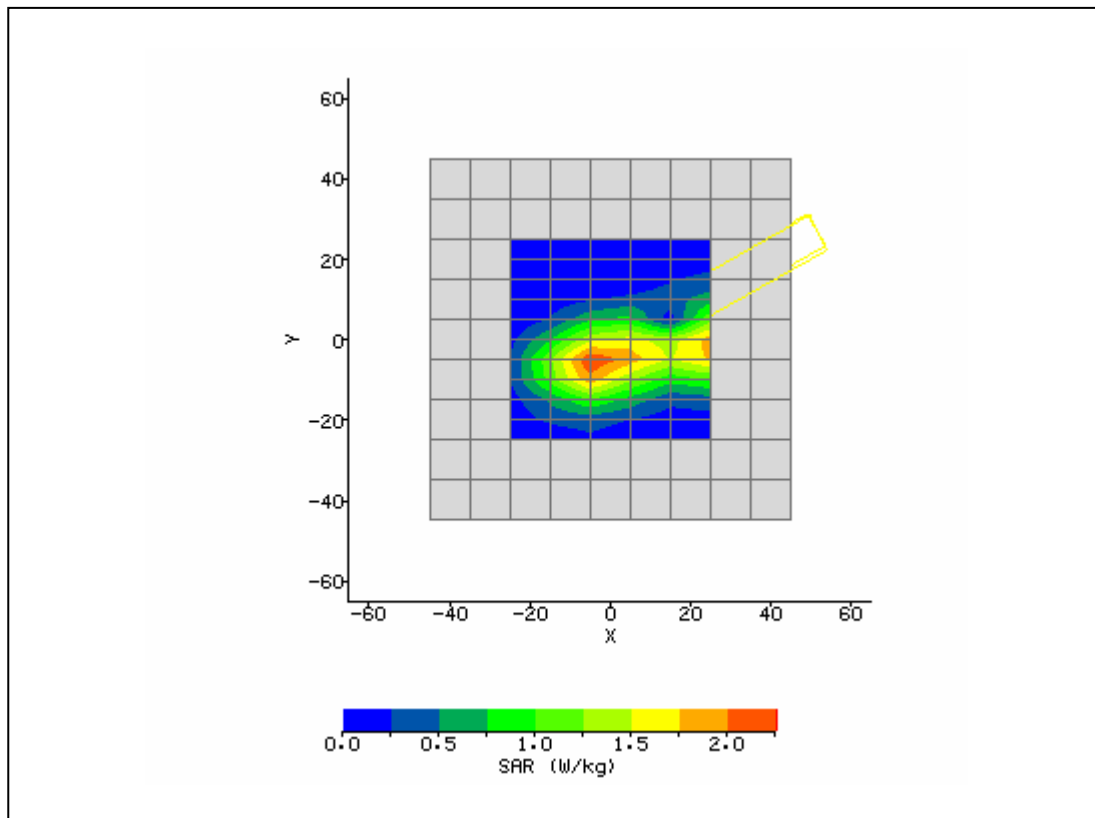


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 4:12:47 PM	DUT Battery Model/No:	
Filename:	Main_Side_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.402
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	6.00 mm
Antenna Configuration:	Integral Main	Max E Field:	15.65 V/m
Test Frequency:	5180MHz	SAR 1g:	0.714 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.121 W/kg
Type of Modulation:		SAR End:	0.125 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

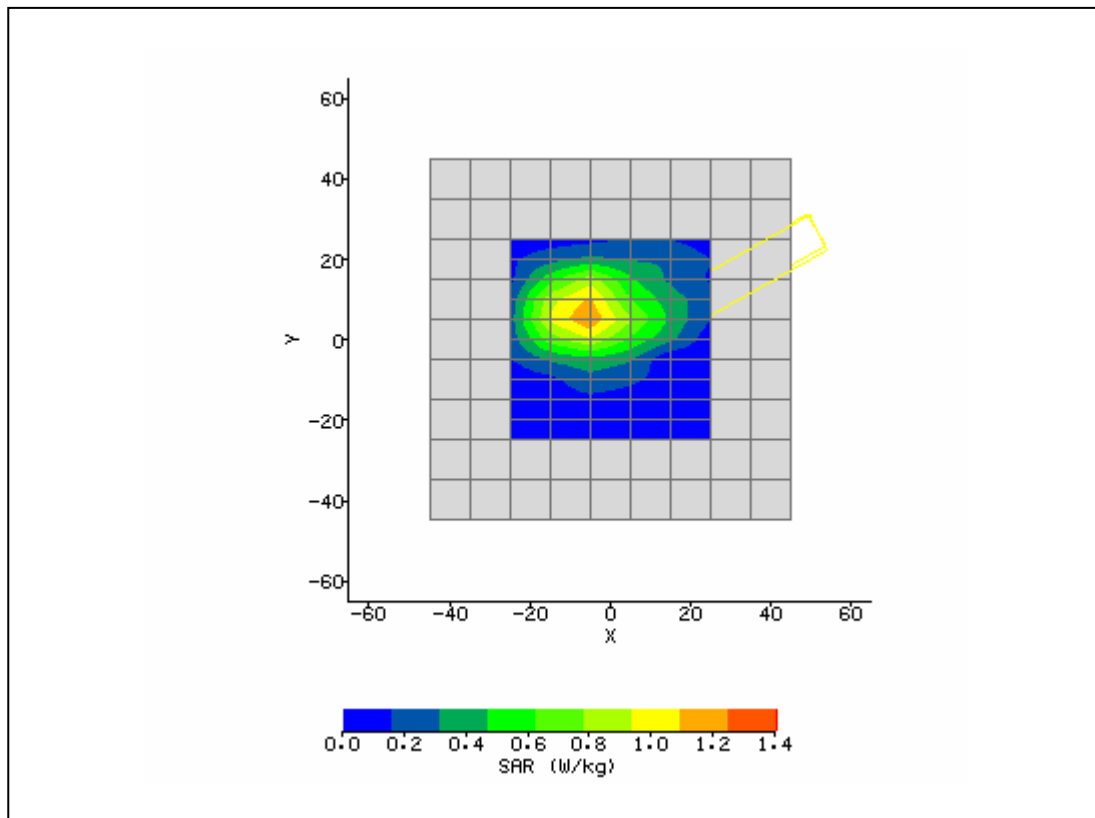


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 4:32:39 PM	DUT Battery Model/No:	
Filename:	Main_Top_36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.97
Relative Humidity:	30%	Conductivity:	5.463
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-11.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-2.50 mm
Antenna Configuration:	Integral Main	Max E Field:	20.20 V/m
Test Frequency:	5240MHz	SAR 1g:	1.174 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.043 W/kg
Type of Modulation:		SAR End:	0.044 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.33%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

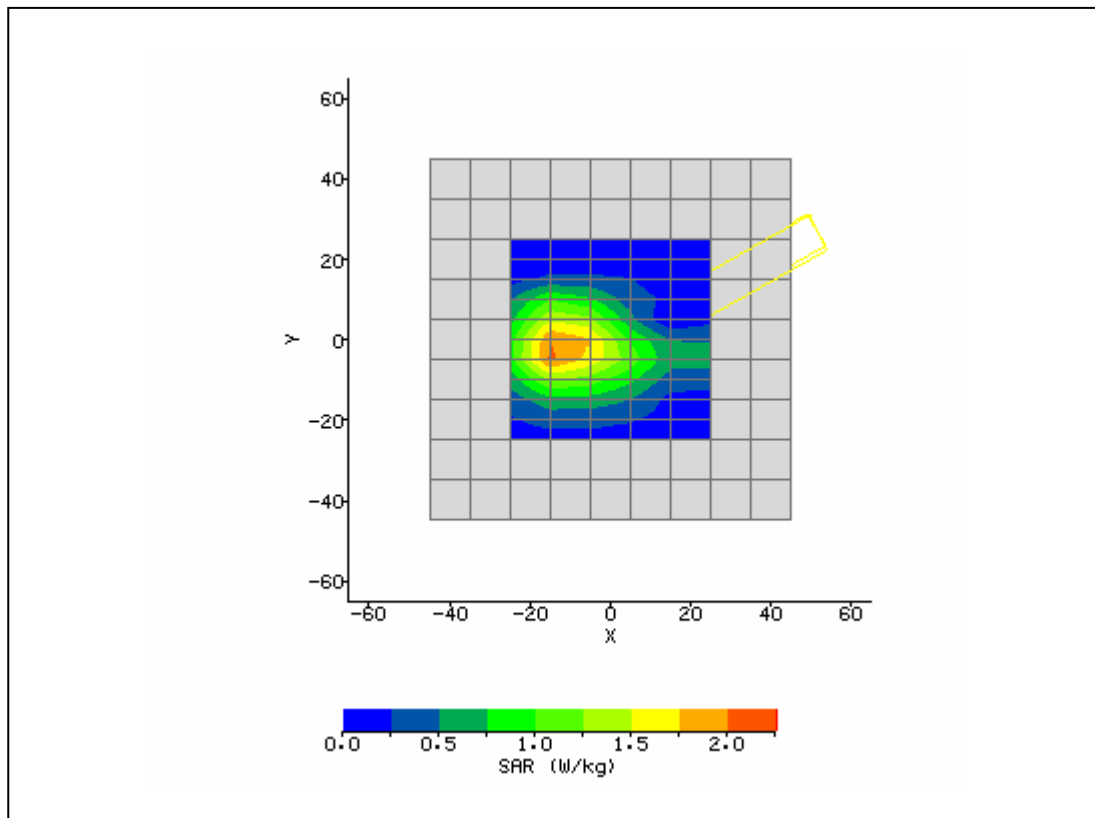


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 4:53:44 PM	DUT Battery Model/No:	
Filename:	Main_Top_48_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.71
Relative Humidity:	30%	Conductivity:	5.485
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-9.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-8.50 mm
Antenna Configuration:	Integral Main	Max E Field:	13.92 V/m
Test Frequency:	5320MHz	SAR 1g:	0.515 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.98 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

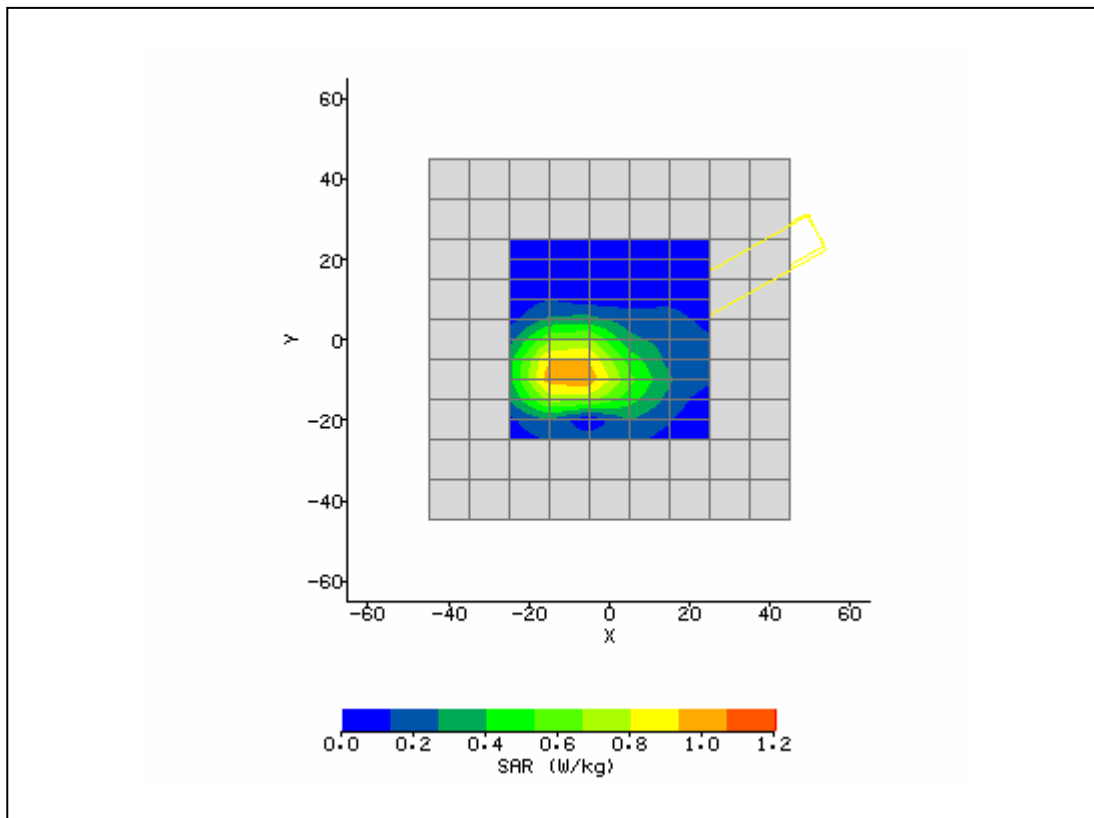


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/6/2007 1:37:29 PM	DUT Battery Model/No:	
Filename:	Main_Top_11_BT_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	BCM94311MCAG + DW360BT	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.468
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.40 mm
DUT Position:	Top	Max SAR Y-axis Location:	-8.80 mm
Antenna Configuration:	Integral - Main	Max E Field:	19.52 V/m
Test Frequency:	5260MHz	SAR 1g:	1.197 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.097 W/kg
Type of Modulation:		SAR End:	0.094 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/6/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

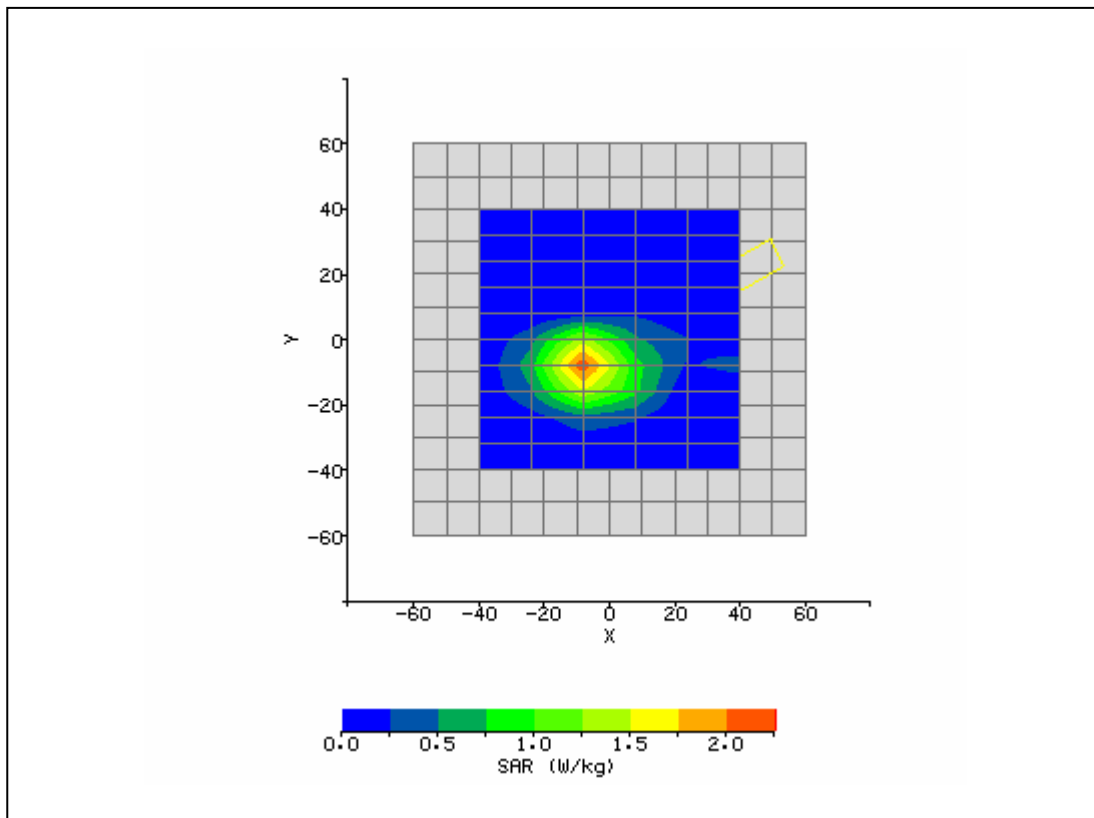


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2007 3:24:07 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG	Relative Permittivity:	46.92
Relative Humidity:	30%	Conductivity:	6.439
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-17.60 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-15.20 mm
Antenna Configuration:	Integral Main	Max E Field:	19.57 V/m
Test Frequency:	5785MHz	SAR 1g:	1.335 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.121 W/kg
Type of Modulation:		SAR End:	0.119 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

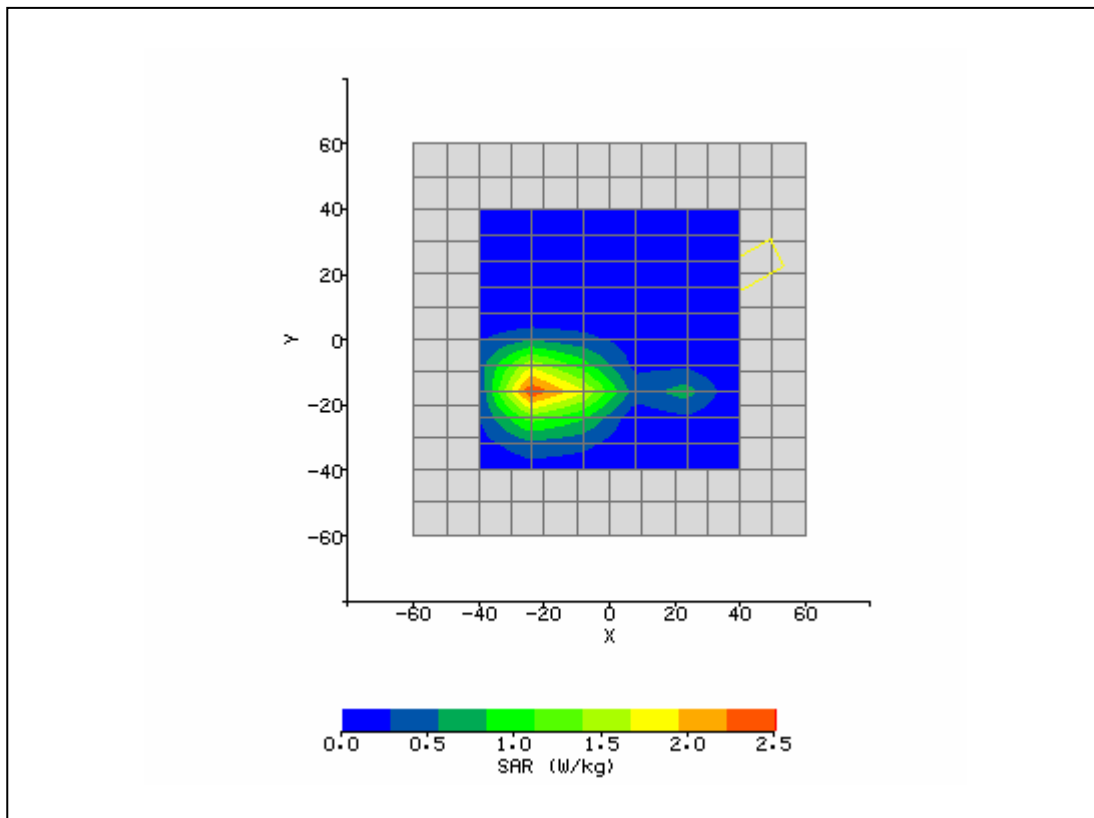


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2007 3:45:43 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG	Relative Permittivity:	46.92
Relative Humidity:	30%	Conductivity:	6.439
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	28.80 mm
Antenna Configuration:	Integral Main	Max E Field:	10.82 V/m
Test Frequency:	5785MHz	SAR 1g:	0.512 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.337 W/kg
Type of Modulation:		SAR End:	0.325 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/07/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

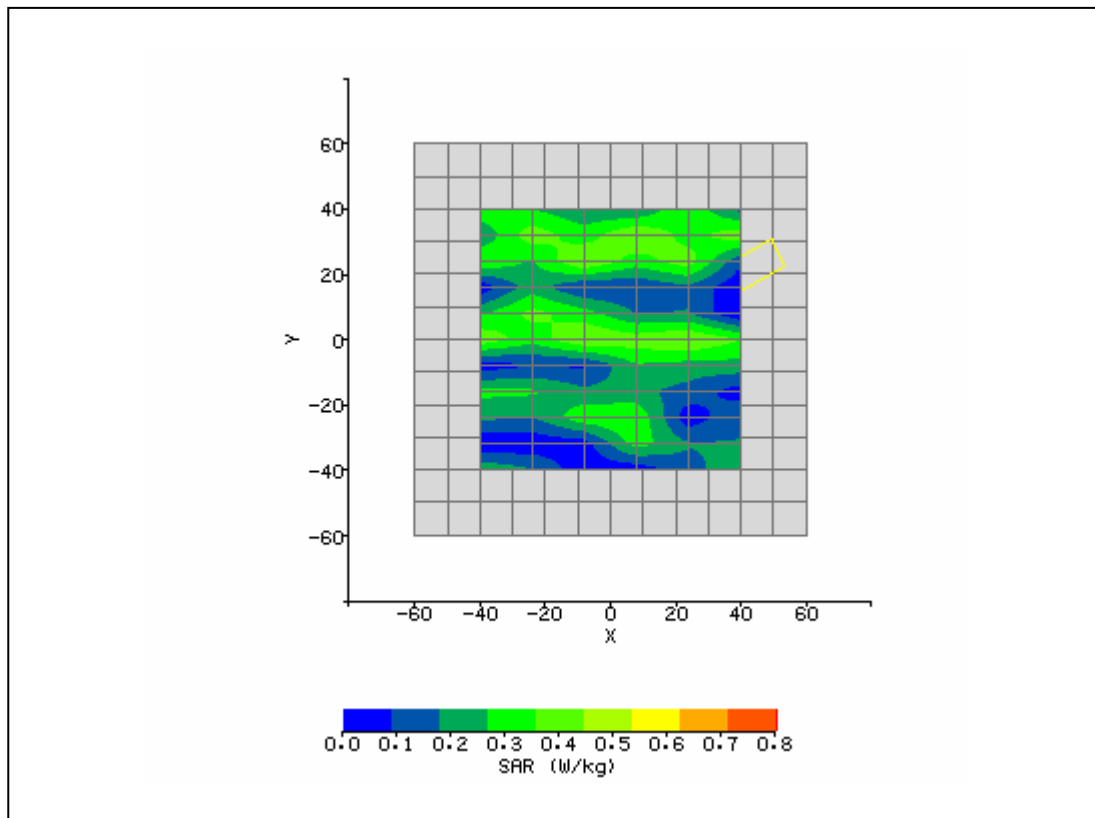


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2007 4:07:54 PM	DUT Battery Model/No:	
Filename:	Main_Lap_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG	Relative Permittivity:	46.92
Relative Humidity:	30%	Conductivity:	6.439
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	11.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-13.00 mm
Antenna Configuration:	Integral Main	Max E Field:	3.86 V/m
Test Frequency:	5785MHz	SAR 1g:	0.018 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/07/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

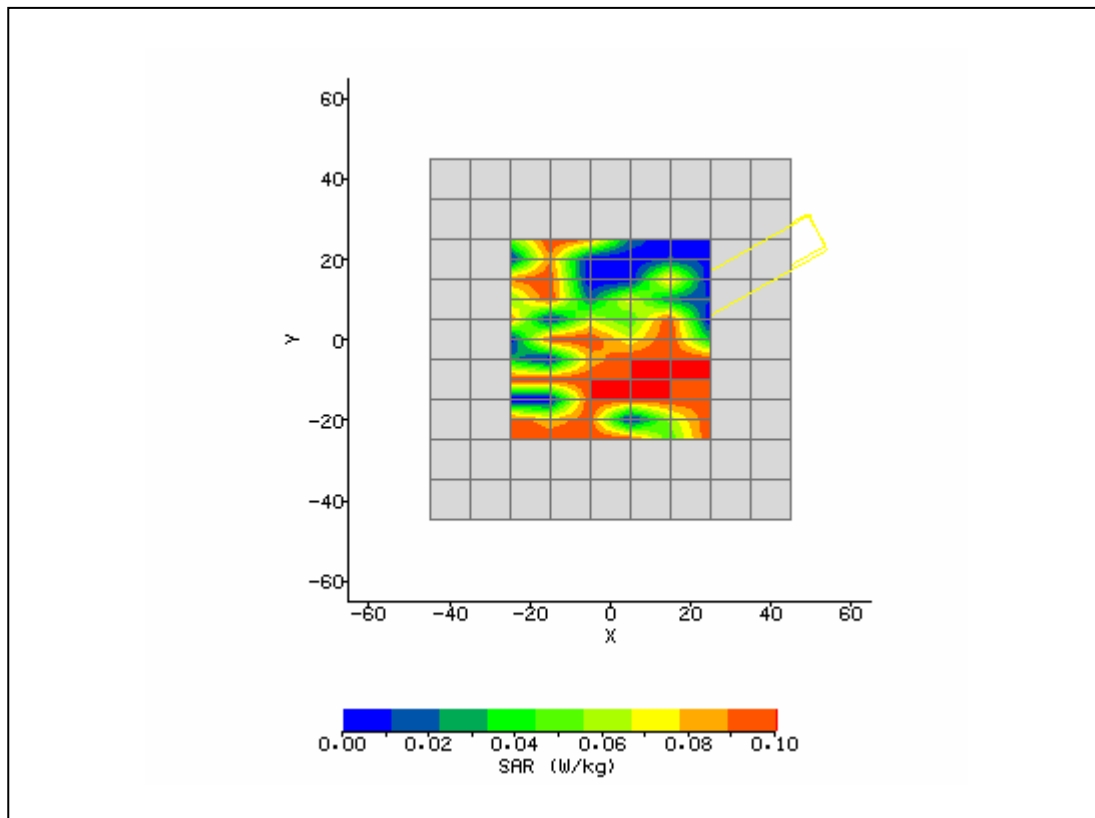


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2007 4:33:29 PM	DUT Battery Model/No:	
Filename:	Main_Side_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG	Relative Permittivity:	46.92
Relative Humidity:	30%	Conductivity:	6.439
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-3.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-15.50 mm
Antenna Configuration:	Integral Aux	Max E Field:	13.83 V/m
Test Frequency:	5785MHz	SAR 1g:	0.734 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.016 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/07/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

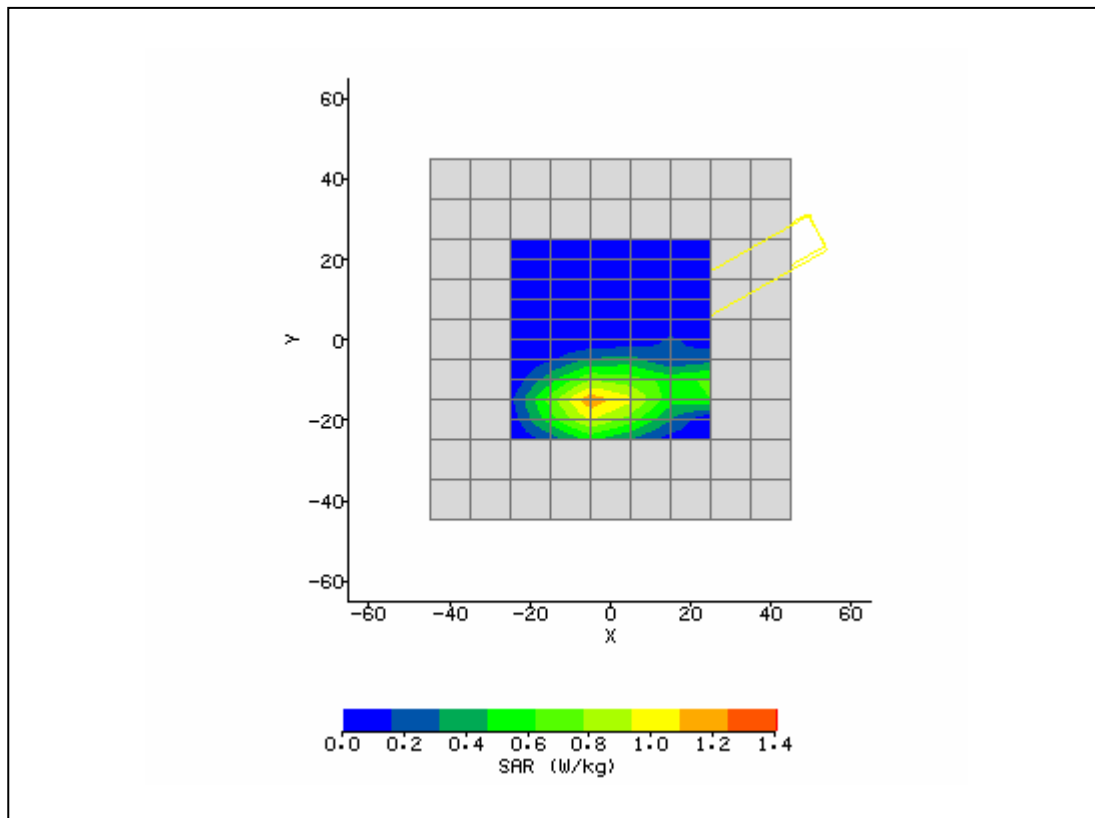


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2007 7:39:30 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG	Relative Permittivity:	47.23
Relative Humidity:	30%	Conductivity:	6.445
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-17.60 mm
Antenna Configuration:	Integral Main	Max E Field:	16.23 V/m
Test Frequency:	5745MHz	SAR 1g:	1.025 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.422 W/kg
Type of Modulation:		SAR End:	0.414 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/07/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

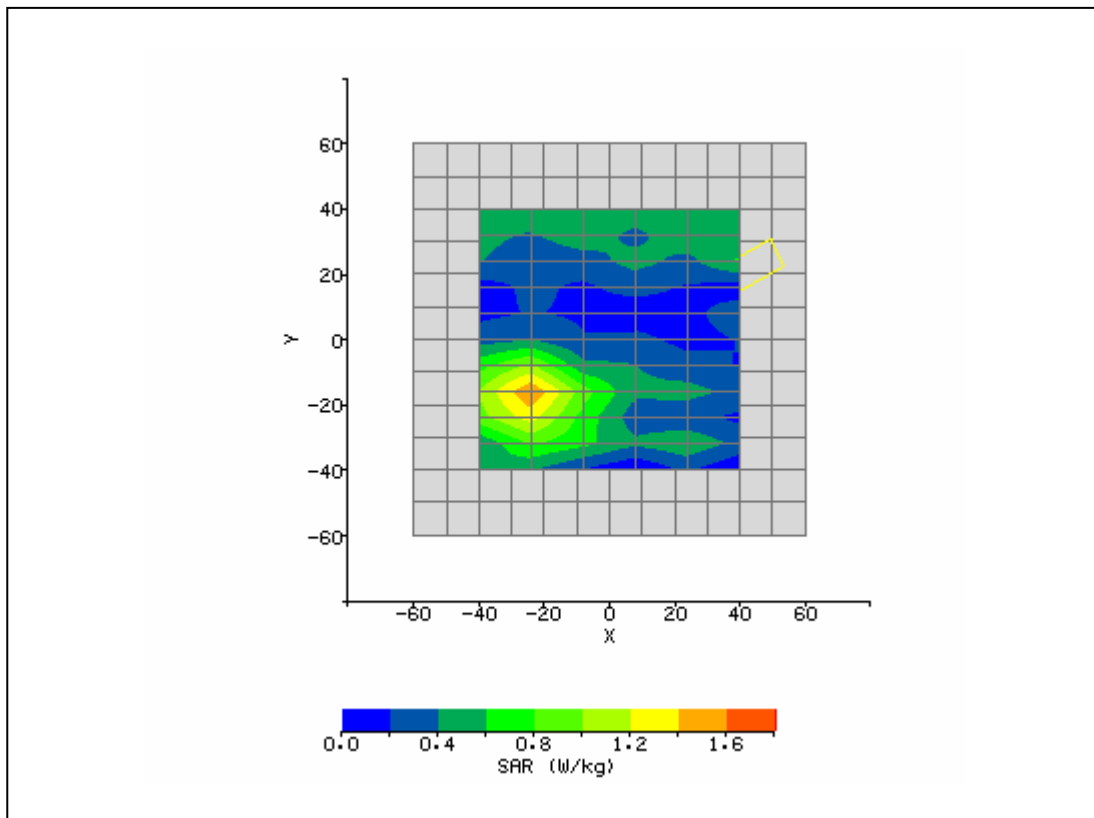


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2007 7:59:13 AM	DUT Battery Model/No:	
Filename:	Main_Top_149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG	Relative Permittivity:	46.79
Relative Humidity:	30%	Conductivity:	6.434
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Top 0mm	Max SAR Y-axis Location:	-20.00 mm
Antenna Configuration:	Integral Main	Max E Field:	20.35 V/m
Test Frequency:	5825MHz	SAR 1g:	1.331 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.530 W/kg
Type of Modulation:		SAR End:	0.531 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/07/2007
Input Power Level:	Set by sw	Extrapolation:	poly4

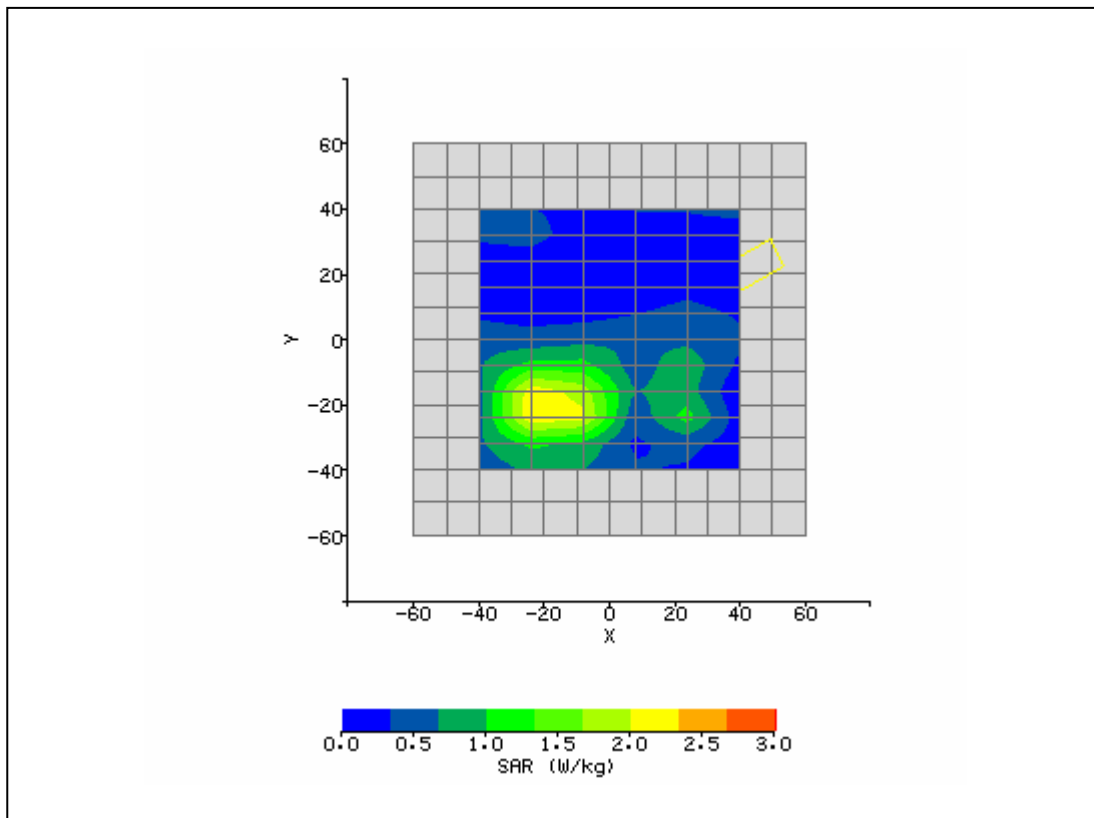


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2007 2:39:29 PM	DUT Battery Model/No:	
Filename:	Main_Top_52_BT_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG + DW360BT	Relative Permittivity:	46.92
Relative Humidity:	30%	Conductivity:	6.439
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	9.60 mm
DUT Position:	Top	Max SAR Y-axis Location:	-31.20 mm
Antenna Configuration:	Integral - Main	Max E Field:	26.04 V/m
Test Frequency:	5775MHz	SAR 1g:	1.402 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.416 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.73 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/8/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

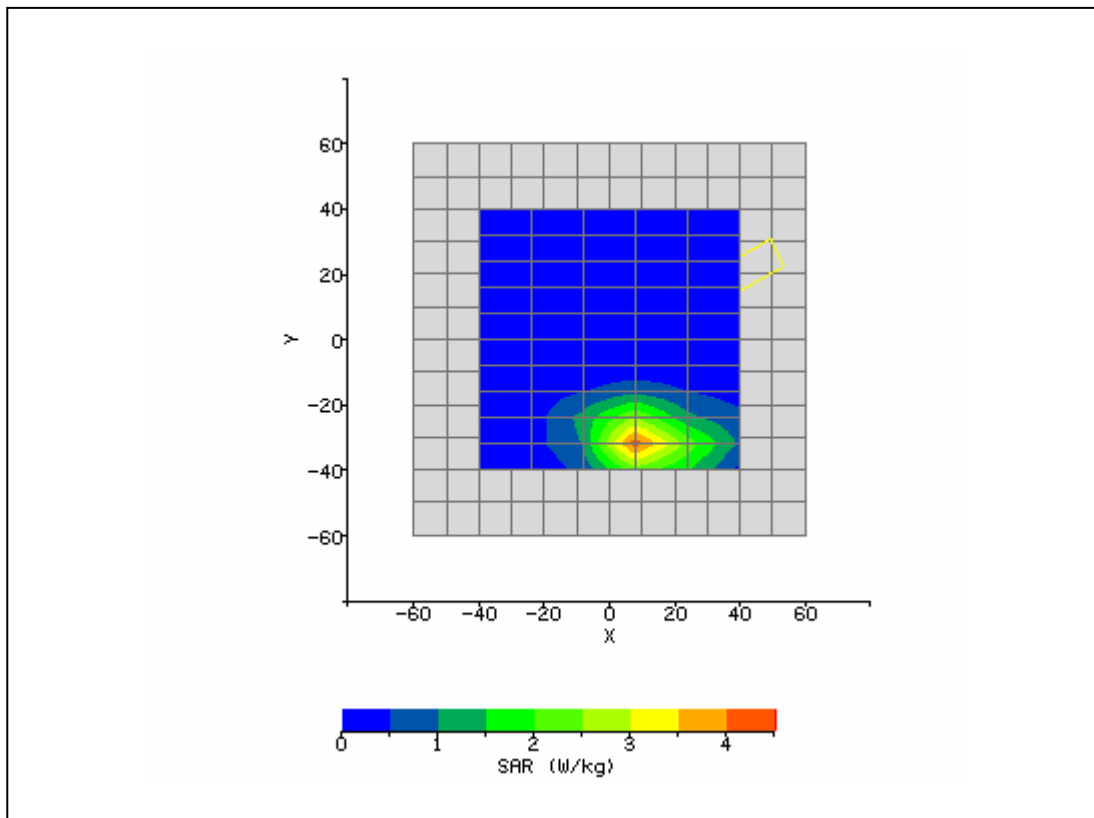

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/3/2007 8:12:14 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.51
Relative Humidity:	30%	Conductivity:	1.82
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.31 mm
DUT Position:	8mm	Max SAR Y-axis Location:	8.80 mm
Antenna Configuration:	2450 Dipole	Max E Field:	149.32 V/m
Test Frequency:	2450MHz	SAR 1g:	52.671 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	23.954 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	3.248 W/kg
Type of Modulation:		SAR End:	3.245 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/03/2007
Input Power Level:	1W	Extrapolation:	poly4

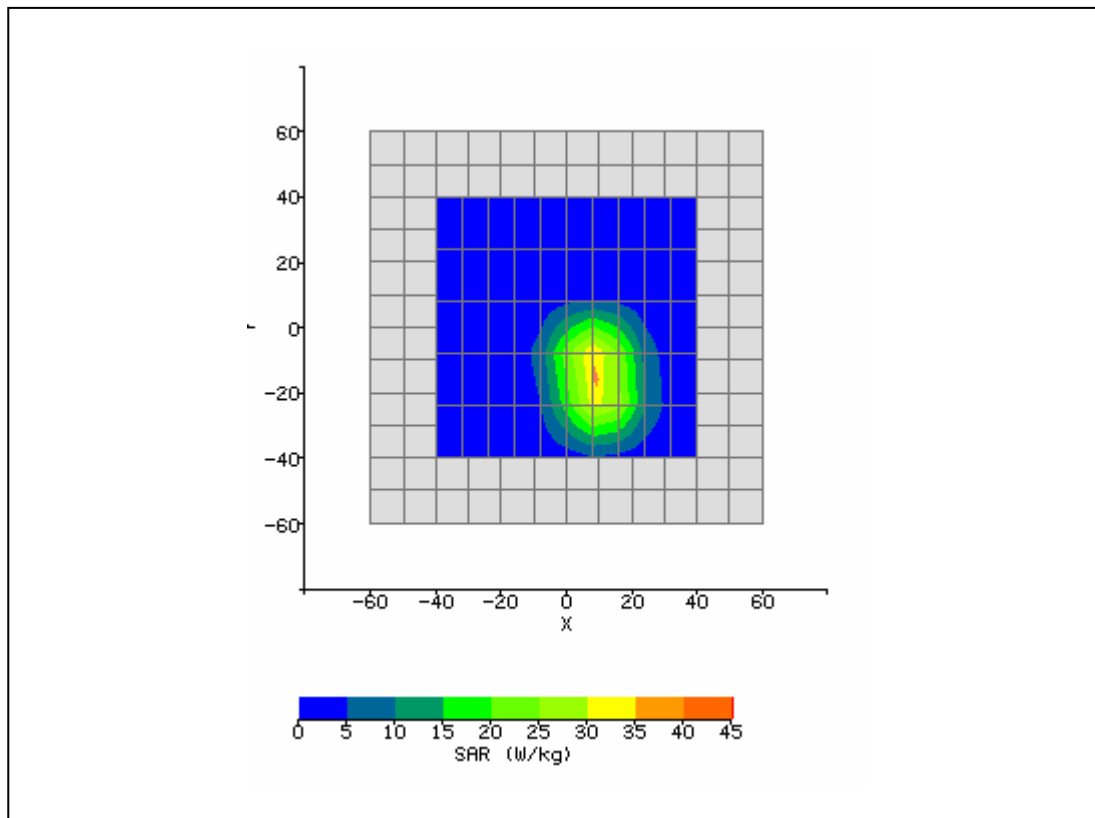

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2007 11:58:42 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	36.0
Relative Humidity:	30%	Conductivity:	4.65
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-3.50 mm
Antenna Configuration:	Waveguide	Max E Field:	41.67 V/m
Test Frequency:	5200MHz	SAR 1g:	3.369 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	1.455 W/kg
Conversion Factors:	.390 / .390 / .390	SAR Start:	0.163 W/kg
Type of Modulation:		SAR End:	0.159 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	0.1W	Extrapolation:	poly4

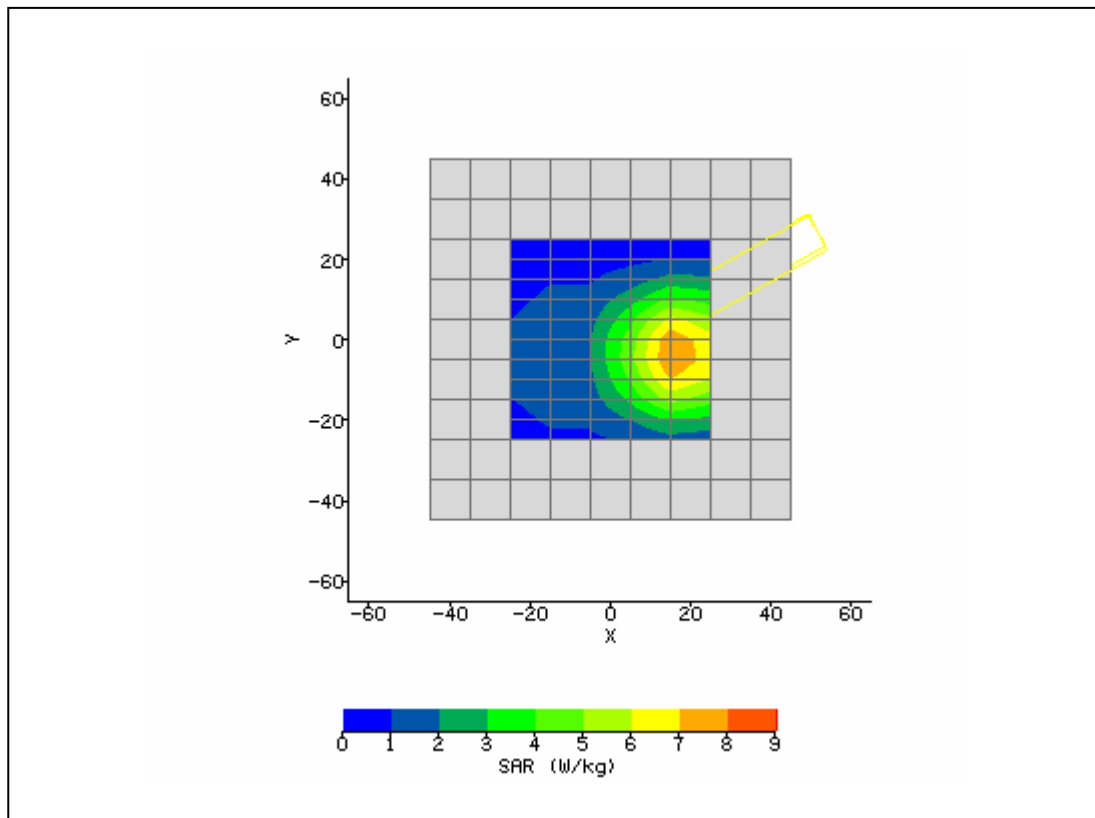

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2007 9:47:45 AM	DUT Battery Model/No:	
Filename:	Main_Top_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	35.4
Relative Humidity:	30%	Conductivity:	5.27
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	Waveguide	Max E Field:	42.44 V/m
Test Frequency:	5800MHz	SAR 1g:	3.859 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	1.650 W/kg
Conversion Factors:	.428 / .428 / .428	SAR Start:	0.200 W/kg
Type of Modulation:		SAR End:	0.141 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-29.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/06/2007
Input Power Level:	0.1W	Extrapolation:	poly4

