




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 12:12:12 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	49.21
Relative Humidity:	41.5%	Conductivity:	1.983
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	6.92 V/m
Test Frequency:	2412MHz	SAR 1g:	0.036 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/12/08
Input Power Level:	Set by sw	Extrapolation:	poly4

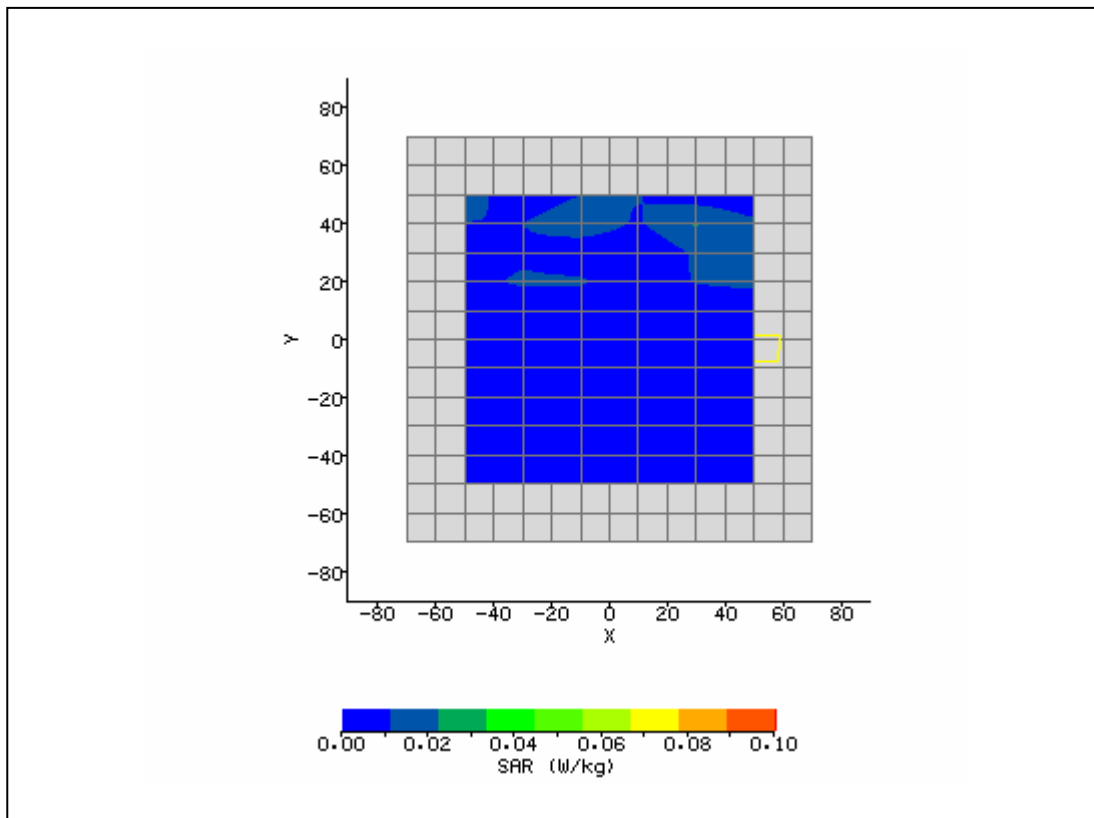


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 1:18:16 PM	DUT Battery Model/No:	
Filename:	Main_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	49.02
Relative Humidity:	41.5%	Conductivity:	2.018
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	7.01 V/m
Test Frequency:	2437MHz	SAR 1g:	0.047 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.98 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/12/08
Input Power Level:	Set by sw	Extrapolation:	poly4

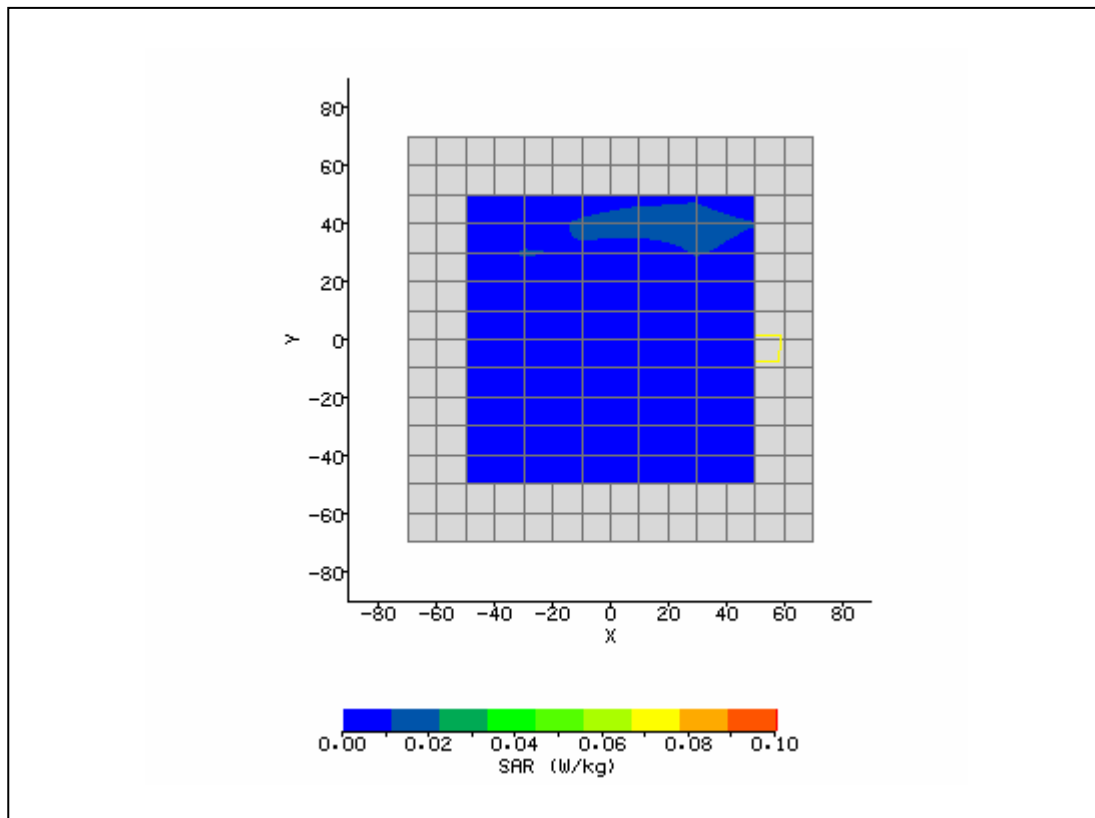


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 2:21:45 PM	DUT Battery Model/No:	
Filename:	Main_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	48.86
Relative Humidity:	41.5%	Conductivity:	2.048
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	6.85 V/m
Test Frequency:	2462MHz	SAR 1g:	0.046 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.01%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/12/08
Input Power Level:	Set by sw	Extrapolation:	poly4

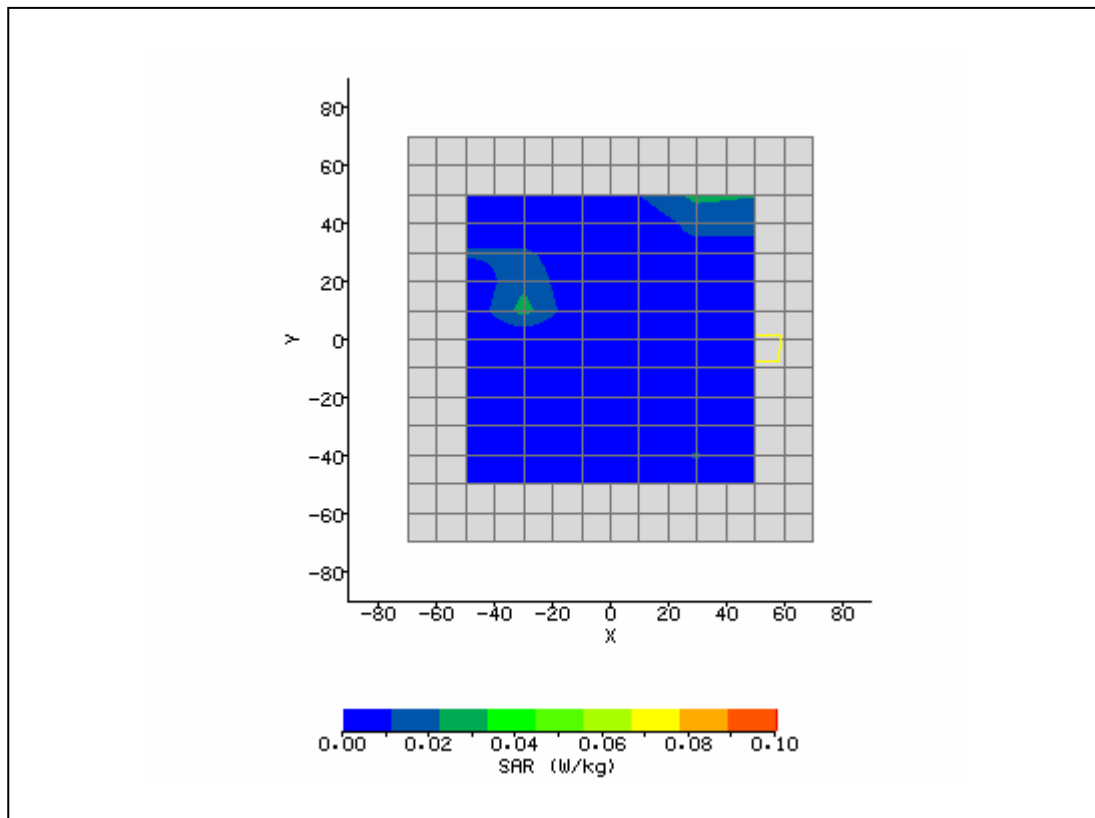


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 2:41:34 PM	DUT Battery Model/No:	
Filename:	Main_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	49.02
Relative Humidity:	41.5%	Conductivity:	2.018
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Yageo - Aux	Max E Field:	6.93 V/m
Test Frequency:	2437MHz	SAR 1g:	0.031 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.042 W/kg
Type of Modulation:		SAR End:	0.043 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/12/08
Input Power Level:	Set by sw	Extrapolation:	poly4

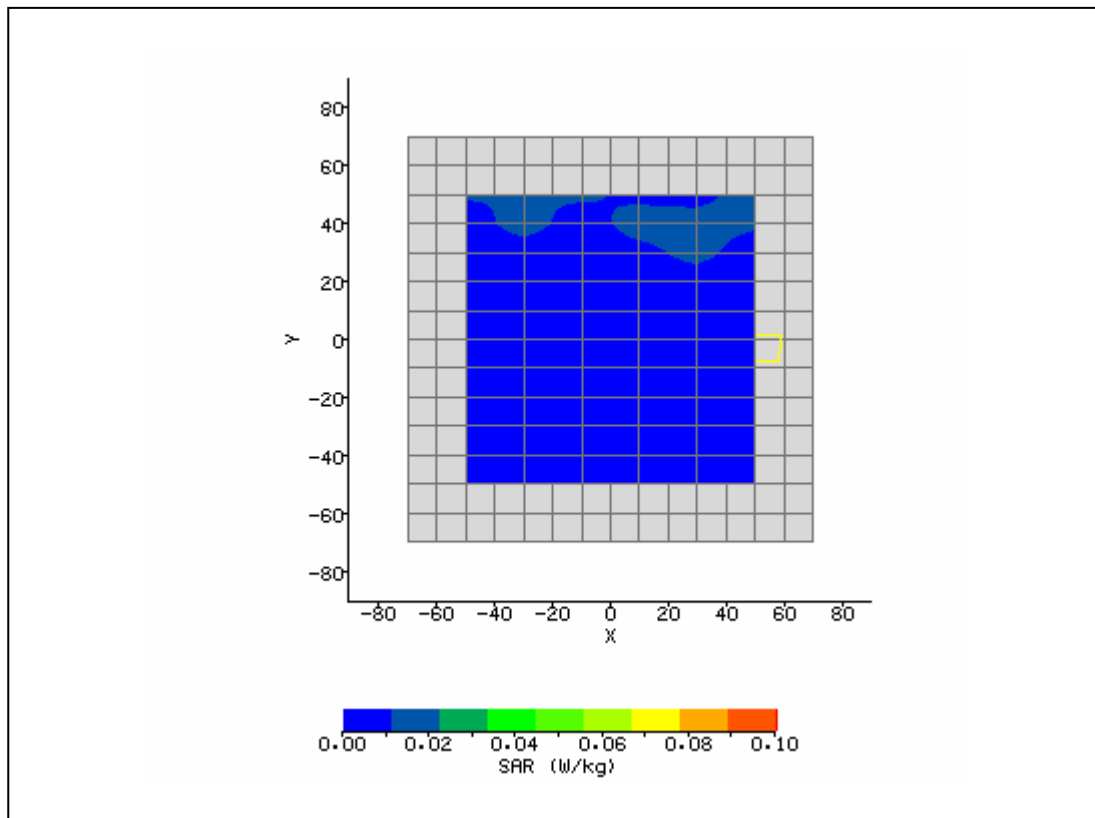


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 9:27:28 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	48.21
Relative Humidity:	41.5%	Conductivity:	5.225
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-17.60 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	5.28 V/m
Test Frequency:	5180MHz	SAR 1g:	0.087 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.059 W/kg
Type of Modulation:		SAR End:	0.060 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

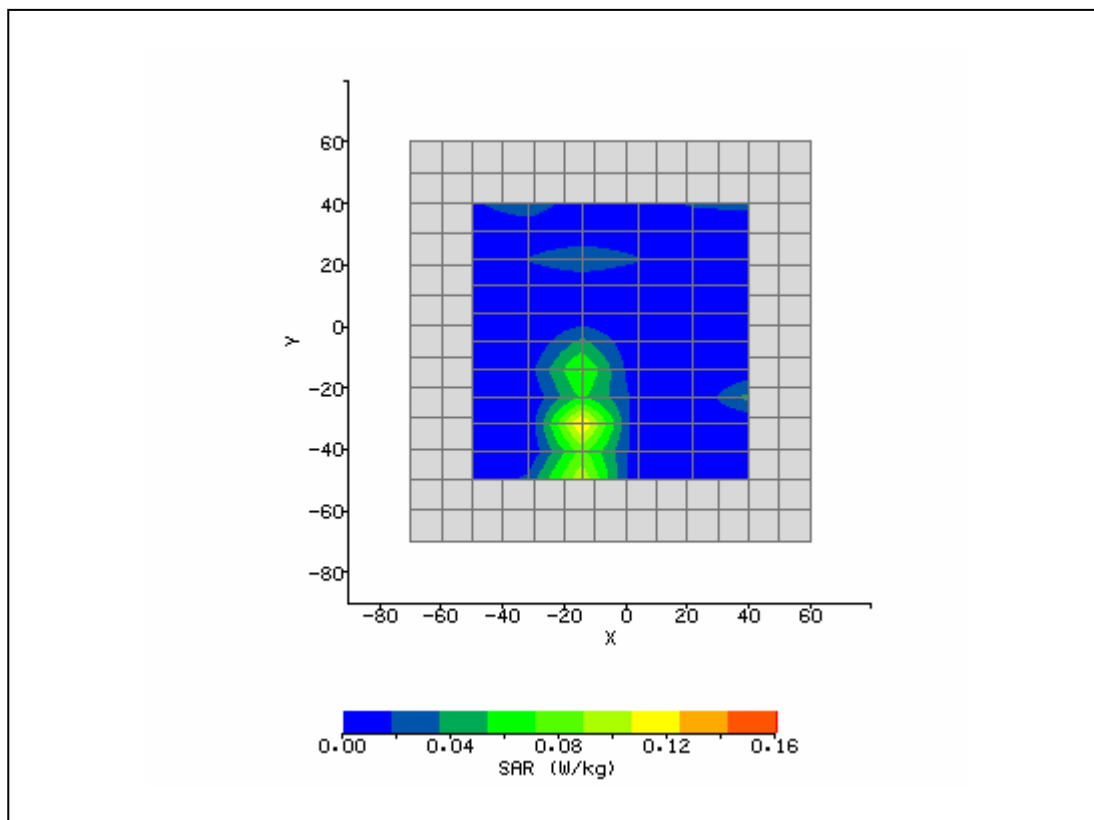


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 10:09:05 AM	DUT Battery Model/No:	
Filename:	Main_48_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	48.14
Relative Humidity:	41.5%	Conductivity:	5.220
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.20 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	4.34 V/m
Test Frequency:	5240MHz	SAR 1g:	0.052 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.028 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

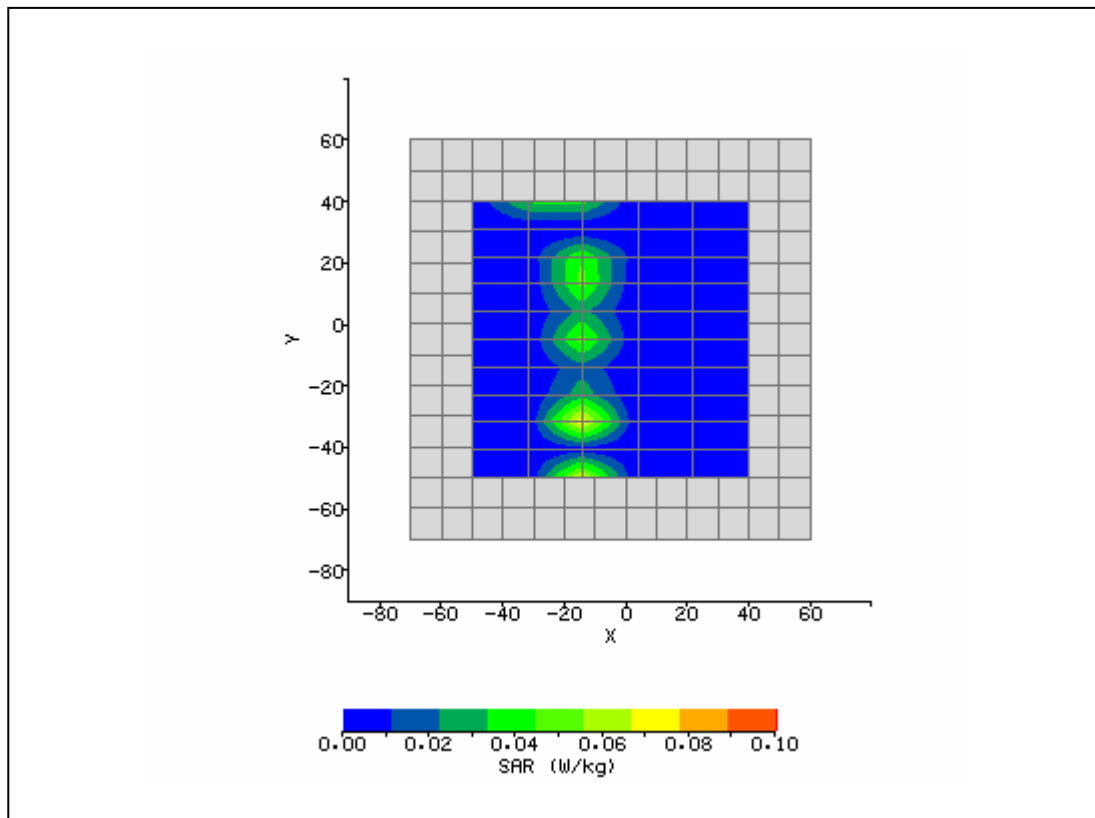


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 10:49:56 AM	DUT Battery Model/No:	
Filename:	Main_48_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	48.06
Relative Humidity:	41.5%	Conductivity:	5.217
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.80 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-30.20 mm
Antenna Configuration:	Yageo - Main	Max E Field:	3.66 V/m
Test Frequency:	5260MHz	SAR 1g:	0.040 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.010 W/kg
Type of Modulation:		SAR End:	0.010 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

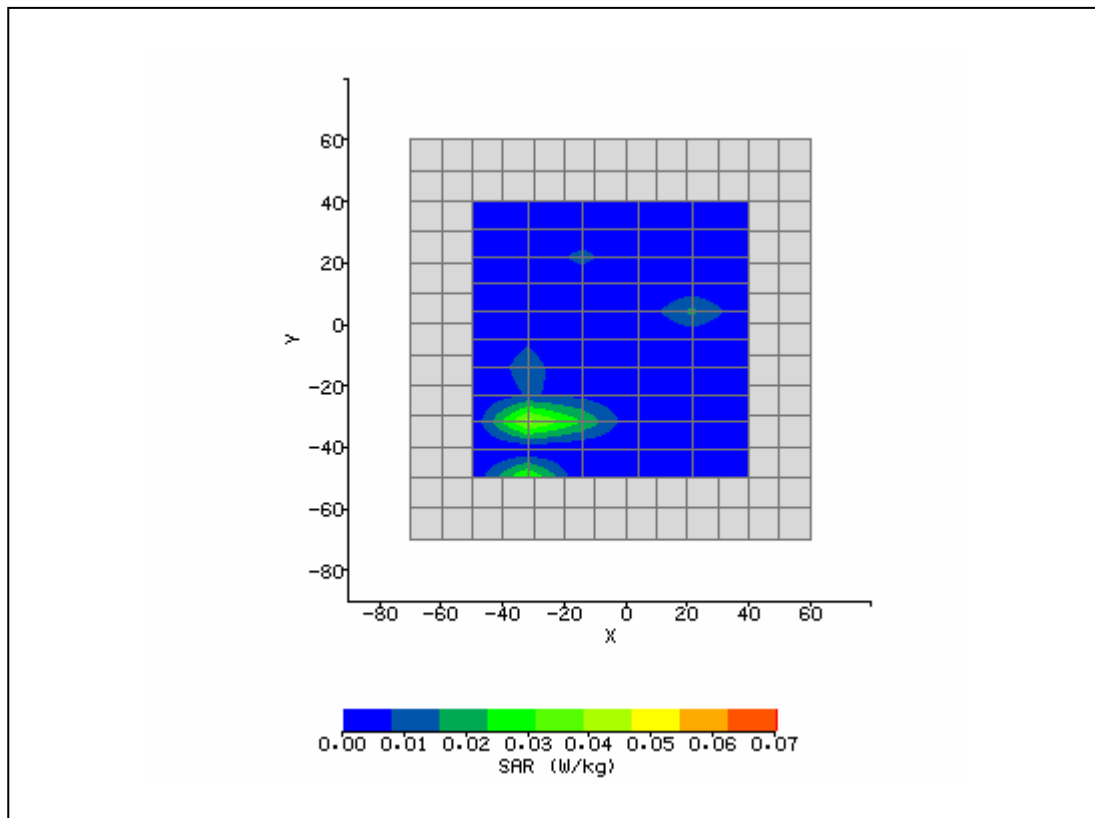


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 11:14:03 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	47.91
Relative Humidity:	44.5%	Conductivity:	5.213
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	16.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	10.69 V/m
Test Frequency:	5320MHz	SAR 1g:	0.371 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.295 W/kg
Type of Modulation:		SAR End:	0.295 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

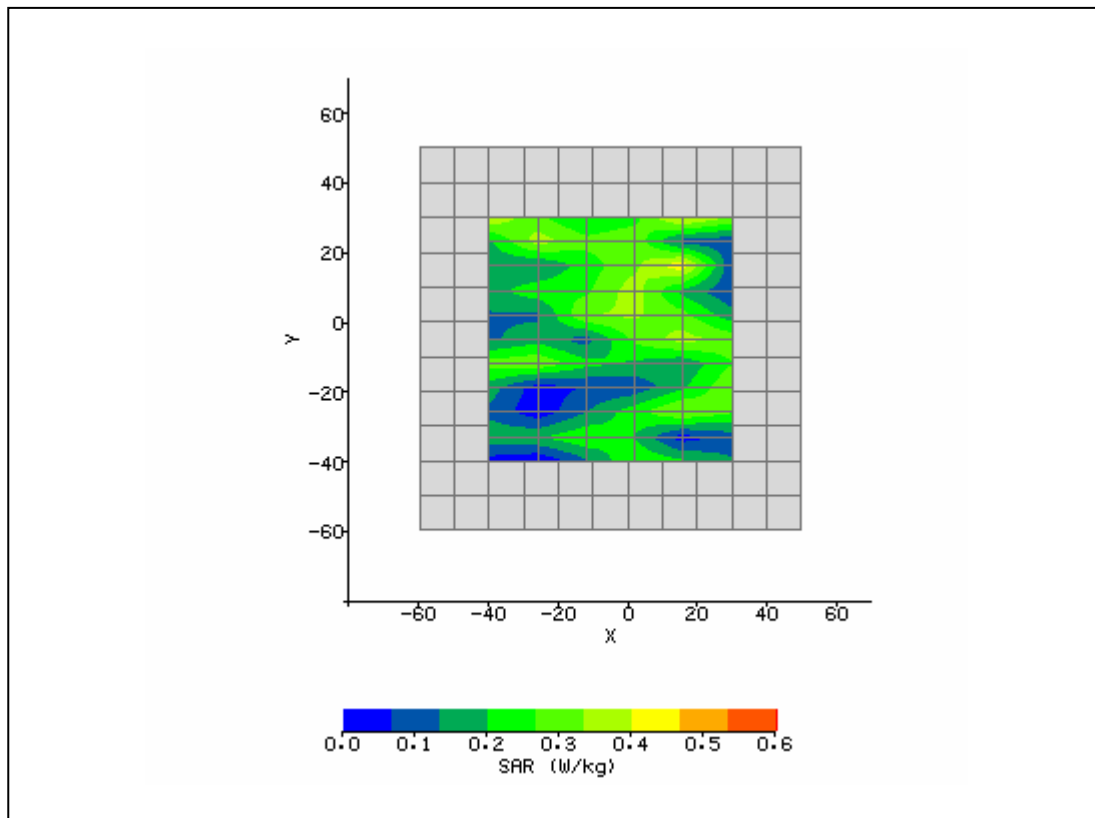


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 11:41:12 AM	DUT Battery Model/No:	
Filename:	Main_64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	47.91
Relative Humidity:	44.5%	Conductivity:	5.213
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Yageo - Aux	Max E Field:	10.60 V/m
Test Frequency:	5320MHz	SAR 1g:	0.501 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.323 W/kg
Type of Modulation:		SAR End:	0.327 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

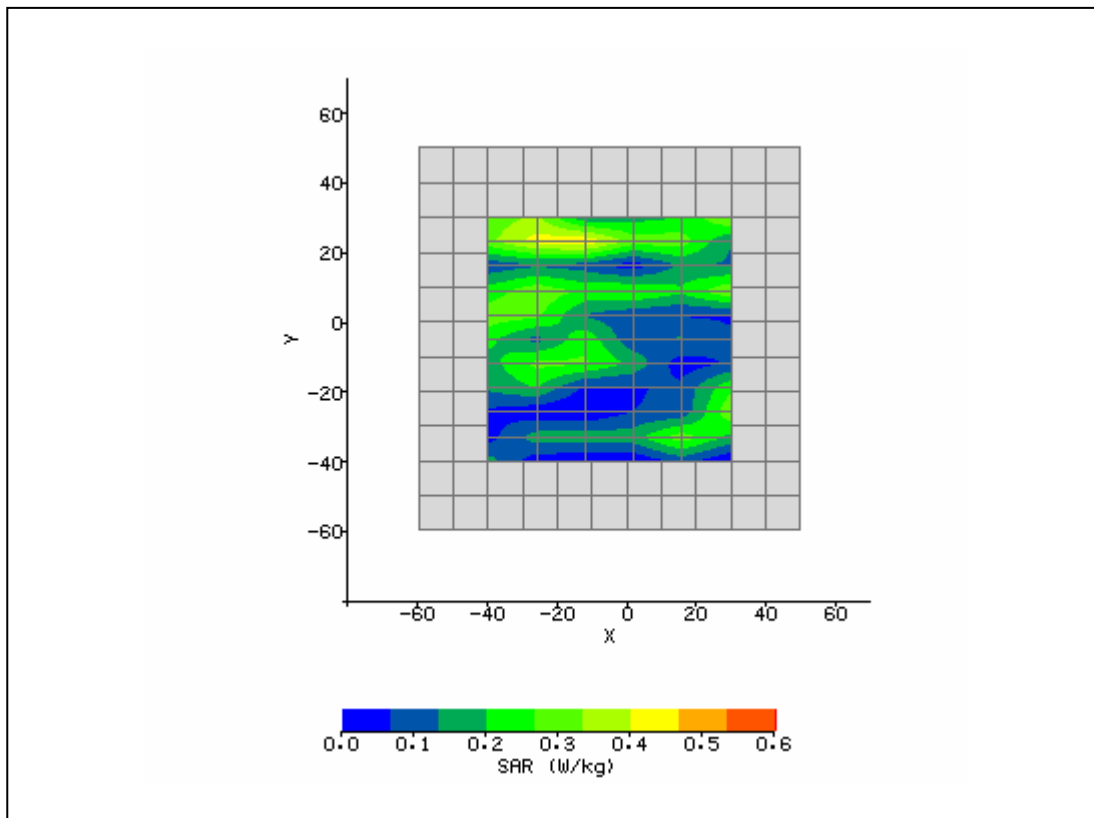


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 11:55:17 AM	DUT Battery Model/No:	
Filename:	Main_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	47.72
Relative Humidity:	41.5%	Conductivity:	5.875
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-25.60 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-32.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	8.78 V/m
Test Frequency:	5745MHz	SAR 1g:	0.360 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.324 W/kg
Type of Modulation:		SAR End:	0.329 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.26 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

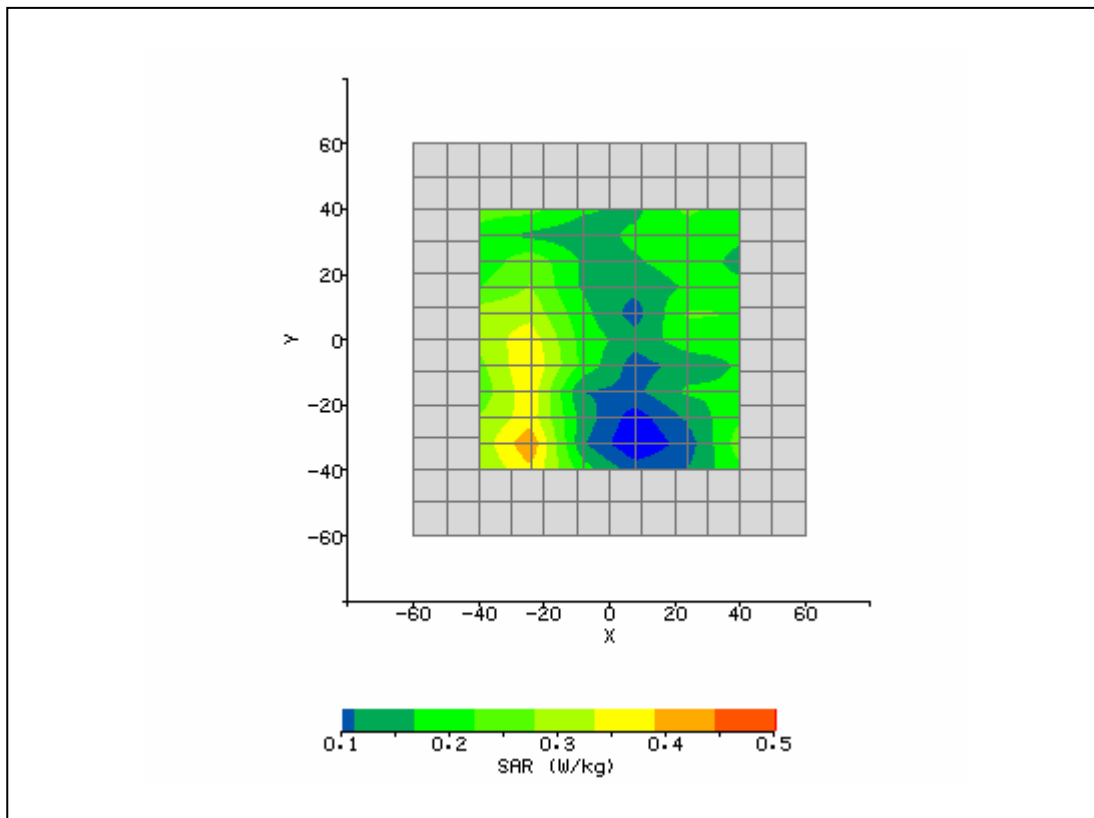


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 1:43:12 PM	DUT Battery Model/No:	
Filename:	Main_149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	46.88
Relative Humidity:	41.5%	Conductivity:	6.044
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-12.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	12.72 V/m
Test Frequency:	5785MHz	SAR 1g:	0.845 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.662 W/kg
Type of Modulation:		SAR End:	0.669 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

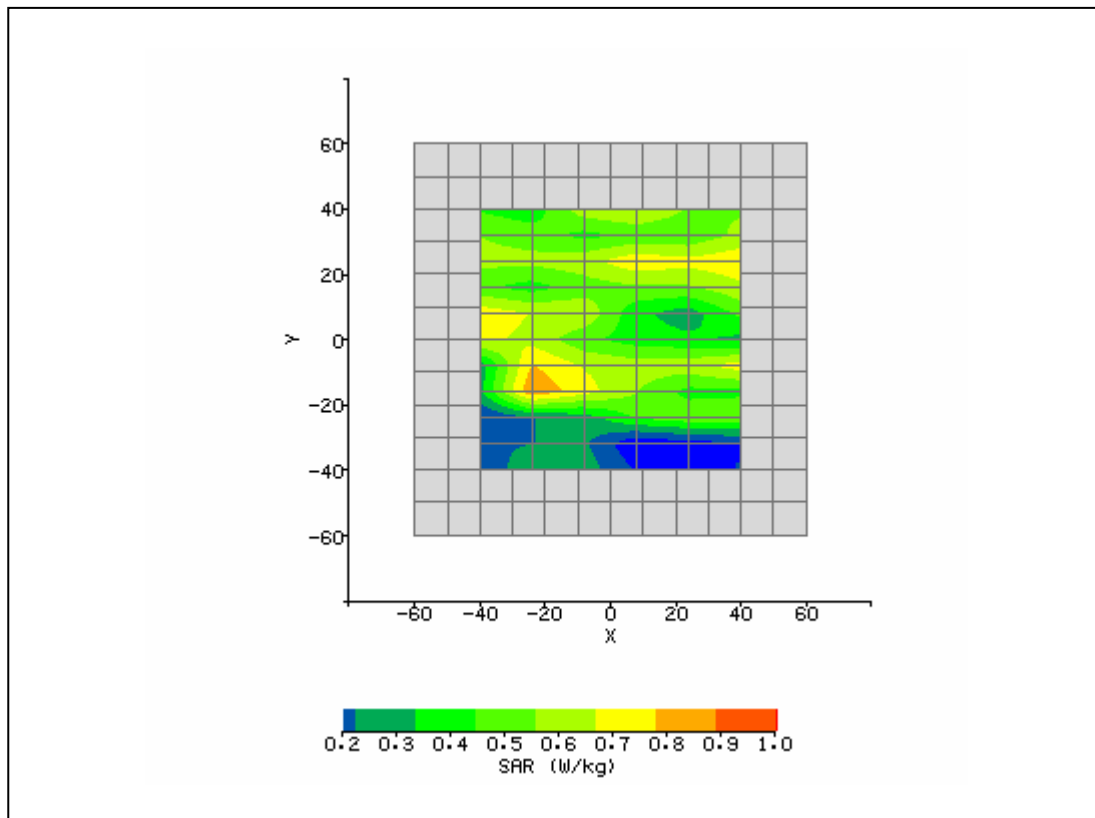


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 2:55:55 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	46.56
Relative Humidity:	41.5%	Conductivity:	6.107
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-16.00 mm
Antenna Configuration:	Integral - Main (Yageo)	Max E Field:	11.27 V/m
Test Frequency:	5825MHz	SAR 1g:	0.524 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.307 W/kg
Type of Modulation:		SAR End:	0.312 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.66 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

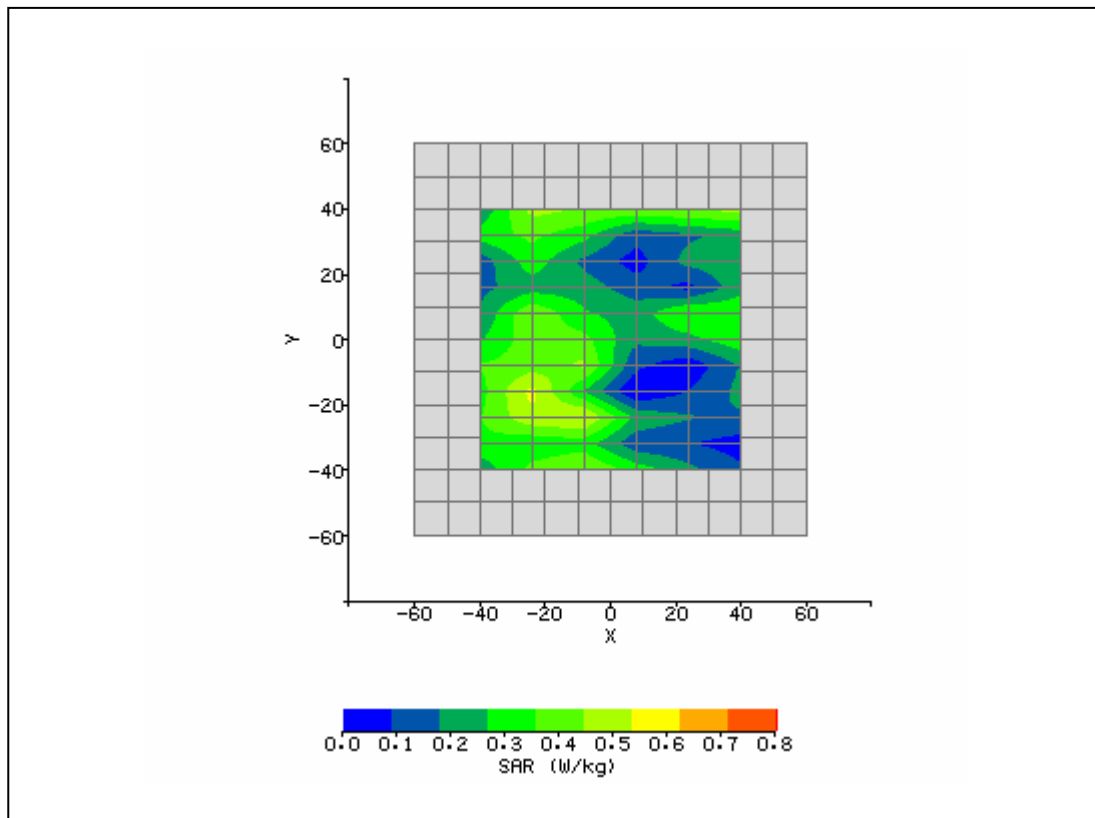


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 3:36:32 PM	DUT Battery Model/No:	
Filename:	Main_165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	5800
Device Under Test:	BCM94311MCAG / Galileo	Relative Permittivity:	46.88
Relative Humidity:	41.5%	Conductivity:	6.044
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.80 mm
DUT Position:	Lap Touch	Max SAR Y-axis Location:	-16.00 mm
Antenna Configuration:	Integral - Main (Yageo)	Max E Field:	9.35 V/m
Test Frequency:	5785MHz	SAR 1g:	0.358 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.298 W/kg
Type of Modulation:		SAR End:	0.302 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw - max.	Extrapolation:	poly4

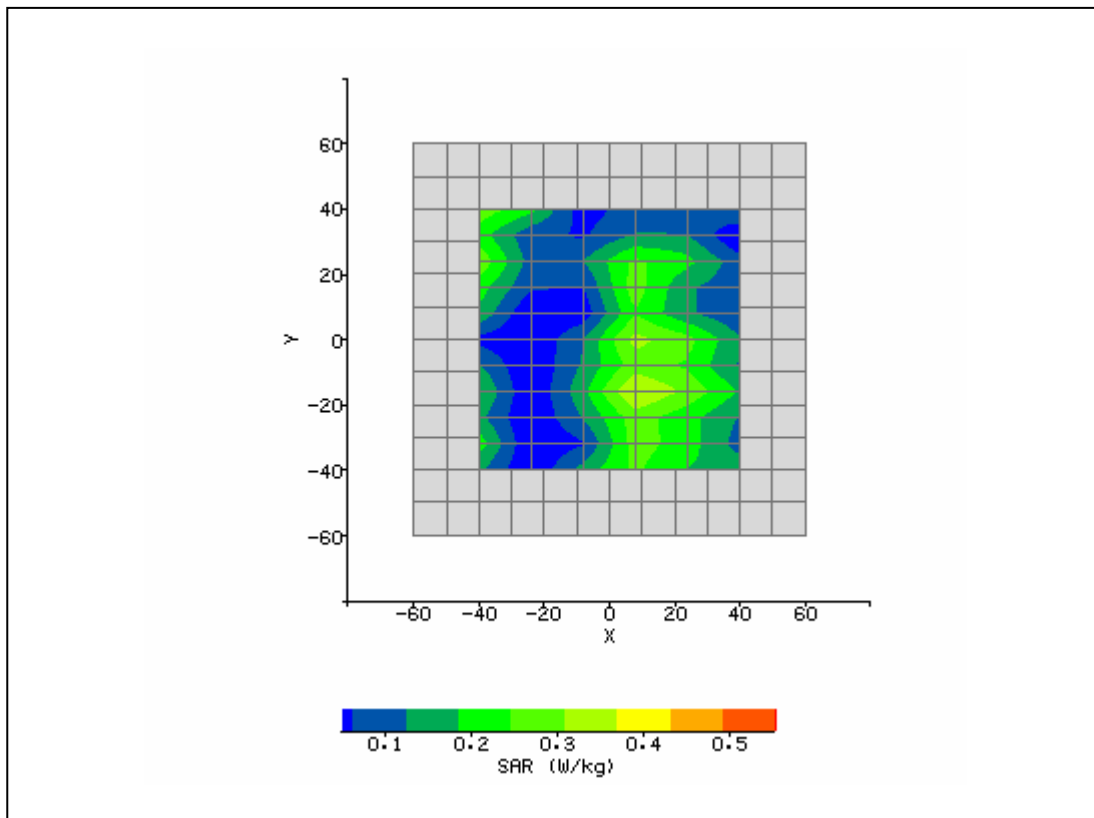


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 9:21:19 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.1°C	Liquid Simulant:	2450
Device Under Test:	94311MCAG	Relative Permittivity:	49.22
Relative Humidity:	47.3%	Conductivity:	1.983
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-8.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	2.87 V/m
Test Frequency:	2412MHz	SAR 1g:	0.023 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/12/08
Input Power Level:	Set by SW	Extrapolation:	poly4

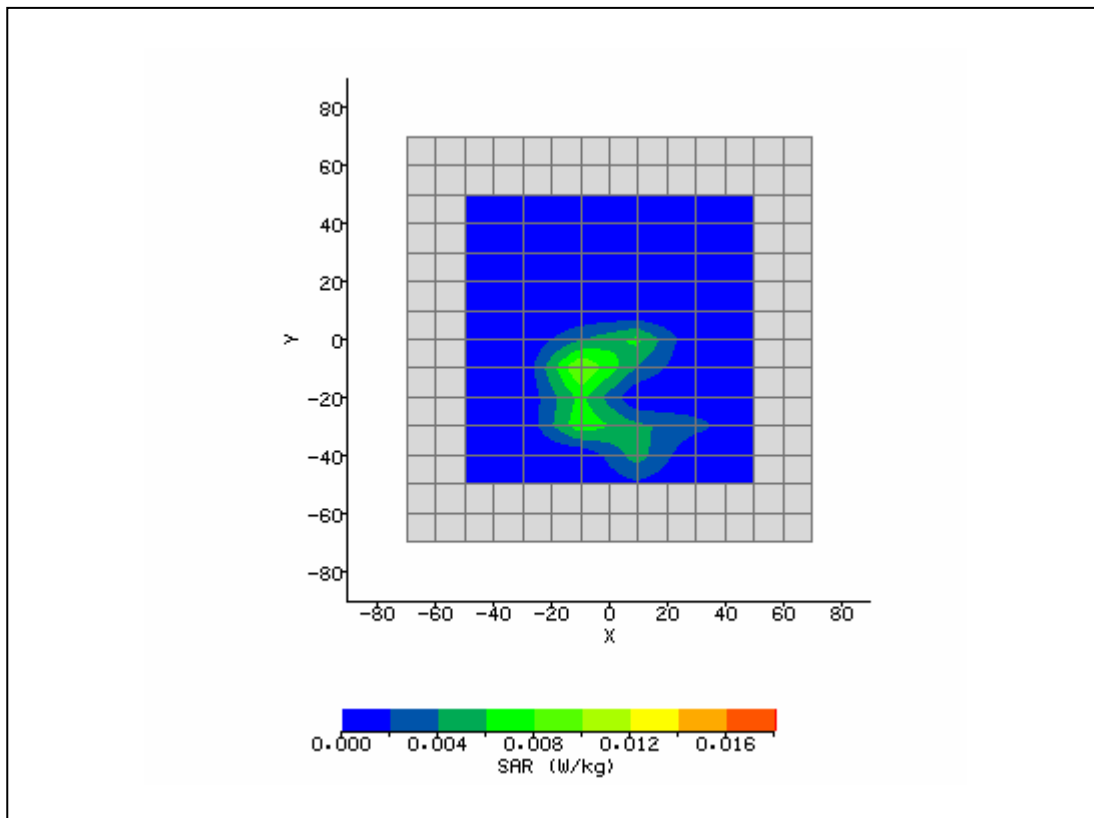


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 9:37:56 AM	DUT Battery Model/No:	
Filename:	Main_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.1°C	Liquid Simulant:	2450
Device Under Test:	94311MCAG	Relative Permittivity:	49.03
Relative Humidity:	47.3%	Conductivity:	2.017
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-26.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	2.07 V/m
Test Frequency:	2437MHz	SAR 1g:	0.015 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by SW	Extrapolation:	poly4

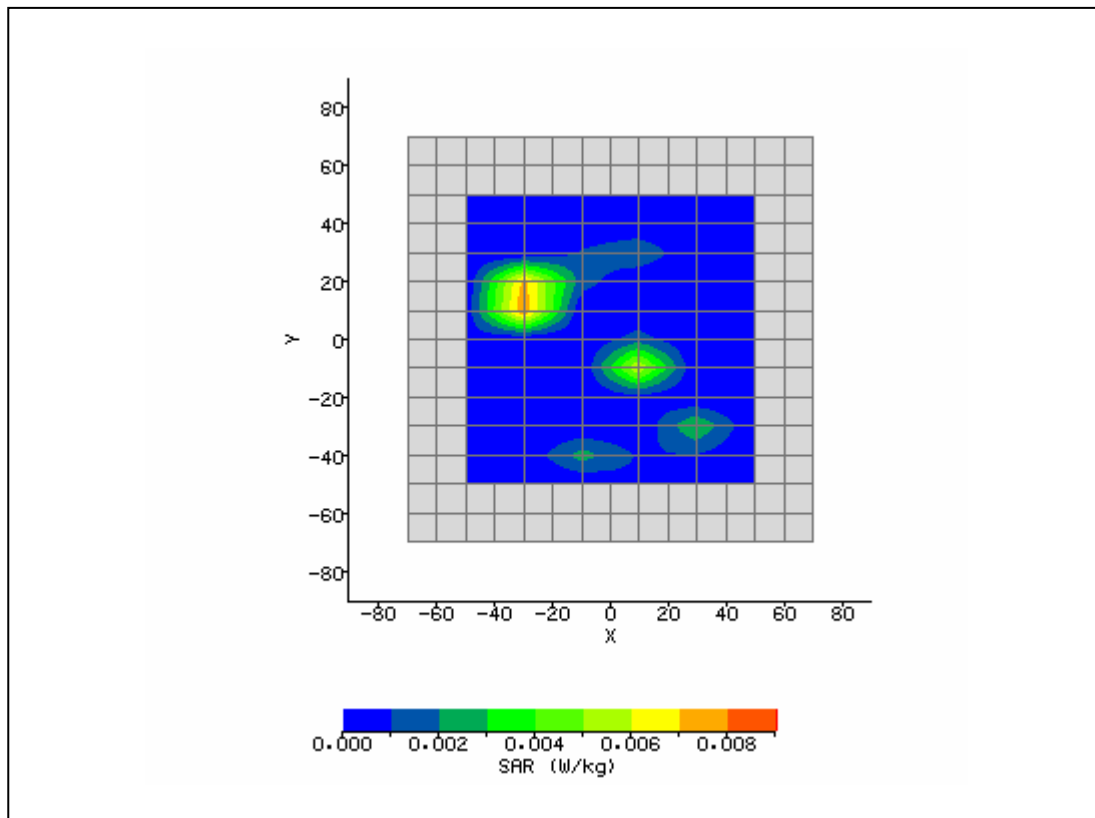


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 9:51:15 AM	DUT Battery Model/No:	
Filename:	Main_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.1°C	Liquid Simulant:	2450
Device Under Test:	94311MCAG	Relative Permittivity:	48.87
Relative Humidity:	47.3%	Conductivity:	2.047
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	24.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	1.76 V/m
Test Frequency:	2462MHz	SAR 1g:	0.009 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by SW	Extrapolation:	poly4

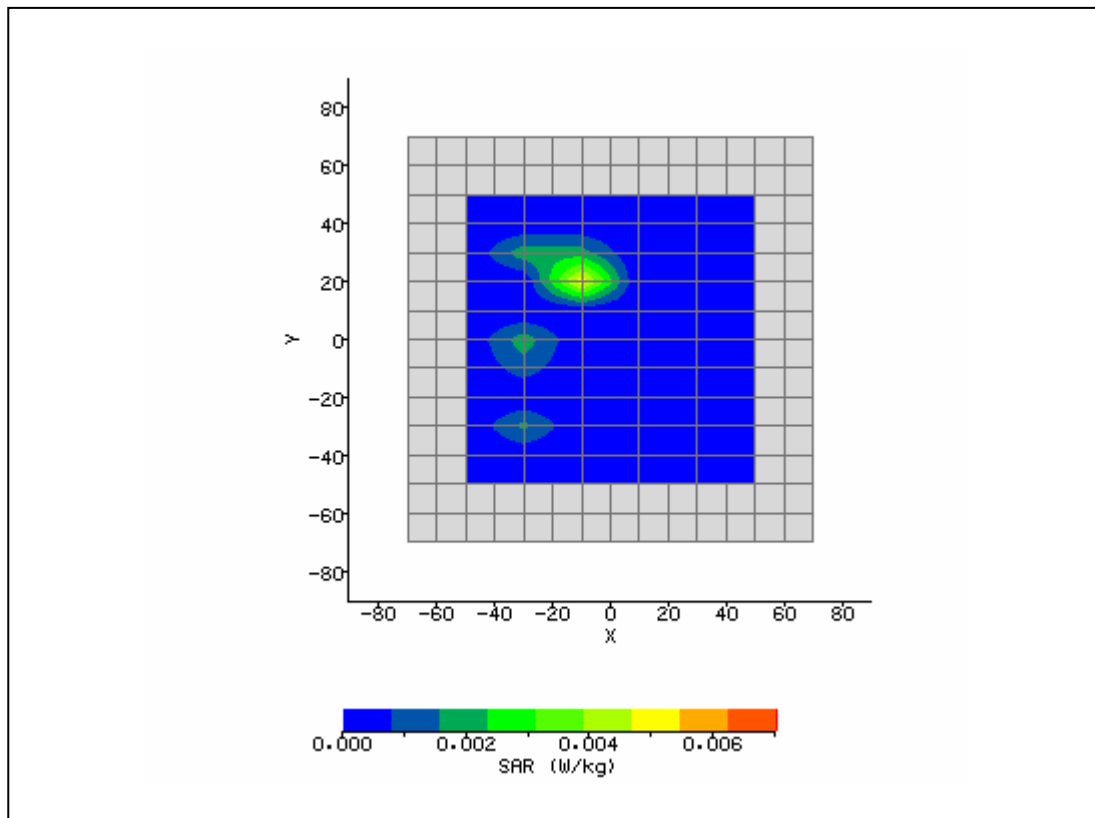


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 10:34:23 AM	DUT Battery Model/No:	
Filename:	Main_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.1°C	Liquid Simulant:	2450
Device Under Test:	94311MCAG	Relative Permittivity:	49.22
Relative Humidity:	47.3%	Conductivity:	1.983
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	15.00 mm
Antenna Configuration:	WNC - Aux	Max E Field:	1.48 V/m
Test Frequency:	2412MHz	SAR 1g:	0.007 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by SW	Extrapolation:	poly4

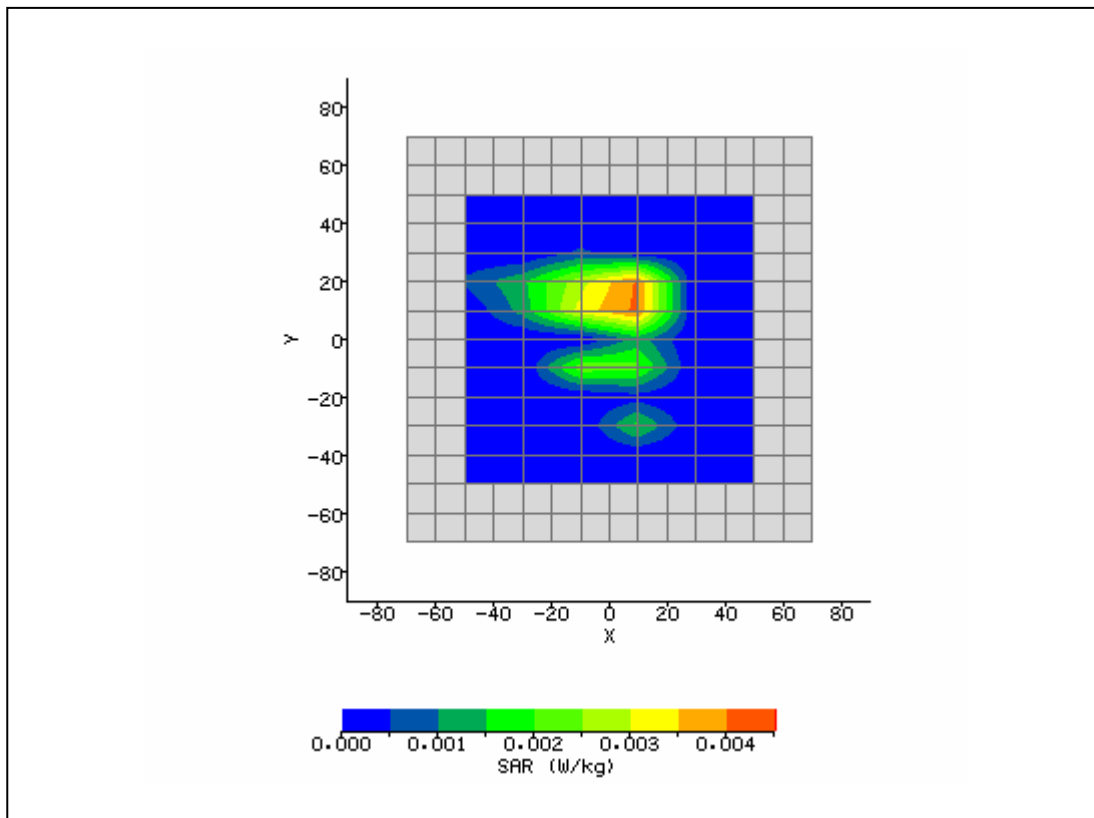


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 12:05:26 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	48.22
Relative Humidity:	44.5%	Conductivity:	5.224
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-23.20 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-25.05 mm
Antenna Configuration:	WNC - Main	Max E Field:	6.34 V/m
Test Frequency:	5180MHz	SAR 1g:	0.124 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.149 W/kg
Type of Modulation:		SAR End:	0.152 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.05 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

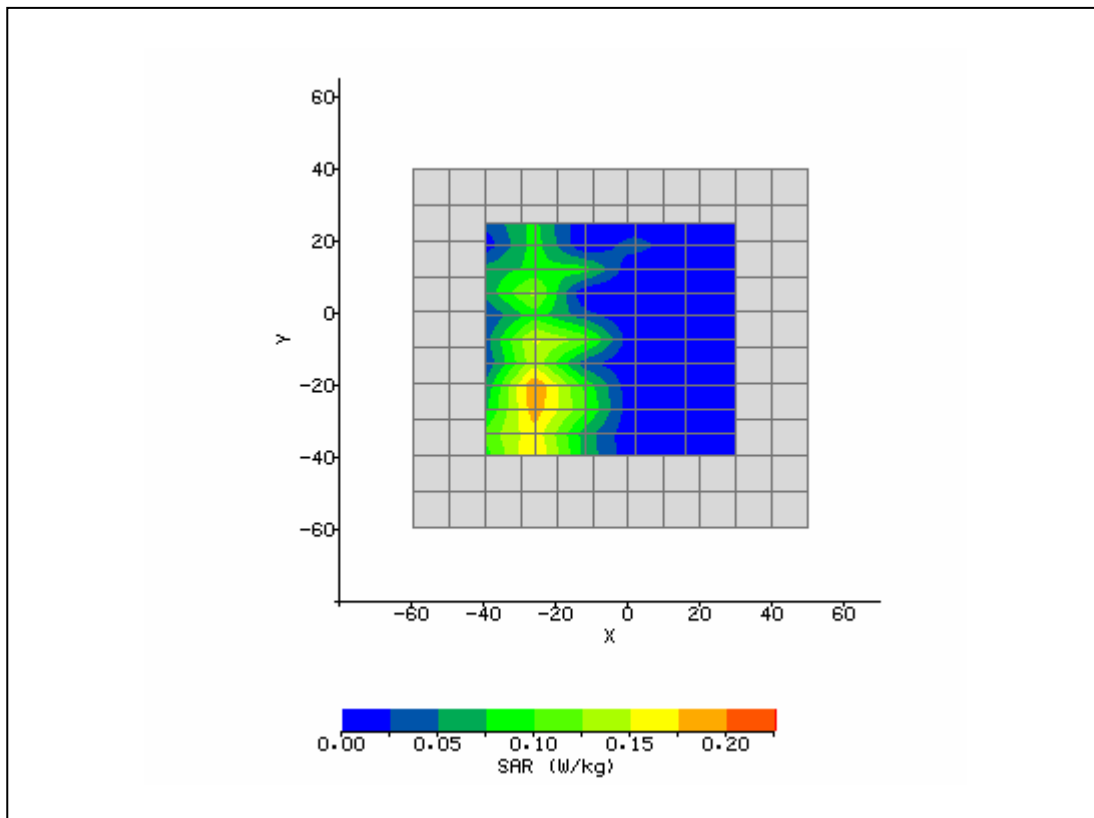


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 12:46:07 PM	DUT Battery Model/No:	
Filename:	Main_36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	48.14
Relative Humidity:	44.5%	Conductivity:	5.219
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-26.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-28.95 mm
Antenna Configuration:	WNC - Main	Max E Field:	4.86 V/m
Test Frequency:	5240MHz	SAR 1g:	0.039 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.036 W/kg
Type of Modulation:		SAR End:	0.037 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

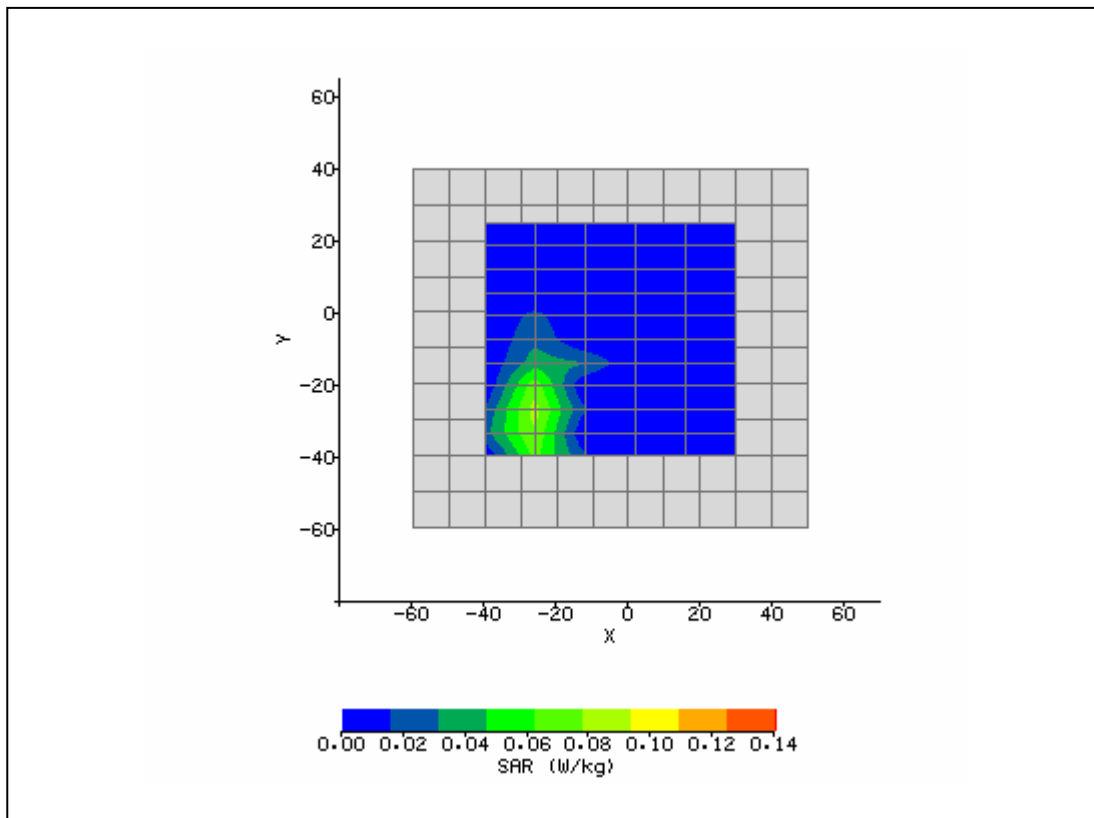


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 1:18:54 PM	DUT Battery Model/No:	
Filename:	Main_48_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	48.07
Relative Humidity:	44.5%	Conductivity:	5.216
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-17.60 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	4.65 V/m
Test Frequency:	5260MHz	SAR 1g:	0.046 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.031 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

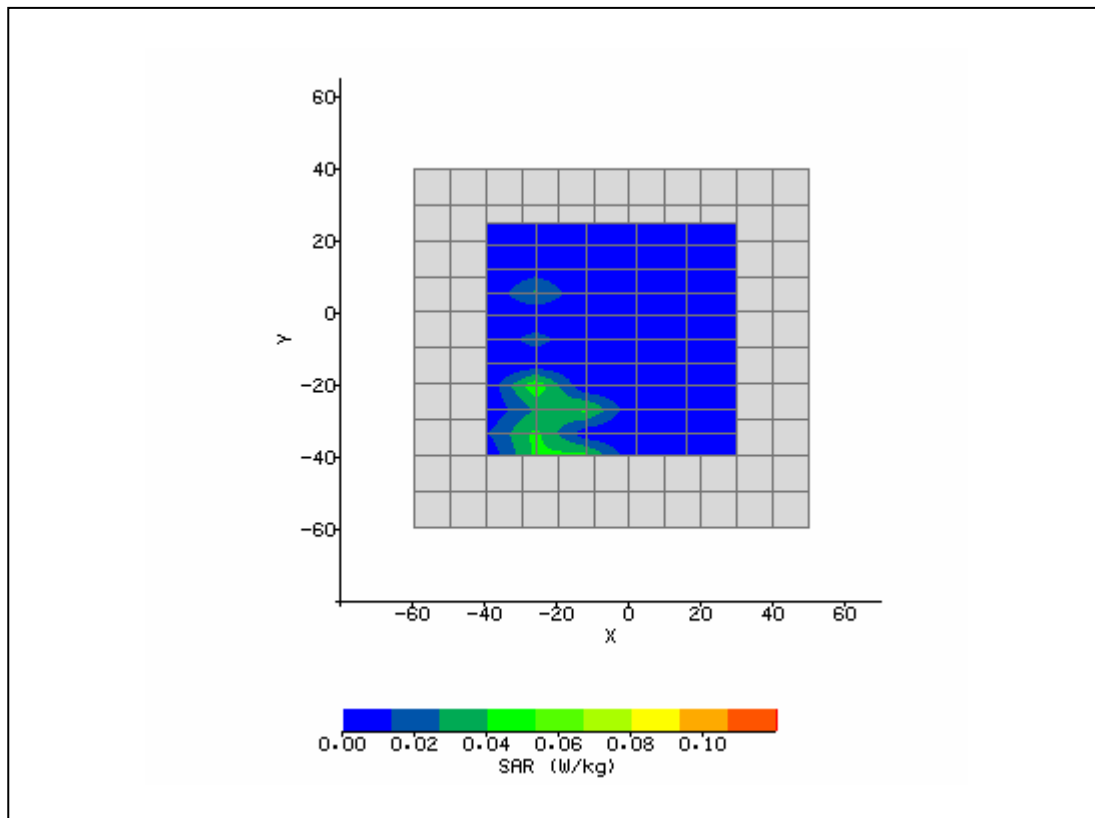


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 1:50:42 PM	DUT Battery Model/No:	
Filename:	Main_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	47.92
Relative Humidity:	44.5%	Conductivity:	5.213
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-17.60 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	4.72 V/m
Test Frequency:	5320MHz	SAR 1g:	0.039 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.84 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

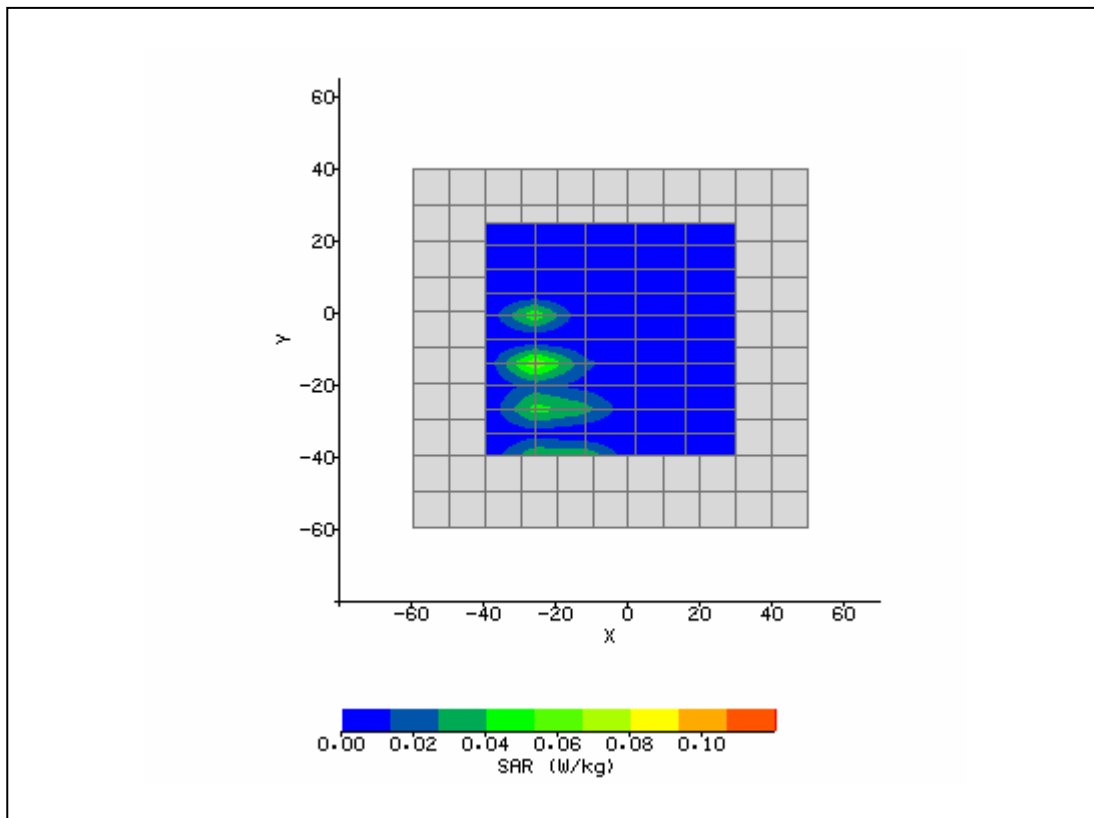


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 2:20:30 PM	DUT Battery Model/No:	
Filename:	Main_64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.1°C	Liquid Simulant:	5250
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	48.22
Relative Humidity:	44.5%	Conductivity:	5.224
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	14.60 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-22.45 mm
Antenna Configuration:	WNC - Aux	Max E Field:	7.09 V/m
Test Frequency:	5180MHz	SAR 1g:	0.171 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.131 W/kg
Type of Modulation:		SAR End:	0.133 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	Set by sw	Extrapolation:	poly4

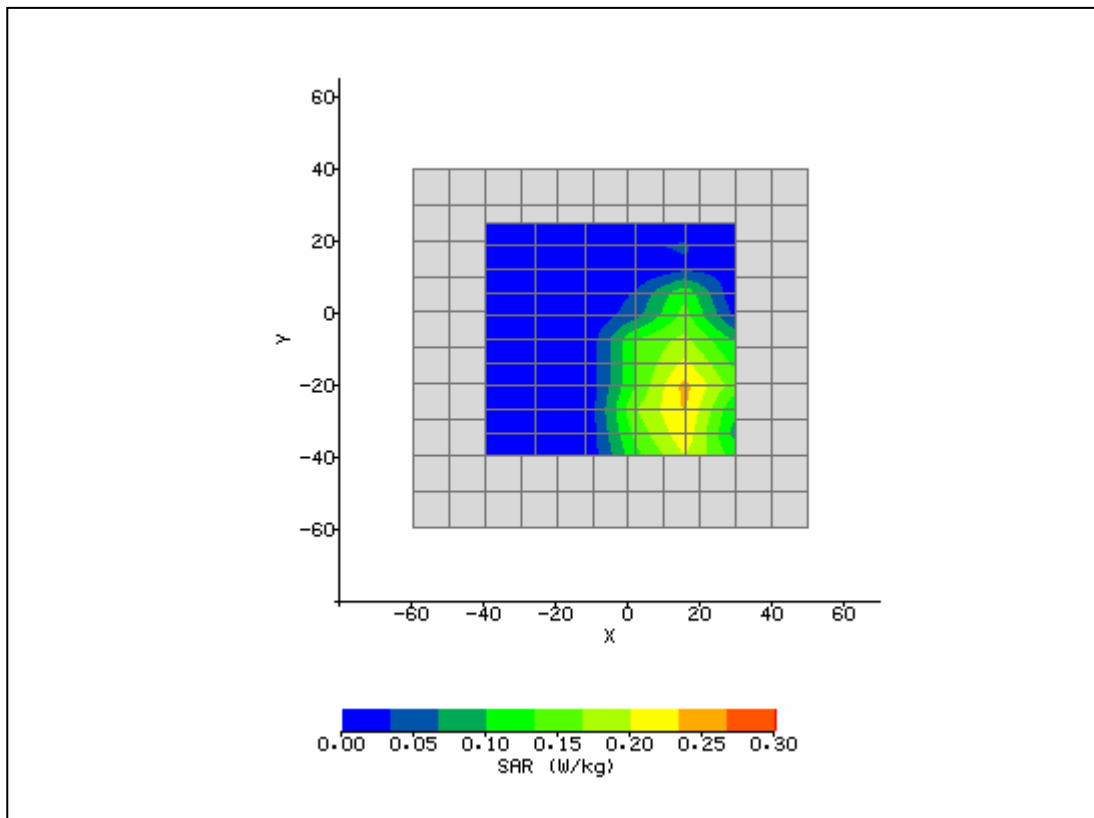


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 8:45:00 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.1°C	Liquid Simulant:	5800
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	47.71
Relative Humidity:	44.5%	Conductivity:	5.874
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	12.64 V/m
Test Frequency:	5745MHz	SAR 1g:	0.746 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.544 W/kg
Type of Modulation:		SAR End:	0.536 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw	Extrapolation:	poly4

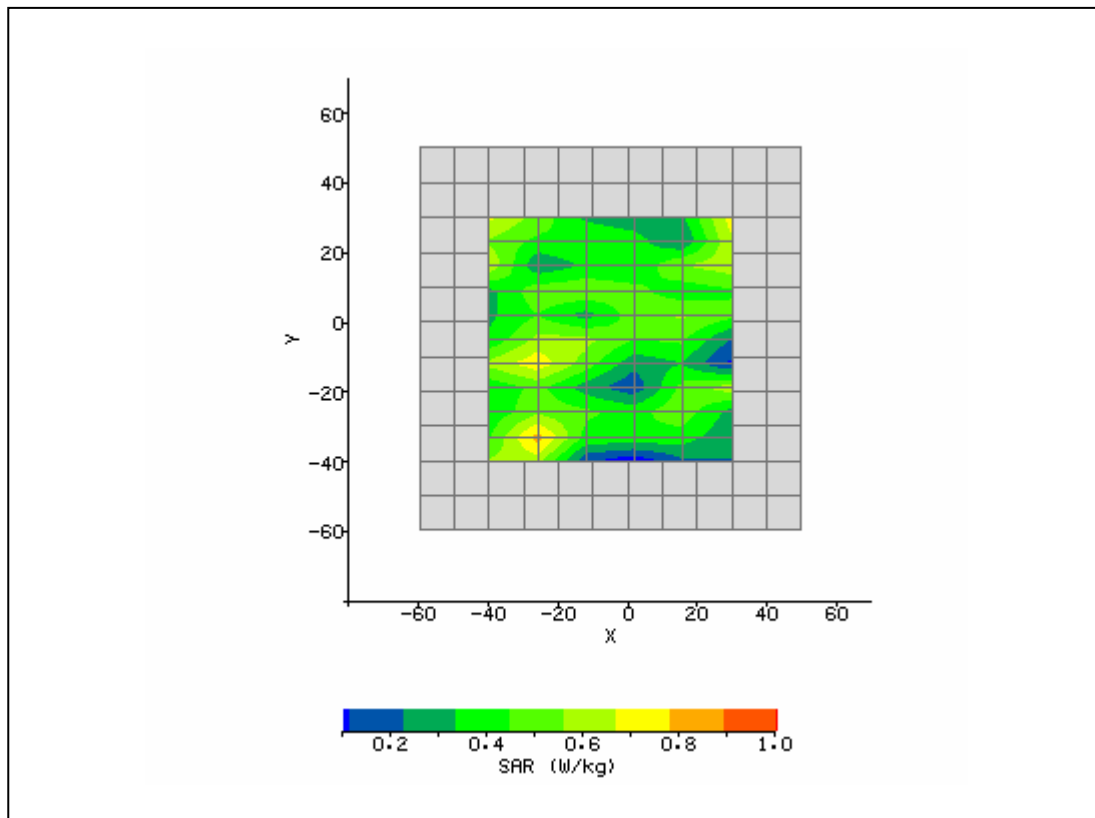


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 9:07:44 AM	DUT Battery Model/No:	
Filename:	Main_149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.1°C	Liquid Simulant:	5800
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	46.88
Relative Humidity:	44.5%	Conductivity:	6.043
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-33.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.20 mm
Antenna Configuration:	WNC - Main	Max E Field:	11.86 V/m
Test Frequency:	5785MHz	SAR 1g:	0.704 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.502 W/kg
Type of Modulation:		SAR End:	0.521 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.78 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw	Extrapolation:	poly4

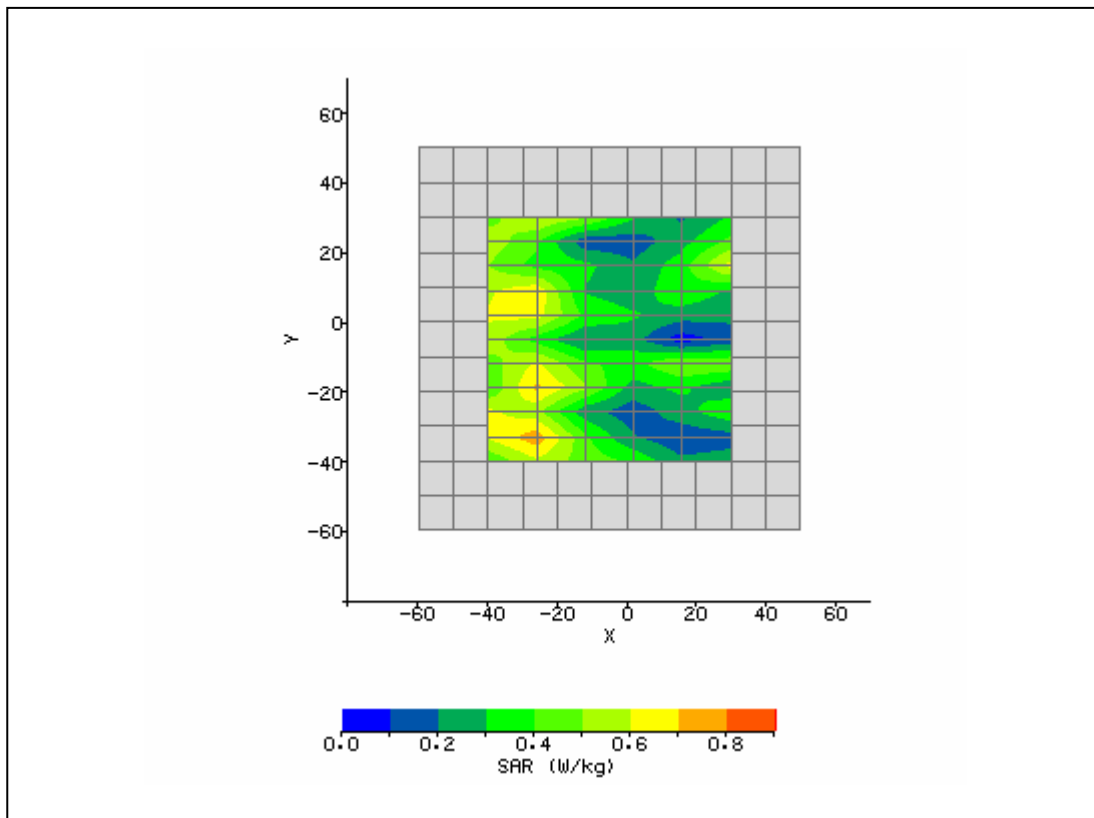


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 9:25:49 AM	DUT Battery Model/No:	
Filename:	Main_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.1°C	Liquid Simulant:	5800
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	46.57
Relative Humidity:	44.5%	Conductivity:	6.107
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	12.05 V/m
Test Frequency:	5825MHz	SAR 1g:	0.683 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.540 W/kg
Type of Modulation:		SAR End:	0.543 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw	Extrapolation:	poly4

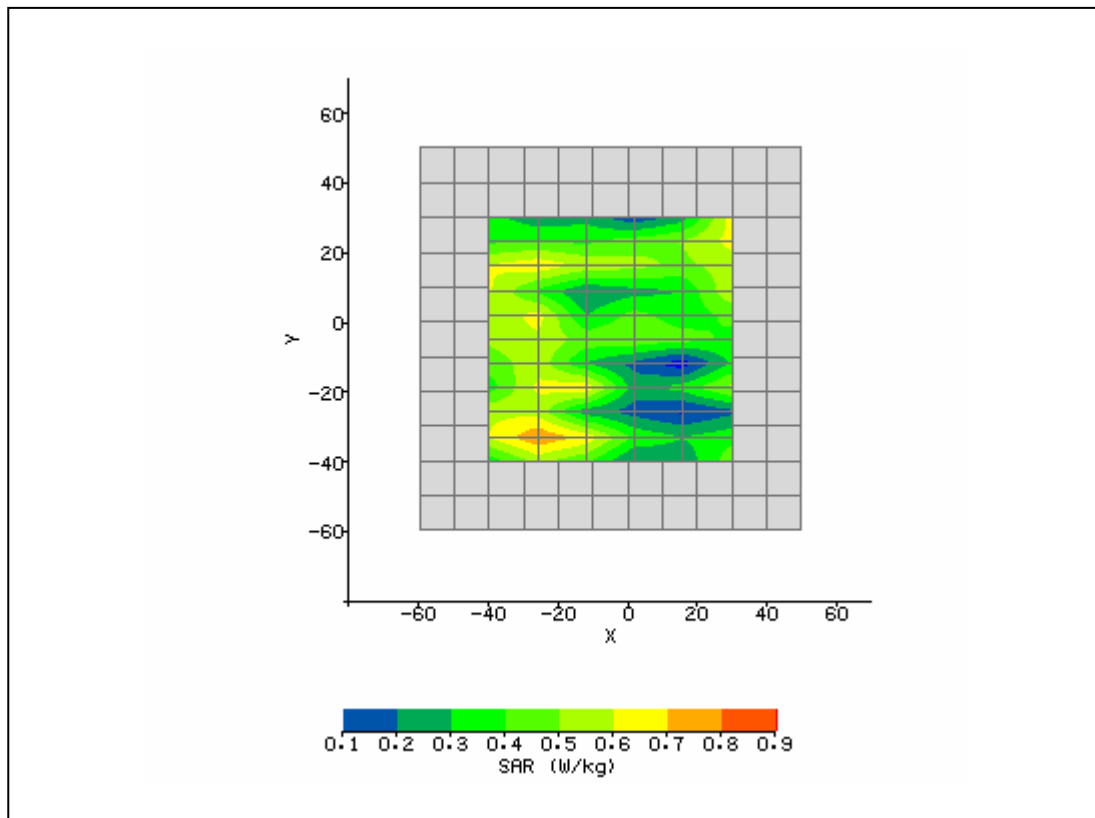


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 9:55:26 AM	DUT Battery Model/No:	
Filename:	Main_165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.1°C	Liquid Simulant:	5800
Device Under Test:	94311MCAG / Galileo	Relative Permittivity:	47.71
Relative Humidity:	44.5%	Conductivity:	5.874
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	7.60 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-26.00 mm
Antenna Configuration:	WNC - Aux	Max E Field:	13.19 V/m
Test Frequency:	5745MHz	SAR 1g:	0.741 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.566 W/kg
Type of Modulation:		SAR End:	0.593 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	Set by sw	Extrapolation:	poly4

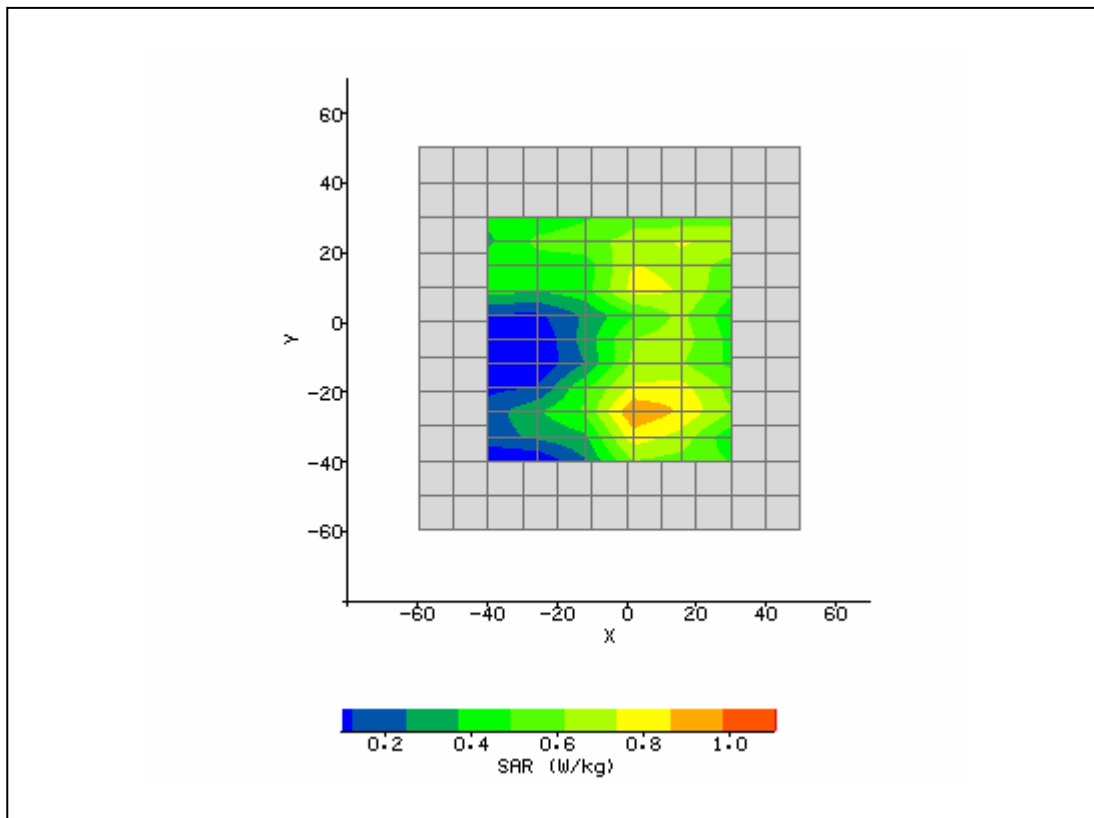

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/12/2008 8:13:38 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.50
Relative Humidity:	41.5%	Conductivity:	1.878
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	4.00 mm
Antenna Configuration:	Dipole	Max E Field:	137.87 V/m
Test Frequency:	2450MHz	SAR 1g:	49.847 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	22.317 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	2.757 W/kg
Type of Modulation:		SAR End:	2.790 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.21 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/12/08
Input Power Level:	1W	Extrapolation:	poly4

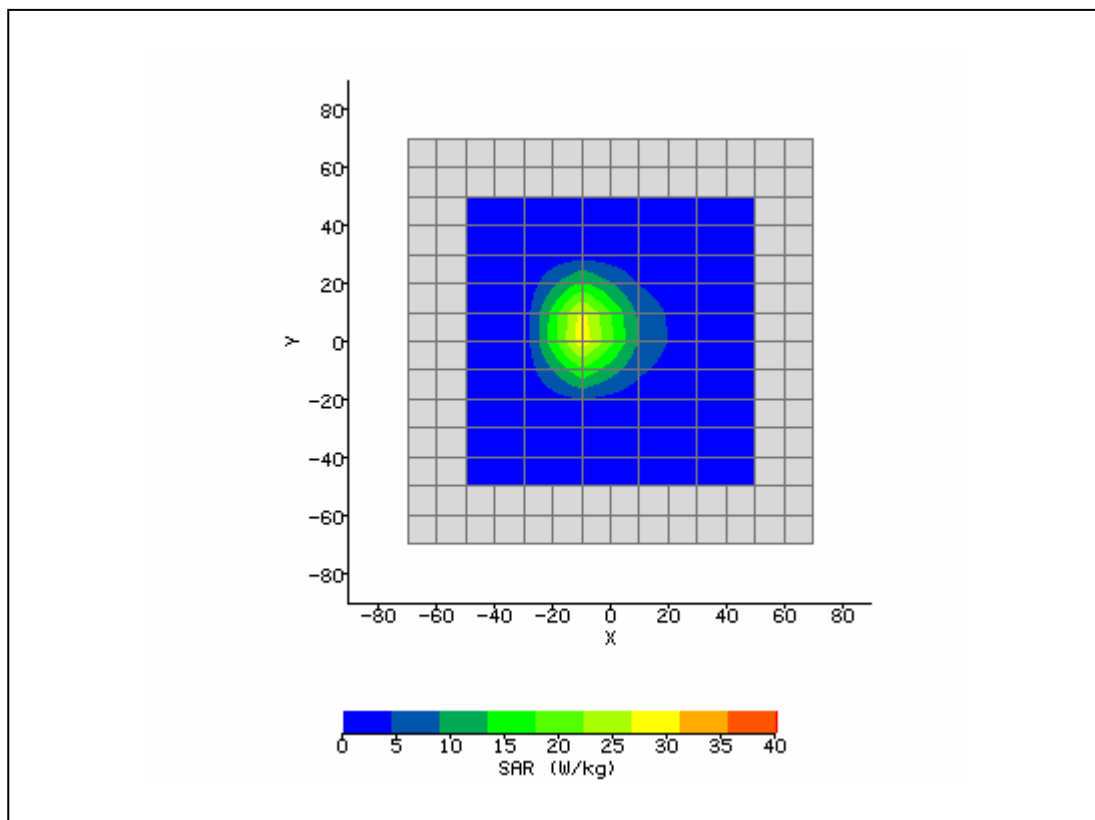

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/13/2008 8:07:14 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	35.83
Relative Humidity:	30%	Conductivity:	4.658
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.40 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-4.80 mm
Antenna Configuration:	Waveguide	Max E Field:	45.50 V/m
Test Frequency:	5200MHz	SAR 1g:	3.867 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	2.671 W/kg
Conversion Factors:	.390 / .390 / .390	SAR Start:	1.969 W/kg
Type of Modulation:		SAR End:	1.894 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/13/08
Input Power Level:	0.1W	Extrapolation:	poly4

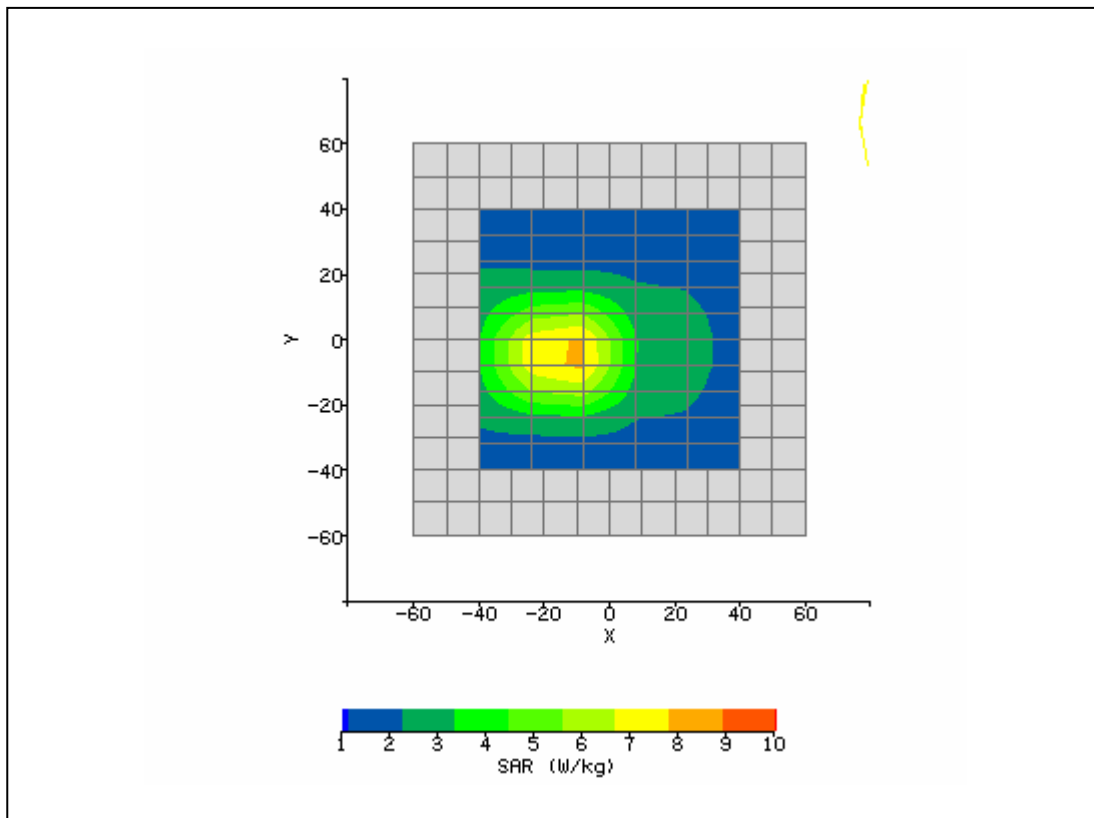

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	2/25/2008 8:12:58 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	35.63
Relative Humidity:	30%	Conductivity:	5.281
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	11.20 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-4.80 mm
Antenna Configuration:	Waveguide	Max E Field:	48.13 V/m
Test Frequency:	5800MHz	SAR 1g:	4.331 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	3.282 W/kg
Conversion Factors:	.428 / .428 / .428	SAR Start:	2.591 W/kg
Type of Modulation:		SAR End:	2.595 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	2/25/08
Input Power Level:	0.1W	Extrapolation:	poly4

