



System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2005 3:29:36 PM	DUT Battery Model/No:	
Filename:	2412_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94311MCG	Relative Permittivity:	51.0
Relative Humidity:	50%	Conductivity:	1.858
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-184.80 mm
Antenna Configuration:	Auxiliary	Max E Field:	9.15 V/m
Test Frequency:	2412MHz	SAR 1g:	0.120 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.060 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.017 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

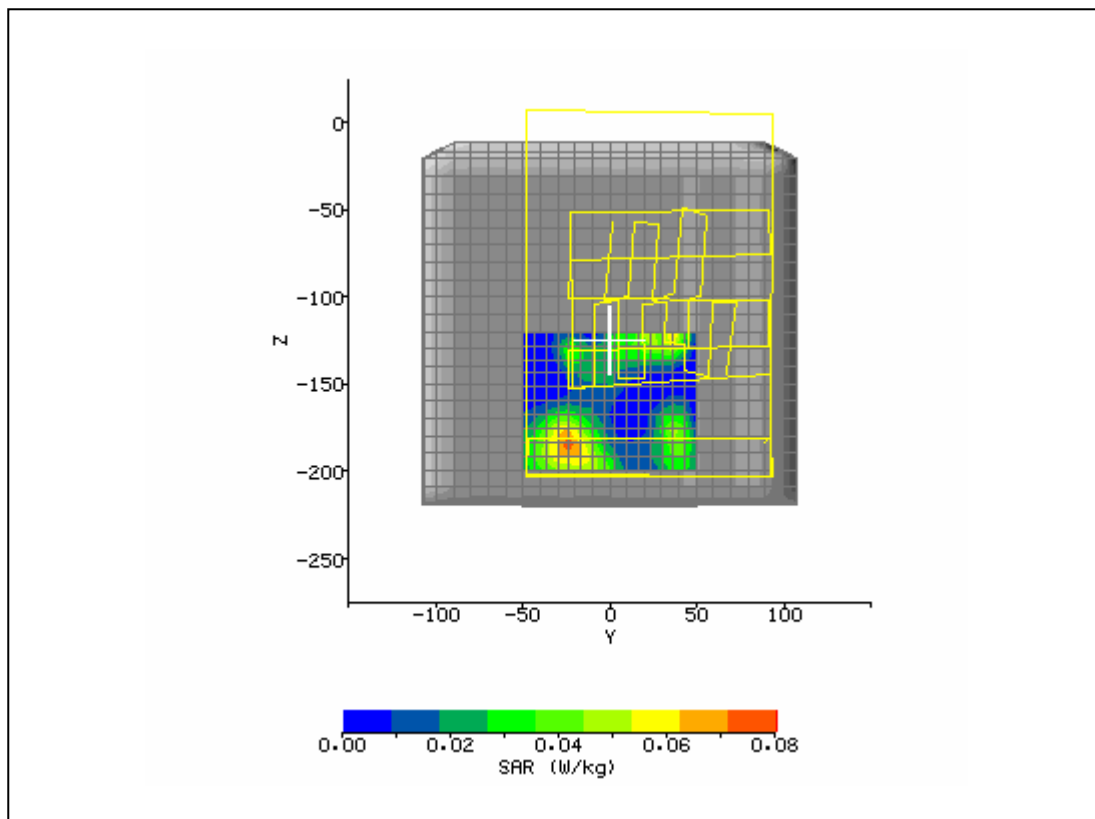

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2005 4:12:55 PM	DUT Battery Model/No:	
Filename:	2442_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94311MCG	Relative Permittivity:	50.91
Relative Humidity:	50%	Conductivity:	1.896
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-184.00 mm
Antenna Configuration:	Auxiliary	Max E Field:	8.40 V/m
Test Frequency:	2442MHz	SAR 1g:	0.103 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.050 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.014 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

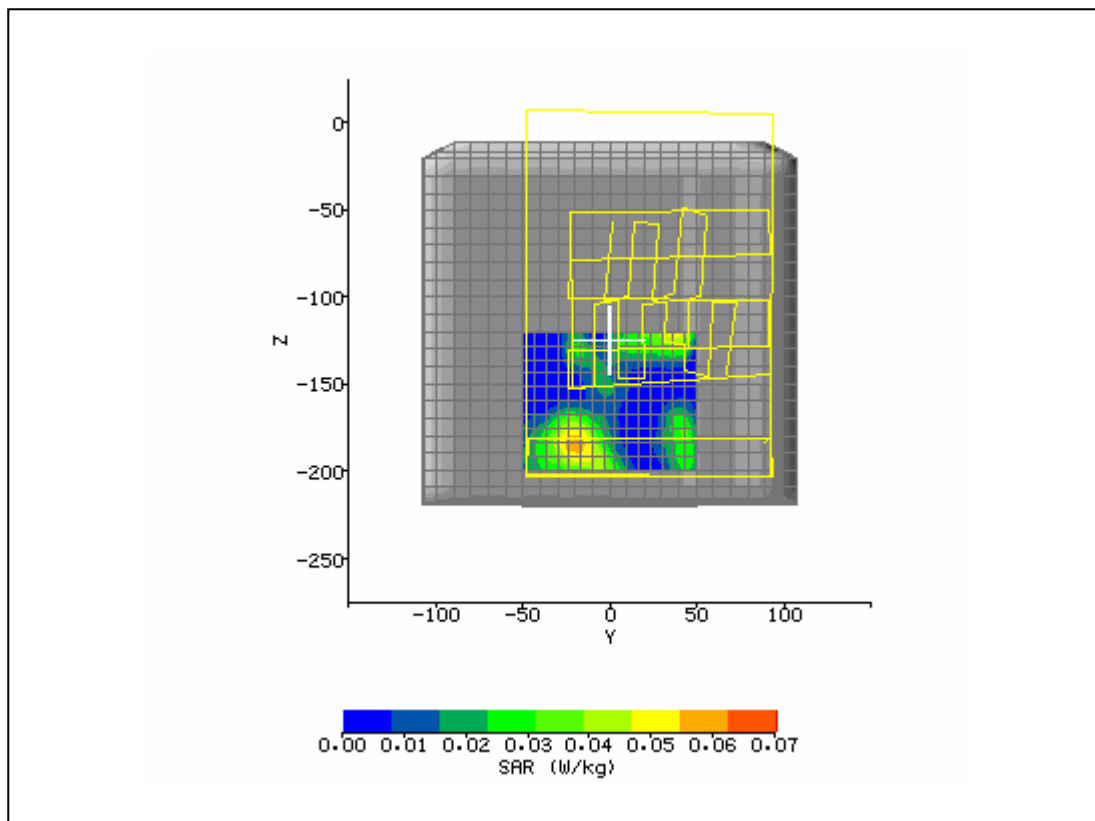

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2005 4:47:56 PM	DUT Battery Model/No:	
Filename:	2472_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94311MCG	Relative Permittivity:	50.79
Relative Humidity:	50%	Conductivity:	1.932
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.33 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-186.40 mm
Antenna Configuration:	Auxiliary	Max E Field:	8.36 V/m
Test Frequency:	2472MHz	SAR 1g:	0.102 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.049 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.015 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

