




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/14/2006 3:24:29 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Tablet side touching	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Main	Max E Field:	13.95 V/m
Test Frequency:	2437MHz	SAR 1g:	0.519 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.204 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.027 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

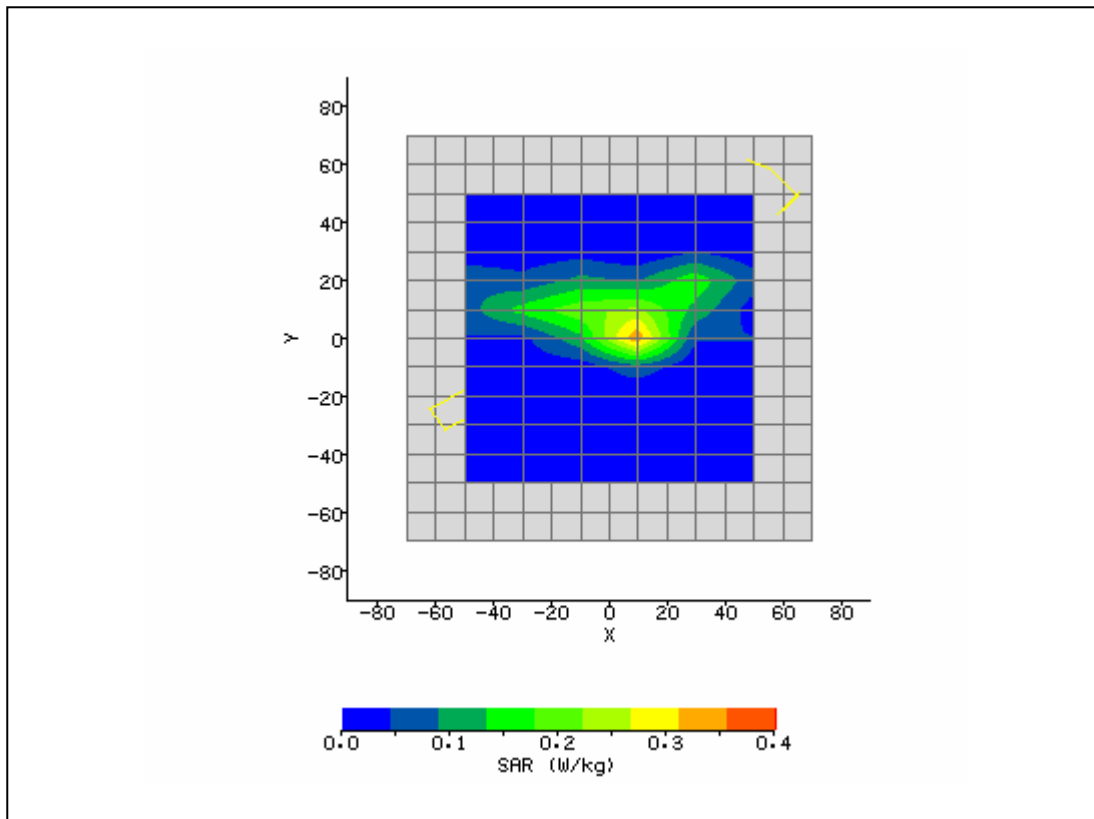


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 10:26:28 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Tablet right side touching	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Main	Max E Field:	8.30 V/m
Test Frequency:	2437MHz	SAR 1g:	0.141 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.067 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.106 W/kg
Type of Modulation:		SAR End:	0.106 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

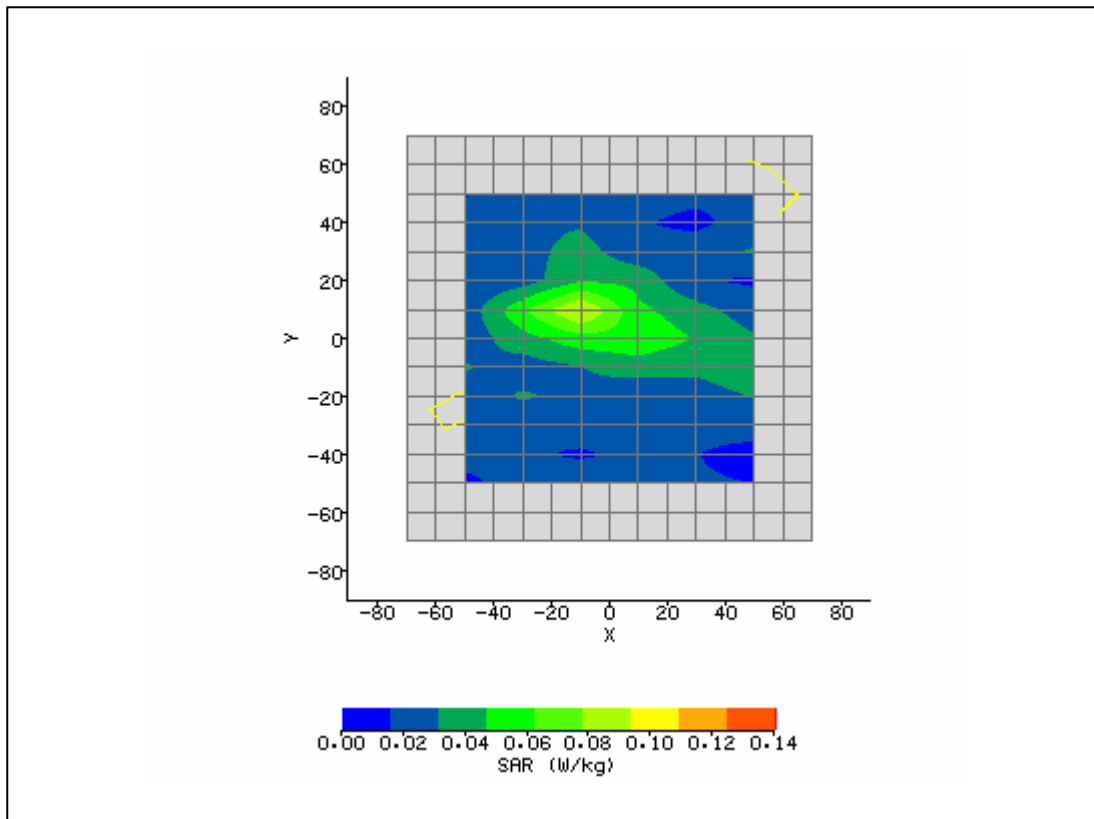


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 10:52:56 AM	DUT Battery Model/No:	
Filename:	rightside_main6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Tablet back side touching	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Main	Max E Field:	3.64 V/m
Test Frequency:	2437MHz	SAR 1g:	0.033 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.021 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.010 W/kg
Type of Modulation:		SAR End:	0.010 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

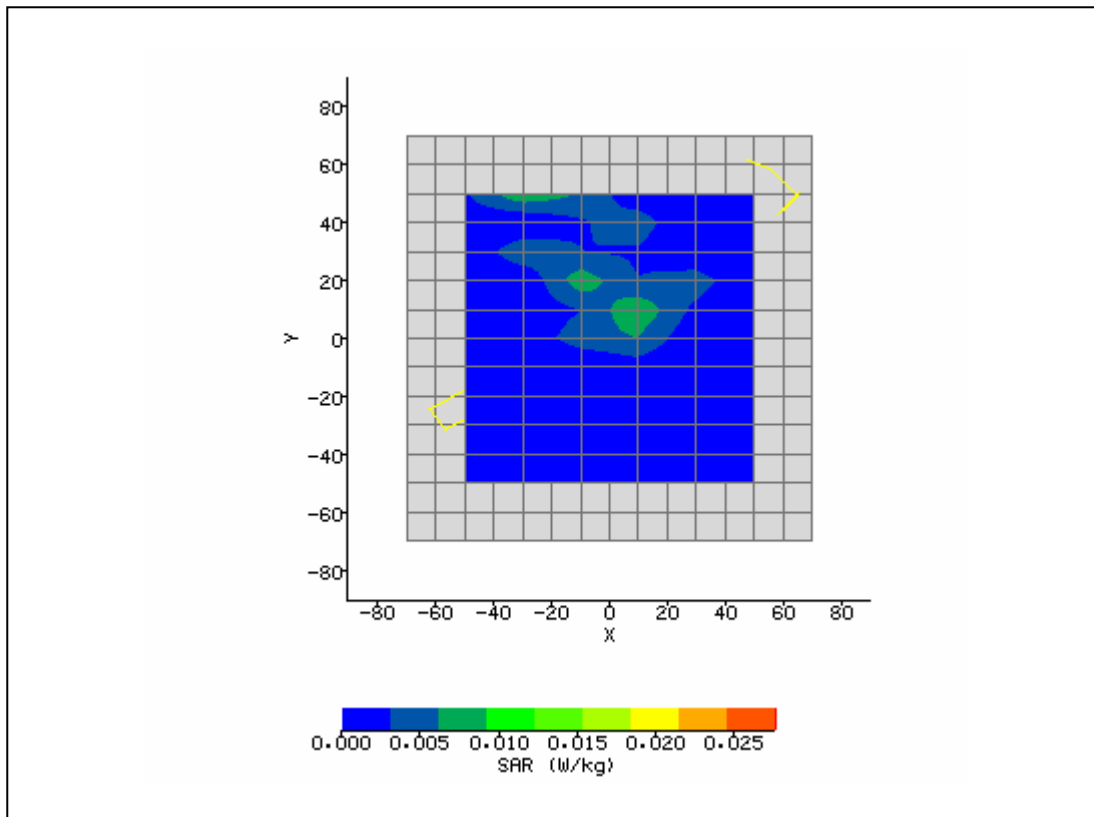


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 11:26:08 AM	DUT Battery Model/No:	
Filename:	lap_AUX6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	9.67 mm
Antenna Configuration:	Aux	Max E Field:	2.84 V/m
Test Frequency:	2437MHz	SAR 1g:	0.023 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.008 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

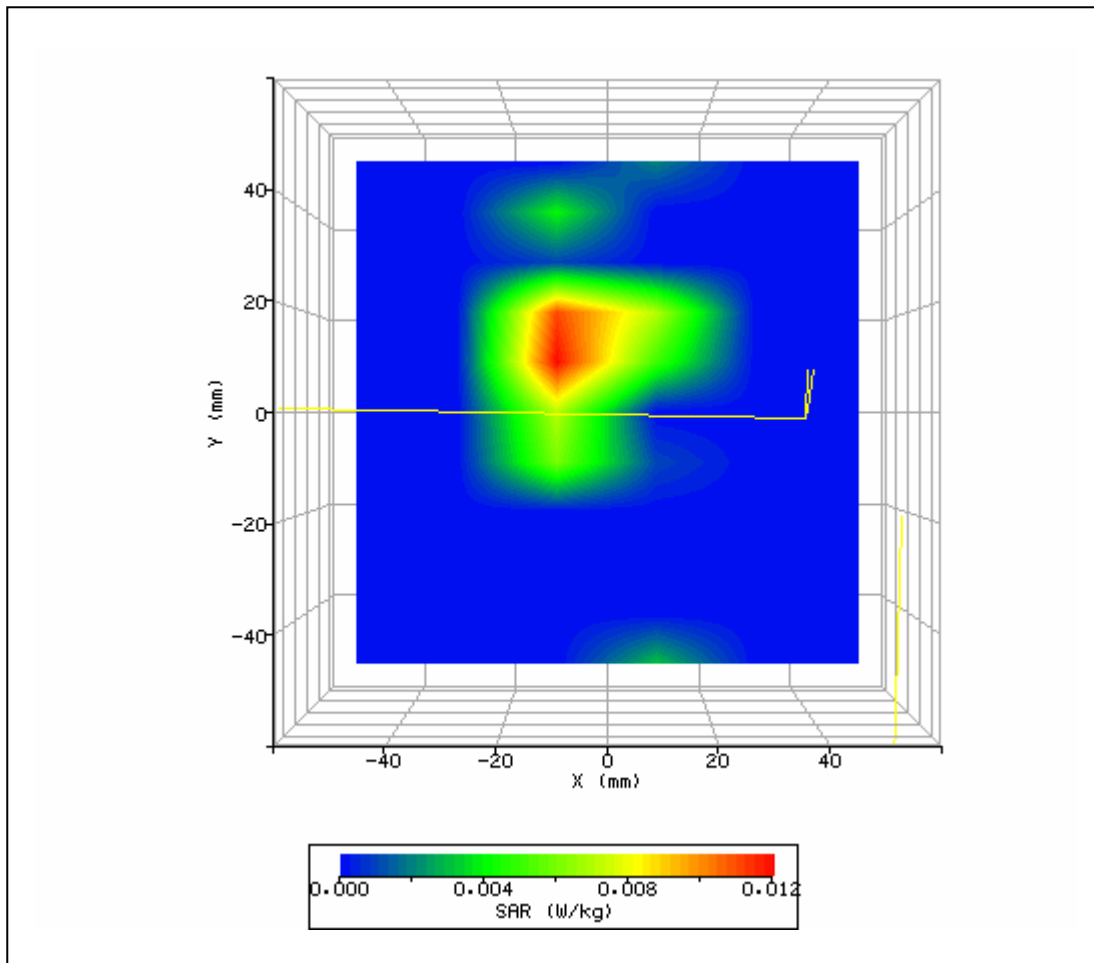


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 11:25:52 AM	DUT Battery Model/No:	
Filename:	lap_AUX6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.00 mm
DUT Position:	left side	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	Aux	Max E Field:	15.21 V/m
Test Frequency:	2437MHz	SAR 1g:	0.623 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.299 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.024 W/kg
Type of Modulation:		SAR End:	0.024 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

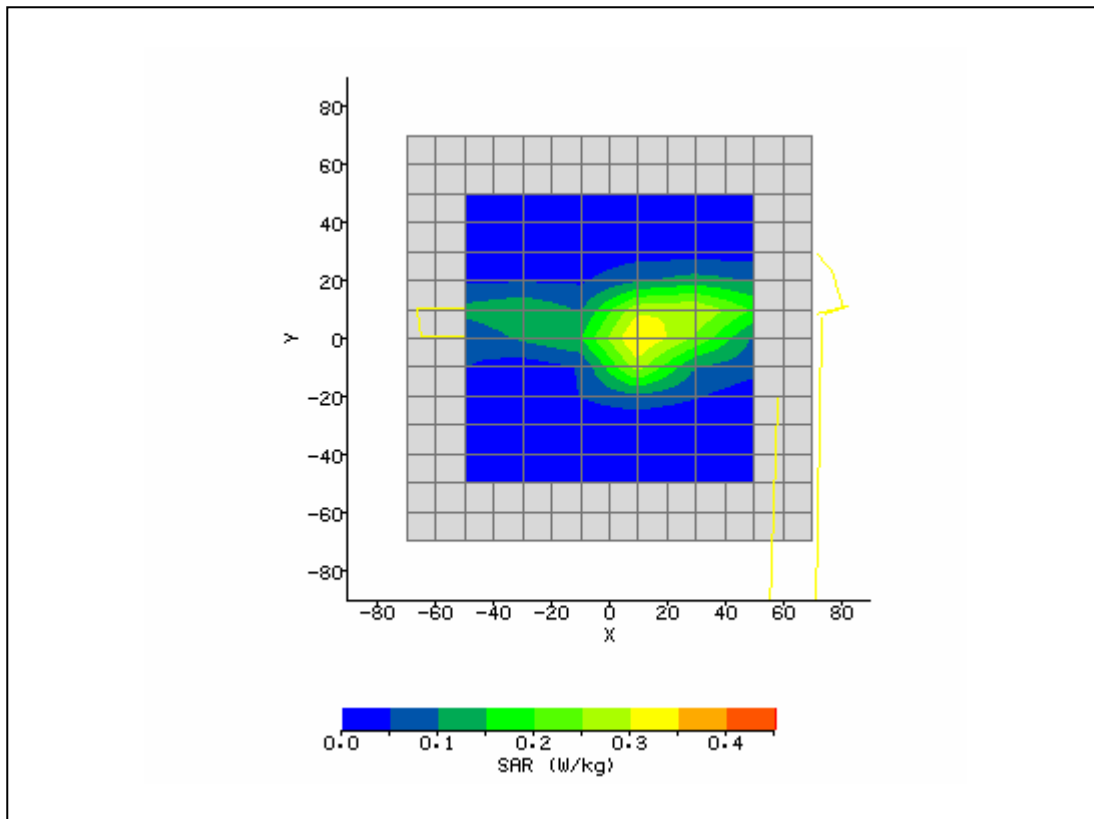

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 12:19:13 PM	DUT Battery Model/No:	
Filename:	left_aux6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	top left side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Aux	Max E Field:	2.54 V/m
Test Frequency:	2437MHz	SAR 1g:	0.020 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.006 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

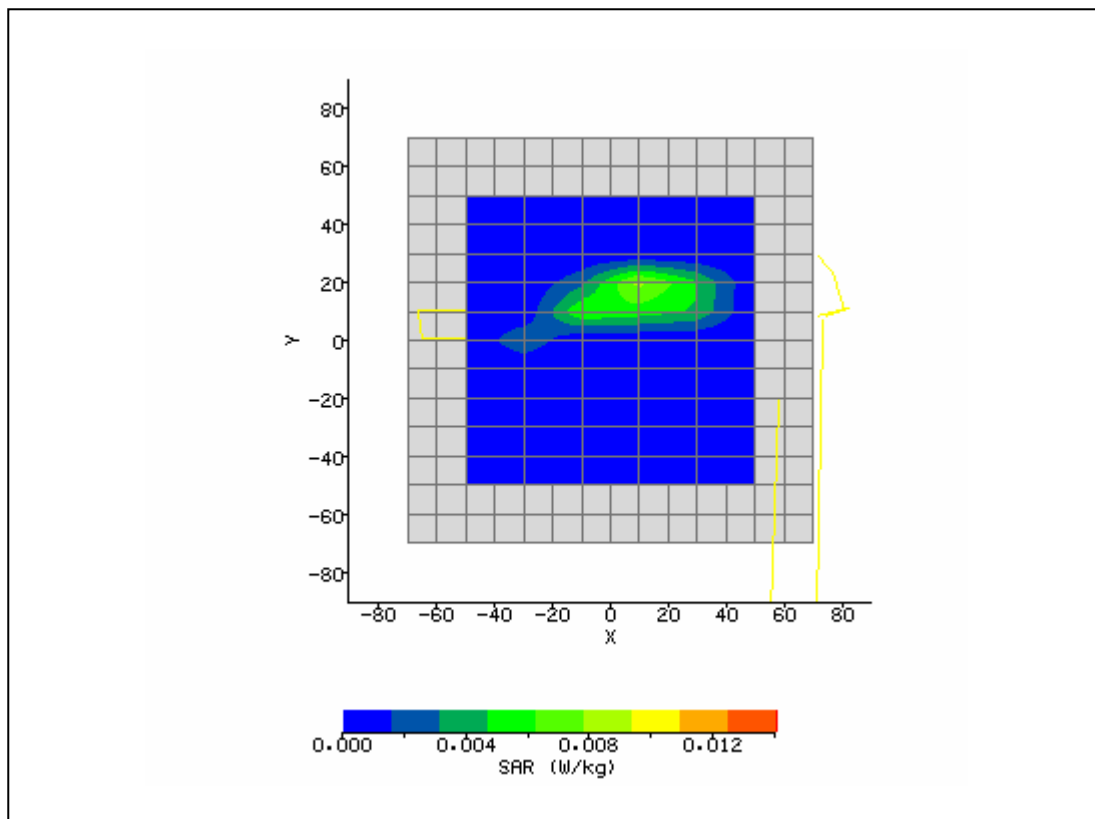

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 1:13:21 PM	DUT Battery Model/No:	
Filename:	top_aux6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	left side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Aux	Max E Field:	15.36 V/m
Test Frequency:	2437MHz	SAR 1g:	0.631 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.327 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.92 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

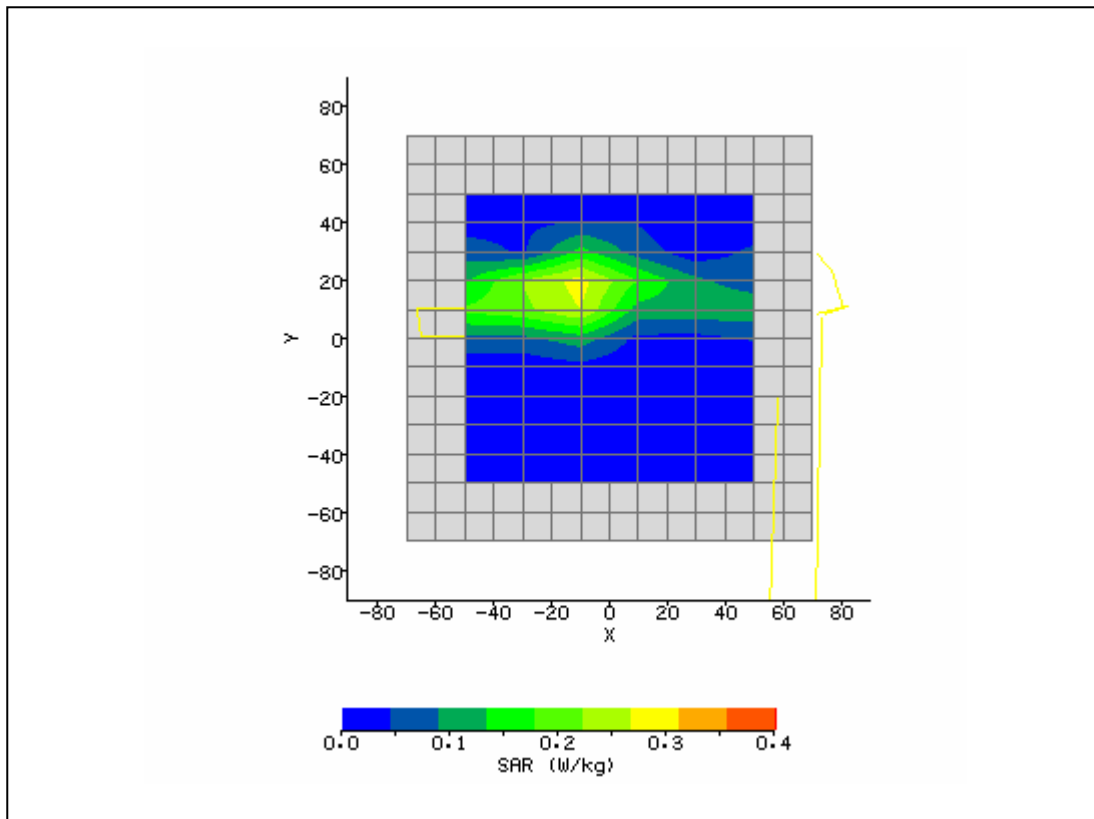

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/14/2006 2:06:49 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System verification	Relative Permittivity:	39.86
Relative Humidity:	30%	Conductivity:	1.86
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	dipole	Max E Field:	142.82 V/m
Test Frequency:	2450MHz	SAR 1g:	51.977 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	22.968 W/kg
Conversion Factors:	.613 / .613 / .613	SAR Start:	4.031 W/kg
Type of Modulation:		SAR End:	4.042 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

