




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/25/2007 11:59:03 AM	DUT Battery Model/No:	
Filename:	Lap6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	51.09
Relative Humidity:	30%	Conductivity:	1.908
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	4.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	4.85 V/m
Test Frequency:	24012MHz	SAR 1g:	0.059 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.006 W/kg
Type of Modulation:		SAR End:	0.007 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/07
Input Power Level:	max	Extrapolation:	poly4

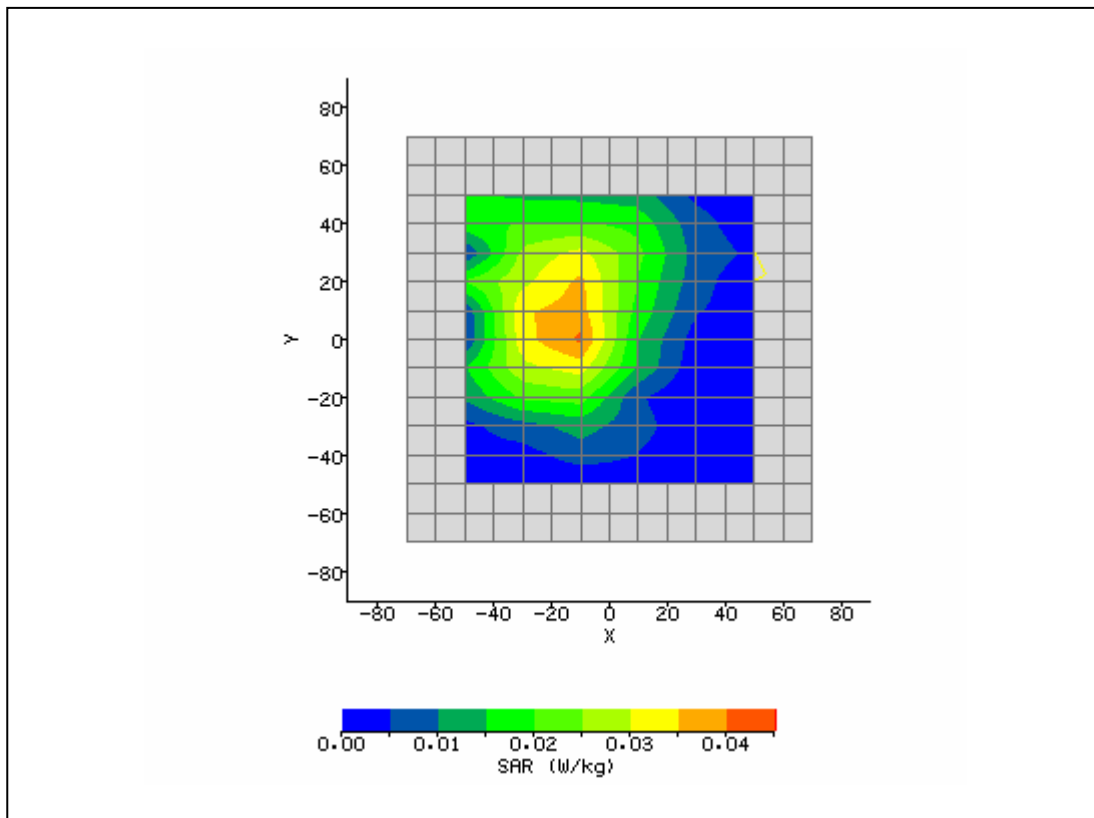

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/25/2007 11:38:21 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	51.01
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-34.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	4.47 V/m
Test Frequency:	2437MHz	SAR 1g:	0.049 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.006 W/kg
Type of Modulation:		SAR End:	0.006 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/07
Input Power Level:	max	Extrapolation:	poly4

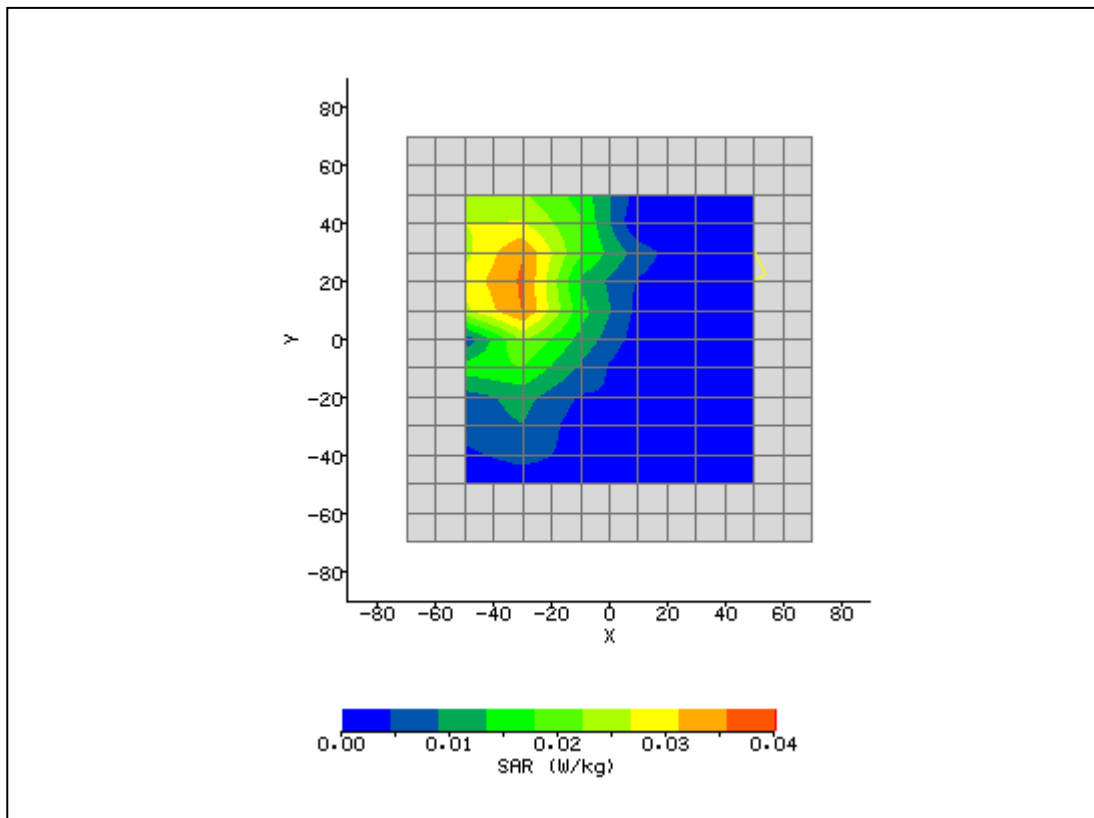

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/25/2007 12:18:58 PM	DUT Battery Model/No:	
Filename:	Lap1_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DELL - BRCM	Relative Permittivity:	51.09
Relative Humidity:	30%	Conductivity:	1.921
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	4.21 V/m
Test Frequency:	2462MHz	SAR 1g:	0.038 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.0045W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/07
Input Power Level:	max	Extrapolation:	poly4

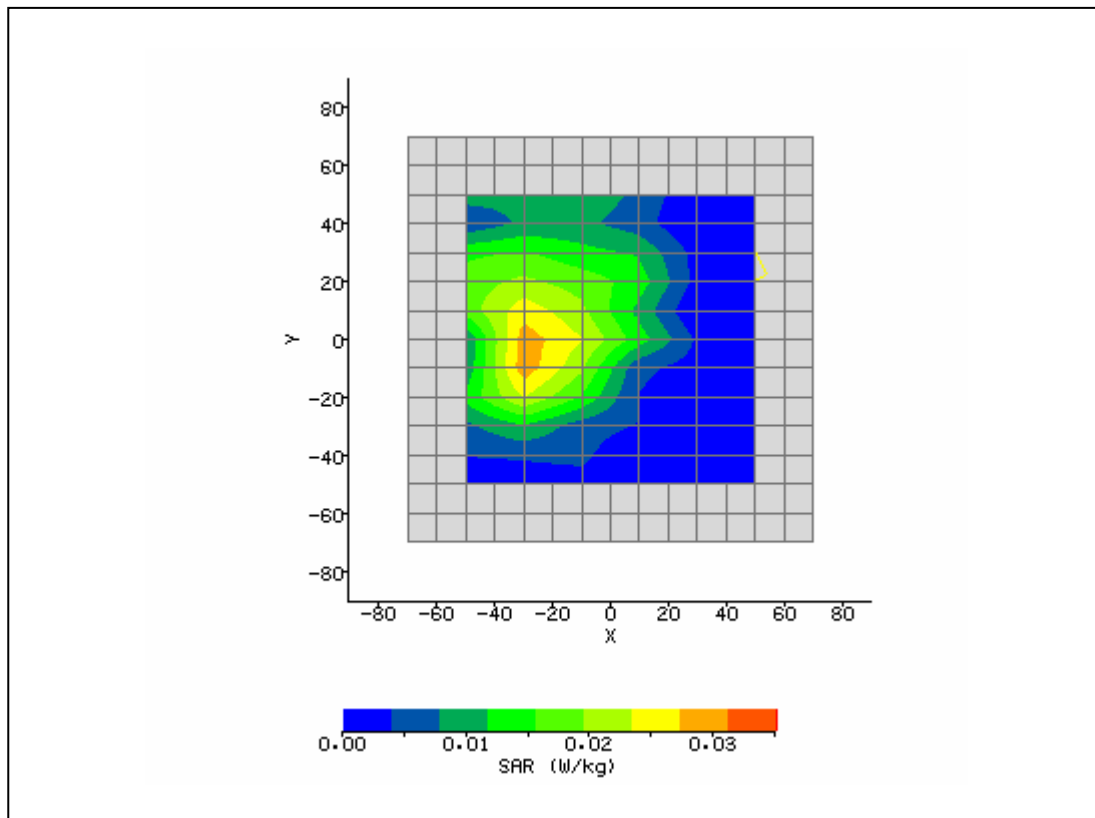

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	06/25/2007 12:06:49 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System verification	Relative Permittivity:	39.86
Relative Humidity:	30%	Conductivity:	1.861
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	dipole	Max E Field:	142.82 V/m
Test Frequency:	2450MHz	SAR 1g:	50.278 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	22.968 W/kg
Conversion Factors:	.613 / .613 / .613	SAR Start:	4.031 W/kg
Type of Modulation:	CW	SAR End:	4.042 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/25/2007
Input Power Level:	max	Extrapolation:	poly4

