




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 8:40:12 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_Lap_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG	<b>Relative Permittivity:</b>	50.97
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	12.80 mm
<b>DUT Position:</b>	Top 0mm	<b>Max SAR Y-axis Location:</b>	-30.40 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	17.16 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.750 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.108 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.110 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.86 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/02/2007
<b>Input Power Level:</b>	Set by sw	<b>Extrapolation:</b>	poly4

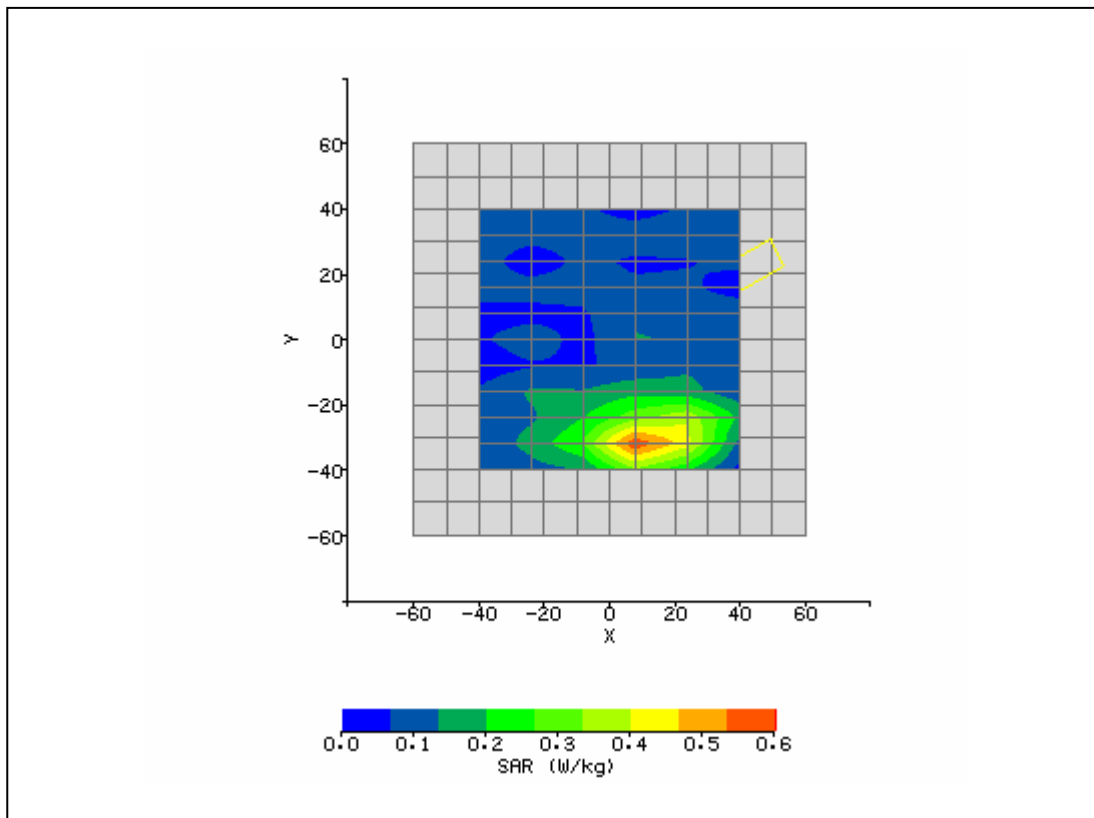


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 8:54:36 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_Lap_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG	<b>Relative Permittivity:</b>	50.97
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	40.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	36.00 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	10.26 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.217 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.113 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.112 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.88 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/02/2007
<b>Input Power Level:</b>	Set by sw	<b>Extrapolation:</b>	poly4

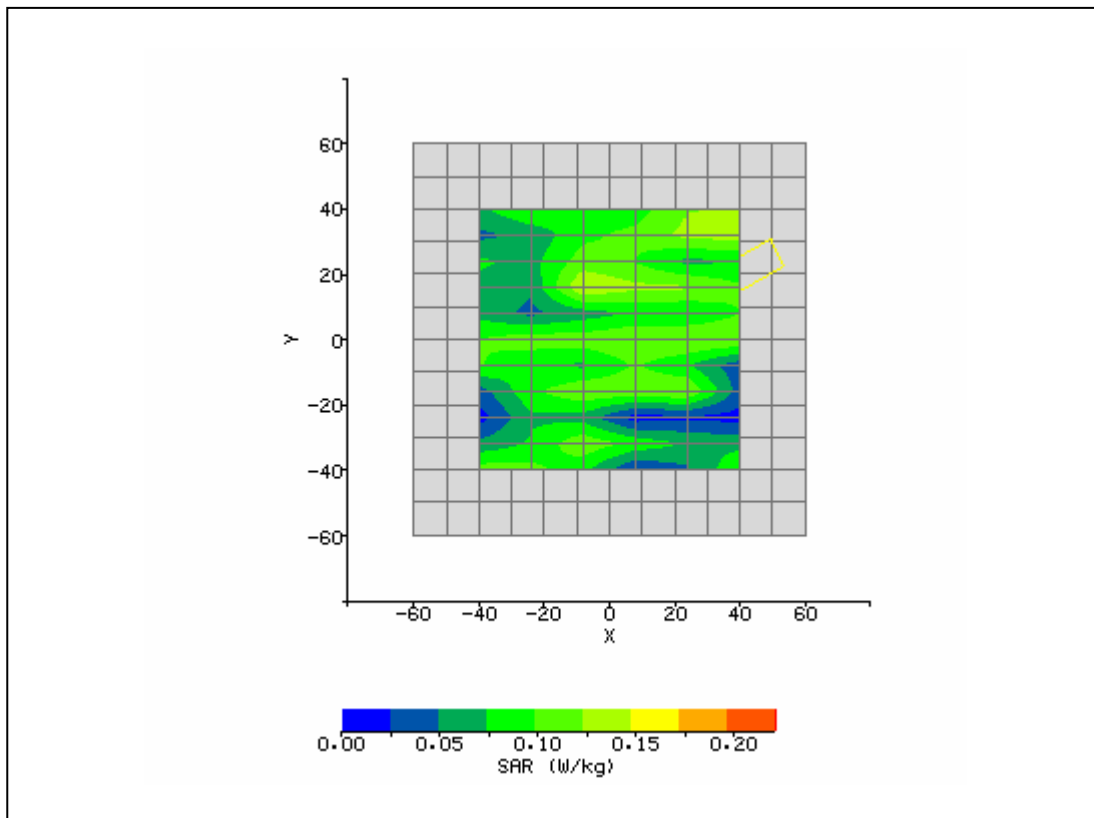


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 9:13:53 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_Lap_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG	<b>Relative Permittivity:</b>	50.97
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	12.80 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	23.20 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	10.53 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.181 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.114 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.110 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.51 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/02/2007
<b>Input Power Level:</b>	Set by sw	<b>Extrapolation:</b>	poly4

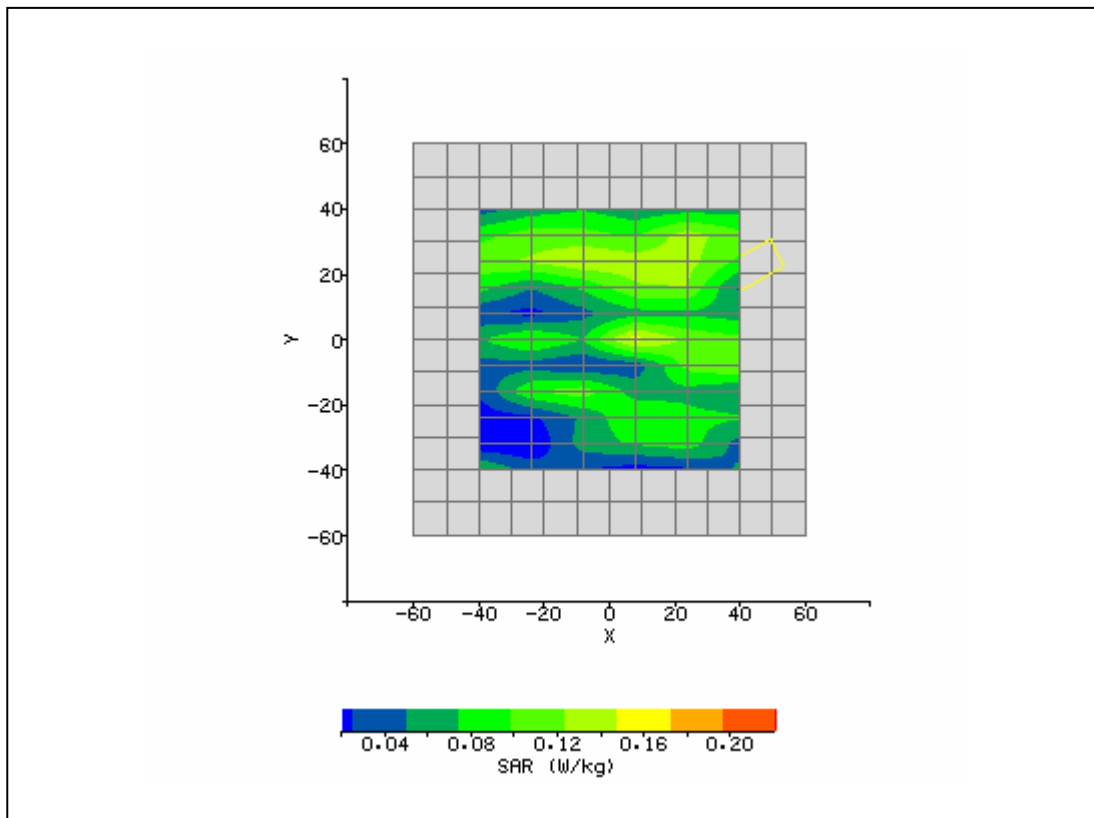


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 2:41:12 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Aux_Top_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG	<b>Relative Permittivity:</b>	50.93
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.863
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-17.60 mm
<b>DUT Position:</b>	Top 0mm	<b>Max SAR Y-axis Location:</b>	0.80 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	21.22 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	1.131 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.172 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.178 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.49 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/02/2007
<b>Input Power Level:</b>	Set by sw	<b>Extrapolation:</b>	poly4

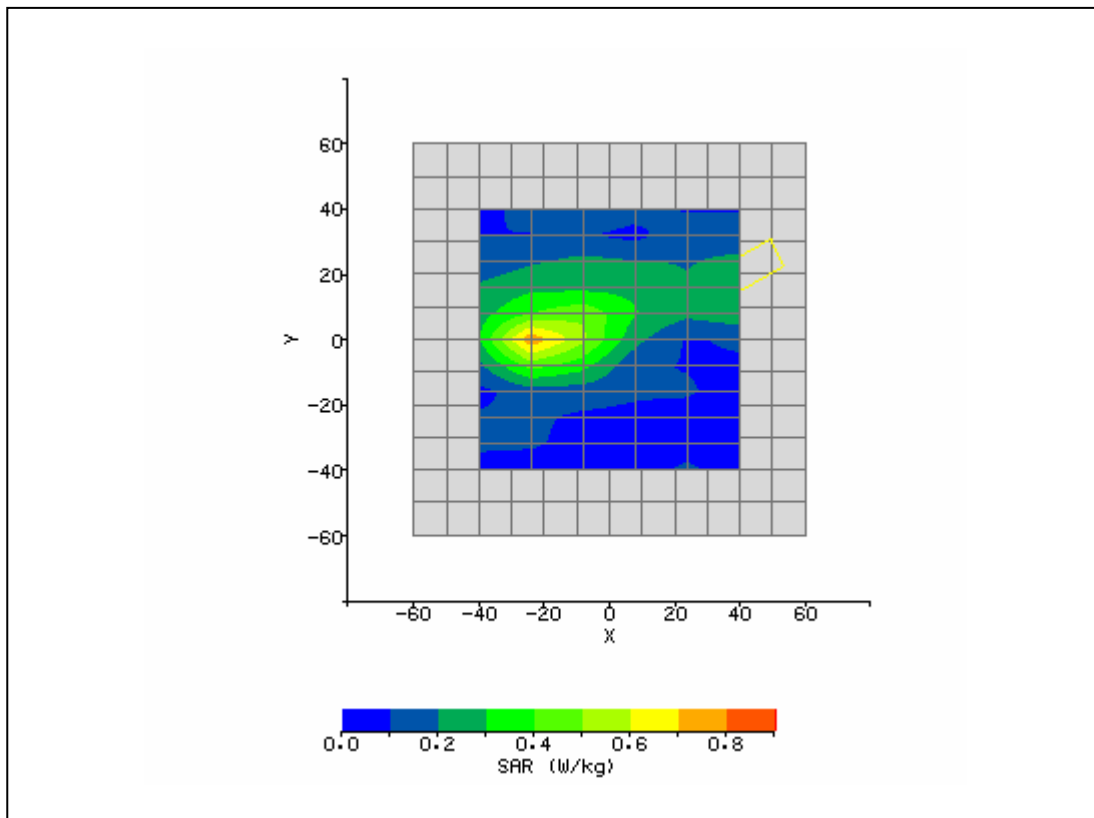


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 2:55:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_Top_1_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG	<b>Relative Permittivity:</b>	50.78
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.964
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-22.40 mm
<b>DUT Position:</b>	Top 0mm	<b>Max SAR Y-axis Location:</b>	-8.00 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	21.66 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	1.094 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.178 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.186 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.49 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/02/2007
<b>Input Power Level:</b>	Set by sw	<b>Extrapolation:</b>	poly4

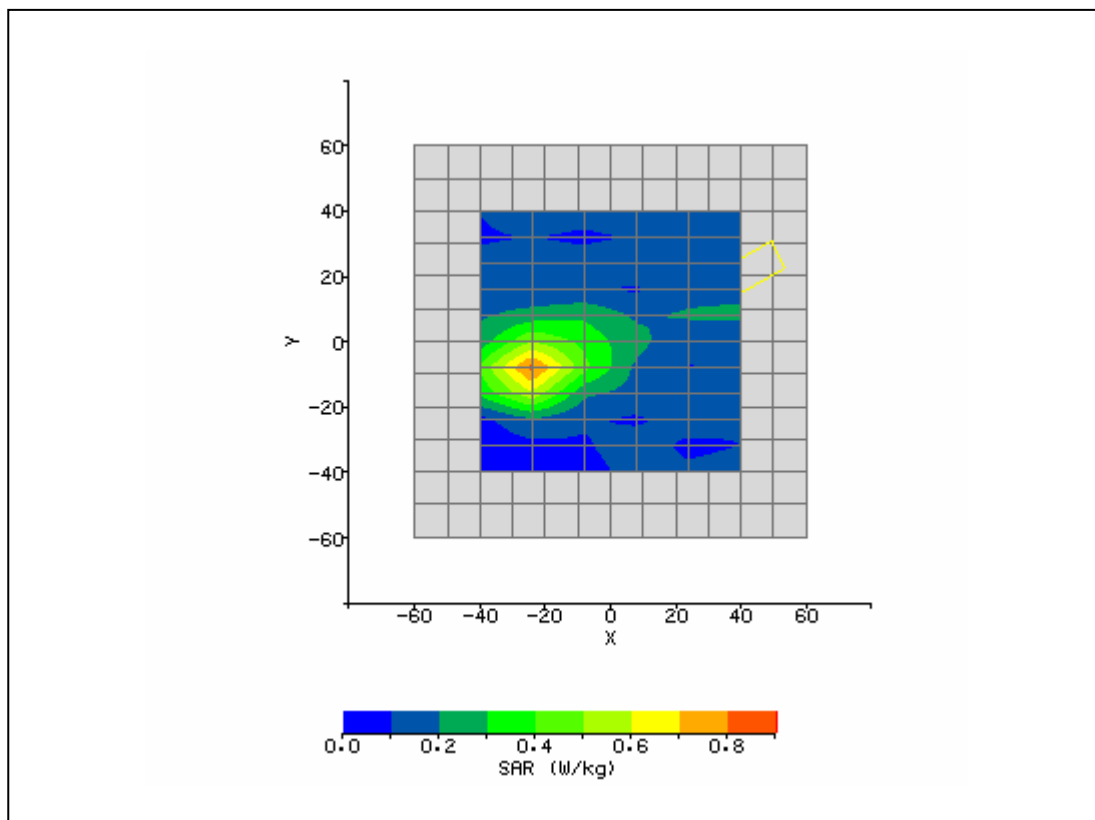

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 2:22:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG	<b>Relative Permittivity:</b>	50.97
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	16.00 mm
<b>DUT Position:</b>	Top 0mm	<b>Max SAR Y-axis Location:</b>	-15.20 mm
<b>Antenna Configuration:</b>	Integral Aux	<b>Max E Field:</b>	16.08 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.619 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.159 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.166 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.41 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/02/2007
<b>Input Power Level:</b>	Set by sw	<b>Extrapolation:</b>	poly4

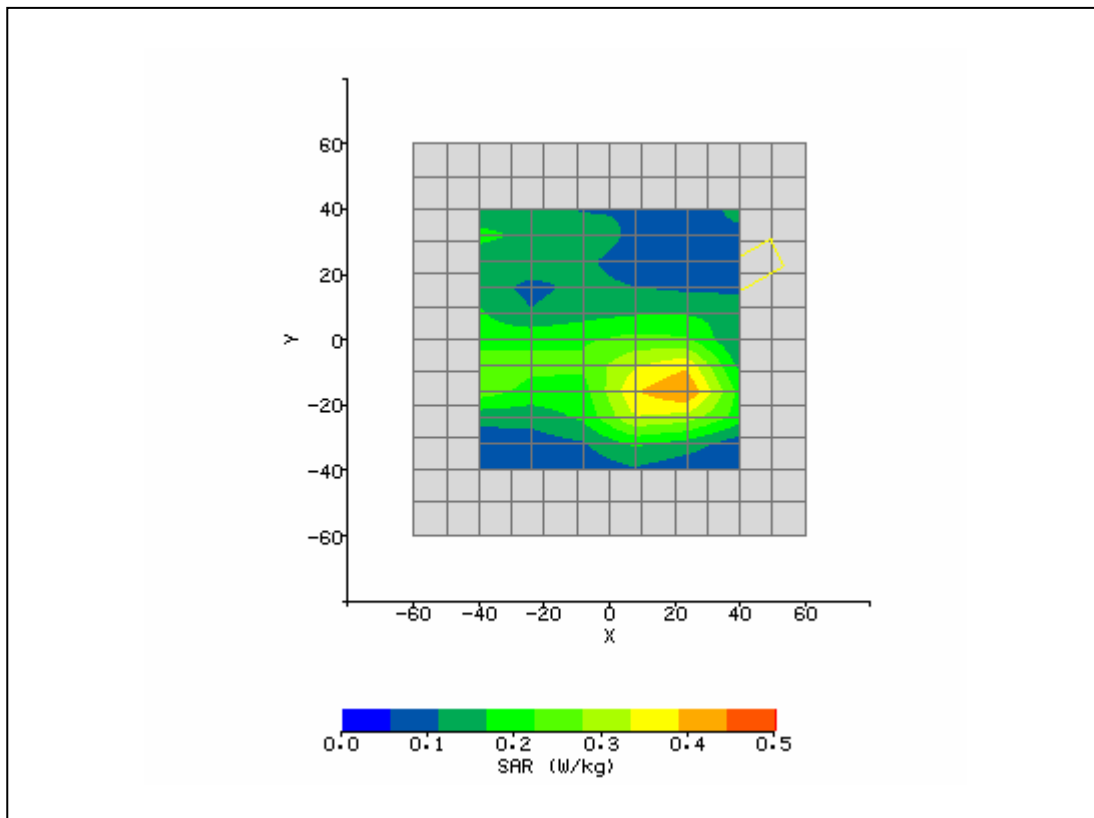

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/30/2007 10:58:13 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_Top_6_BT_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94311MCG + DW360BT	<b>Relative Permittivity:</b>	50.93
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.863
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-16.00 mm
<b>DUT Position:</b>	Top	<b>Max SAR Y-axis Location:</b>	-4.80 mm
<b>Antenna Configuration:</b>	Integral - ACON Main	<b>Max E Field:</b>	20.90 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	1.141 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.051 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.052 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.25 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/30/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

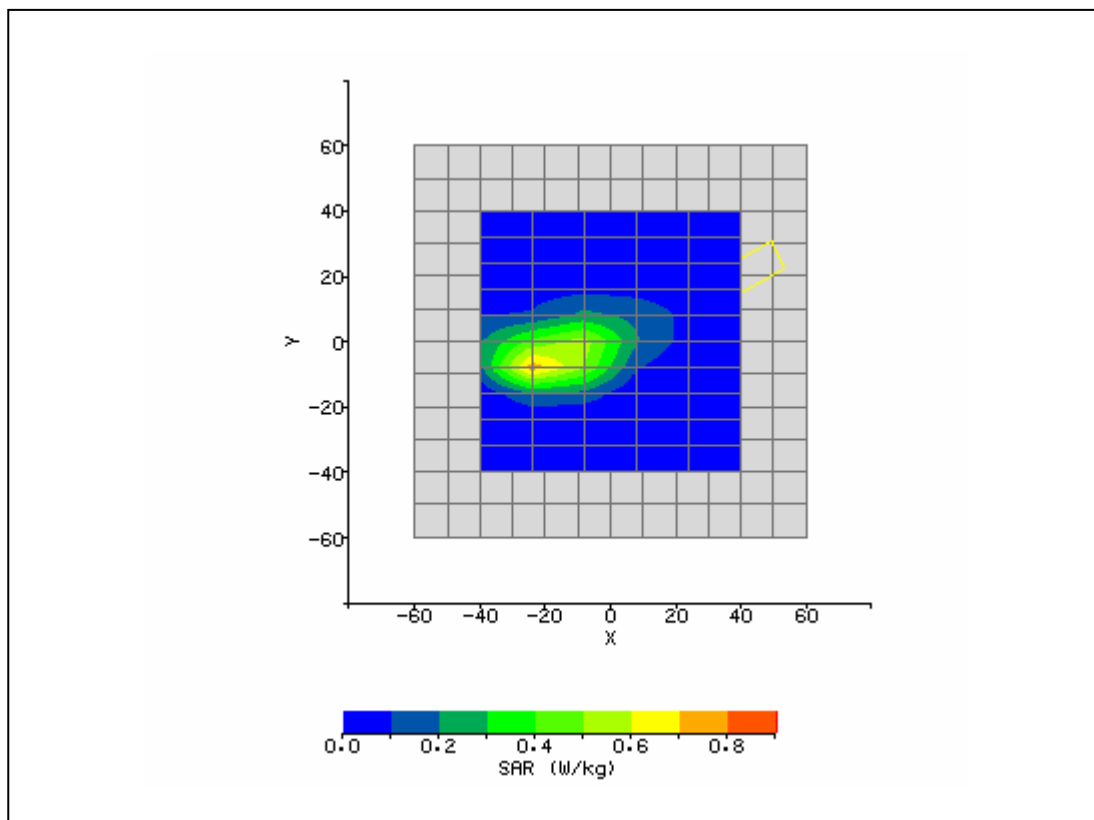

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/3/2007 8:12:14 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	39.51
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.82
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	14.31 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	8.80 mm
<b>Antenna Configuration:</b>	2450 Dipole	<b>Max E Field:</b>	149.32 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	52.671 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	23.954 W/kg
<b>Conversion Factors:</b>	.451 / .451 / .451	<b>SAR Start:</b>	3.248 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	3.245 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.08 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/03/2007
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

