




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 12:00:40 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	35.00 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	11.95 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.298 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.197 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.196 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.26 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

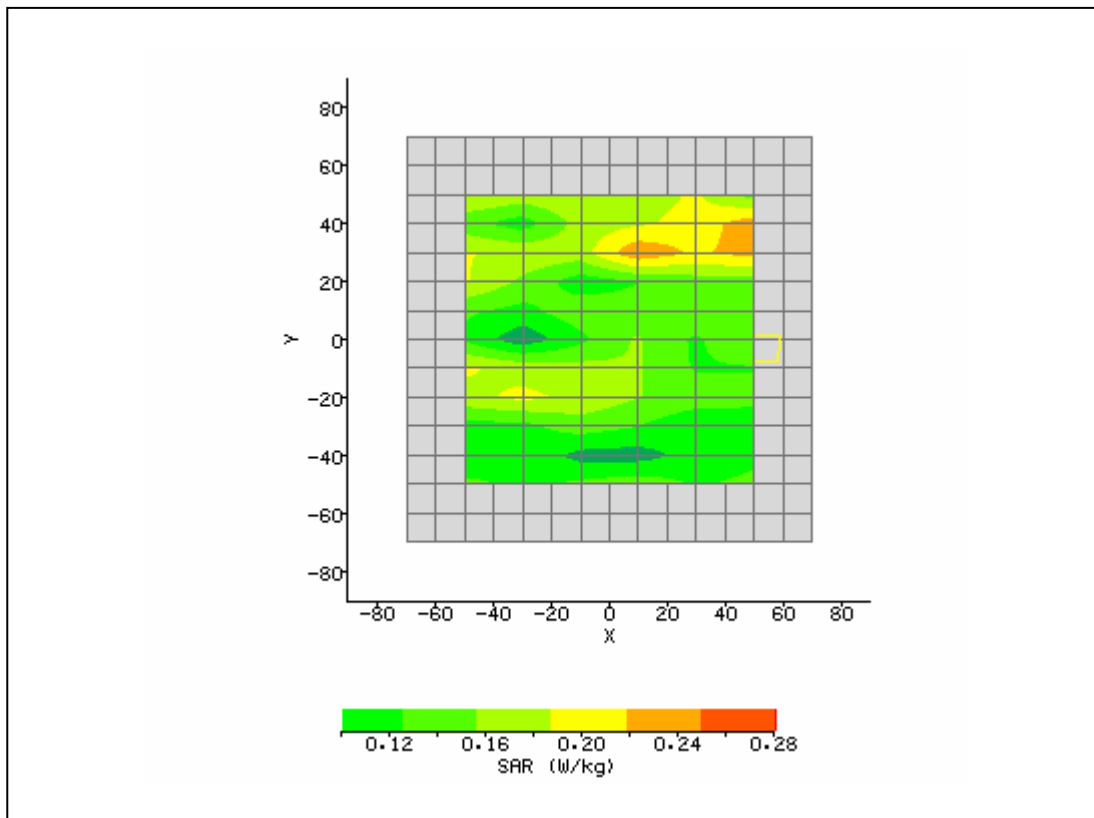


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 4:06:08 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Main_11_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	33.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.90 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.248 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.070 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.073 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.62 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

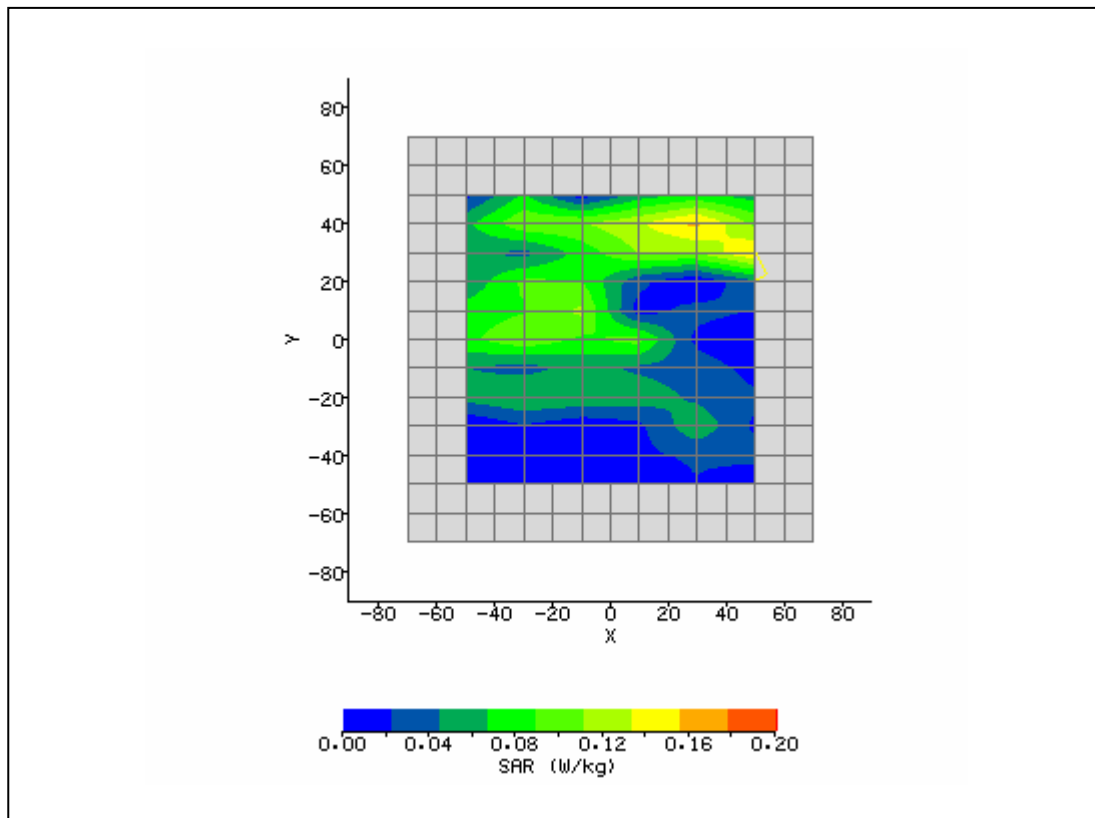


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 1:56:01 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.59 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.189 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.088 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.089 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.01 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

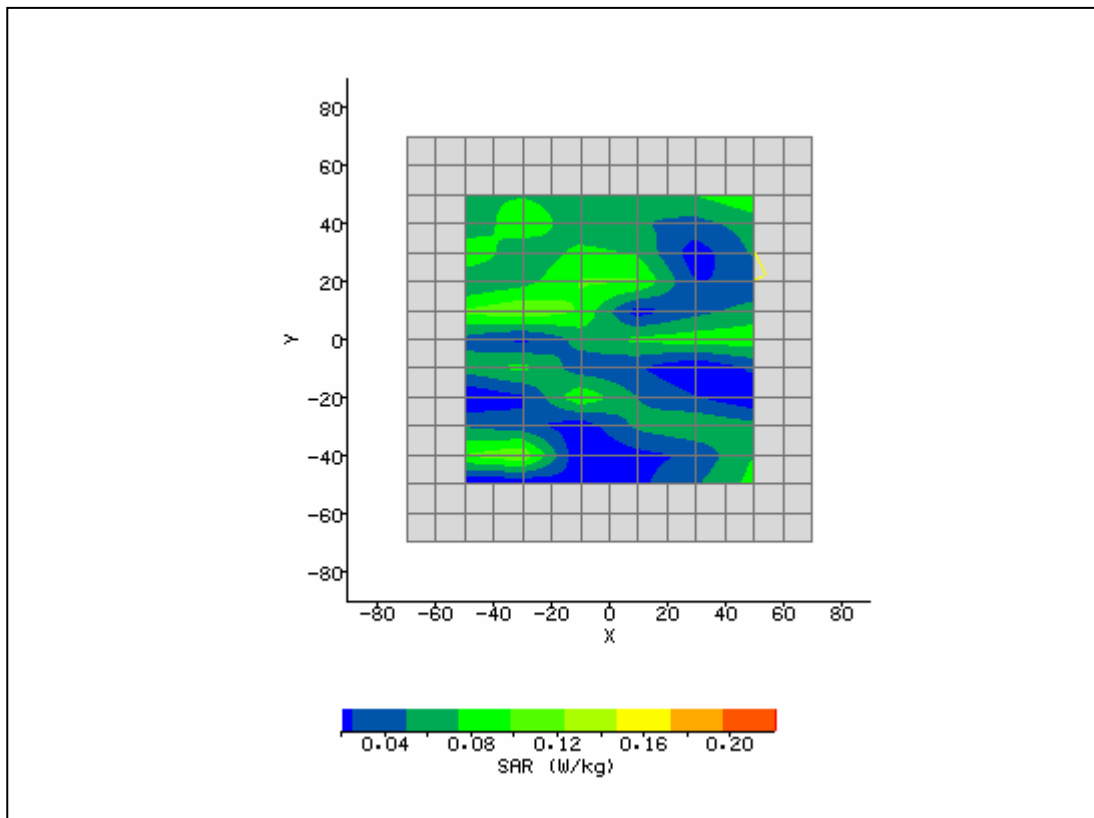


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 4:28:55 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Aux_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	14.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	-4.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.09 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.236 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.074 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.075 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

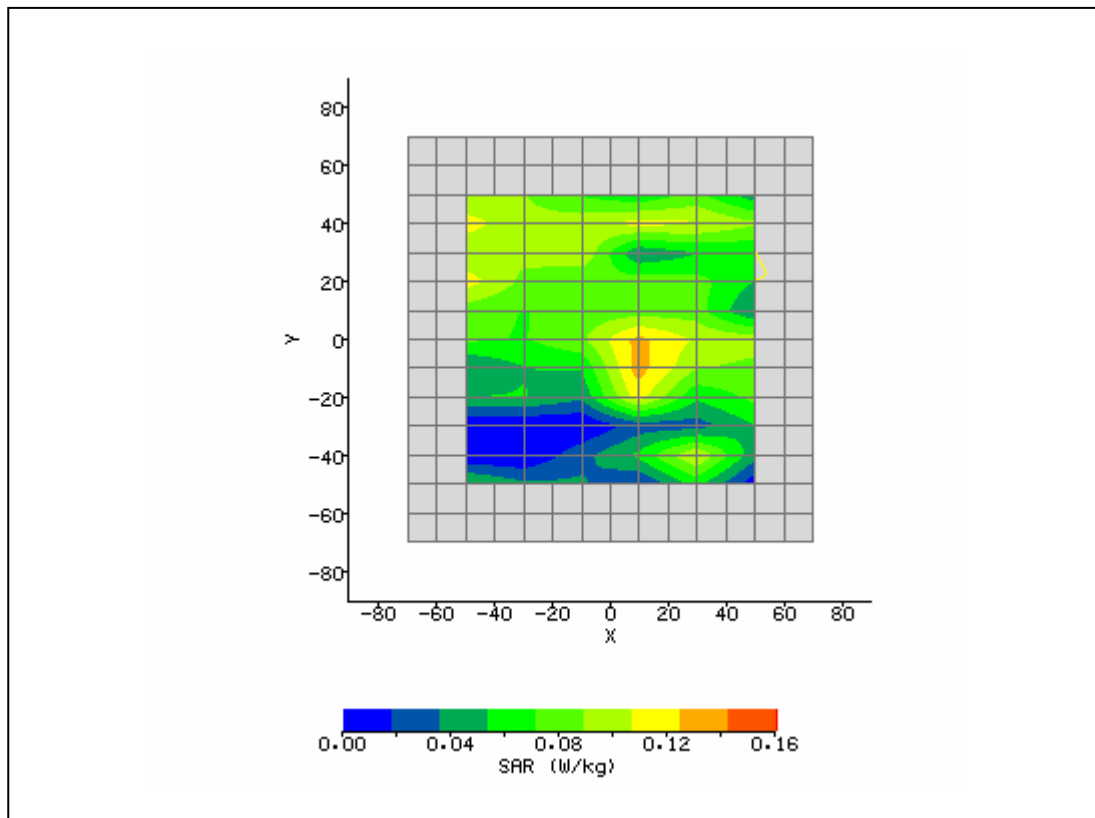


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 2:26:22 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Main_1.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	50.80
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.619
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	30.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	30.00 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	9.47 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.161 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.103 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.105 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.94 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/10/2007
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

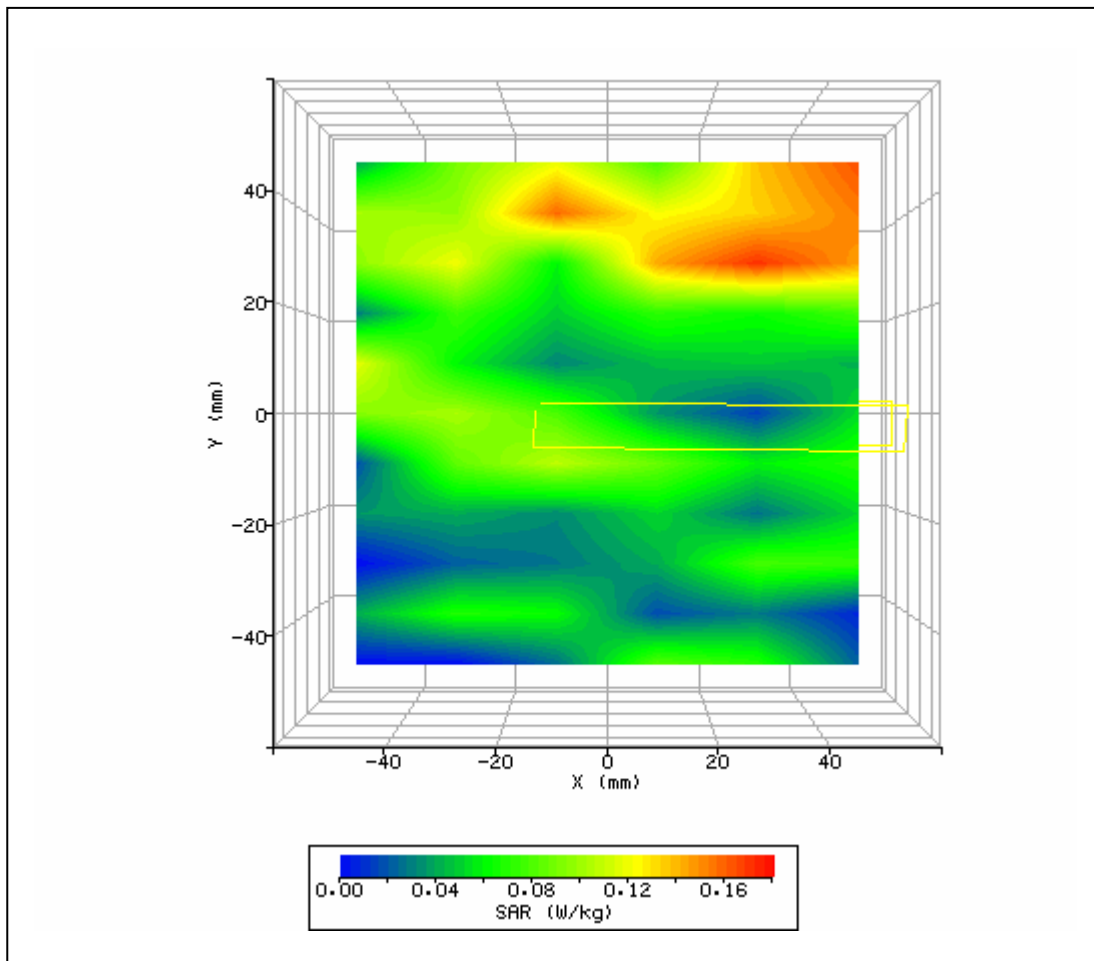


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 3:33:29 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Main_11_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.99 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.212 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	0.164 W/kg
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.095 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.098 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.16 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

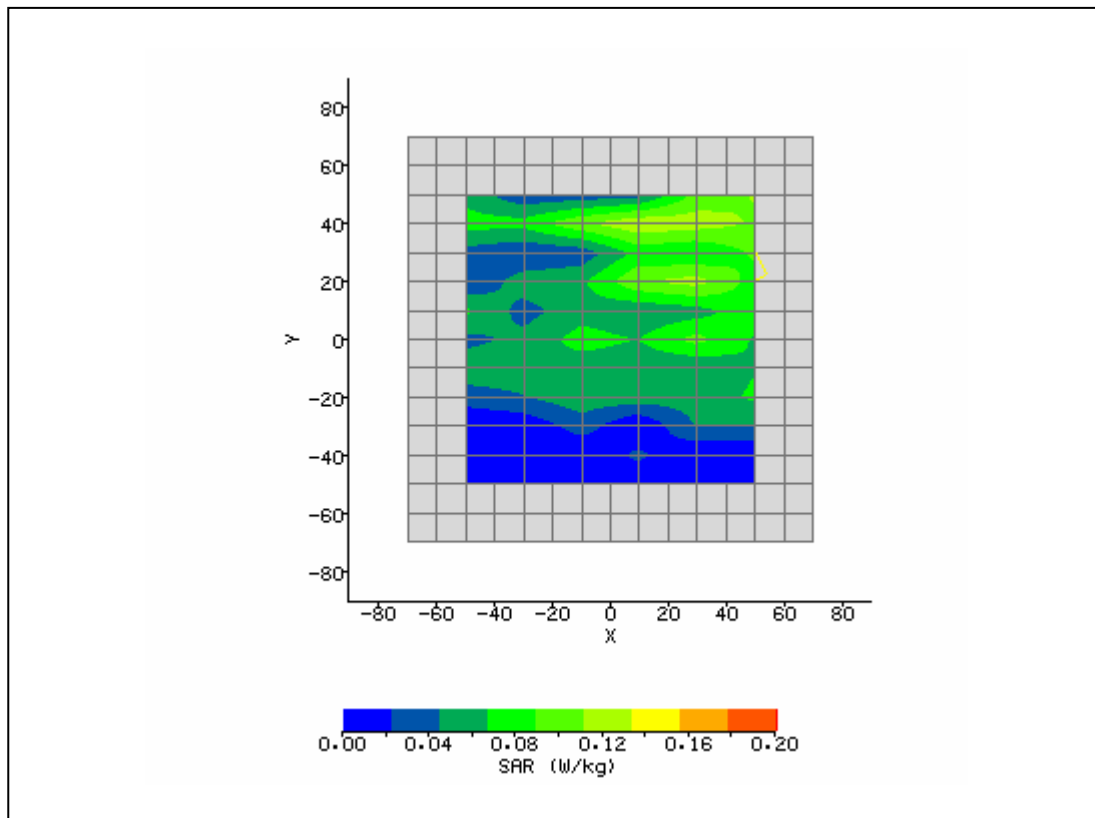

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 4:52:23 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Aux_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	50.89
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.909
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.07 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.228 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.079 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.080 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.91 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

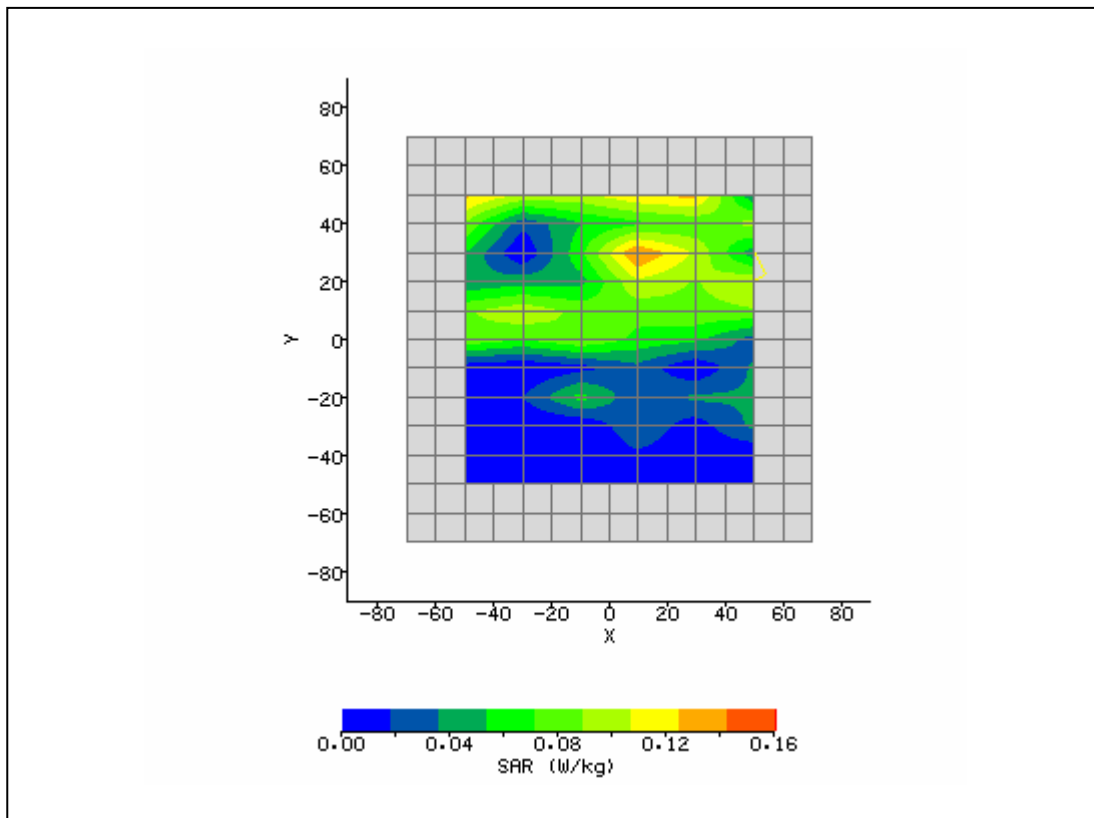


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/29/2007 5:13:25 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Aux_1_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	27.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	8.97 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.161 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.072 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.076 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.88 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/29/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

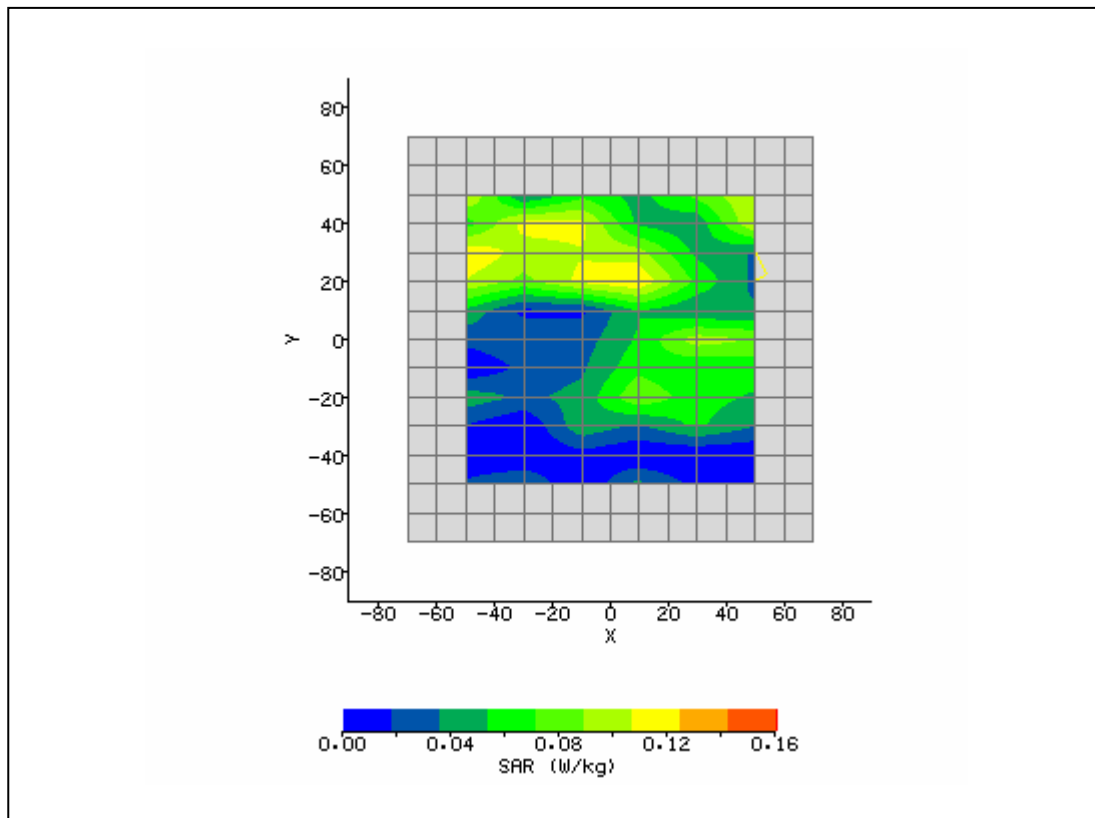





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 3:41:25 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.30
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.21
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	46.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	4.77 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.088 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.018 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.019 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.59 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

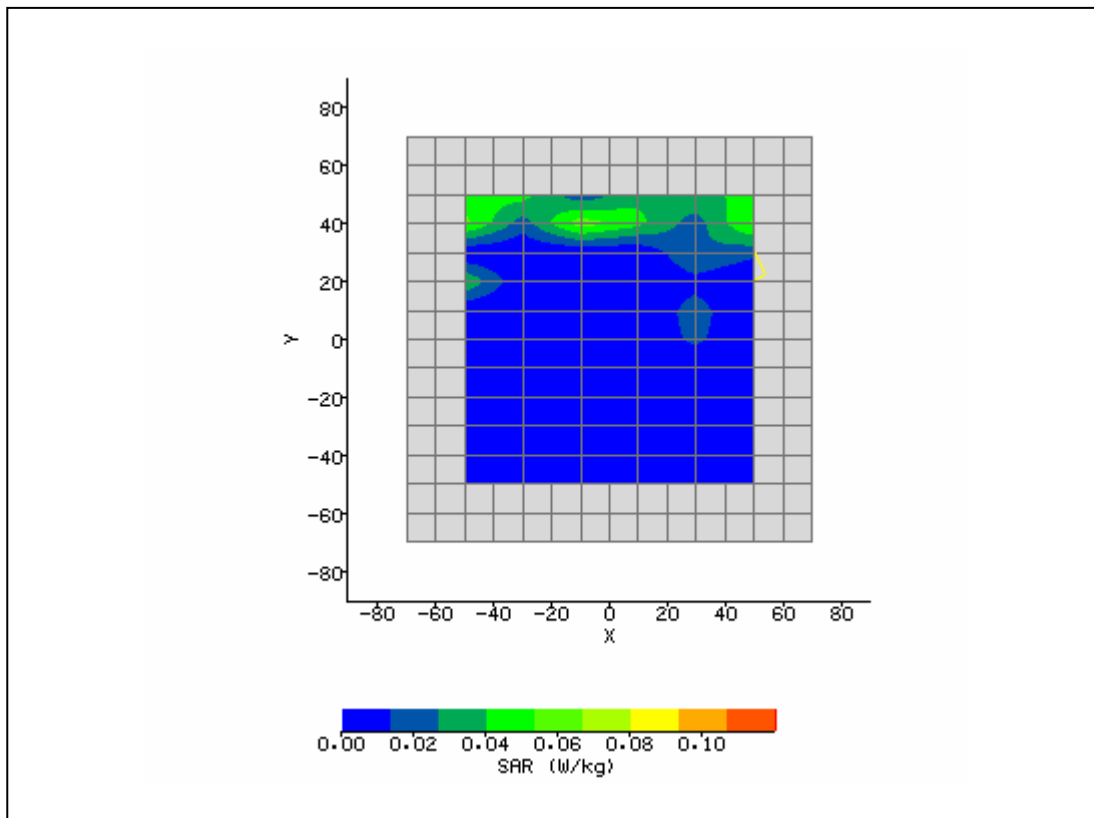


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 4:06:59 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side52_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	48.30
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.187
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	56.67 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	48.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.08 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.132 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.049 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.051 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.94 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

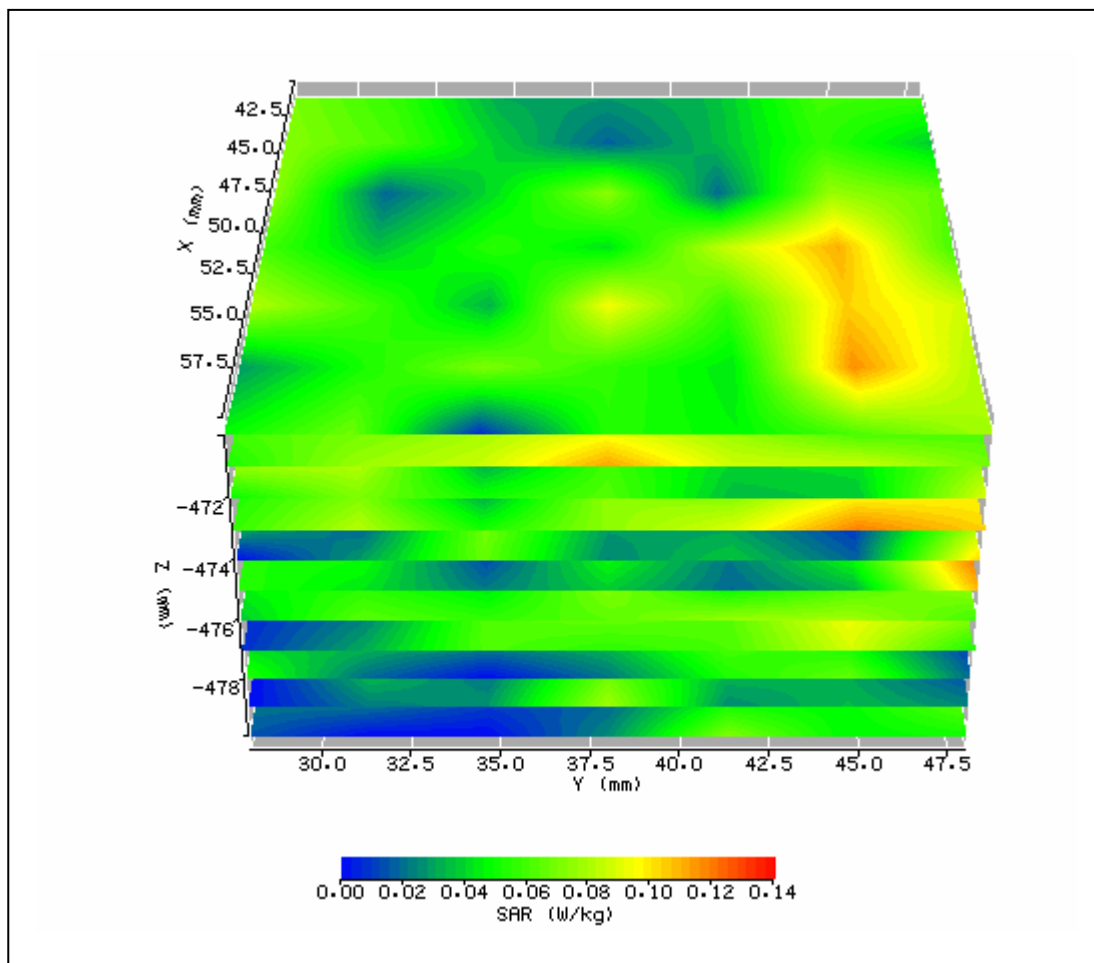


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 4:38:22 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.27
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.229
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	34.67 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	46.67 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.25 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.083 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.031 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.032 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.19 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

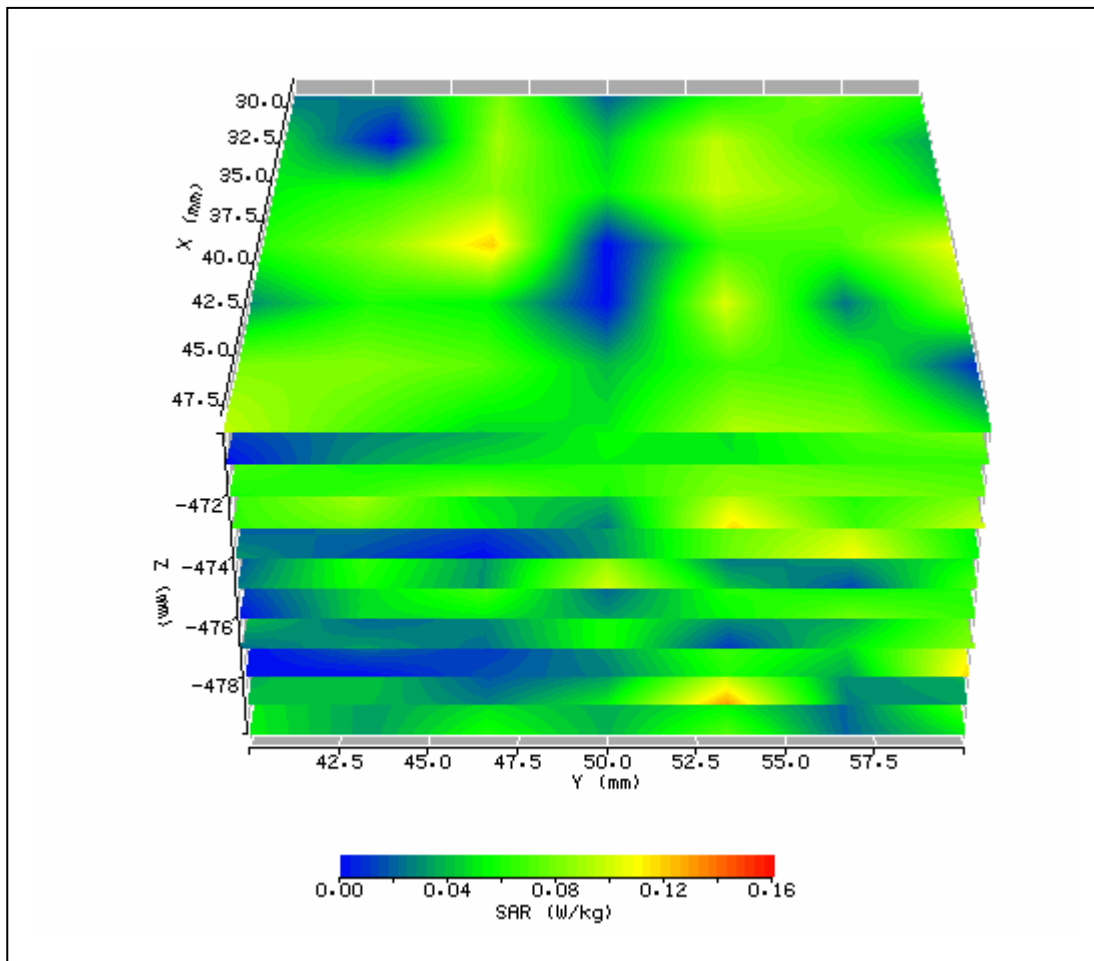


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 4:59:46 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.90
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.187
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	36.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	43.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.18 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.076 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.064 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.061 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.02 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

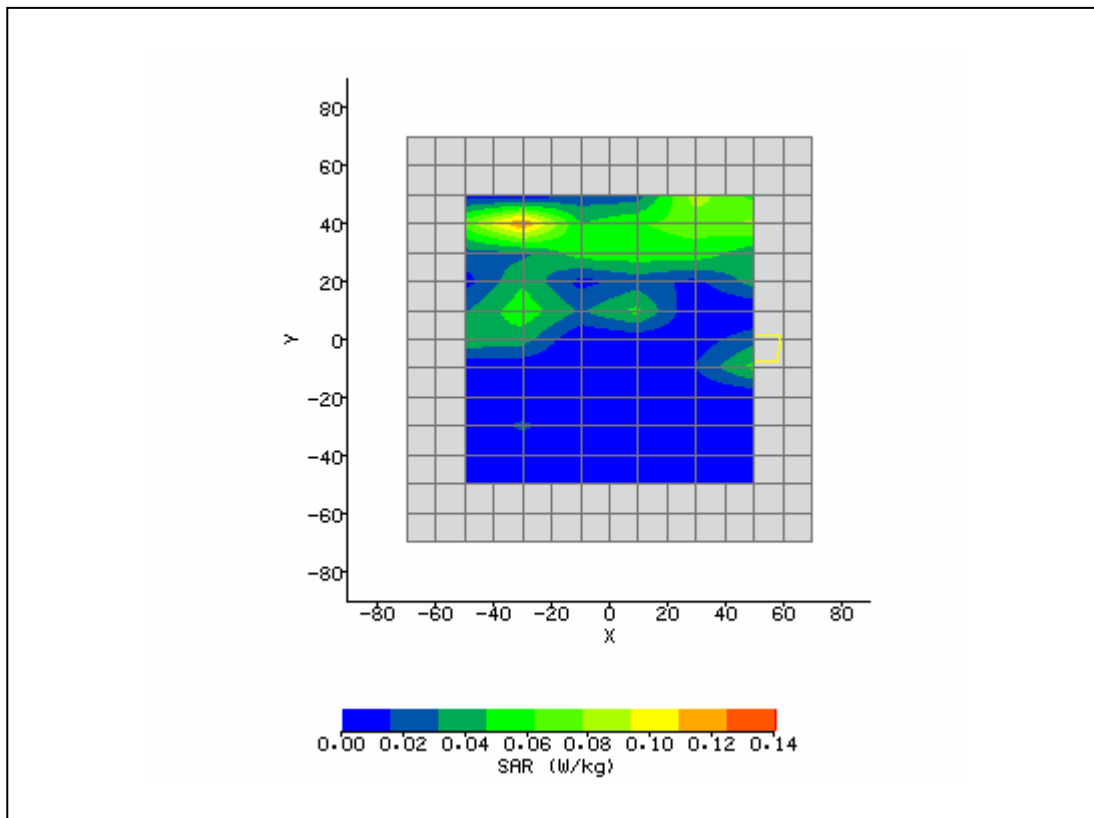


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 8:52:55 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.30
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.21
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	45.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	4.91 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.117 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.035 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.034 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.42 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

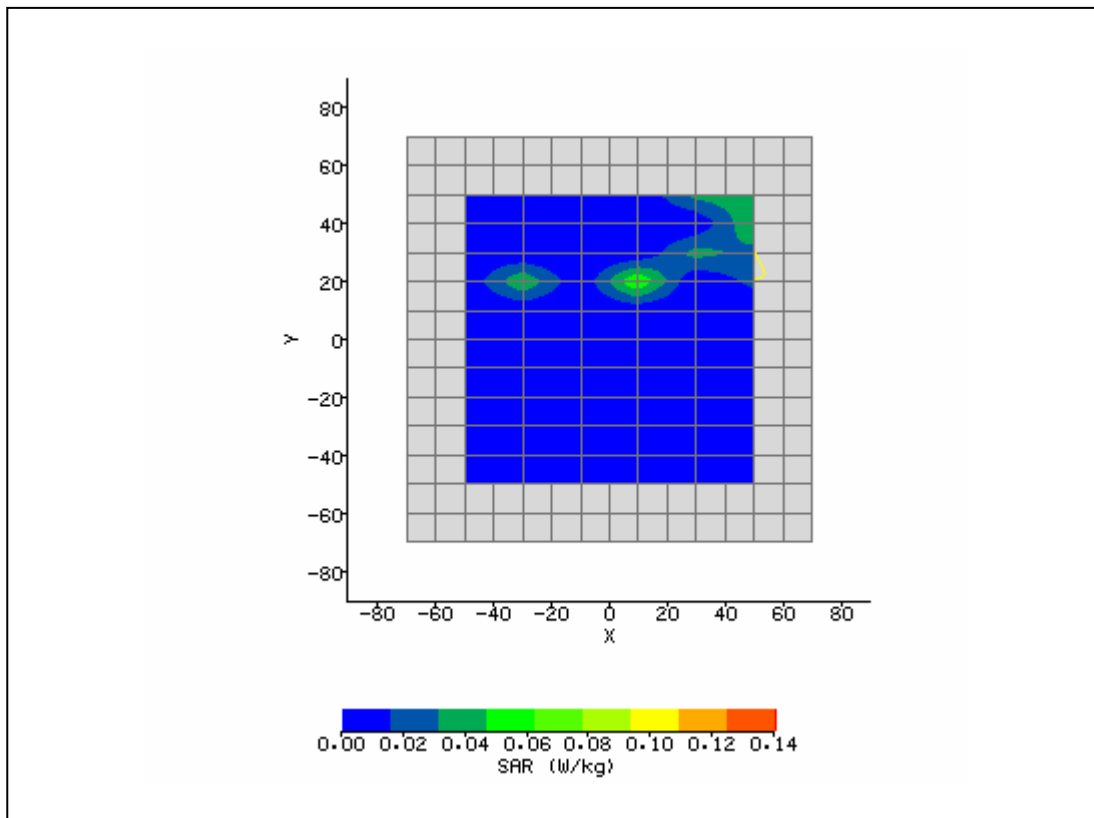


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 9:11:44 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Aux_52_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.30
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.21
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	38.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	4.60 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.126 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.040 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.041 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.16 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

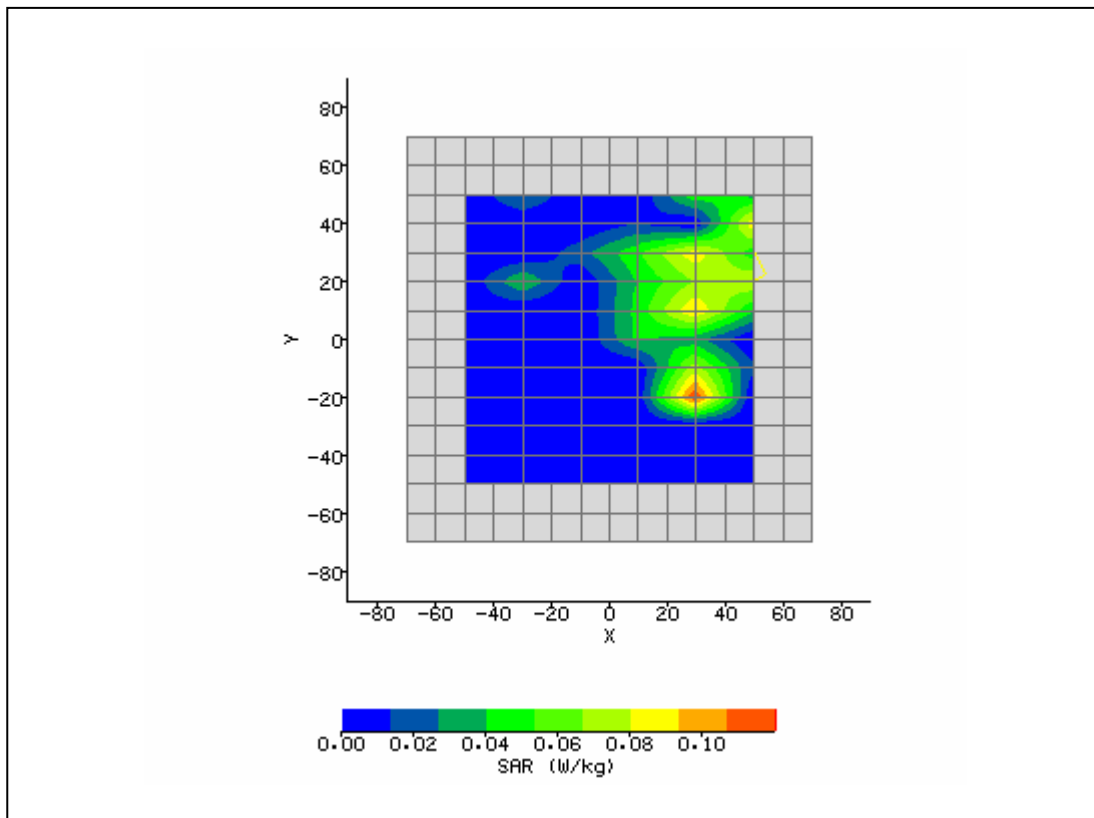

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 4:38:22 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	48.27
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.229
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	34.67 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	46.67 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.25 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.107 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.031 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.032 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.19 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

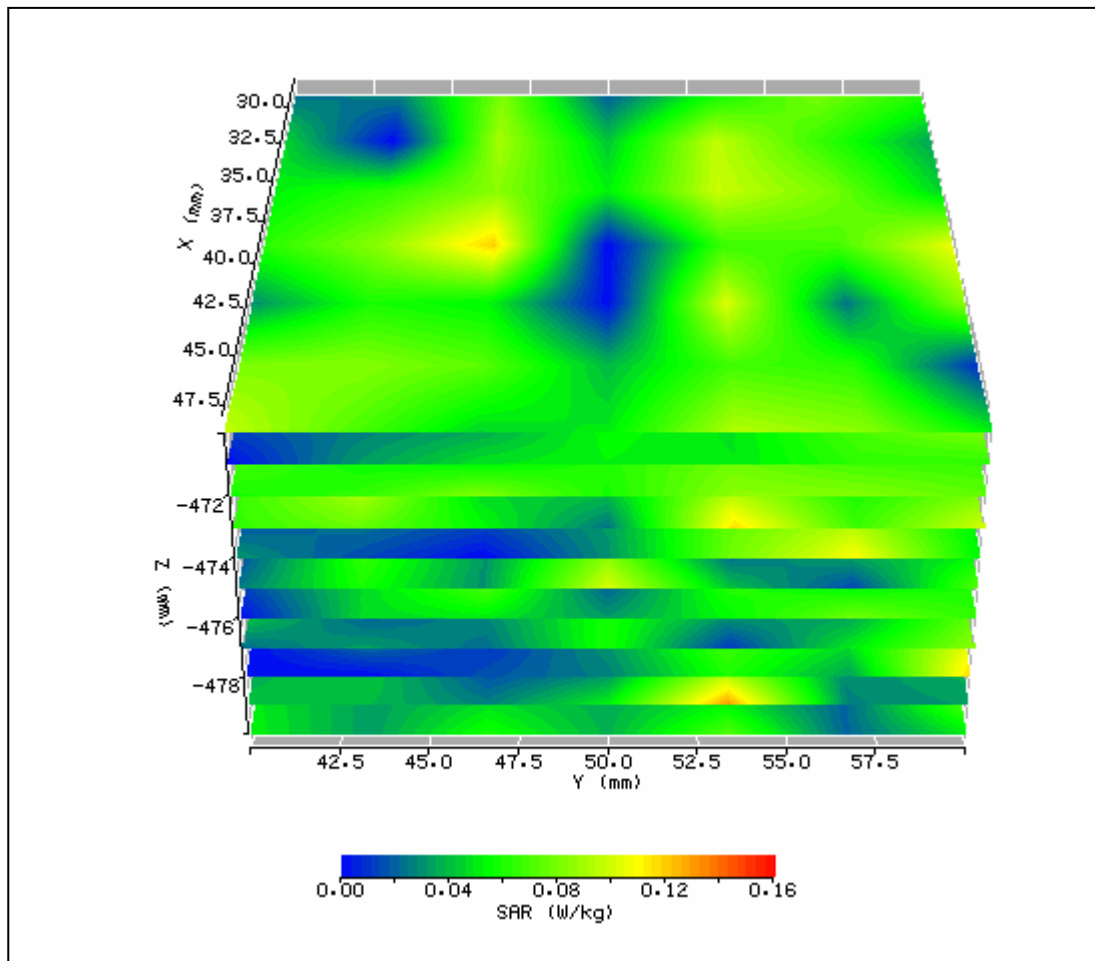


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 9:51:37 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_Aux_36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.90
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.187
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-21.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	3.78 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.051 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.010 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.010 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

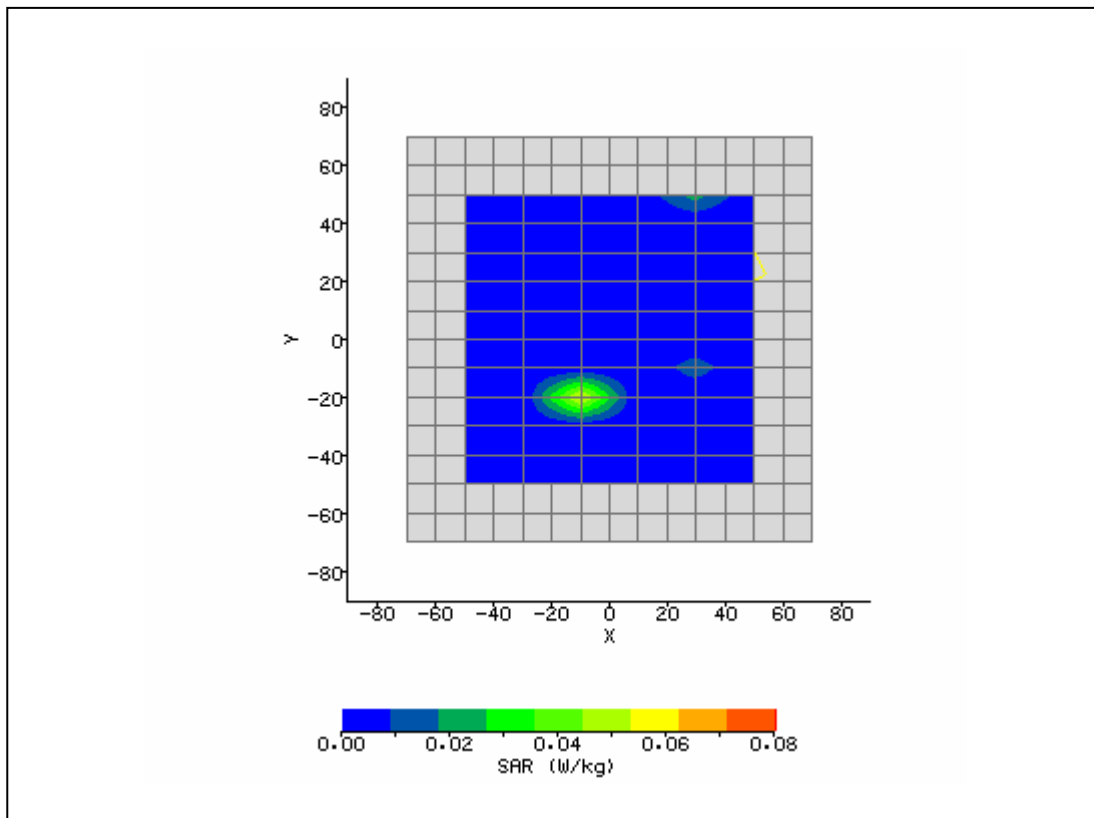





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 2:52:14 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-18.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.50 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.847 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.299 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.312 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

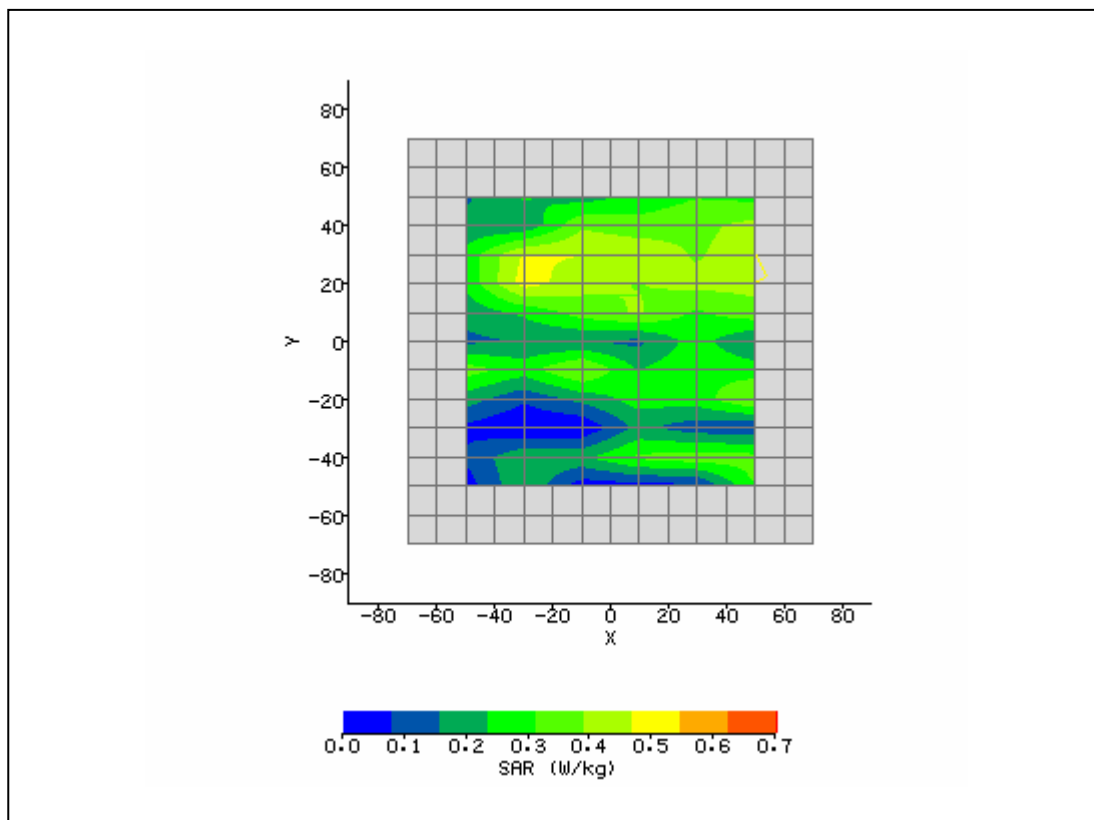


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 3:31:58 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Main_157_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.28 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.621 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.462 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.457 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.08 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

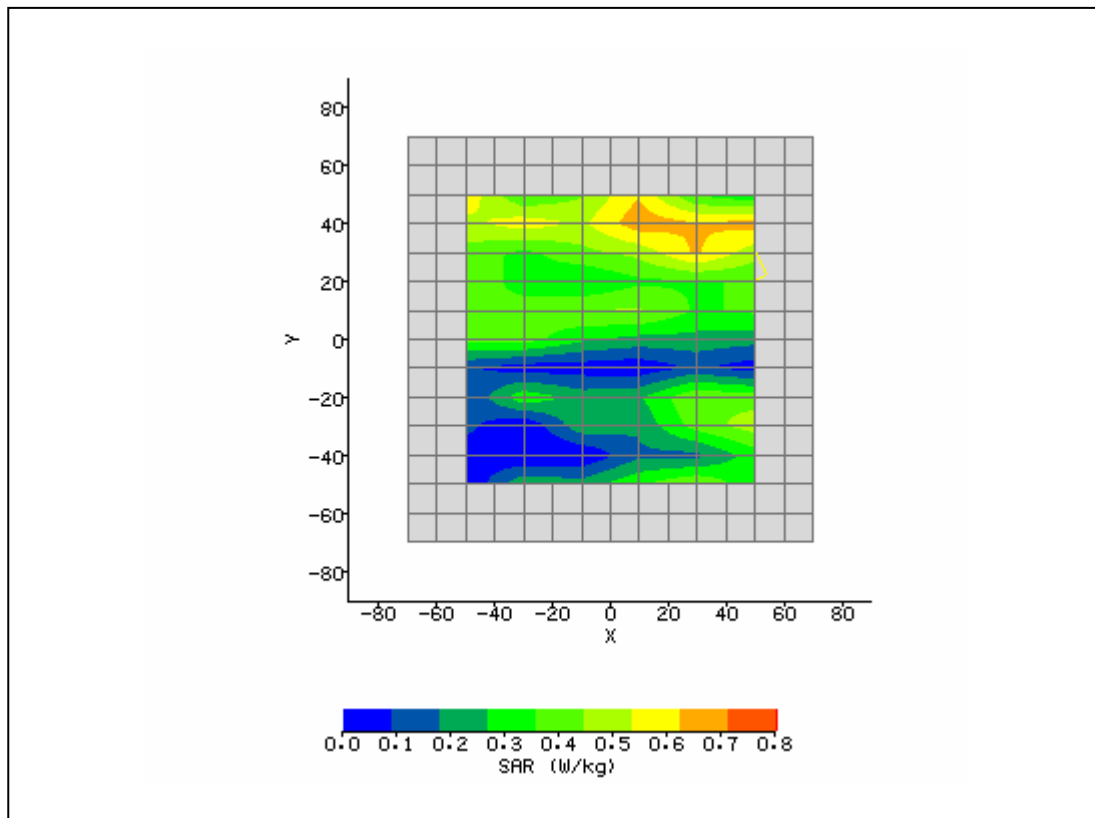


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 3:58:14 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_Main_157_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	48.21
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.985
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	17.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.22 V/m
<b>Test Frequency:</b>	5745MHz	<b>SAR 1g:</b>	0.438 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.364 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.355 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.47 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

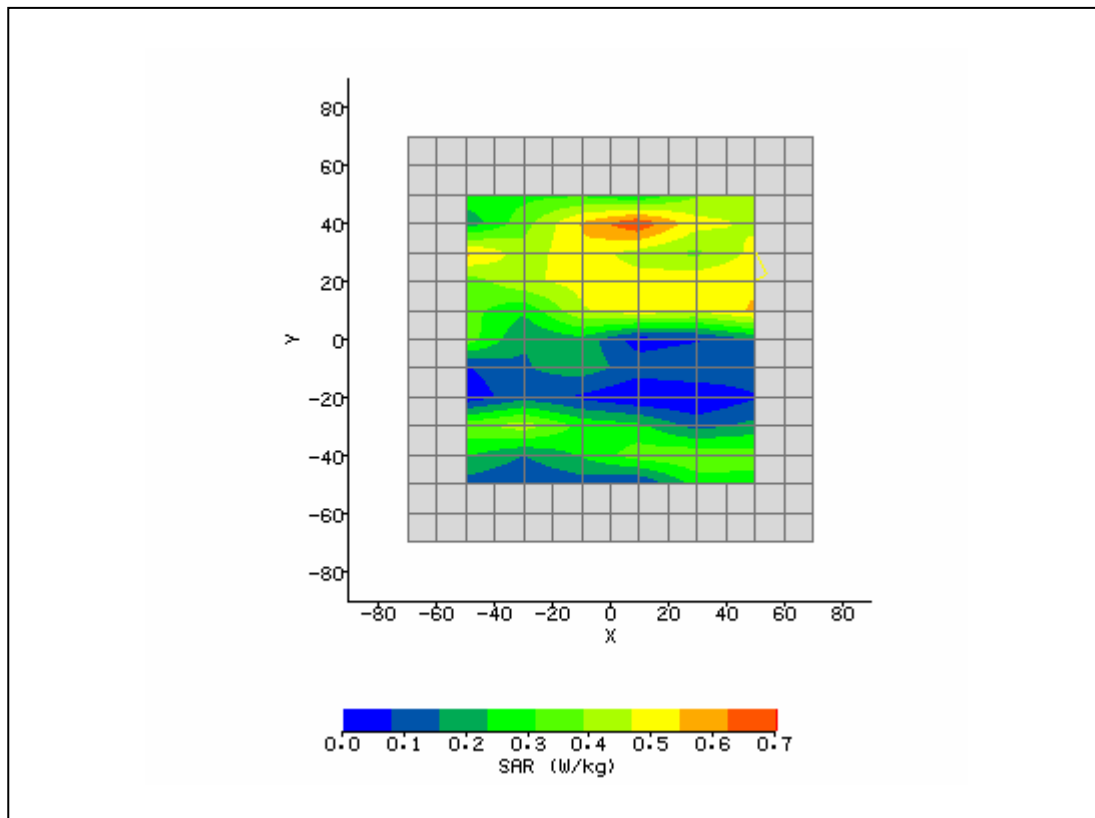


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 4:24:40 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Main_149_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.14
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.112
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-25.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.58 V/m
<b>Test Frequency:</b>	5825MHz	<b>SAR 1g:</b>	0.555 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.338 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.328 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.95 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

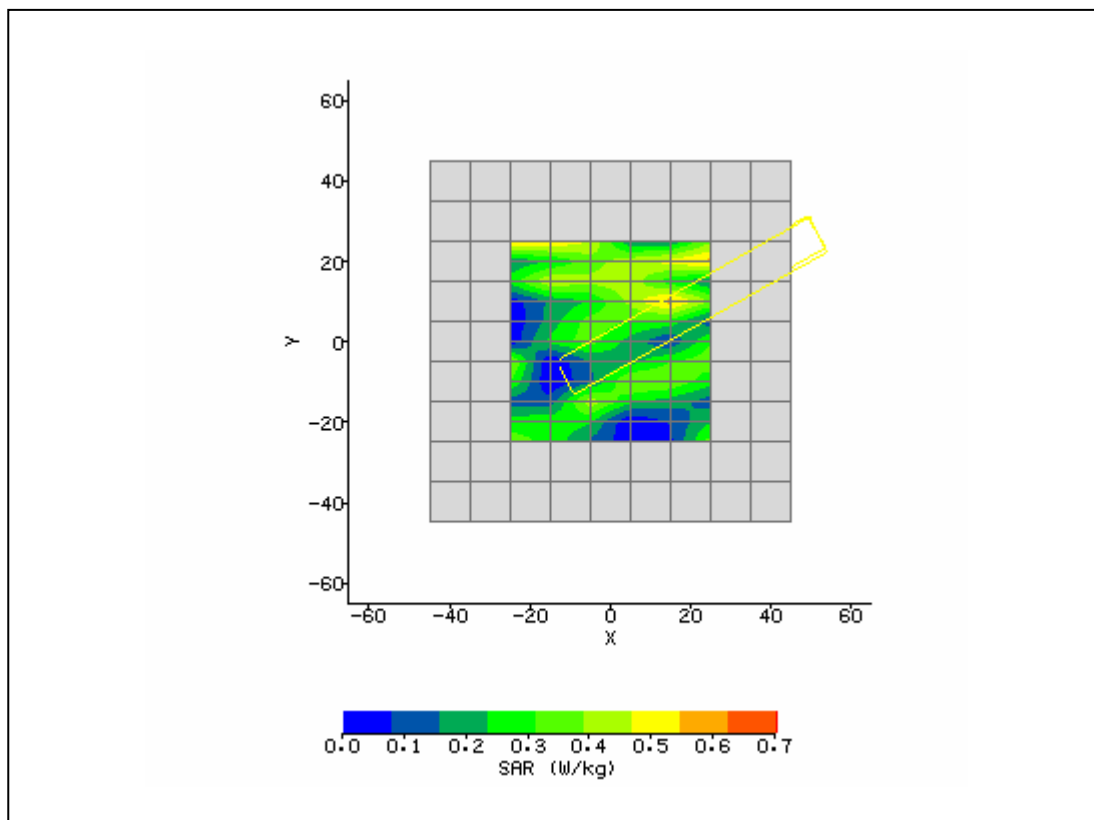


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 4:47:38 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_Main_165_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-25.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	2.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.66 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.520 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.230 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.228 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.16 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

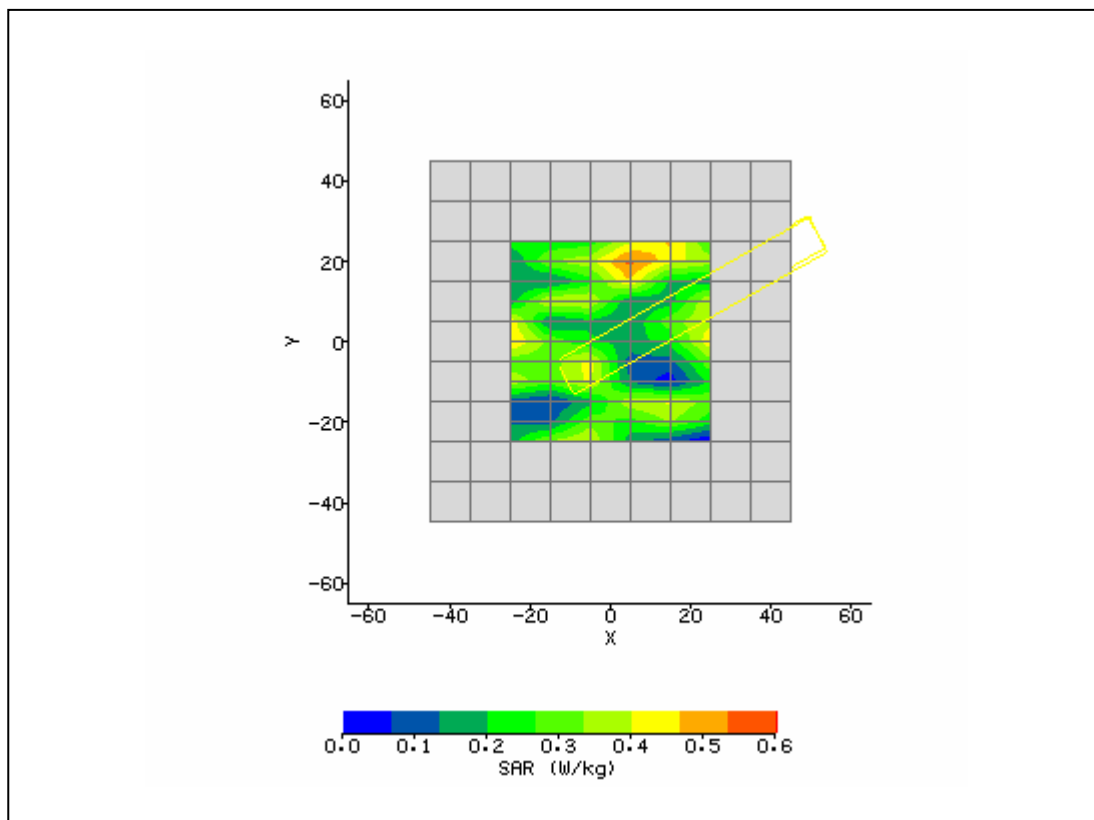


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 5:01:04 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_Aux_157.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-15.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-20.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.79 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.551 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.269 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.257 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.29 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

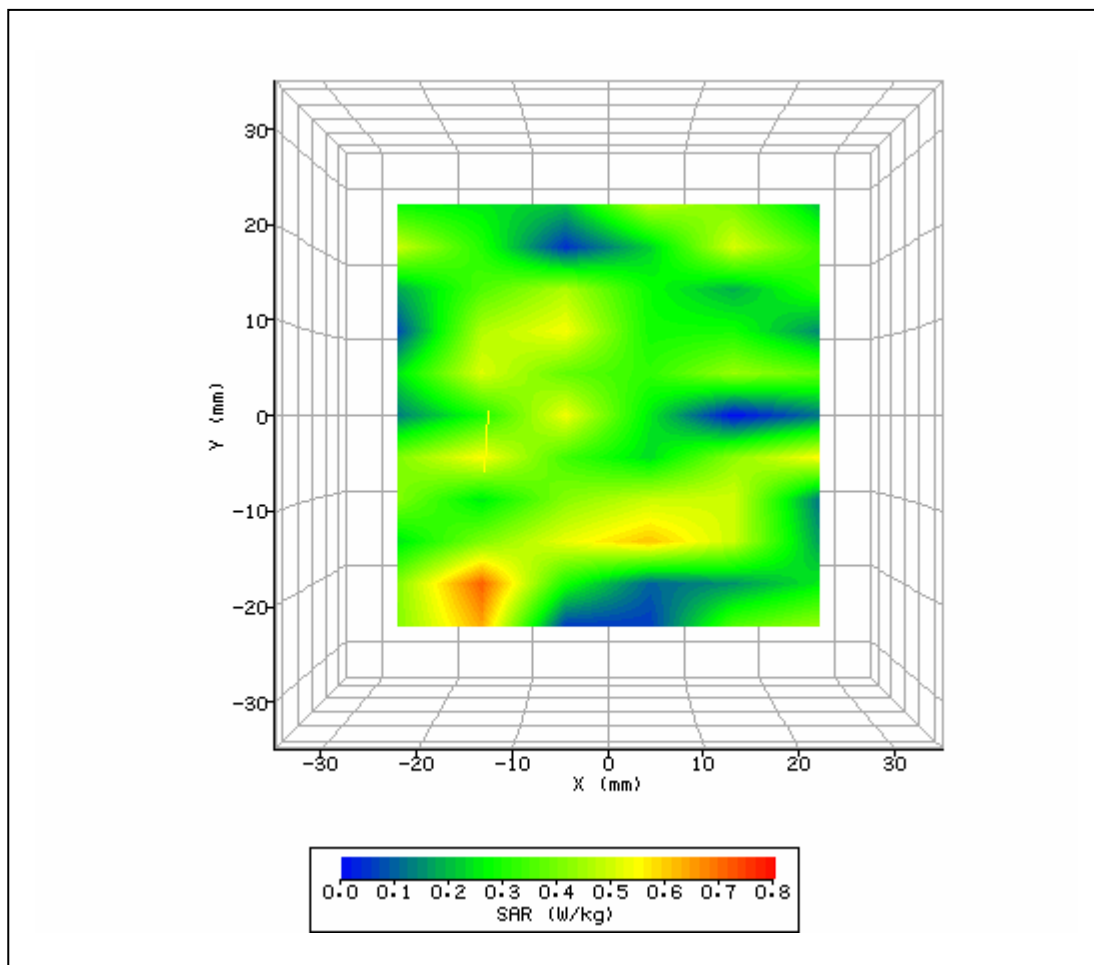

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/5/2007 8:46:47 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.21
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.985
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	5.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-7.50 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	12.79 V/m
<b>Test Frequency:</b>	5745MHz	<b>SAR 1g:</b>	0.733 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.478 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.462 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.34 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

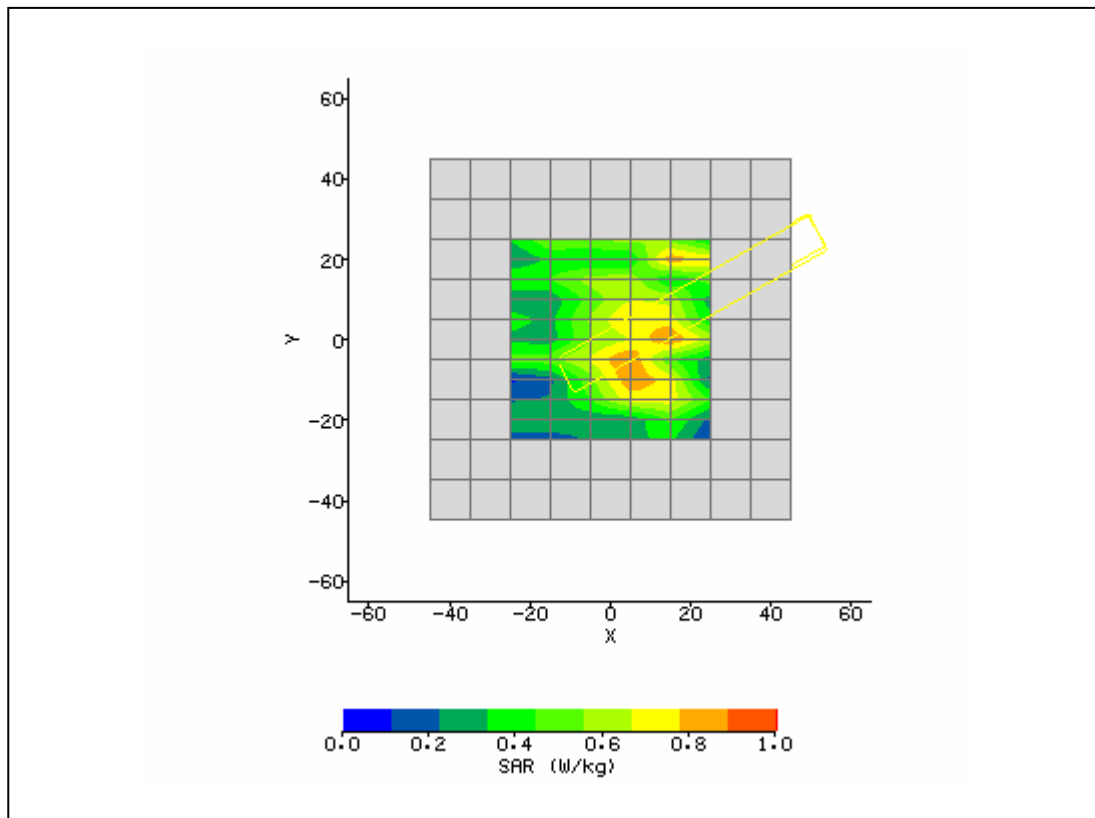


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/5/2007 9:01:59 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_Aux_149_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.14
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.112
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-3.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	13.72 V/m
<b>Test Frequency:</b>	5825MHz	<b>SAR 1g:</b>	0.701 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.341 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.338 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.01 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

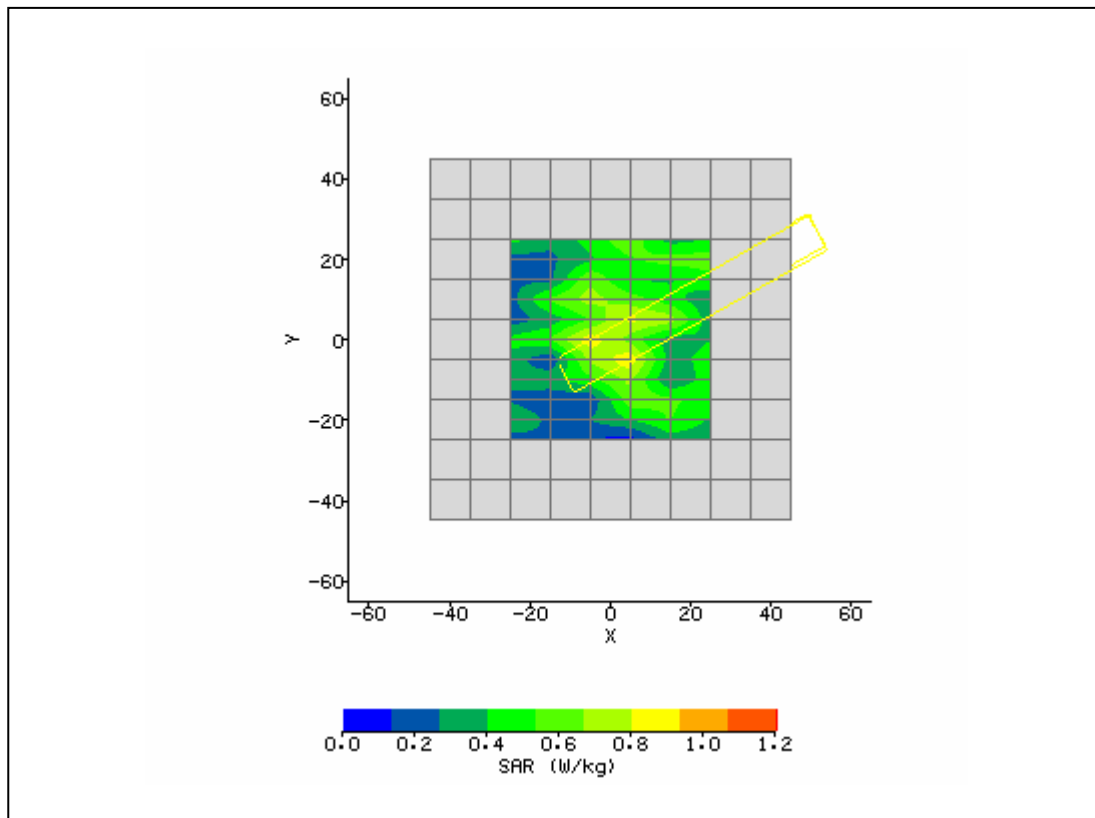





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 9:52:12 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	32.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	40.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	7.55 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.086 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.053 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.055 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.31 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

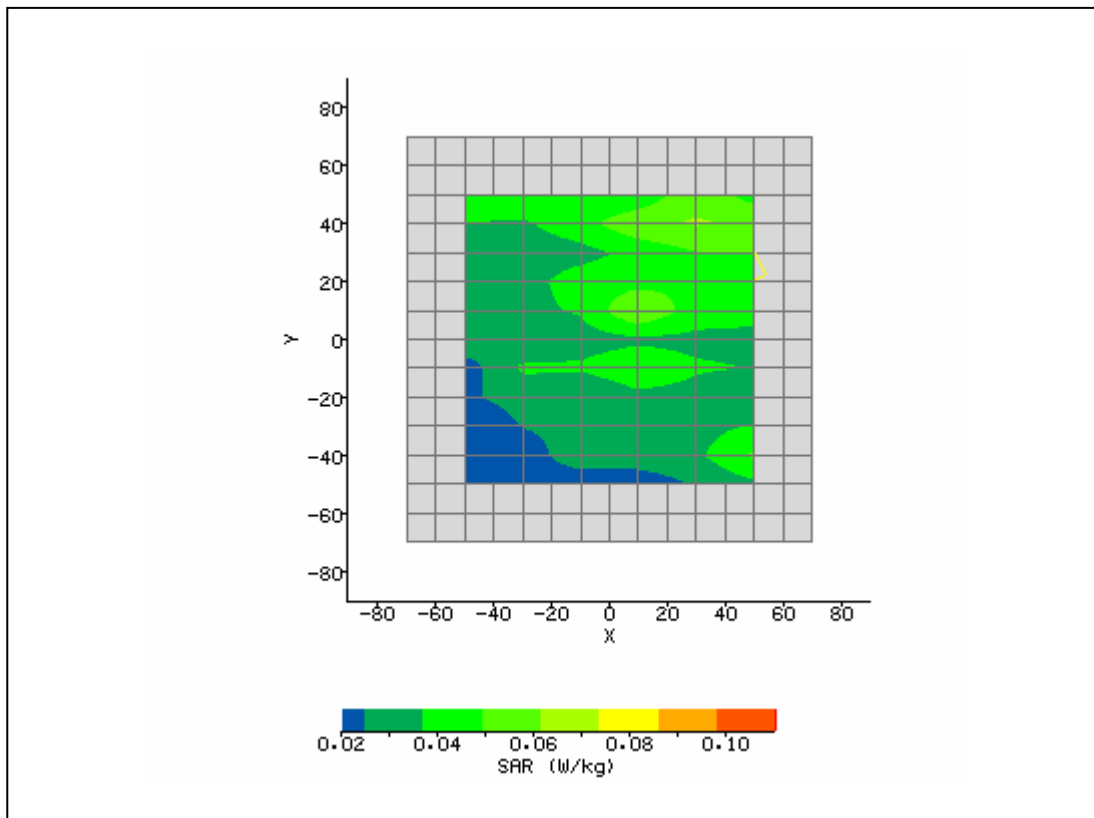


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 10:10:40 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	20.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	7.97 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.091 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.069 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.073 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.97 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

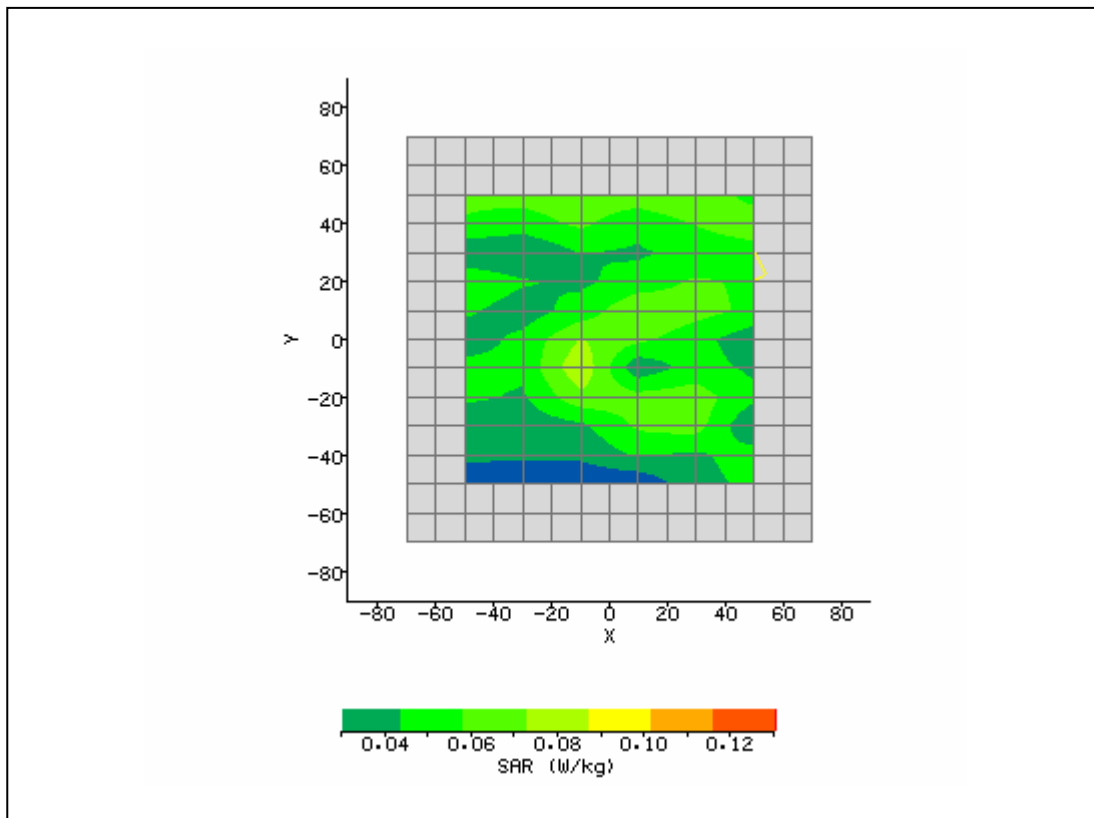


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 10:26:43 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_6_3d1.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	50.89
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.909
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	24.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	-13.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	6.85 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.113 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.048 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.050 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

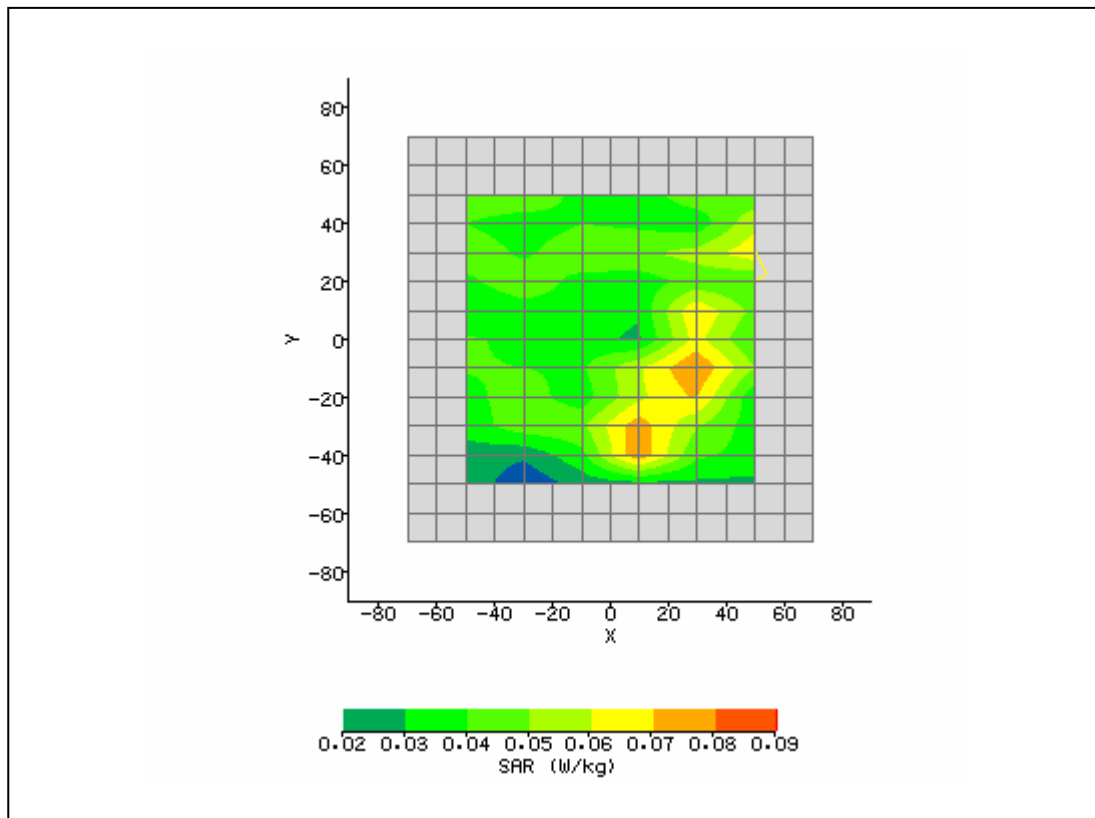


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 10:41:02 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_1_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.923
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	28.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	-9.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	7.68 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.133 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.047 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.049 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.12 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

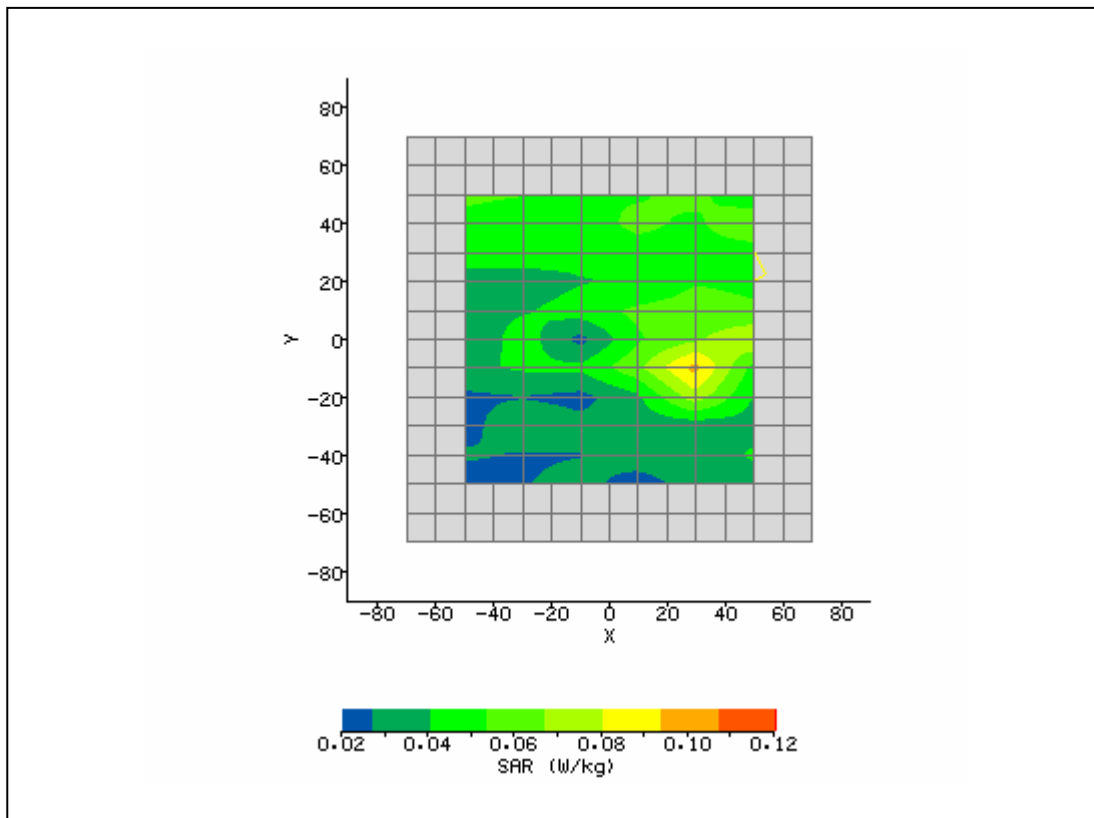


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 11:13:02 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	40.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	6.40 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.064 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.035 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.037 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.35 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

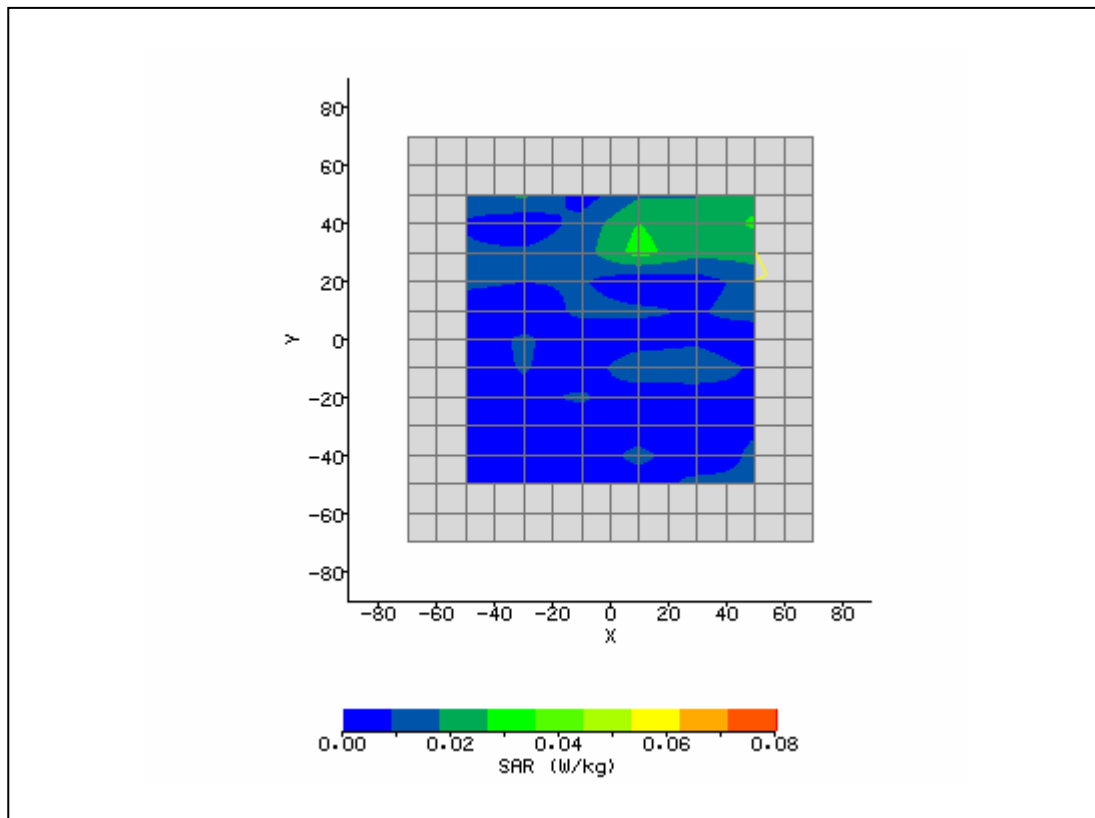


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 11:28:48 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	51.00
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.915
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-14.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	6.42 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.049 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.020 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.021 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.56 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by test SW	<b>Extrapolation:</b>	poly4

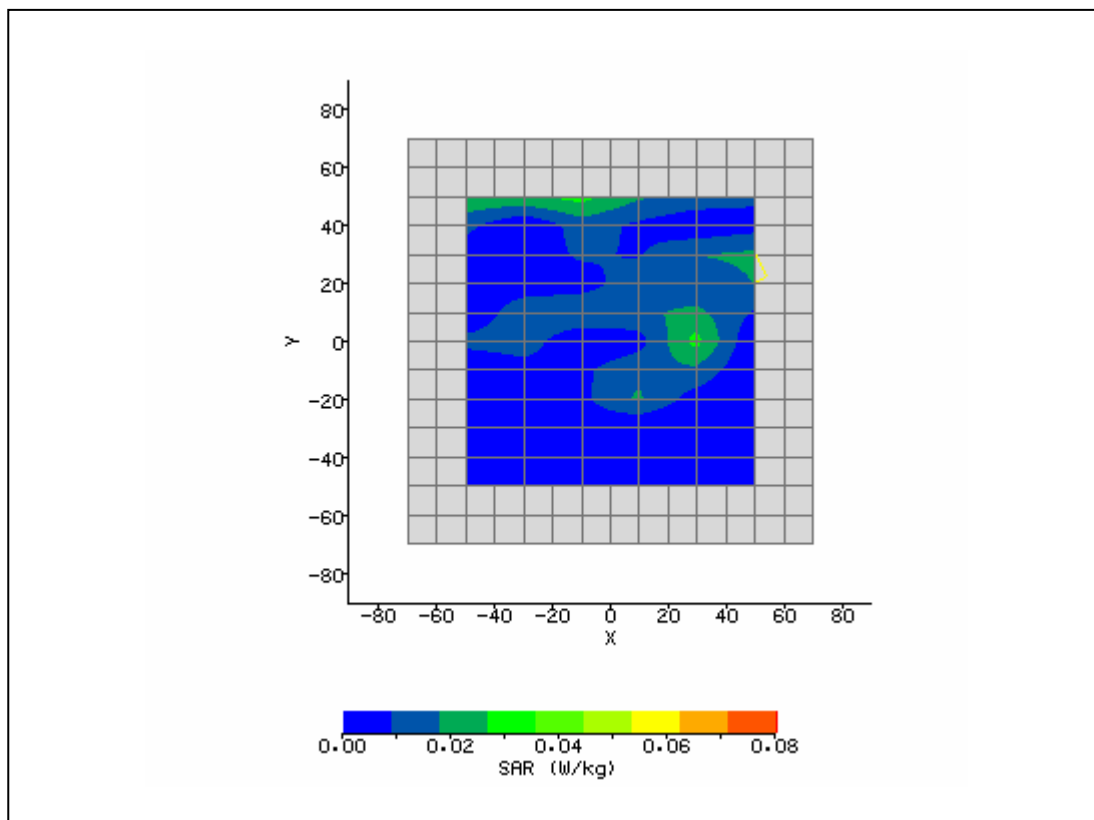

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 2:30:12 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	50.89
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.91
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	30.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	6.17 V/m
<b>Test Frequency:</b>	2422MHz	<b>SAR 1g:</b>	0.010 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	0.008 W/kg
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.005 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.005 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.82 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

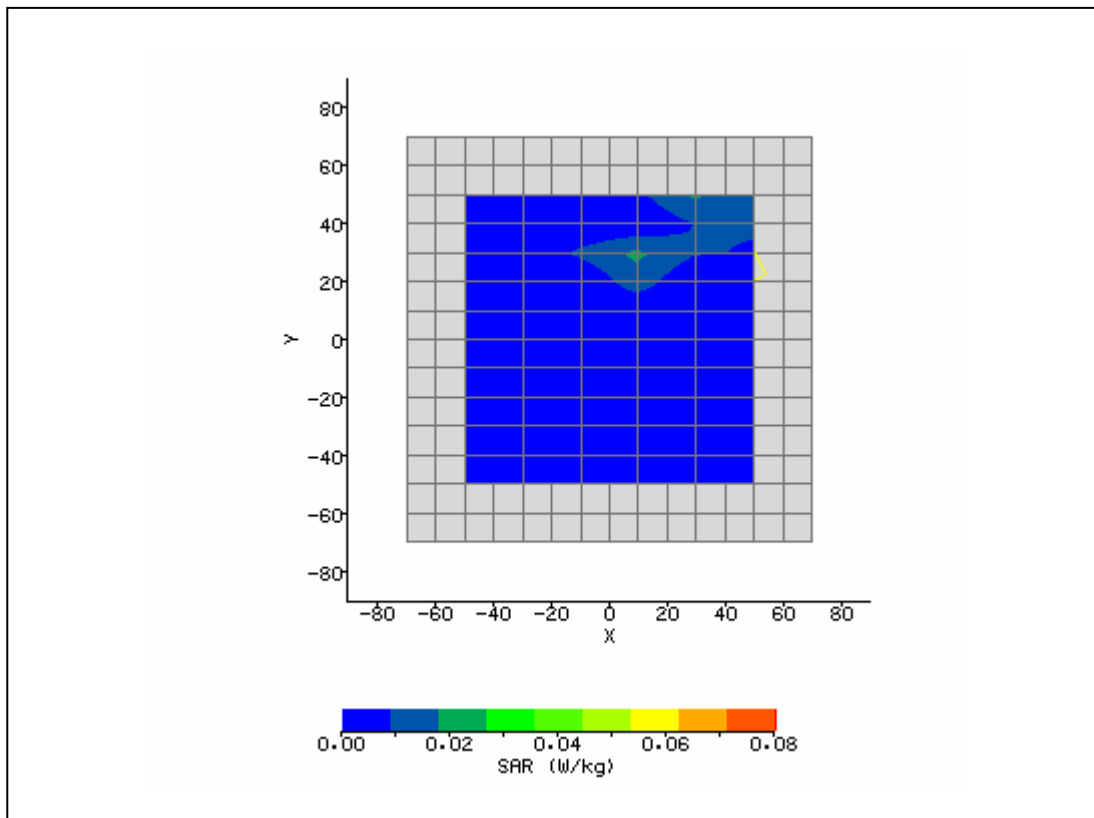


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/2/2007 2:56:04 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.92
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	6.32 V/m
<b>Test Frequency:</b>	2452MHz	<b>SAR 1g:</b>	0.038 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.022 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.023 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.36 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

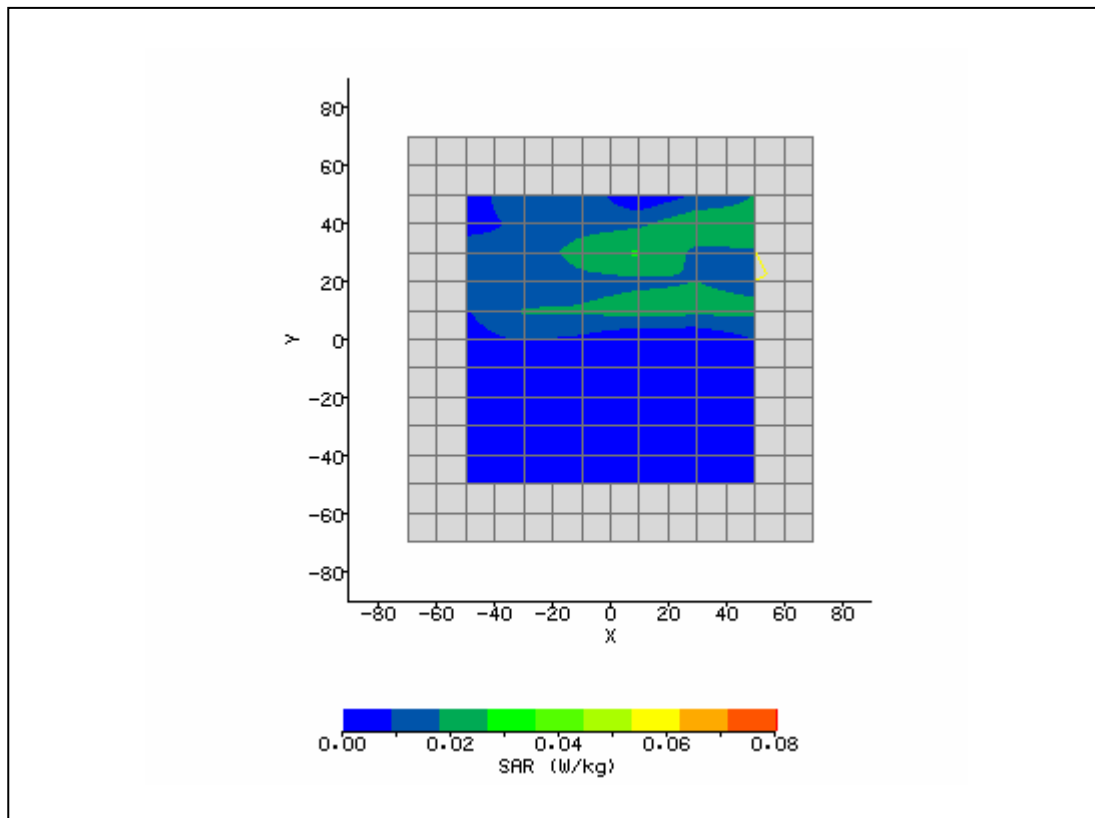





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 10:27:31 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_Aux_64_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.30
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.21
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	42.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	4.19 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.102 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.033 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.035 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.06 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

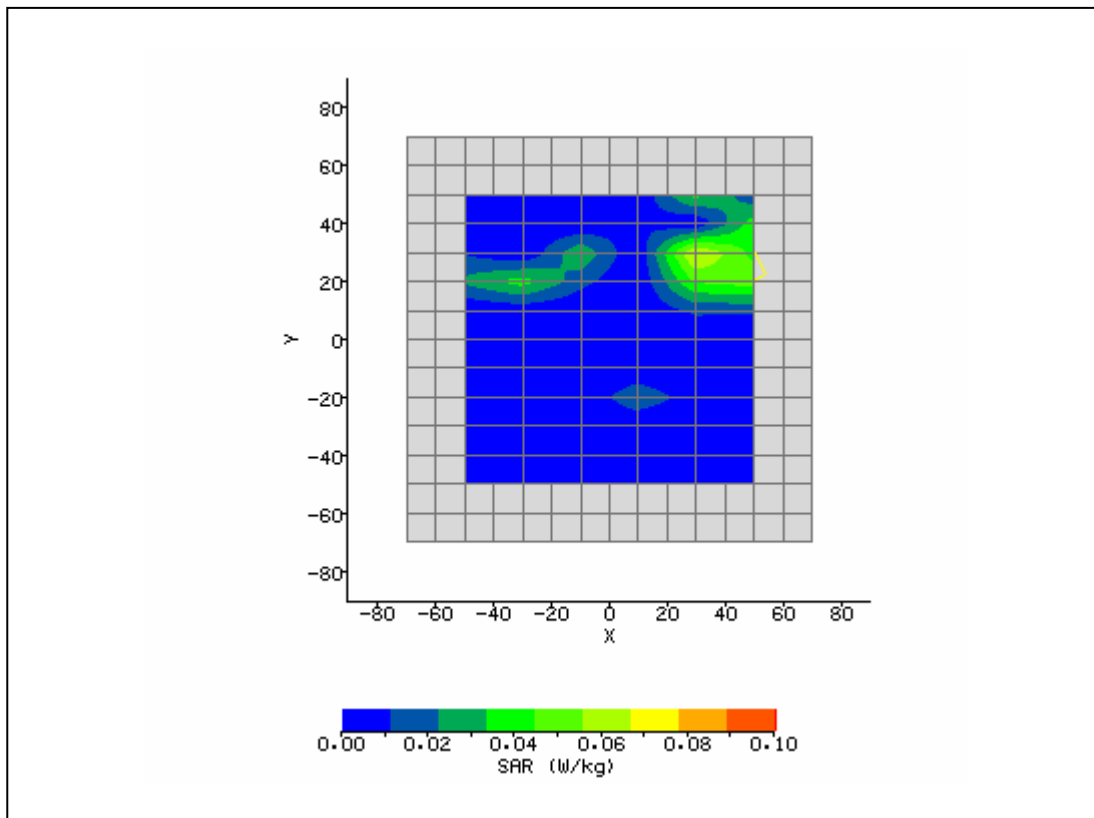


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 10:48:27 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_52_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.30
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.21
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-50.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	49.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	4.56 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.114 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.055 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.054 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

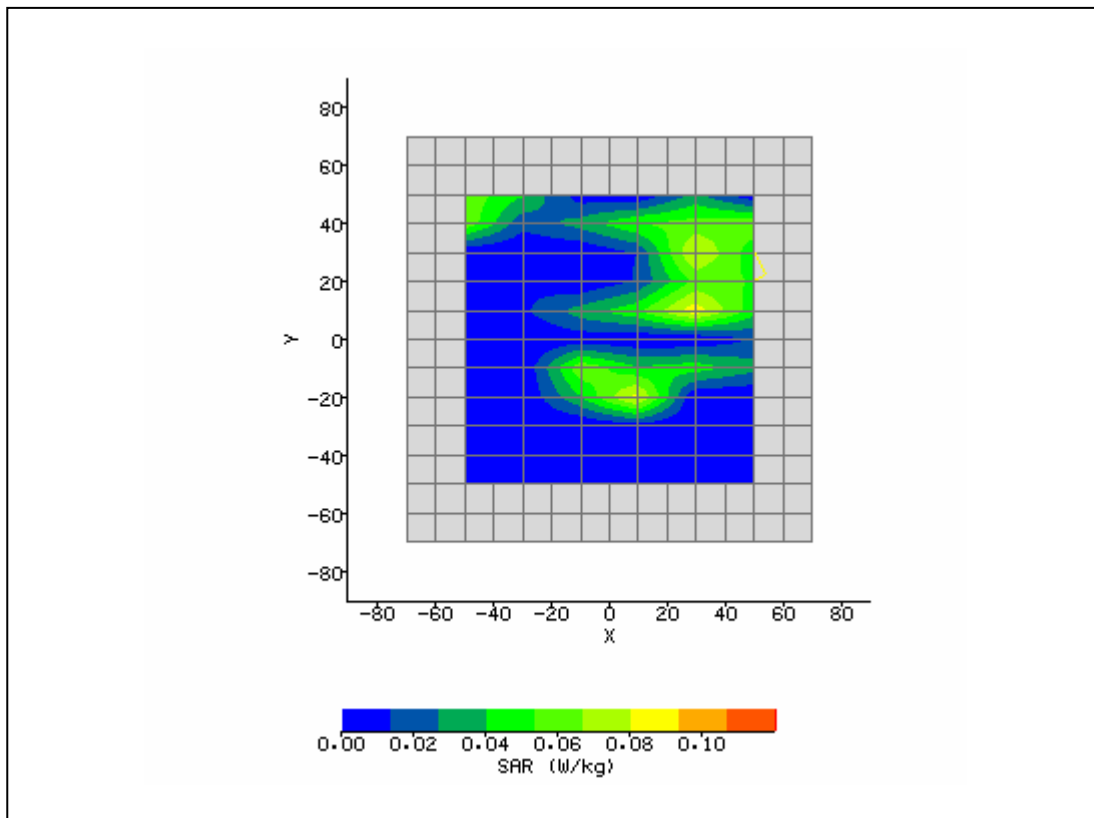


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 11:05:30 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_52_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.27
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.229
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	10.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-27.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.10 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.126 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.025 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.025 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

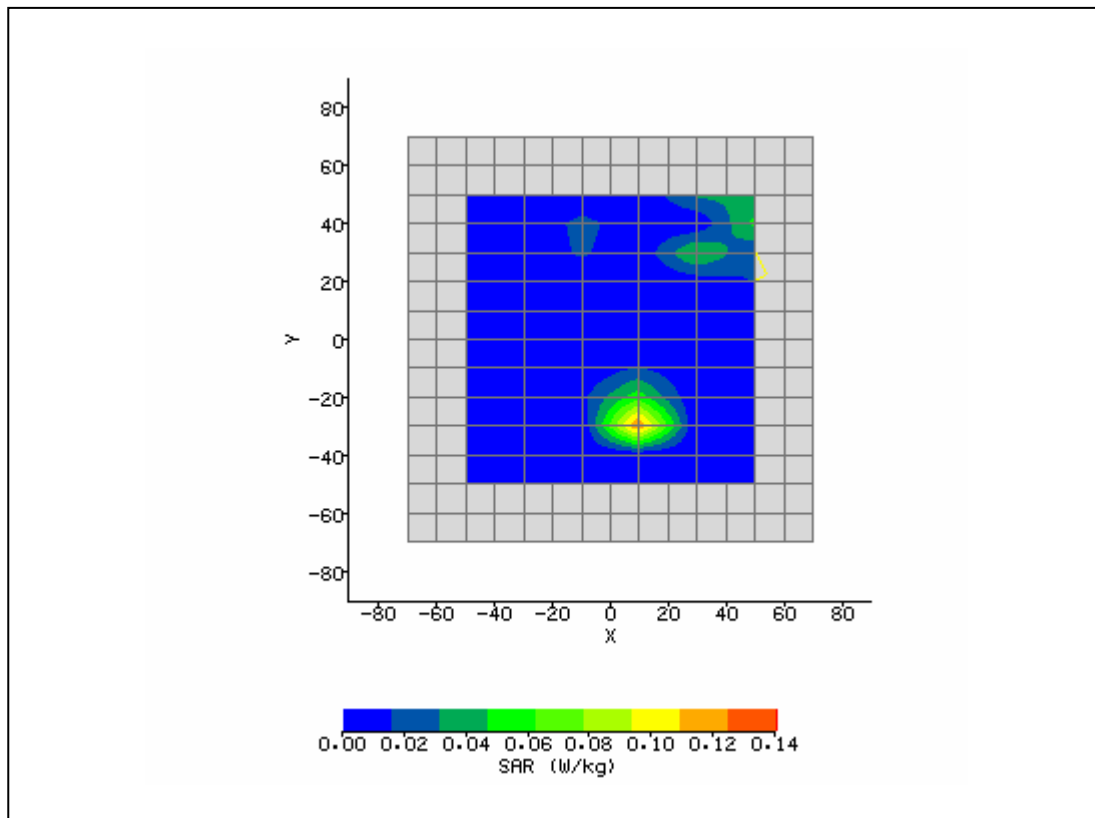


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 11:21:05 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.90
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.229
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	10.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-27.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.85 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.190 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.024 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.023 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.98 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/02/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

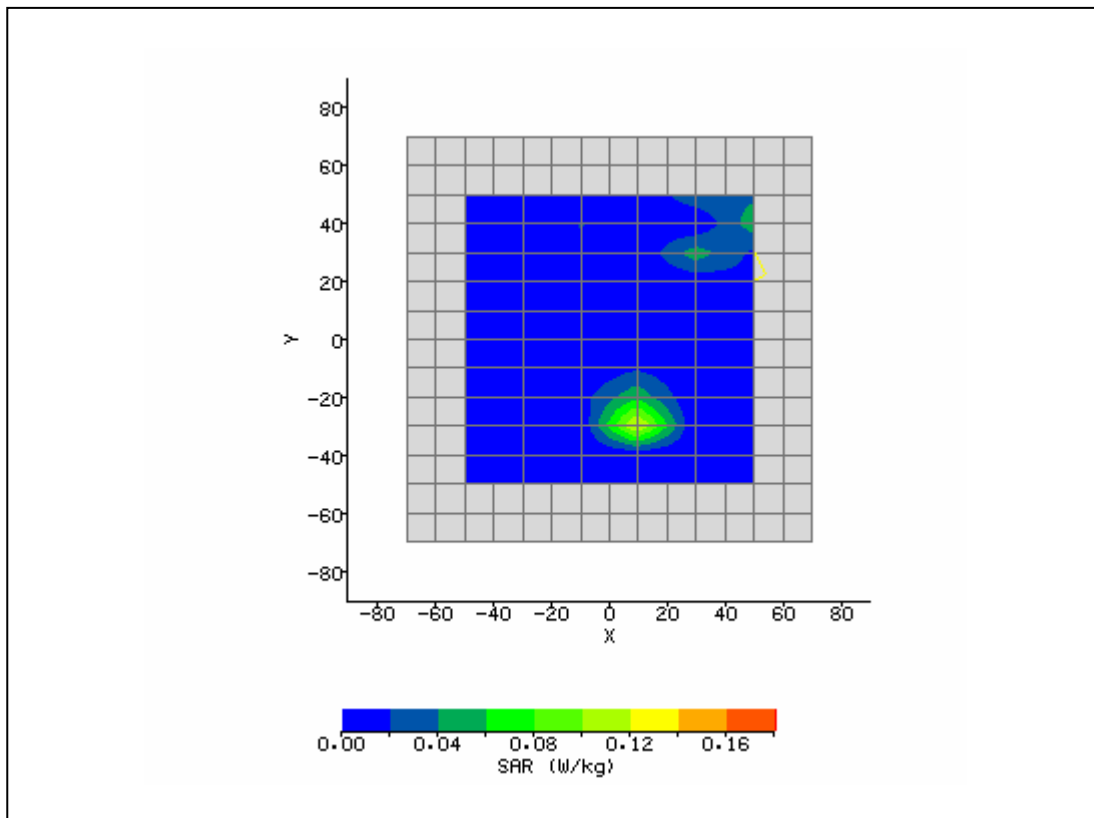


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 12:00:51 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.31
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.213
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	8.53 V/m
<b>Test Frequency:</b>	5270MHz	<b>SAR 1g:</b>	0.414 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.150 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.155 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.34 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

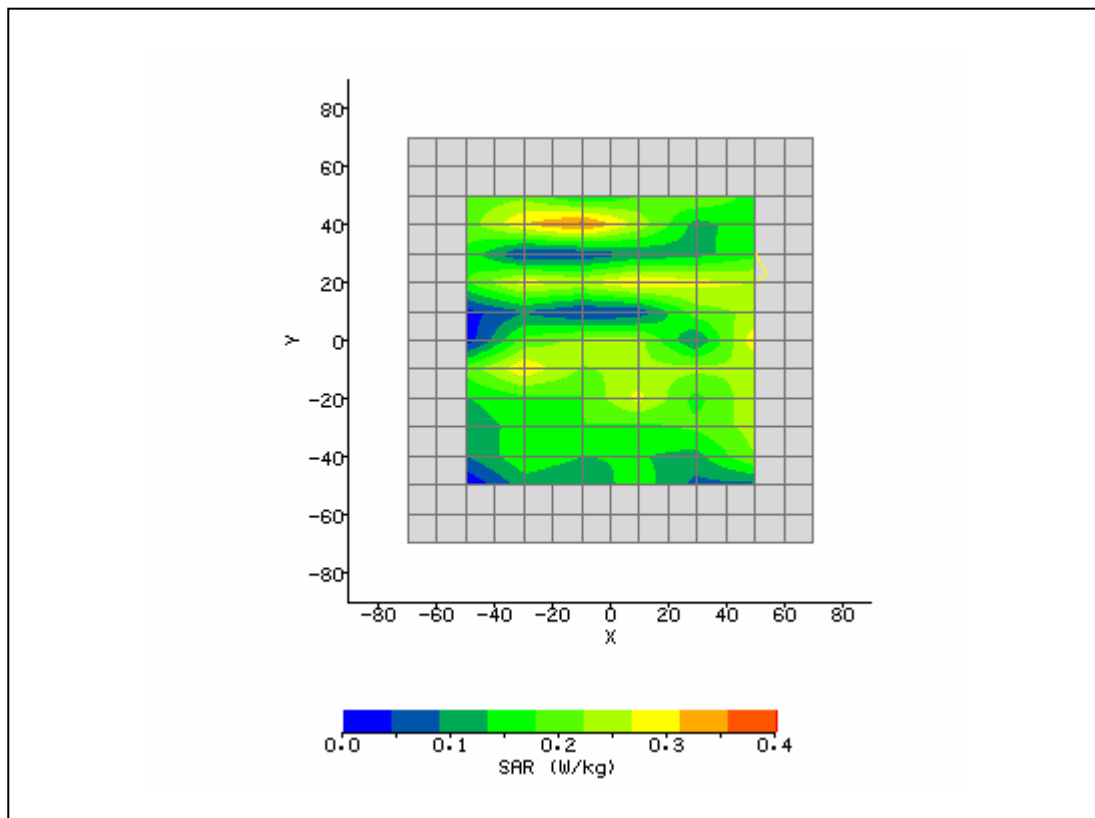


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 12:19:29 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_54_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.31
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.213
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.95 V/m
<b>Test Frequency:</b>	5270MHz	<b>SAR 1g:</b>	0.588 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.266 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.326 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	22.51 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

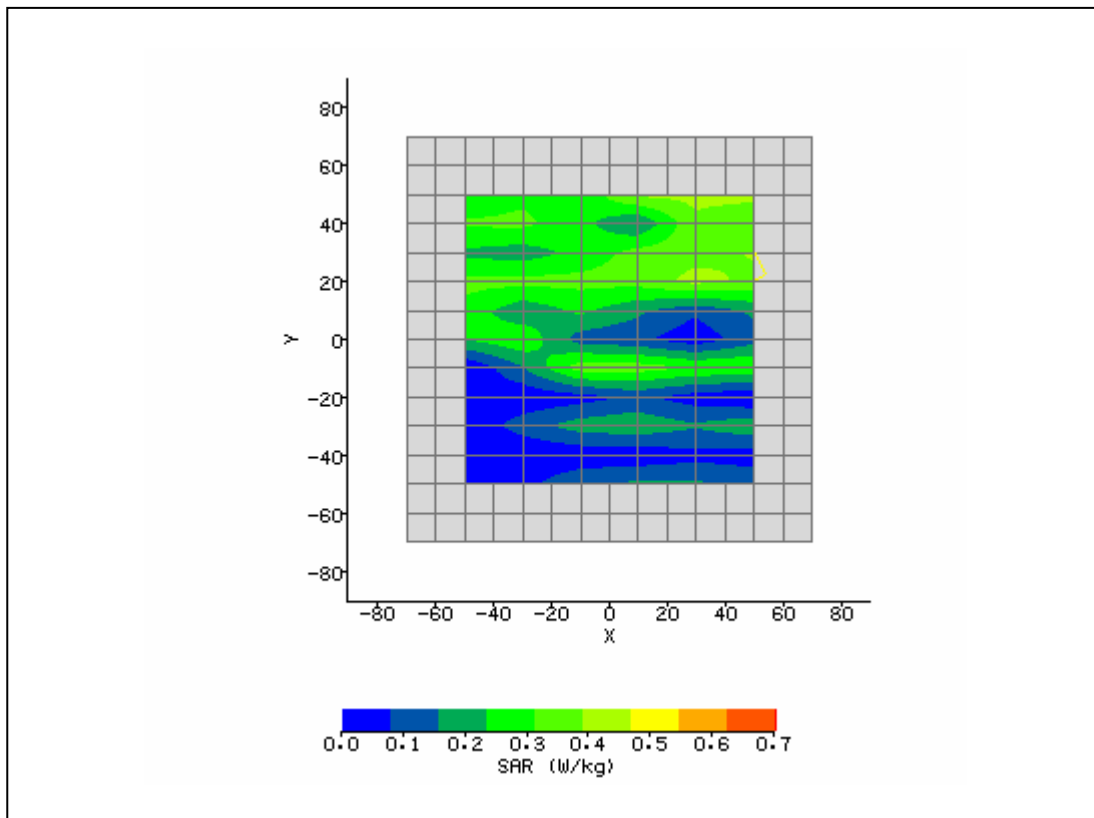

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 12:49:37 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_38_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.29
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.227
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	31.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.90 V/m
<b>Test Frequency:</b>	5190MHz	<b>SAR 1g:</b>	0.327 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.250 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.255 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.11 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

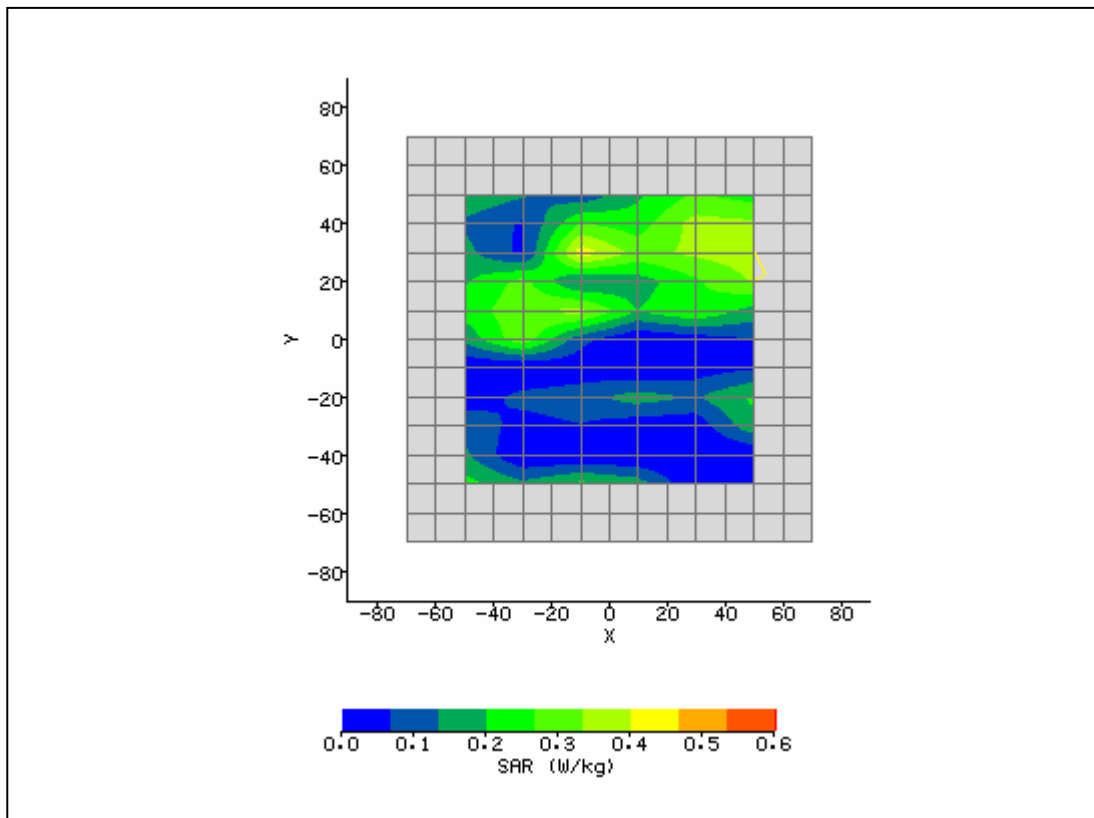


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 1:04:30 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_38_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.92
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.193
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.40 V/m
<b>Test Frequency:</b>	5310MHz	<b>SAR 1g:</b>	0.646 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.315 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.304 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.61 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

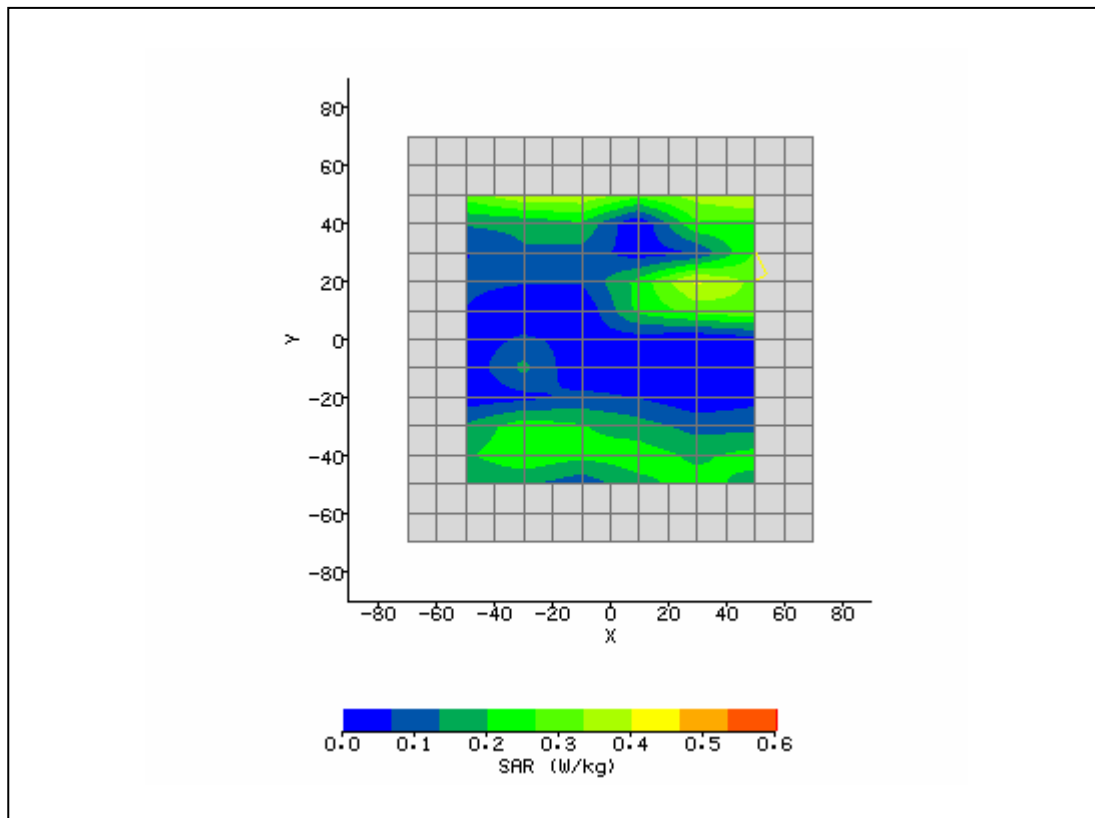





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 9:50:39 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_Aux_165_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	15.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	15.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.21 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.410 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.327 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.334 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

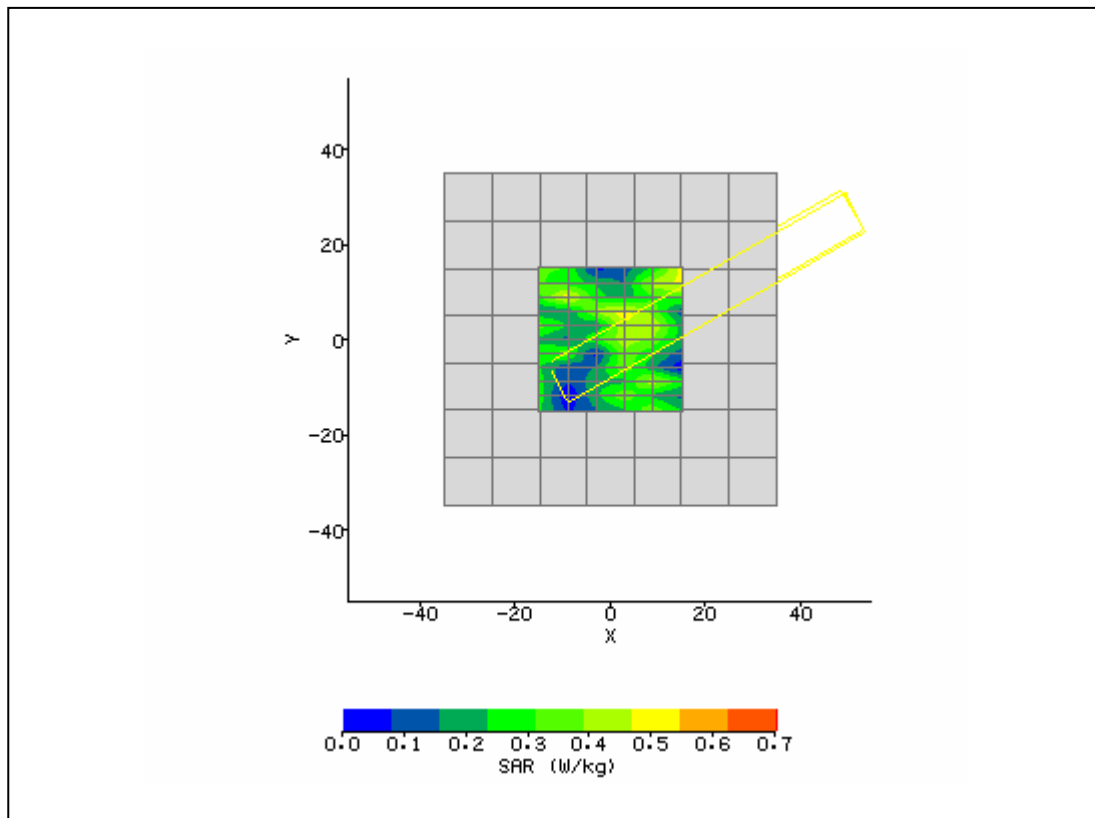


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 10:07:36 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_157_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-4.20 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	3.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.79 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.781 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.265 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.270 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.00 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

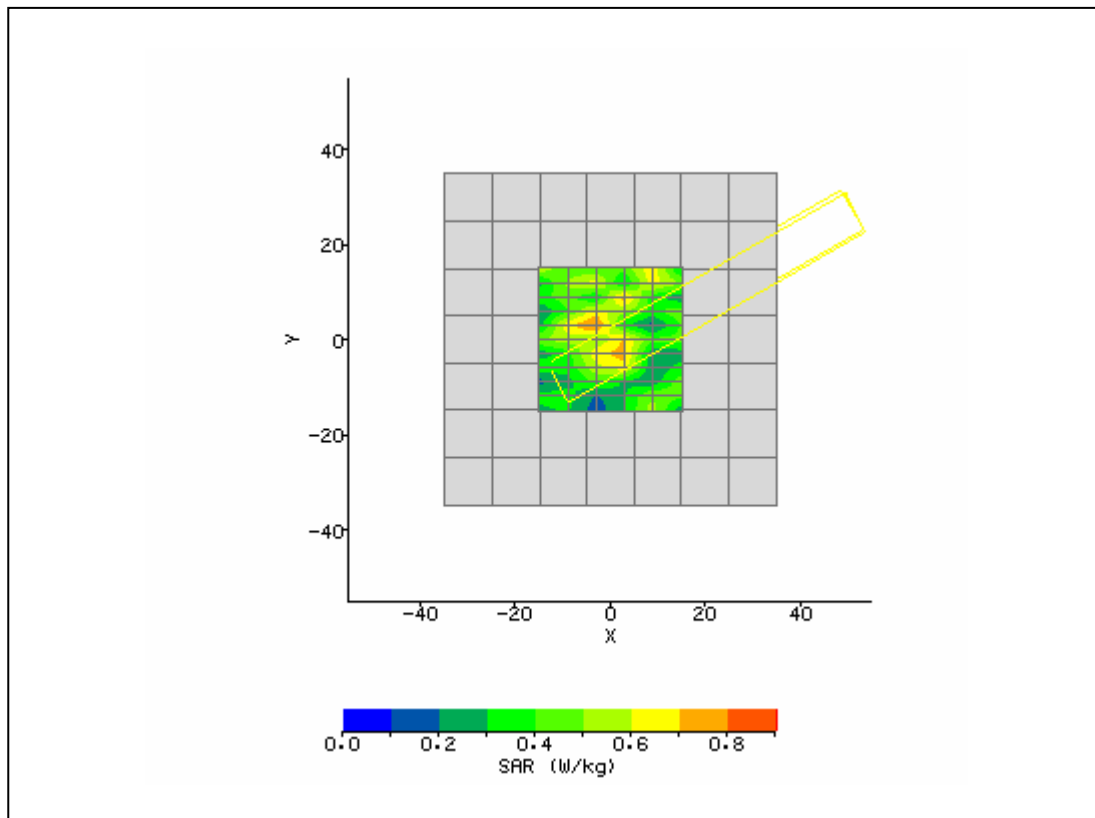


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 10:27:39 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_157_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.21
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.985
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	6.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	5.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.51 V/m
<b>Test Frequency:</b>	5745MHz	<b>SAR 1g:</b>	0.561 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.323 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.316 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.16 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

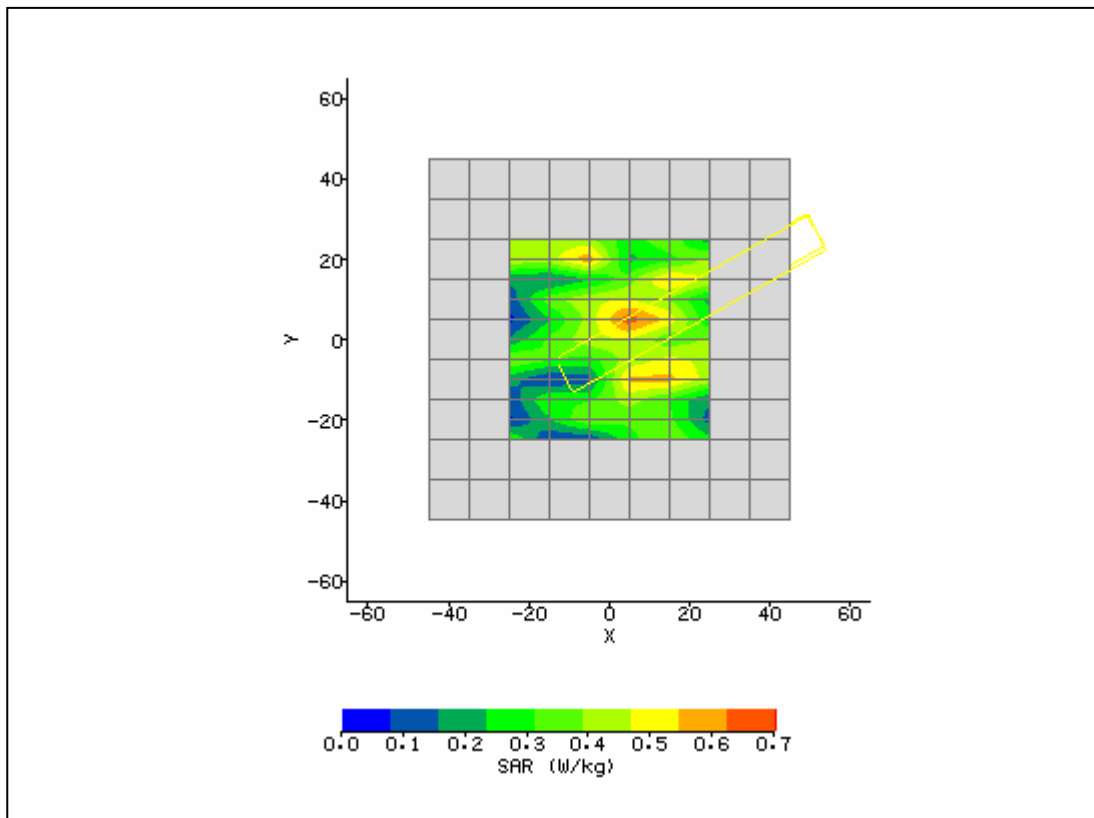


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 10:46:59 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.14
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.112
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	5.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	-2.50 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.19 V/m
<b>Test Frequency:</b>	5825MHz	<b>SAR 1g:</b>	0.614 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.233 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.242 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.86 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

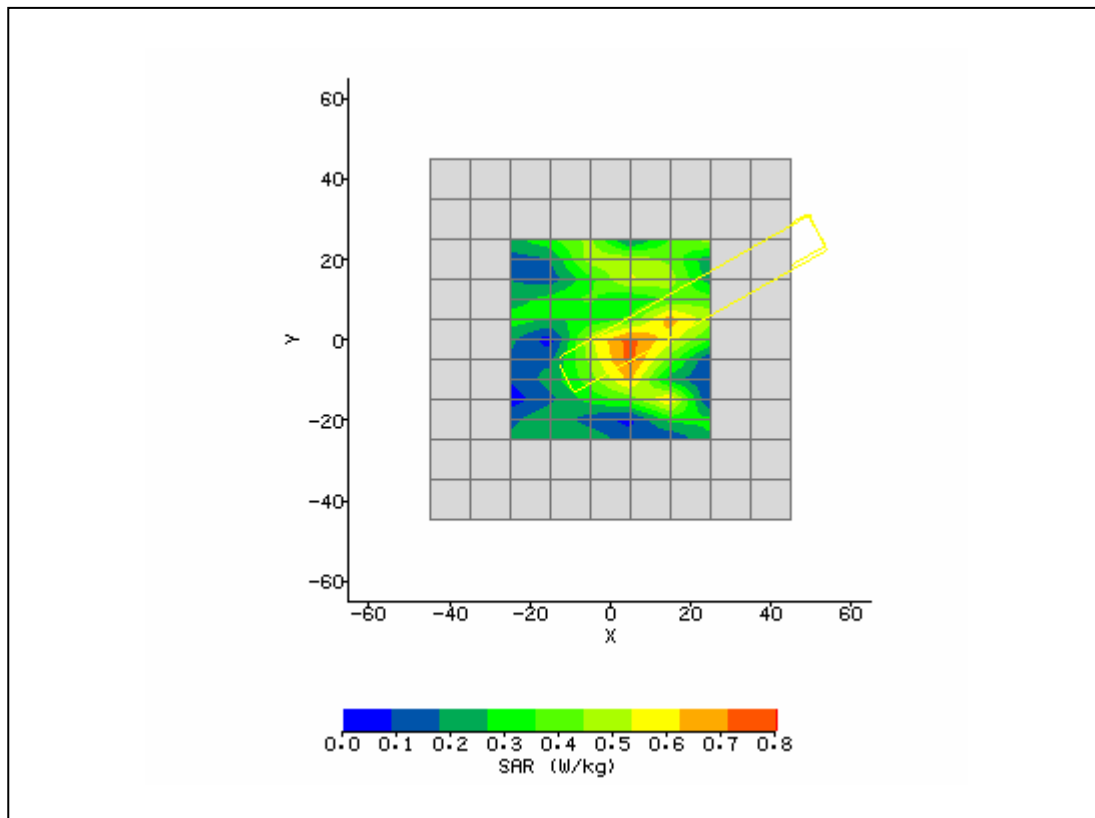


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 11:20:47 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_165_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	48.01
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.021
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	1.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	21.50 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.11 V/m
<b>Test Frequency:</b>	5755MHz	<b>SAR 1g:</b>	0.496 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.287 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.274 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.52 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

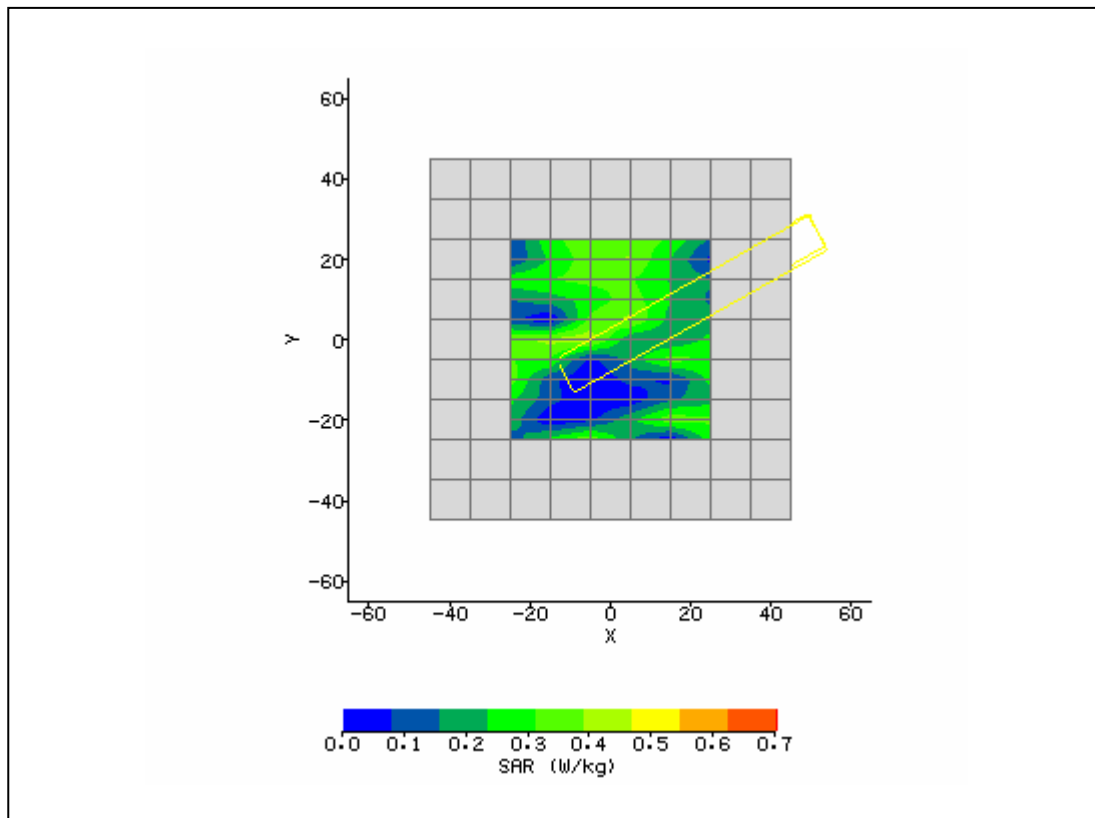

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 11:34:34 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_151_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	48.01
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.021
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	13.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.20 V/m
<b>Test Frequency:</b>	5755MHz	<b>SAR 1g:</b>	0.526 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.334 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.342 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.39 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

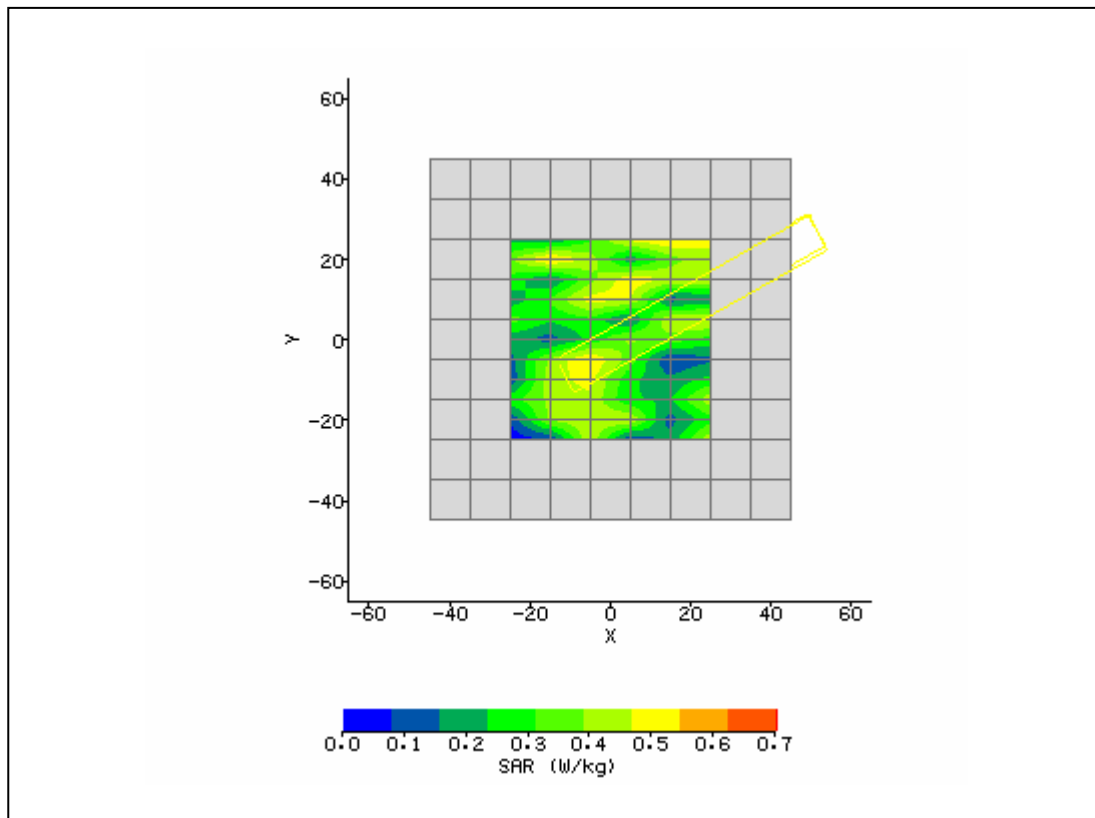

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 11:49:23 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_151_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstrom	<b>Relative Permittivity:</b>	47.63
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.084
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-13.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.06 V/m
<b>Test Frequency:</b>	5795MHz	<b>SAR 1g:</b>	0.578 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.289 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.277 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.15 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

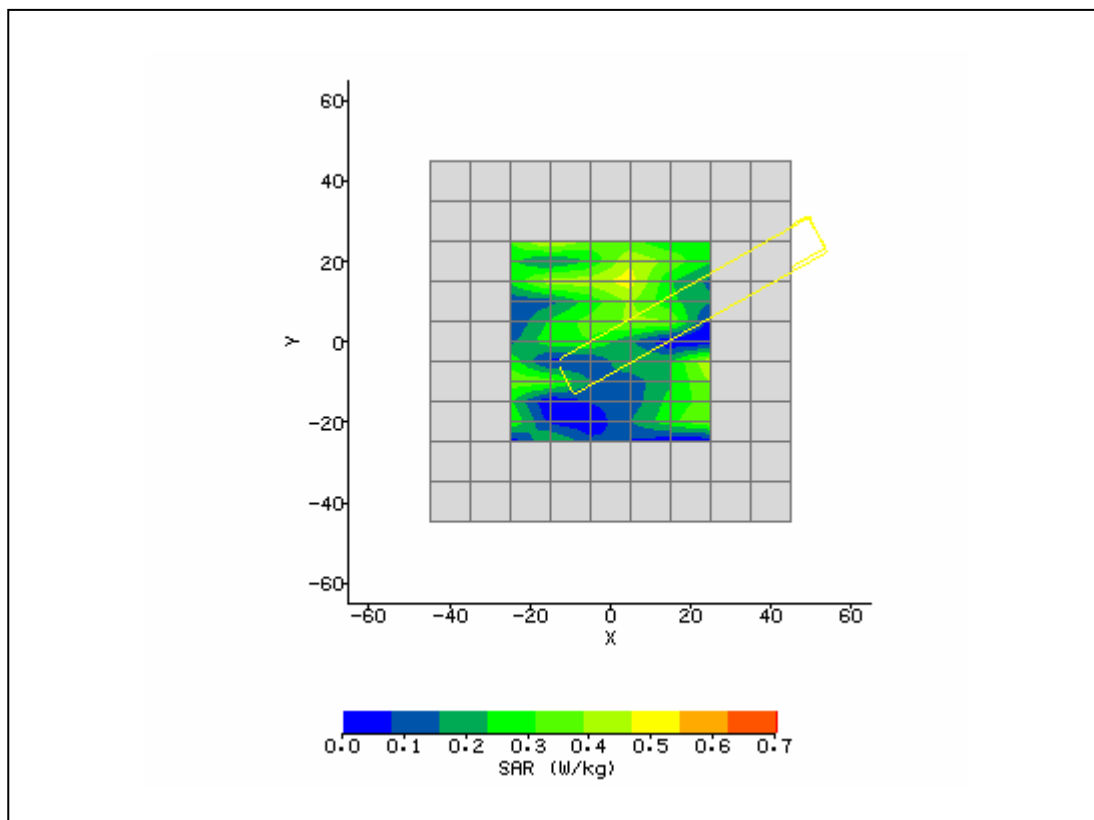

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/3/2007 12:06:56 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Side_159_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Redstorm	<b>Relative Permittivity:</b>	47.63
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.084
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-21.00 mm
<b>DUT Position:</b>	Side 0mm	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.70 V/m
<b>Test Frequency:</b>	5795MHz	<b>SAR 1g:</b>	0.685 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.359 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.348 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.02 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/03/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

