




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/15/2007 11:54:15 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94312MCG	<b>Relative Permittivity:</b>	50.94
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.864
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	40.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	28.80 mm
<b>Antenna Configuration:</b>	Integral - ACON Aux	<b>Max E Field:</b>	10.58 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.225 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.088 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.091 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.41 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/15/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

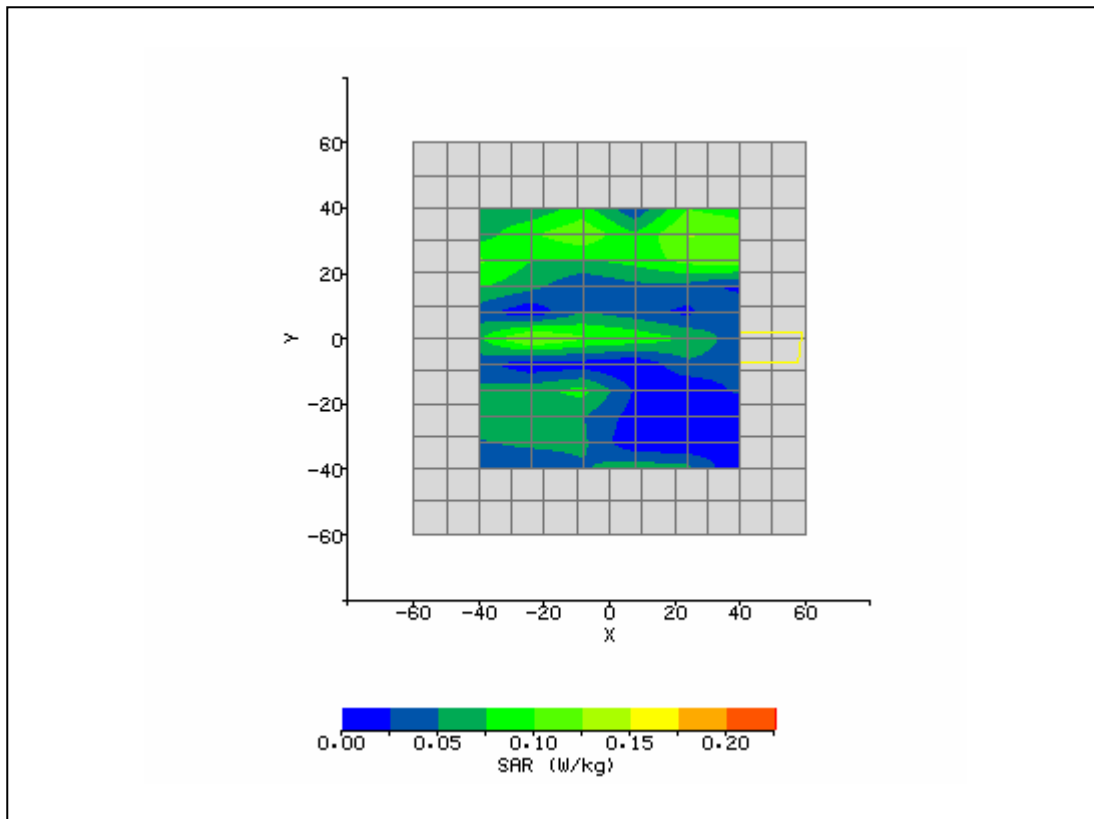


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/15/2007 1:10:22 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94312MCG	<b>Relative Permittivity:</b>	50.96
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.922
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	12.80 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	29.60 mm
<b>Antenna Configuration:</b>	Integral - ACON Aux	<b>Max E Field:</b>	9.49 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.183 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.083 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.087 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.81 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/15/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

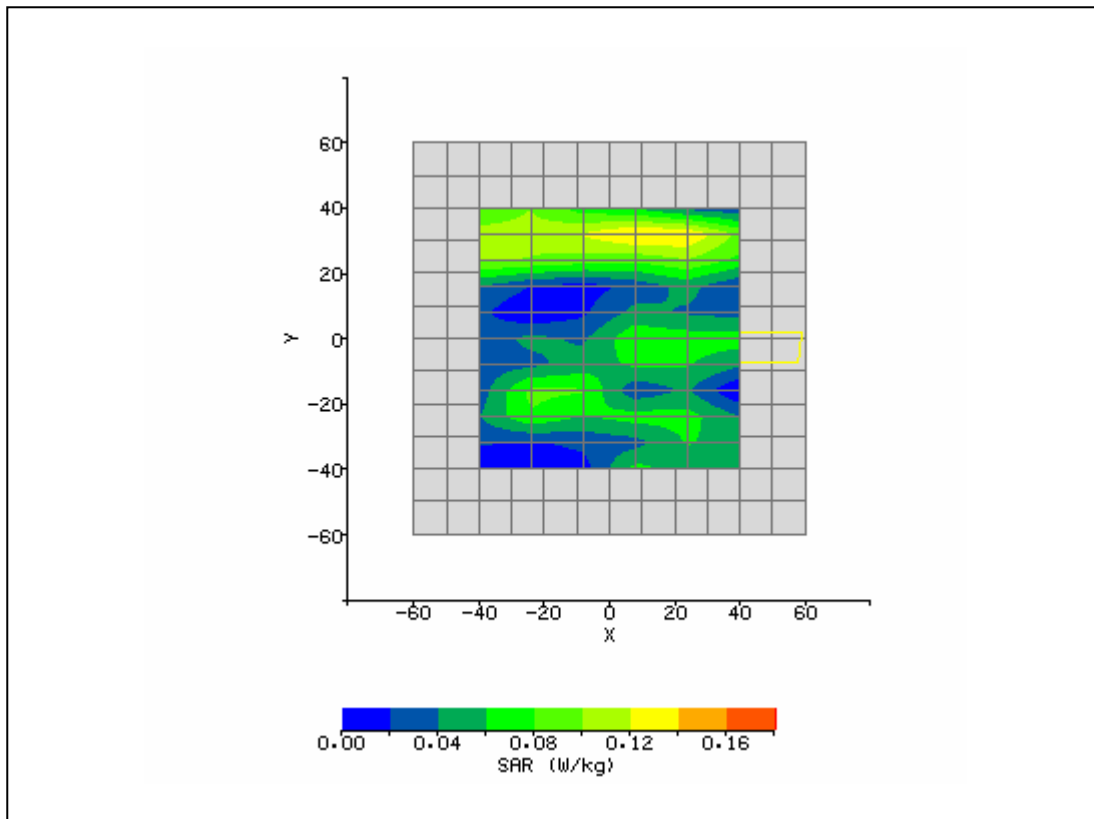

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/15/2007 1:33:11 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_6_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94312MCG	<b>Relative Permittivity:</b>	50.79
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.962
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	24.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	21.60 mm
<b>Antenna Configuration:</b>	Integral - ACON Aux	<b>Max E Field:</b>	10.02 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.256 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.097 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.093 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.12 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/15/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

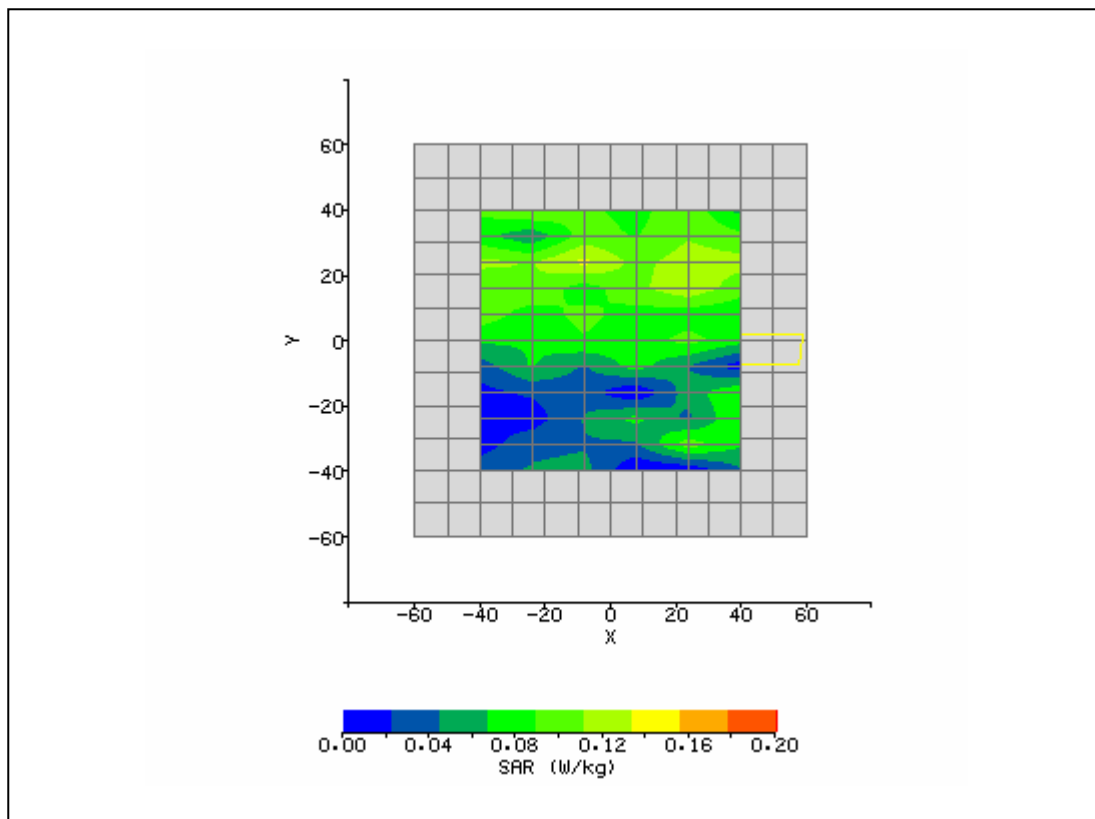

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/15/2007 4:06:33 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	BCM94312MCG + BCM92045MD	<b>Relative Permittivity:</b>	50.79
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.962
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-12.00 mm
<b>DUT Position:</b>	Lap 0mm	<b>Max SAR Y-axis Location:</b>	35.00 mm
<b>Antenna Configuration:</b>	Integral - ACON Aux	<b>Max E Field:</b>	11.60 V/m
<b>Test Frequency:</b>	2462MHz + 2480MHz	<b>SAR 1g:</b>	0.366 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.159 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.167 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.94 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/15/2007
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

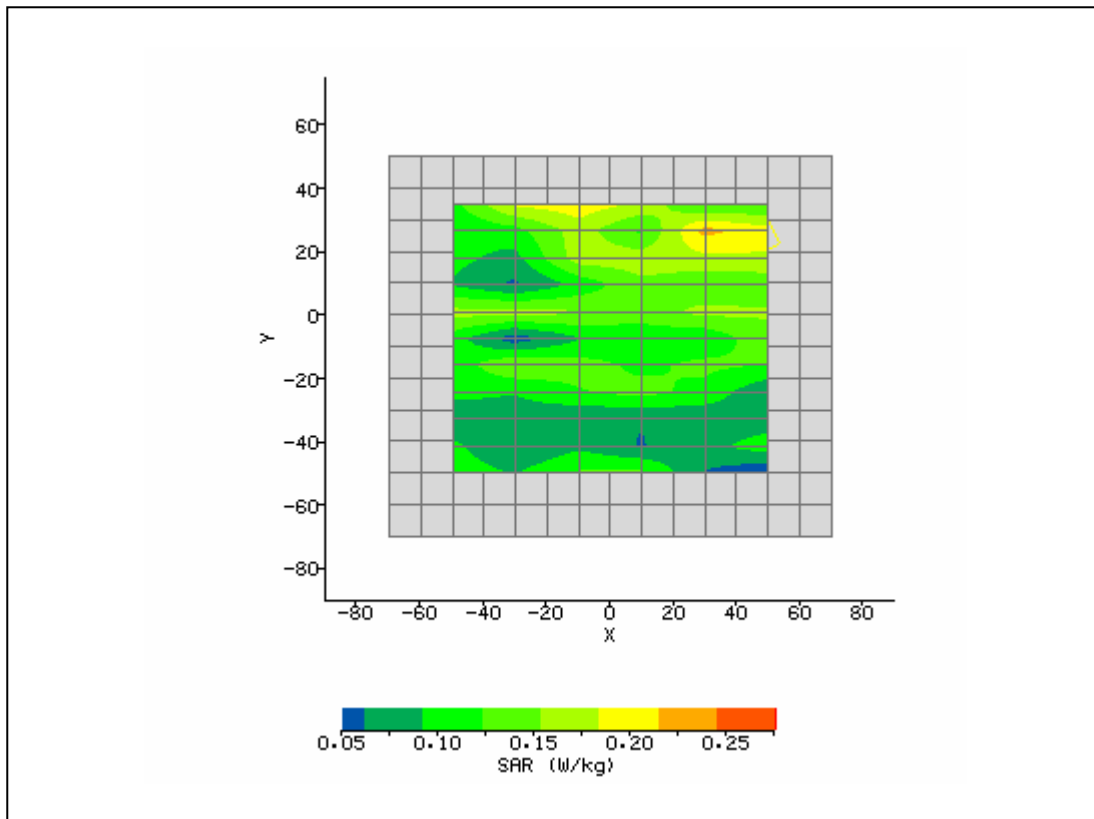

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	8/15/2007 9:02:12 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	38.74
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.77
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-3.20 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	0.80 mm
<b>Antenna Configuration:</b>	2450 Dipole	<b>Max E Field:</b>	140.74 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	47.169 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	21.676 W/kg
<b>Conversion Factors:</b>	.451 / .451 / .451	<b>SAR Start:</b>	3.013 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	3.089 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.50 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	8/15/2007
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

