




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 11:12:04 AM	DUT Battery Model/No:	
Filename:	Main_Side_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG + DW360BT	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-20.80 mm
DUT Position:	Top	Max SAR Y-axis Location:	-4.80 mm
Antenna Configuration:	Integral - ACON Main	Max E Field:	17.13 V/m
Test Frequency:	2437MHz	SAR 1g:	0.706 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.071 W/kg
Type of Modulation:		SAR End:	0.069 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

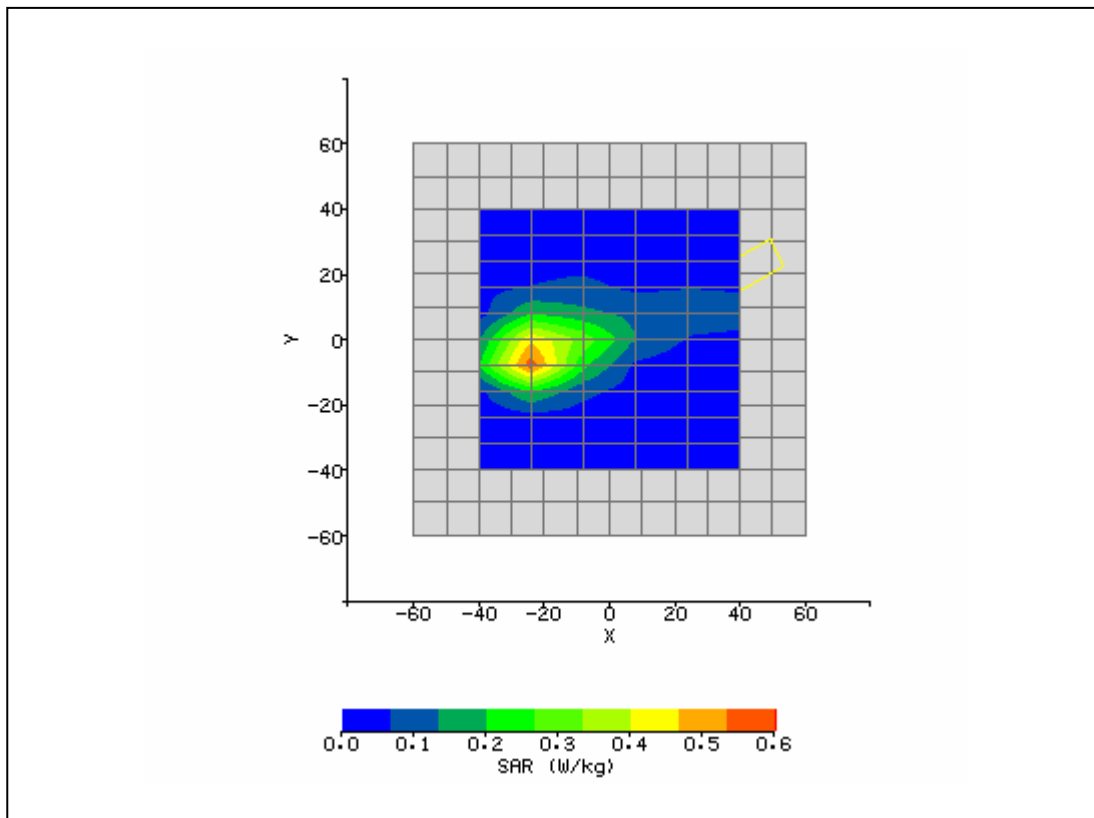


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 10:04:09 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG + DW360BT	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.80 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-24.00 mm
Antenna Configuration:	Integral - ACON Main	Max E Field:	6.27 V/m
Test Frequency:	2437MHz	SAR 1g:	0.031 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.028 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

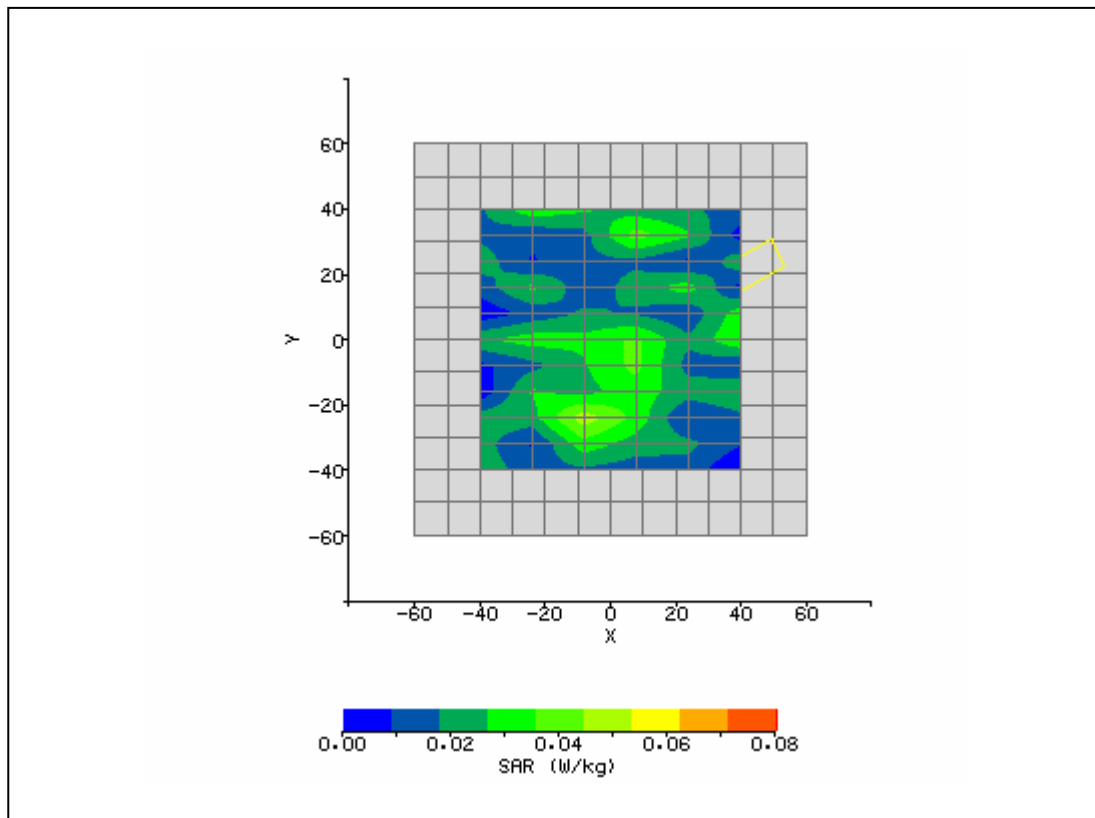


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 10:33:49 AM	DUT Battery Model/No:	
Filename:	Main_Lap_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG + DW360BT	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	11.20 mm
DUT Position:	Side	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral - ACON Main	Max E Field:	7.70 V/m
Test Frequency:	2437MHz	SAR 1g:	0.077 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.054 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

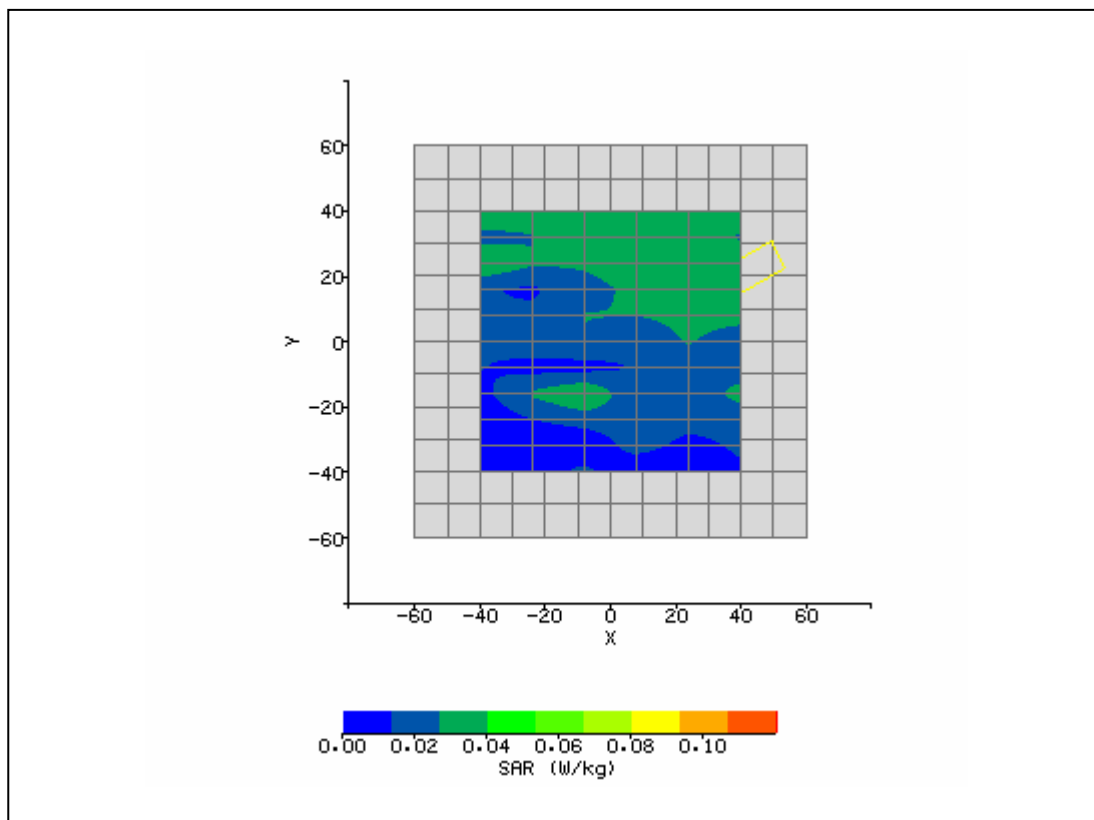


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 11:30:35 AM	DUT Battery Model/No:	
Filename:	Main_Top_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG + DW360BT	Relative Permittivity:	50.94
Relative Humidity:	30%	Conductivity:	1.843
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-9.60 mm
DUT Position:	Top	Max SAR Y-axis Location:	-8.80 mm
Antenna Configuration:	Integral - ACON Main	Max E Field:	19.57 V/m
Test Frequency:	2412MHz	SAR 1g:	0.933 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.083 W/kg
Type of Modulation:		SAR End:	0.080 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

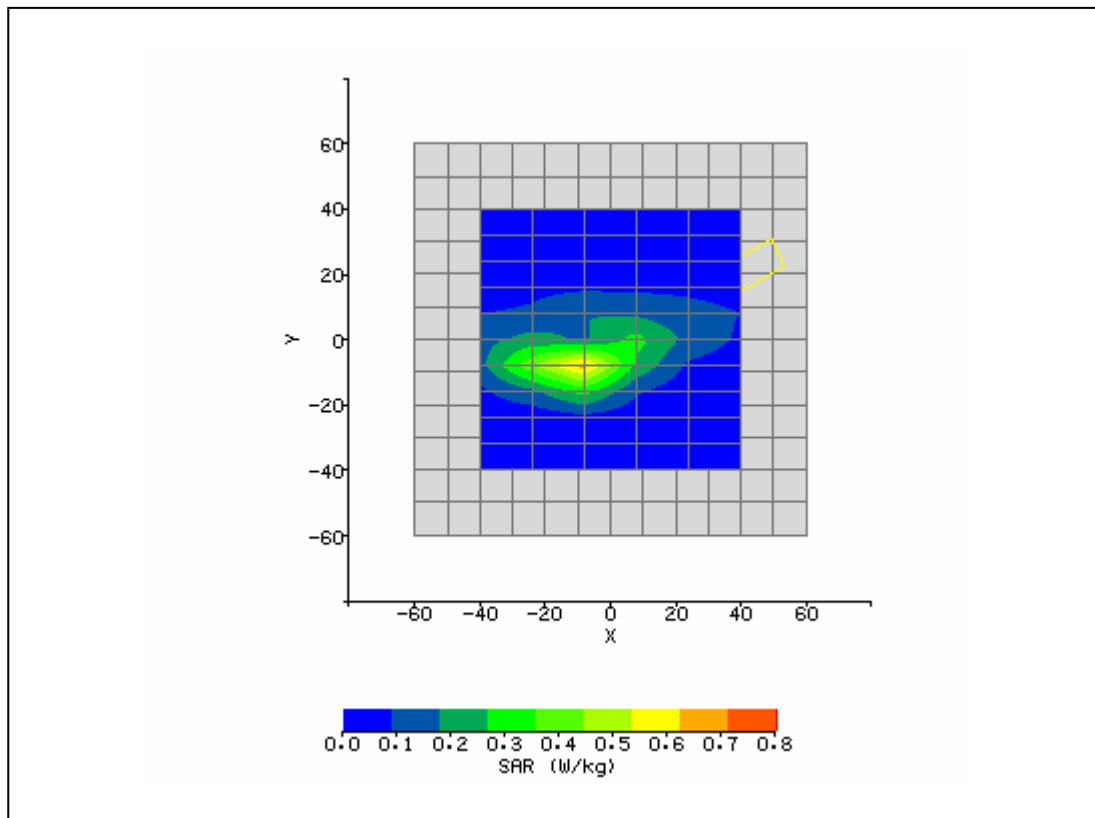

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 11:49:48 AM	DUT Battery Model/No:	
Filename:	Main_Top_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG + DW360BT	Relative Permittivity:	50.79
Relative Humidity:	30%	Conductivity:	1.932
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.40 mm
DUT Position:	Top	Max SAR Y-axis Location:	-8.80 mm
Antenna Configuration:	Integral - ACON Main	Max E Field:	14.71 V/m
Test Frequency:	2462MHz	SAR 1g:	0.559 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.059 W/kg
Type of Modulation:		SAR End:	0.061 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

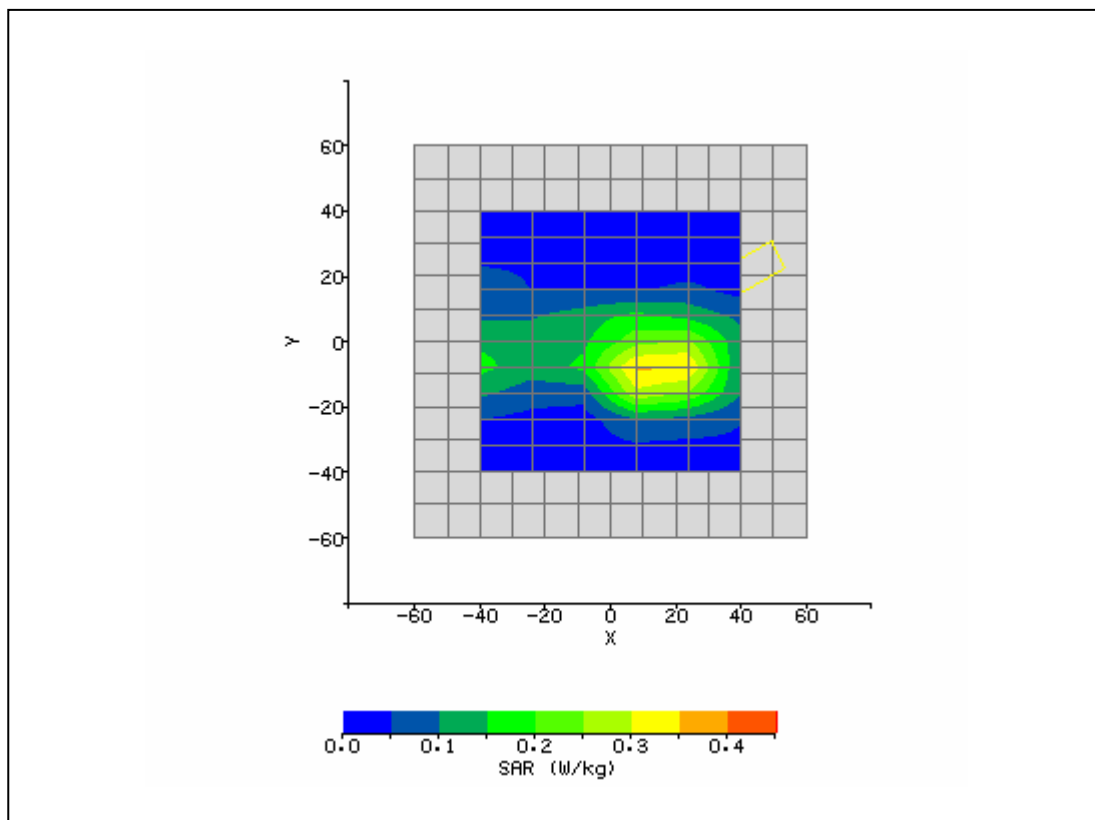

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 12:02:25 PM	DUT Battery Model/No:	
Filename:	Main_Top_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG + DW360BT	Relative Permittivity:	50.94
Relative Humidity:	30%	Conductivity:	1.843
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.80 mm
DUT Position:	Top	Max SAR Y-axis Location:	-6.40 mm
Antenna Configuration:	Integral - ACON Aux	Max E Field:	16.91 V/m
Test Frequency:	2412MHz	SAR 1g:	0.745 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.065 W/kg
Type of Modulation:		SAR End:	0.068 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

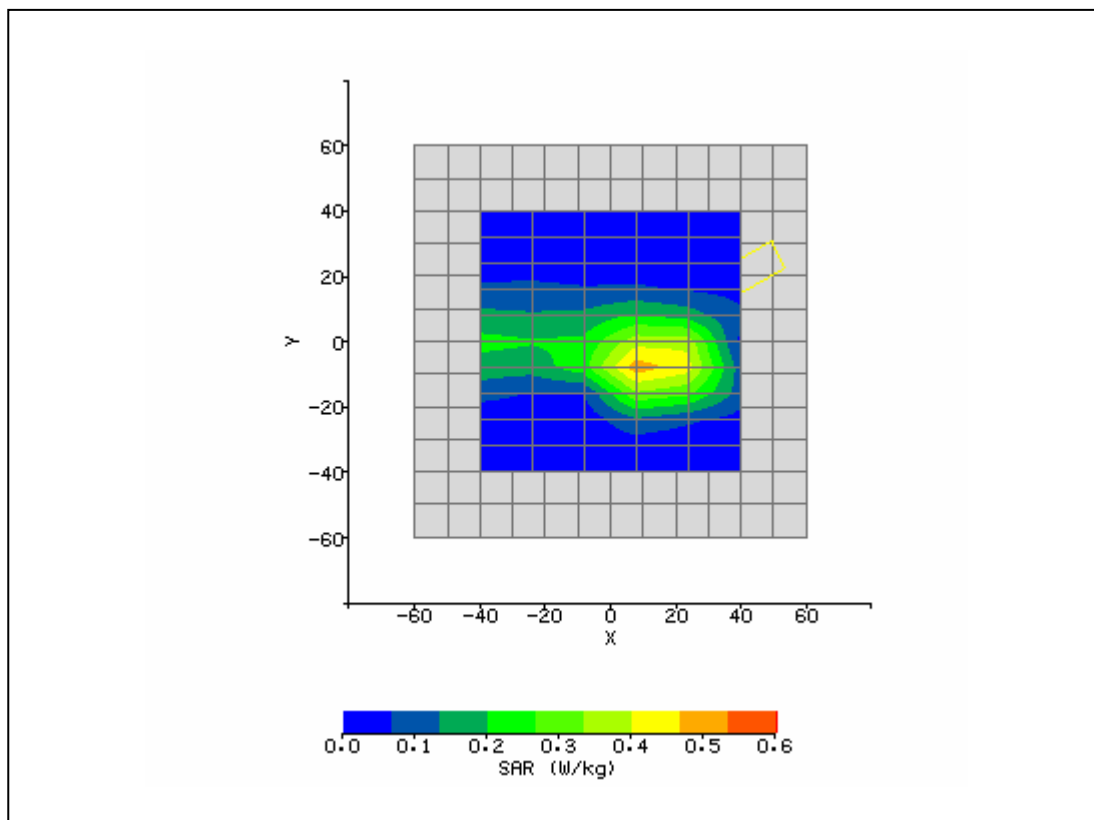

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/4/2007 8:10:47 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.51
Relative Humidity:	30%	Conductivity:	1.82
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.40 mm
DUT Position:	8mm	Max SAR Y-axis Location:	8.80 mm
Antenna Configuration:	2450 Dipole	Max E Field:	149.32 V/m
Test Frequency:	2450MHz	SAR 1g:	53.760 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	24.741 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	3.428 W/kg
Type of Modulation:		SAR End:	3.425 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/04/2007
Input Power Level:	1W	Extrapolation:	poly4

