




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/16/2007 10:14:43 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG	Relative Permittivity:	50.94
Relative Humidity:	30%	Conductivity:	1.864
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	27.90 mm
Antenna Configuration:	Integral - Aux	Max E Field:	11.08 V/m
Test Frequency:	2412MHz	SAR 1g:	0.253 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.115 W/kg
Type of Modulation:		SAR End:	0.118 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/15/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

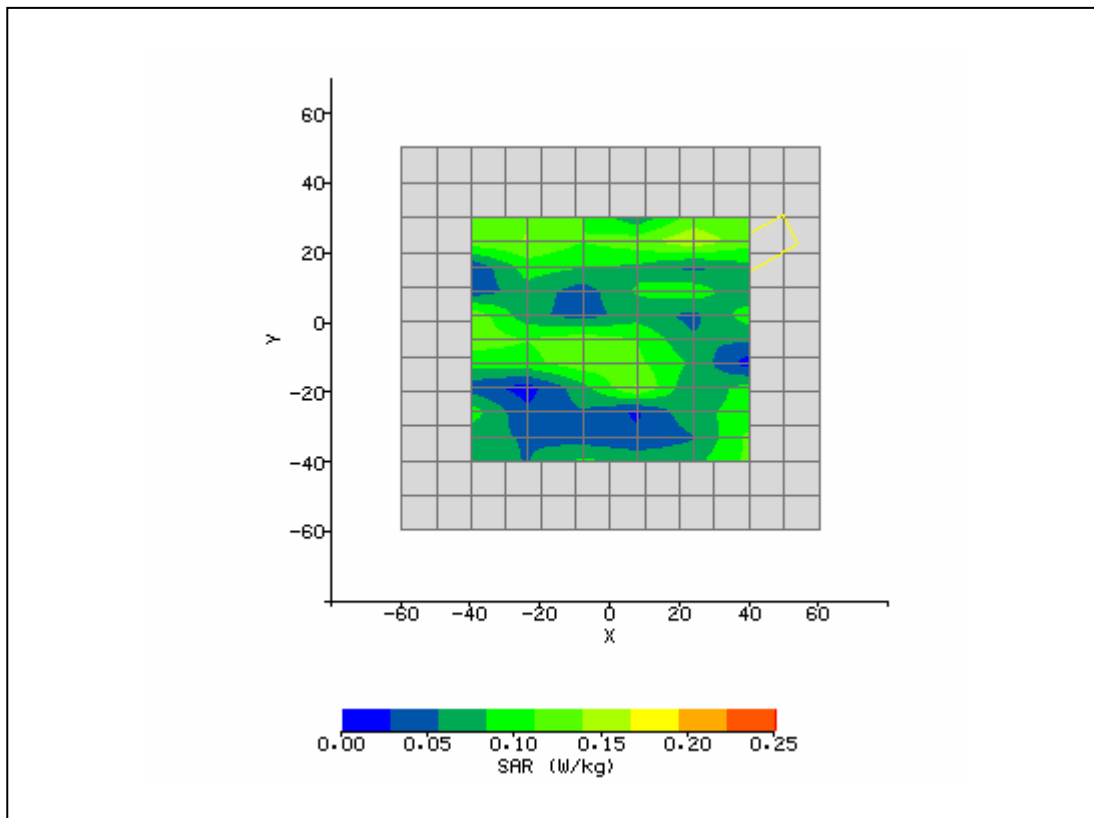

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/16/2007 10:29:34 AM	DUT Battery Model/No:	
Filename:	Lap_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG	Relative Permittivity:	50.96
Relative Humidity:	30%	Conductivity:	1.922
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	36.80 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	11.24 V/m
Test Frequency:	2437MHz	SAR 1g:	0.280 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.141 W/kg
Type of Modulation:		SAR End:	0.143 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/15/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

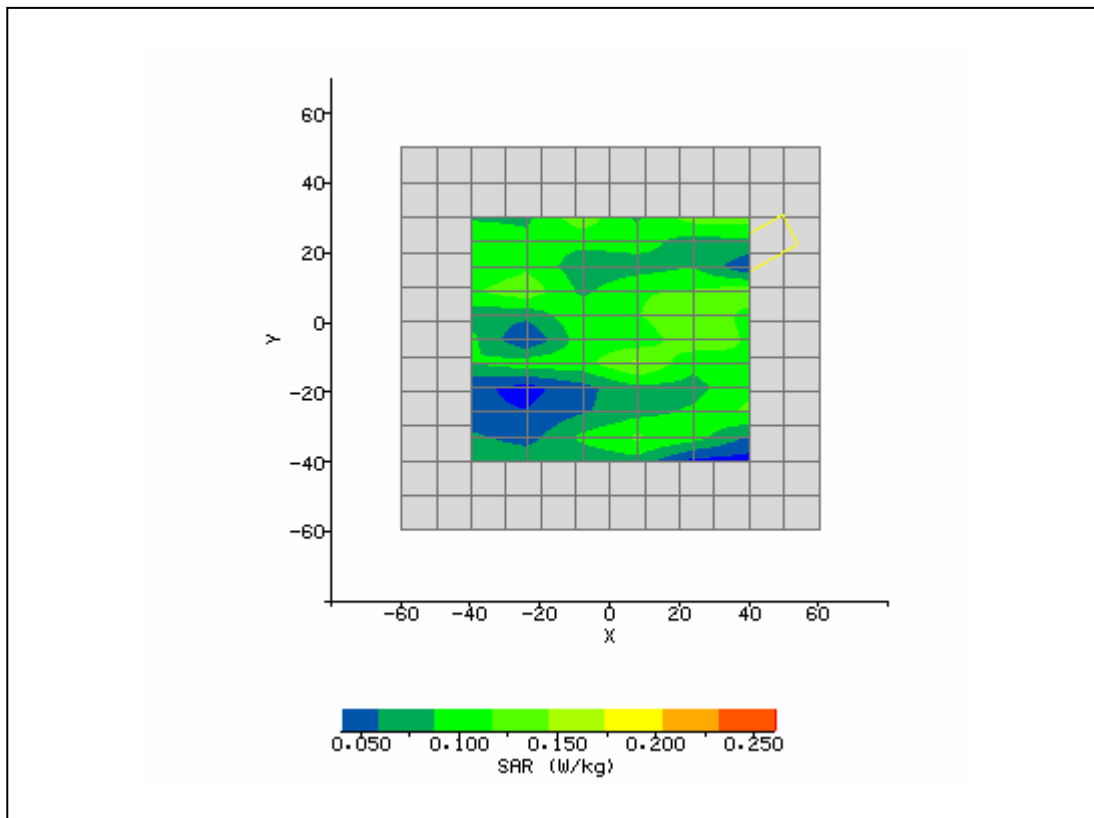

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/16/2007 10:51:36 AM	DUT Battery Model/No:	
Filename:	Lap_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG	Relative Permittivity:	50.79
Relative Humidity:	30%	Conductivity:	1.962
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	40.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	10.99 V/m
Test Frequency:	2462MHz	SAR 1g:	0.198 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.112 W/kg
Type of Modulation:		SAR End:	0.115 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/15/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

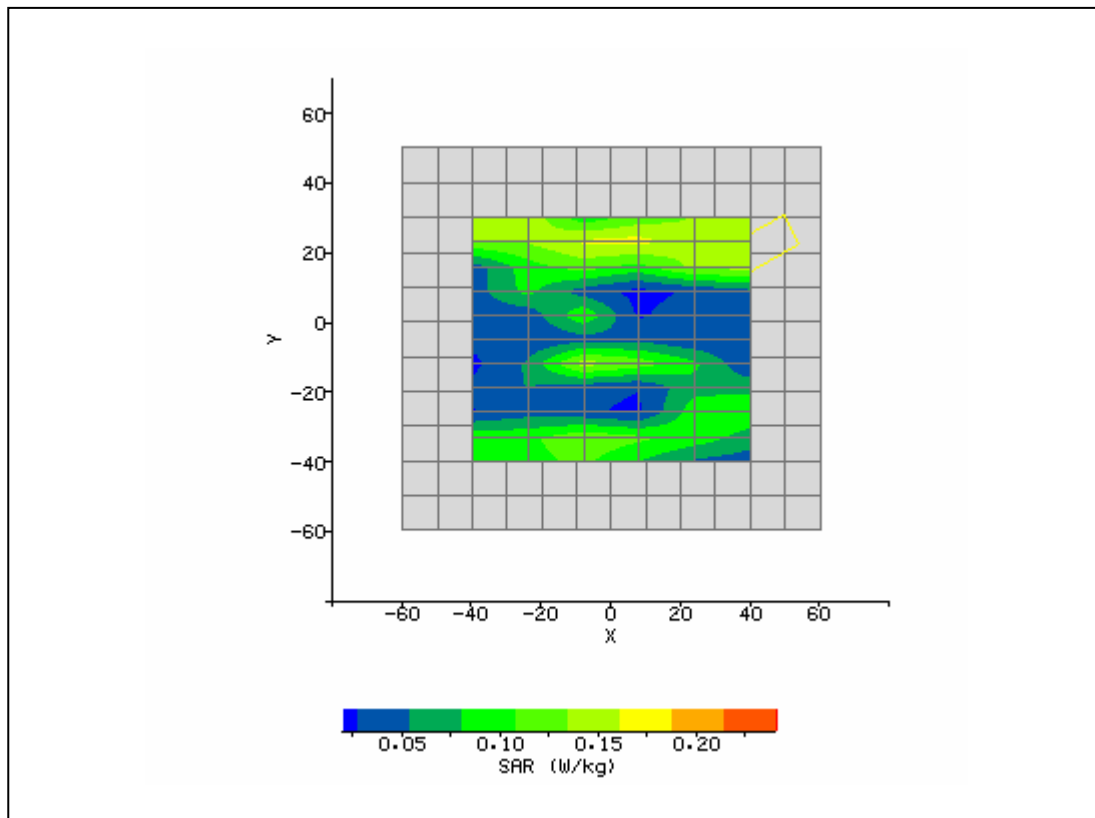

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/15/2007 9:02:12 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	38.74
Relative Humidity:	30%	Conductivity:	1.77
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-3.20 mm
DUT Position:	8mm	Max SAR Y-axis Location:	0.80 mm
Antenna Configuration:	2450 Dipole	Max E Field:	140.74 V/m
Test Frequency:	2450MHz	SAR 1g:	47.169 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	21.676 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	3.013 W/kg
Type of Modulation:		SAR End:	3.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/15/2007
Input Power Level:	1W	Extrapolation:	poly4

