




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 8:59:08 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.2
Relative Humidity:	42.9%	Conductivity:	1.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	11.01 V/m
Test Frequency:	2437MHz	SAR 1g:	0.150 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.096 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

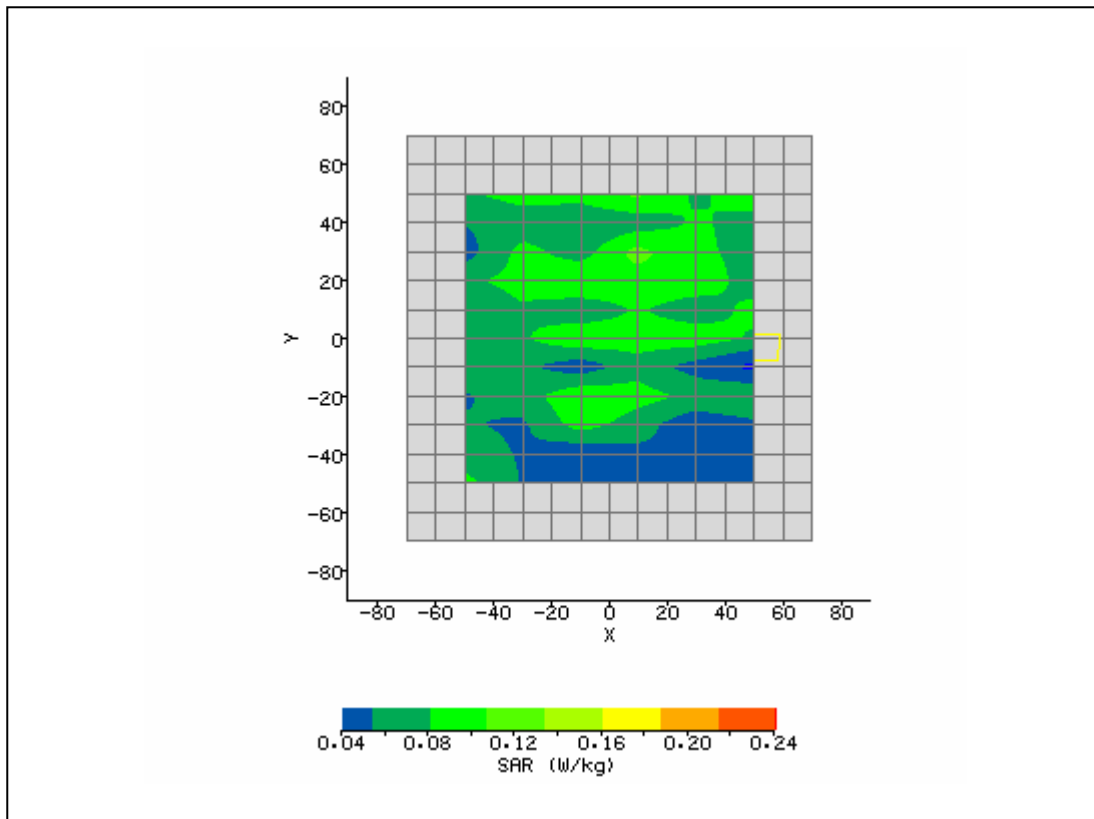


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 9:17:23 AM	DUT Battery Model/No:	
Filename:	Main_Top_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.2
Relative Humidity:	42.9%	Conductivity:	1.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-36.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	11.98 V/m
Test Frequency:	2437MHz	SAR 1g:	0.402 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.033 W/kg
Type of Modulation:		SAR End:	0.034 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

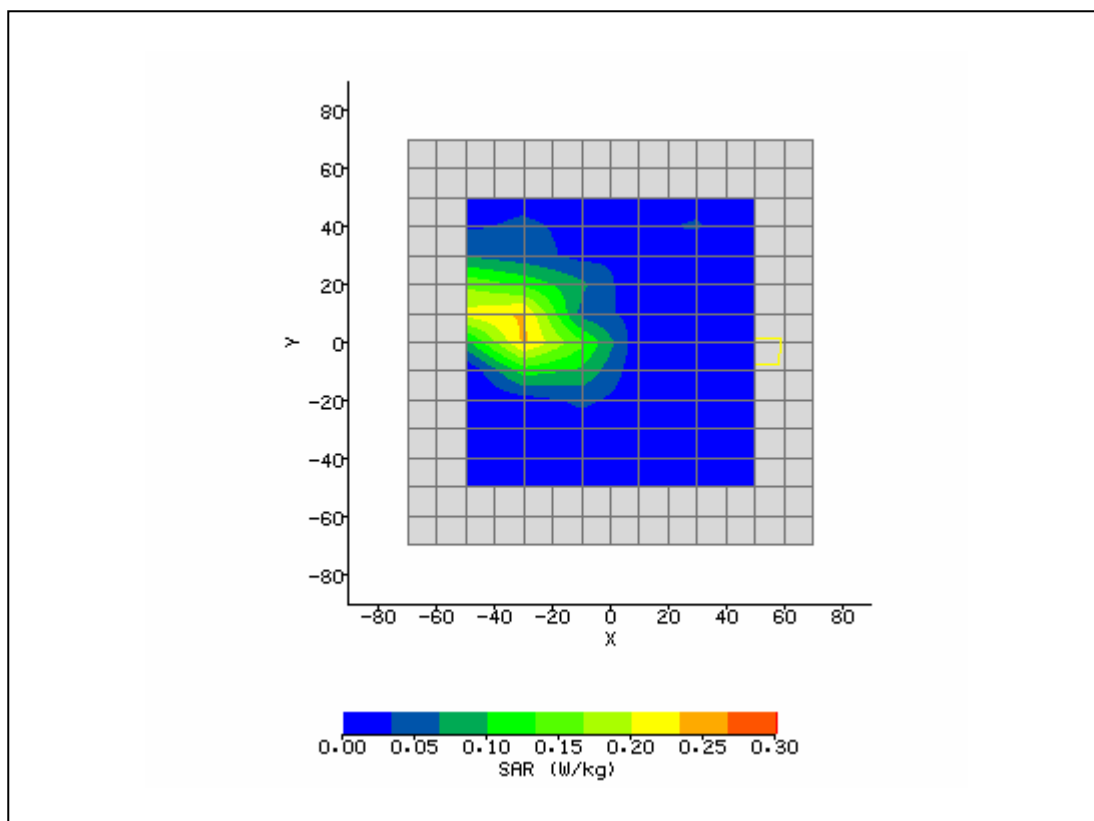


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 9:40:27 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.2
Relative Humidity:	42.9%	Conductivity:	1.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	36.00 mm
Antenna Configuration:	Integral - main	Max E Field:	6.13 V/m
Test Frequency:	2437MHz	SAR 1g:	0.213 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.36 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

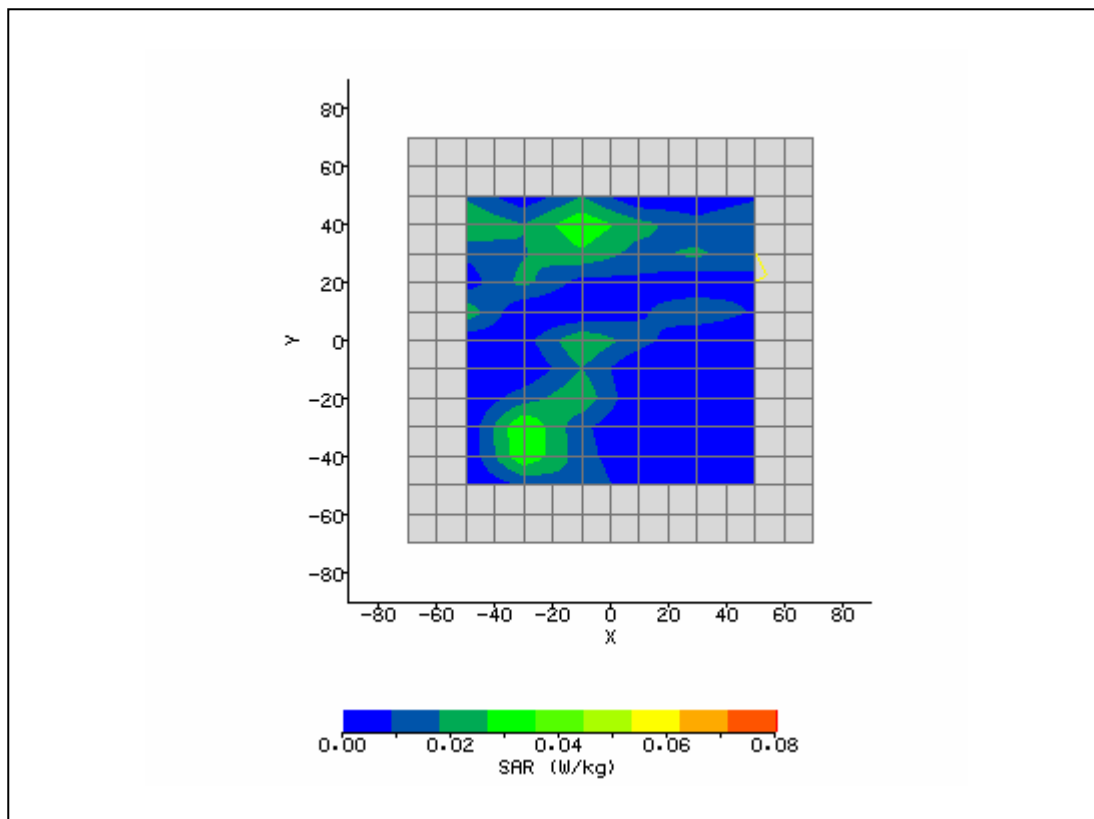


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 9:58:44 AM	DUT Battery Model/No:	
Filename:	Main_Top_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.2
Relative Humidity:	42.9%	Conductivity:	1.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	17.41 V/m
Test Frequency:	2437MHz	SAR 1g:	0.358 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.331 W/kg
Type of Modulation:		SAR End:	0.338 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.15 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

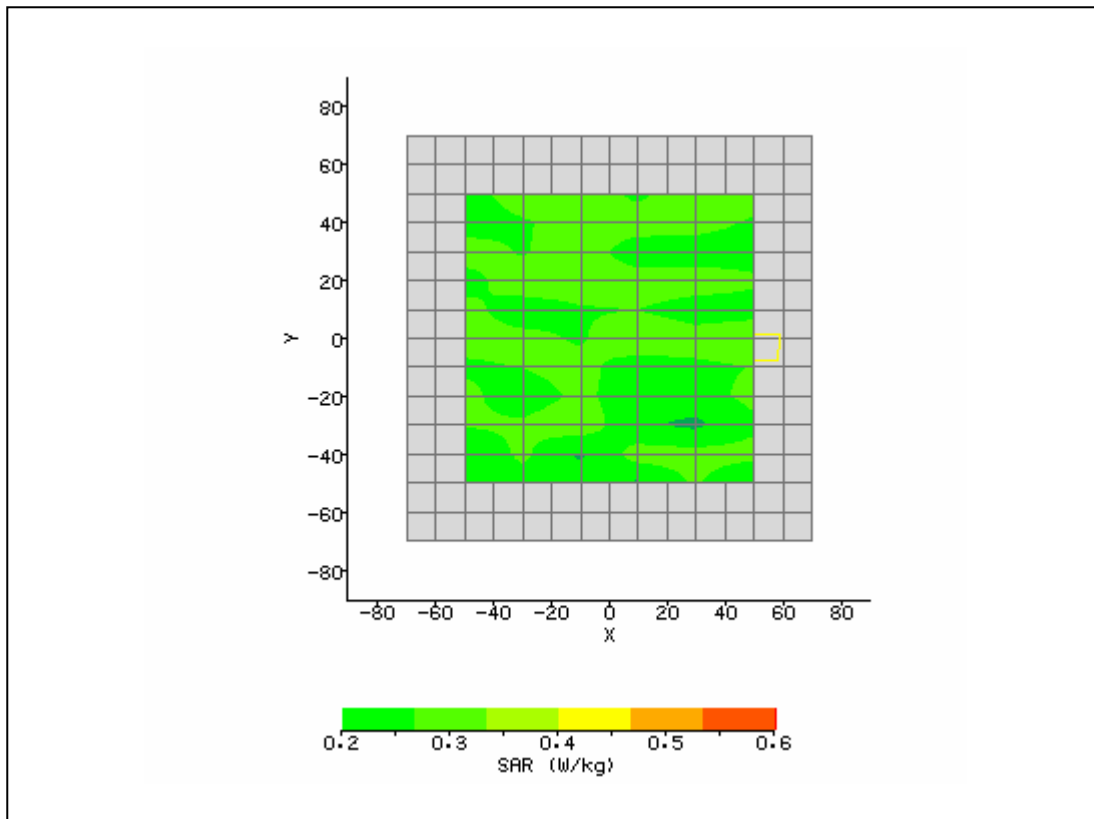


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 10:35:14 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.2
Relative Humidity:	42.9%	Conductivity:	1.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-40.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	10.96 V/m
Test Frequency:	2437MHz	SAR 1g:	0.398 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.159 W/kg
Type of Modulation:		SAR End:	0.165 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

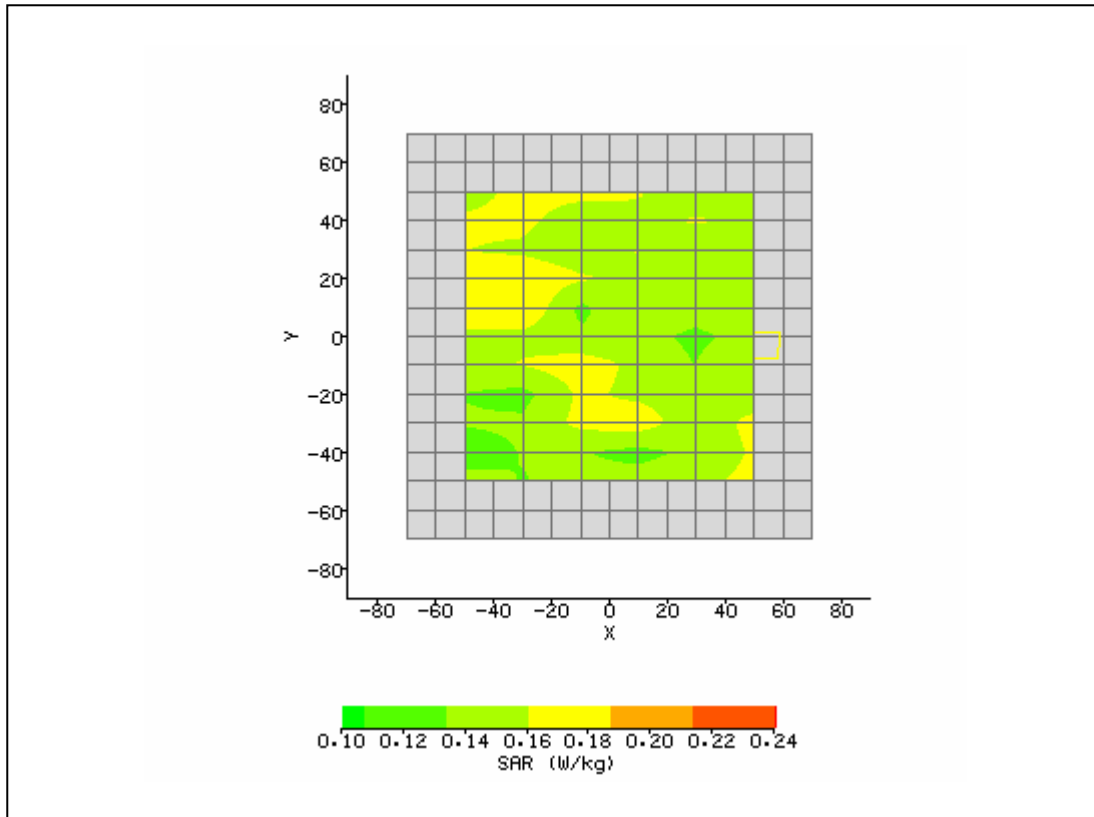


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 10:59:35 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.2
Relative Humidity:	42.9%	Conductivity:	1.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-27.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	19.15 V/m
Test Frequency:	2437MHz	SAR 1g:	1.016 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.192 W/kg
Type of Modulation:		SAR End:	0.189 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

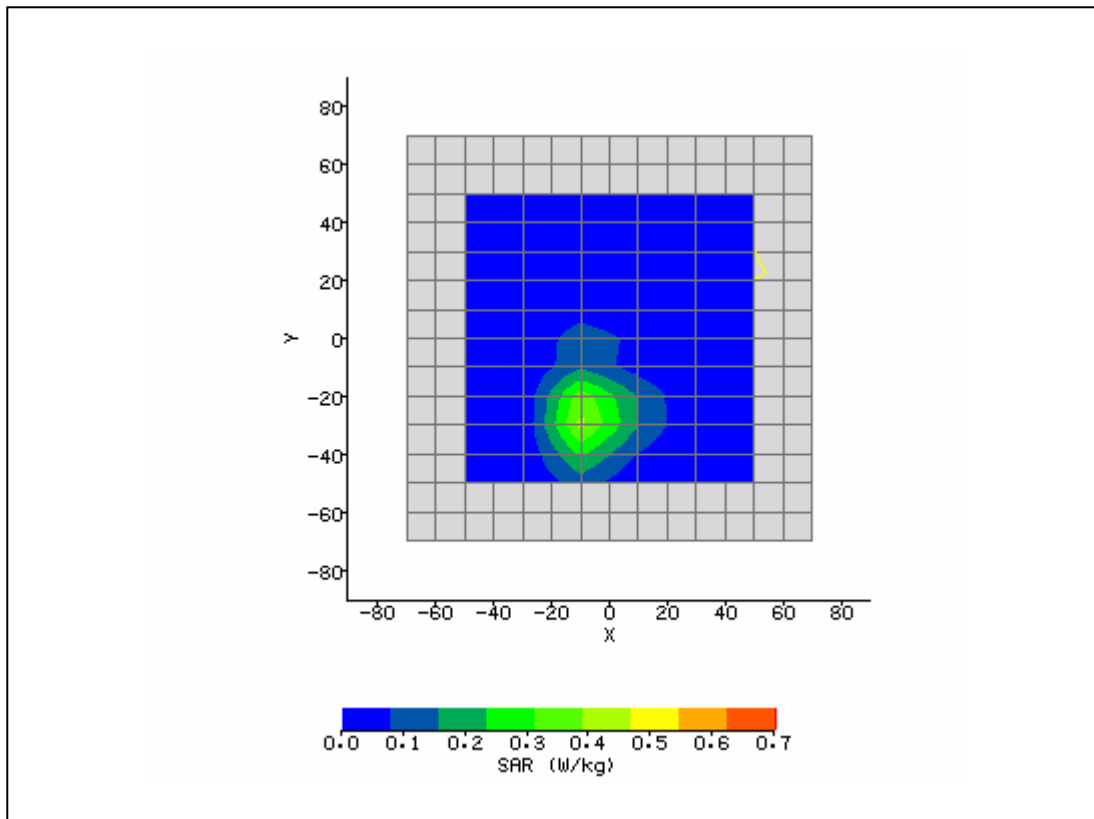


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 11:15:01 AM	DUT Battery Model/No:	
Filename:	Aux_Side_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	48.52
Relative Humidity:	42.9%	Conductivity:	1.862
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	18.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	18.94 V/m
Test Frequency:	2412MHz	SAR 1g:	0.934 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.222 W/kg
Type of Modulation:		SAR End:	0.227 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

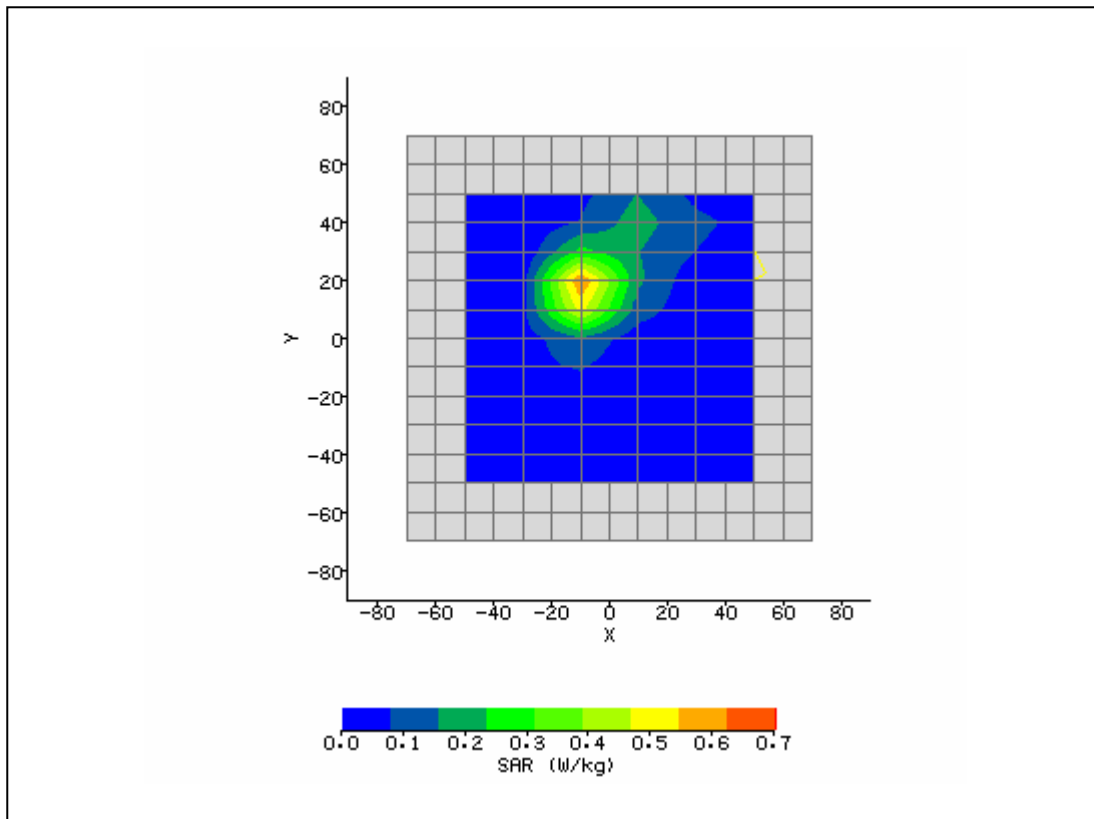

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 11:29:51 AM	DUT Battery Model/No:	
Filename:	Aux_Side_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	47.86
Relative Humidity:	42.9%	Conductivity:	1.928
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	17.98 V/m
Test Frequency:	2462MHz	SAR 1g:	0.807 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.058 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

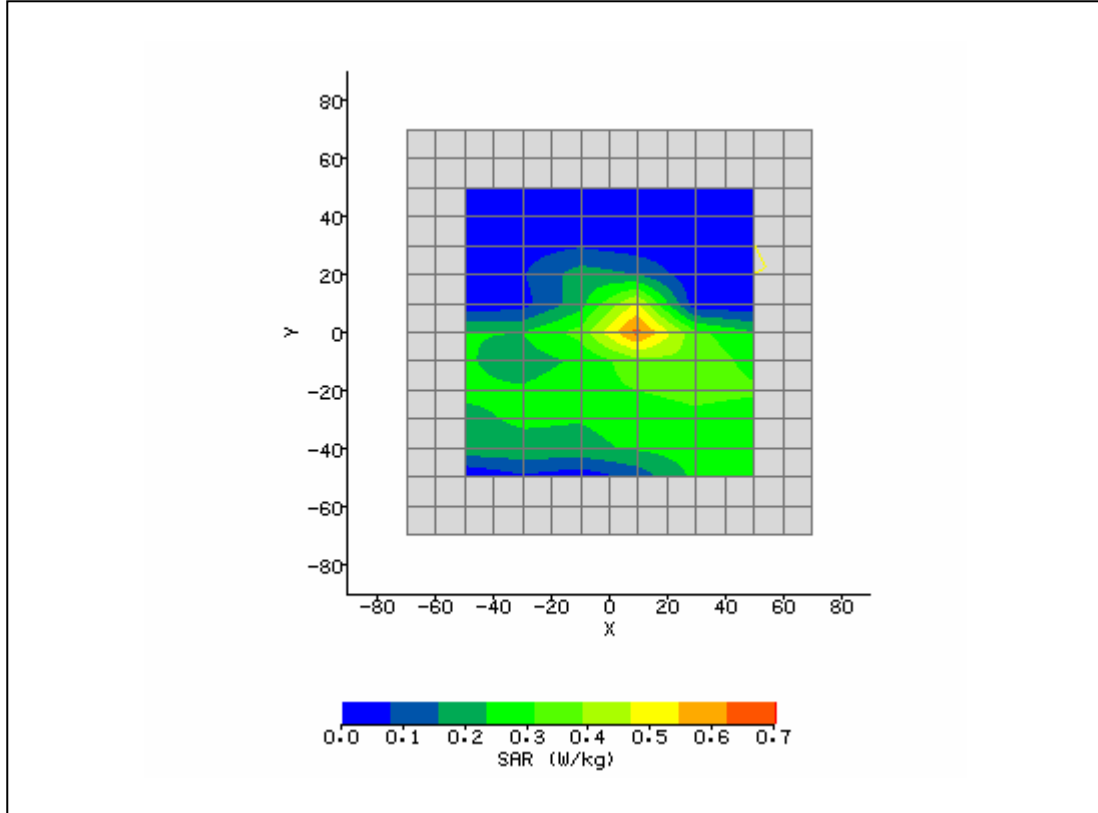

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 11:43:52 AM	DUT Battery Model/No:	
Filename:	Aux_Side_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.9°C	Liquid Simulant:	2450
Device Under Test:	BCM94312MCG - HP Soyuz	Relative Permittivity:	47.84
Relative Humidity:	42.9%	Conductivity:	1.931
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-8.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	9.29 V/m
Test Frequency:	2472MHz	SAR 1g:	0.426 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.057 W/kg
Type of Modulation:		SAR End:	0.059 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/07
Input Power Level:	Set by SW	Extrapolation:	poly4

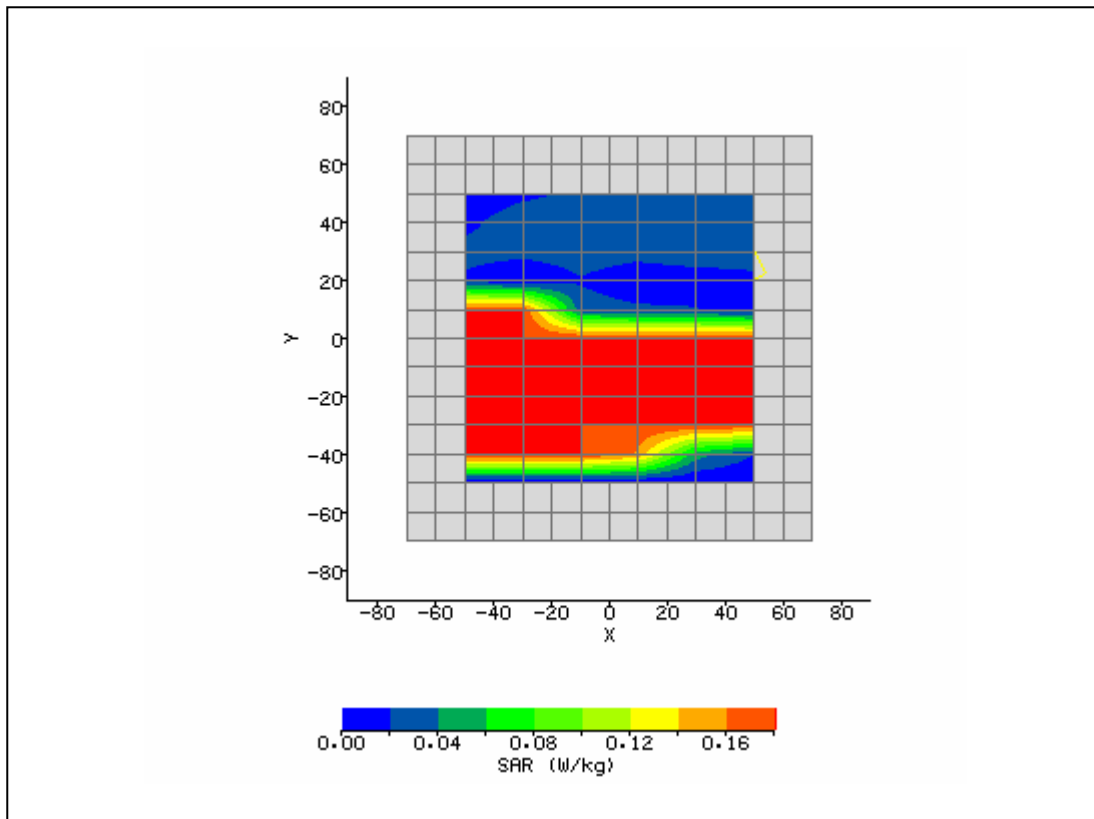

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/4/2007 8:06:53 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.31
Relative Humidity:	30%	Conductivity:	1.814
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	17.60 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-8.80 mm
Antenna Configuration:	2450 Dipole	Max E Field:	144.29 V/m
Test Frequency:	2450MHz	SAR 1g:	50.255 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	22.763 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	3.120 W/kg
Type of Modulation:		SAR End:	3.220 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/04/2007
Input Power Level:	1W	Extrapolation:	poly4

