




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 9:14:53 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG - Galileo	<b>Relative Permittivity:</b>	49.23
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	1.982
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-14.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	1.00 mm
<b>Antenna Configuration:</b>	Yageo - Main	<b>Max E Field:</b>	1.48 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.004 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

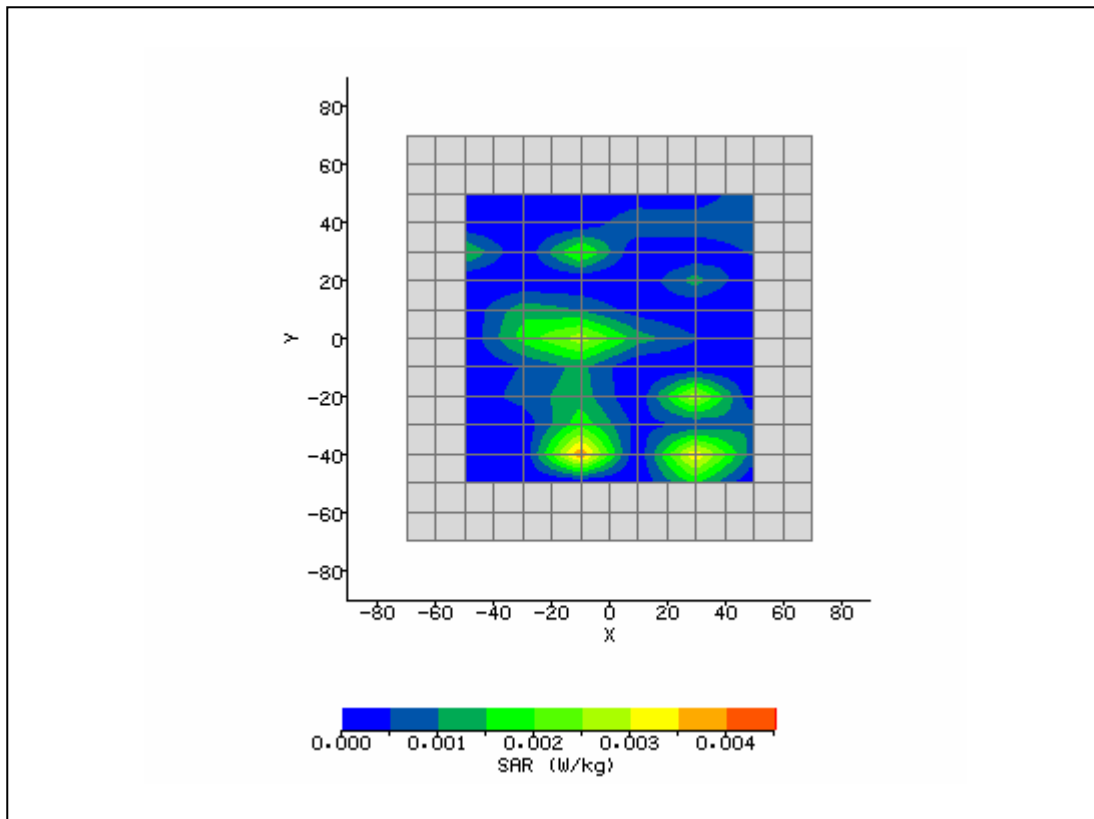


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 9:33:24 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_1_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG - Galileo	<b>Relative Permittivity:</b>	49.03
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	2.016
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	20.00 mm
<b>Antenna Configuration:</b>	Yageo - Main	<b>Max E Field:</b>	1.11 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.003 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

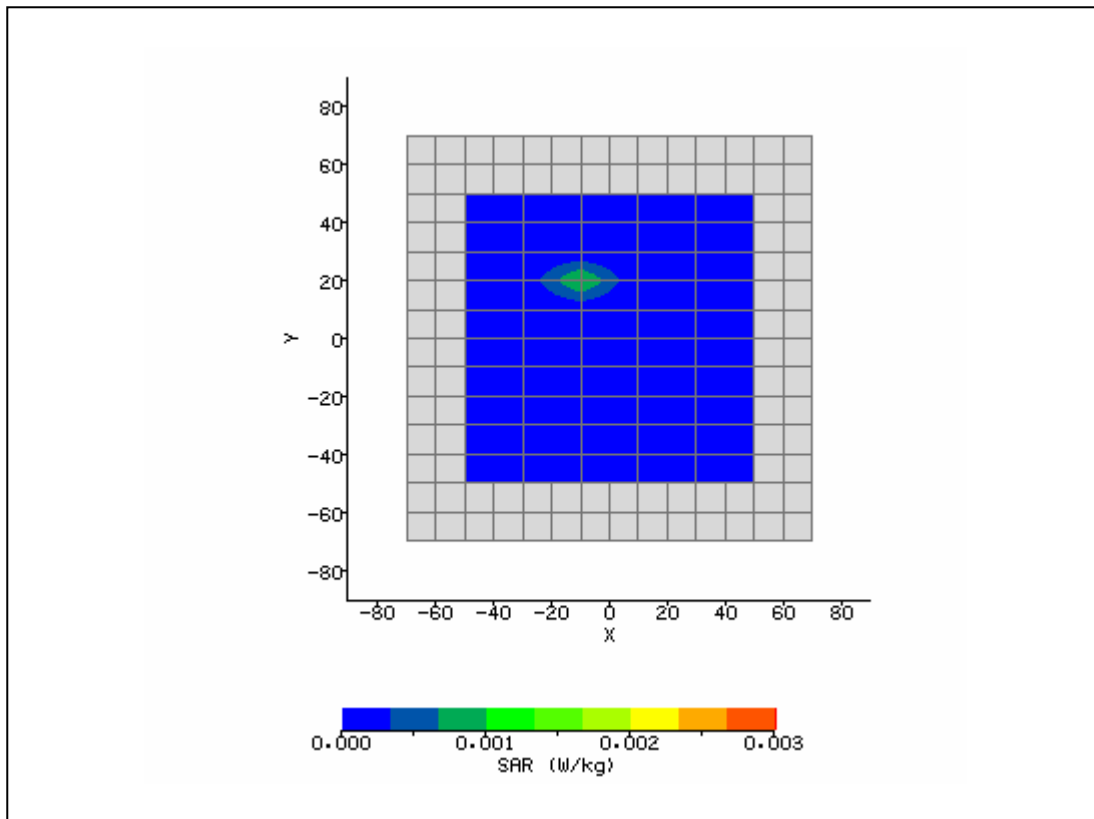


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 9:47:09 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_11_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG - Galileo	<b>Relative Permittivity:</b>	48.88
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	2.047
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-15.33 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	25.33 mm
<b>Antenna Configuration:</b>	Yageo - Main	<b>Max E Field:</b>	1.69 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.006 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

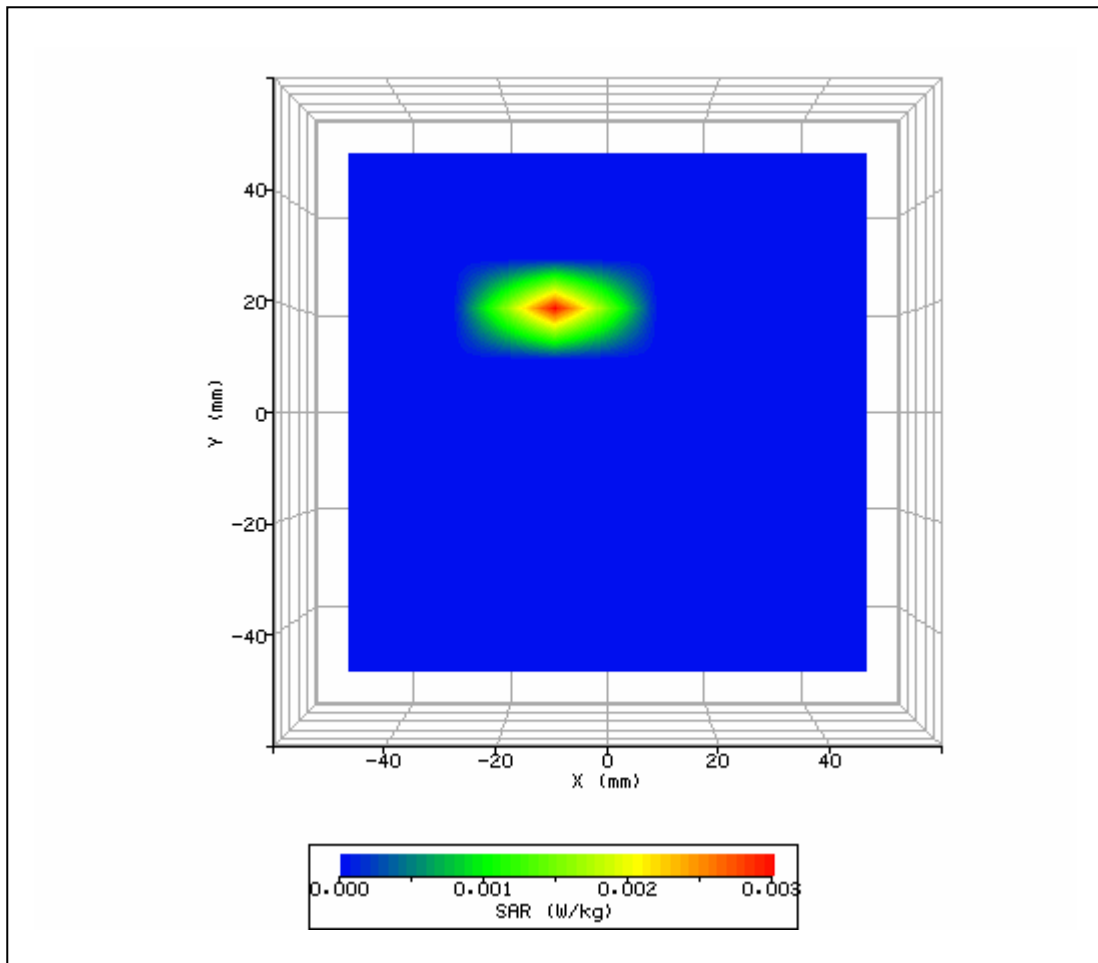


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 10:04:11 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_11_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG - Galileo	<b>Relative Permittivity:</b>	48.88
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	2.047
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	12.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-20.00 mm
<b>Antenna Configuration:</b>	Yageo - Aux	<b>Max E Field:</b>	1.35 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.005 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

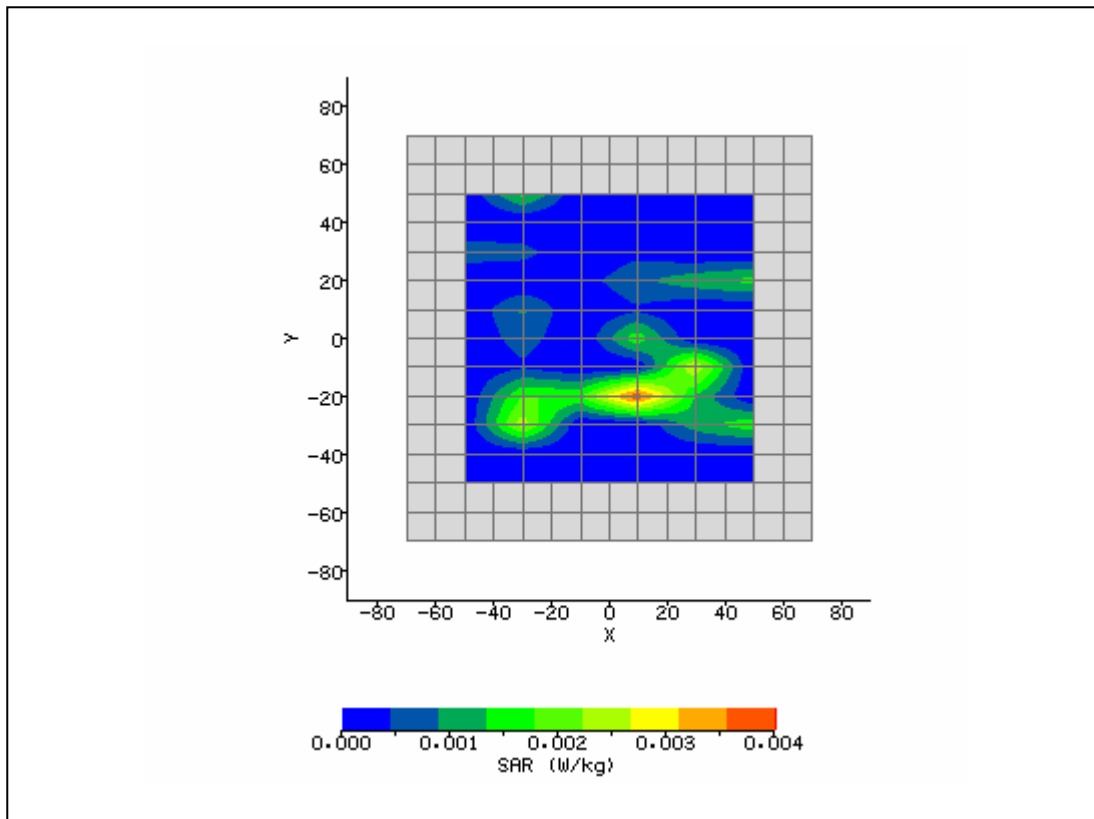


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 12:31:34 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG	<b>Relative Permittivity:</b>	49.23
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	1.982
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-25.00 mm
<b>Antenna Configuration:</b>	WNC - Main	<b>Max E Field:</b>	2.47 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.015 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.003 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.003 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.24 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

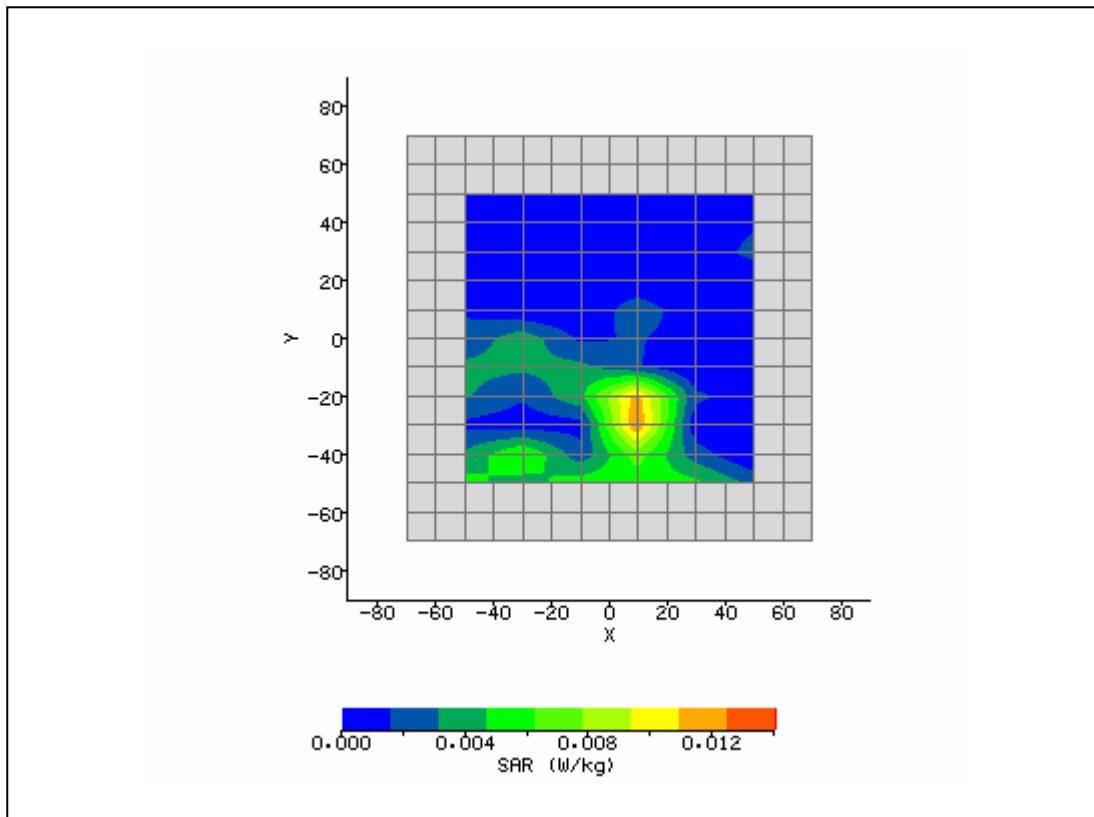


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 1:00:34 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_1_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG	<b>Relative Permittivity:</b>	49.03
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	2.016
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-9.00 mm
<b>Antenna Configuration:</b>	WNC - Main	<b>Max E Field:</b>	0.45 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.002 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

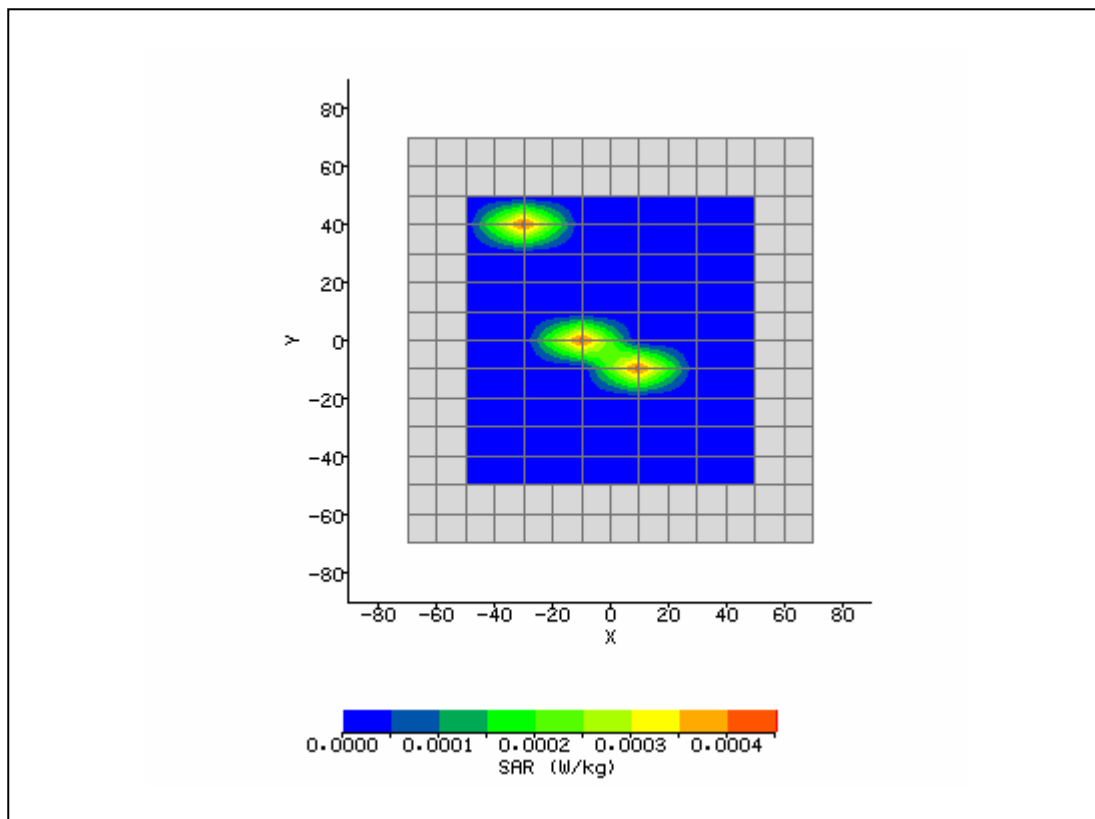

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 1:14:25 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_6_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG	<b>Relative Permittivity:</b>	48.88
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	2.047
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	10.00 mm
<b>Antenna Configuration:</b>	WNC - Main	<b>Max E Field:</b>	1.64 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.006 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

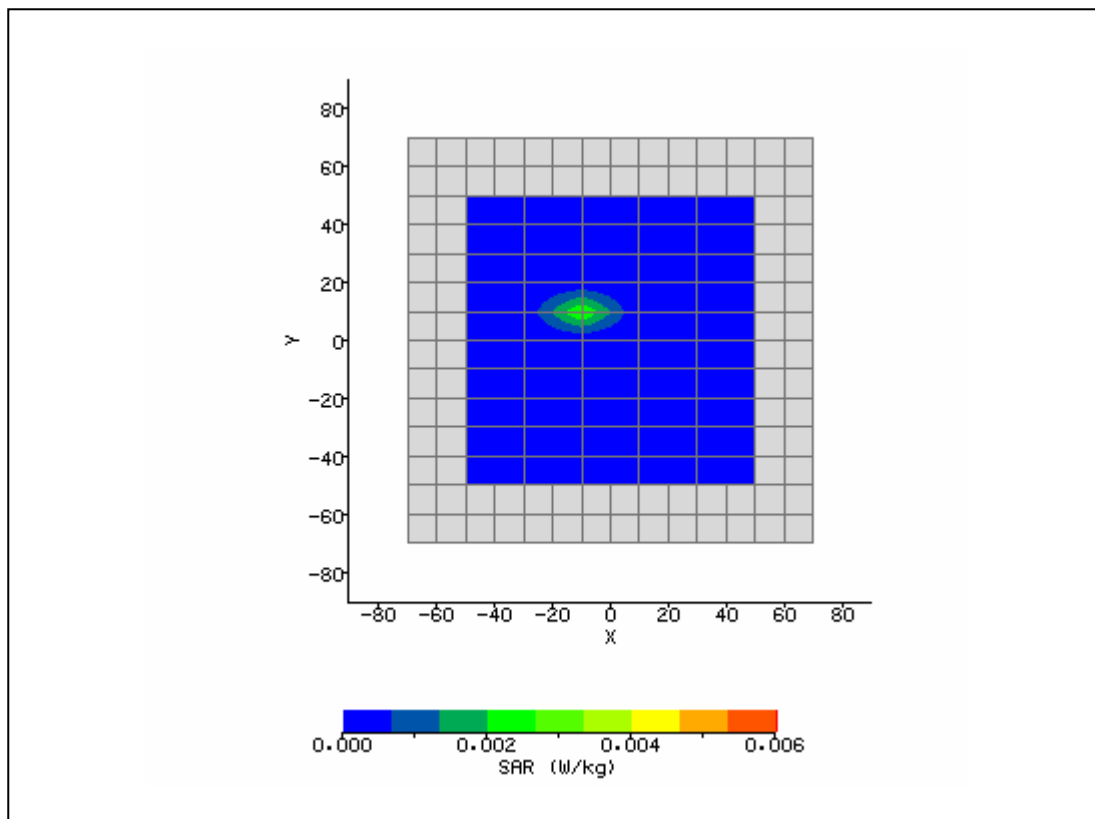

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 1:50:56 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Main_11_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	20.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	94312MCG	<b>Relative Permittivity:</b>	49.23
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	1.982
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	10.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	10.00 mm
<b>Antenna Configuration:</b>	WNC - Aux	<b>Max E Field:</b>	1.28 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.005 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

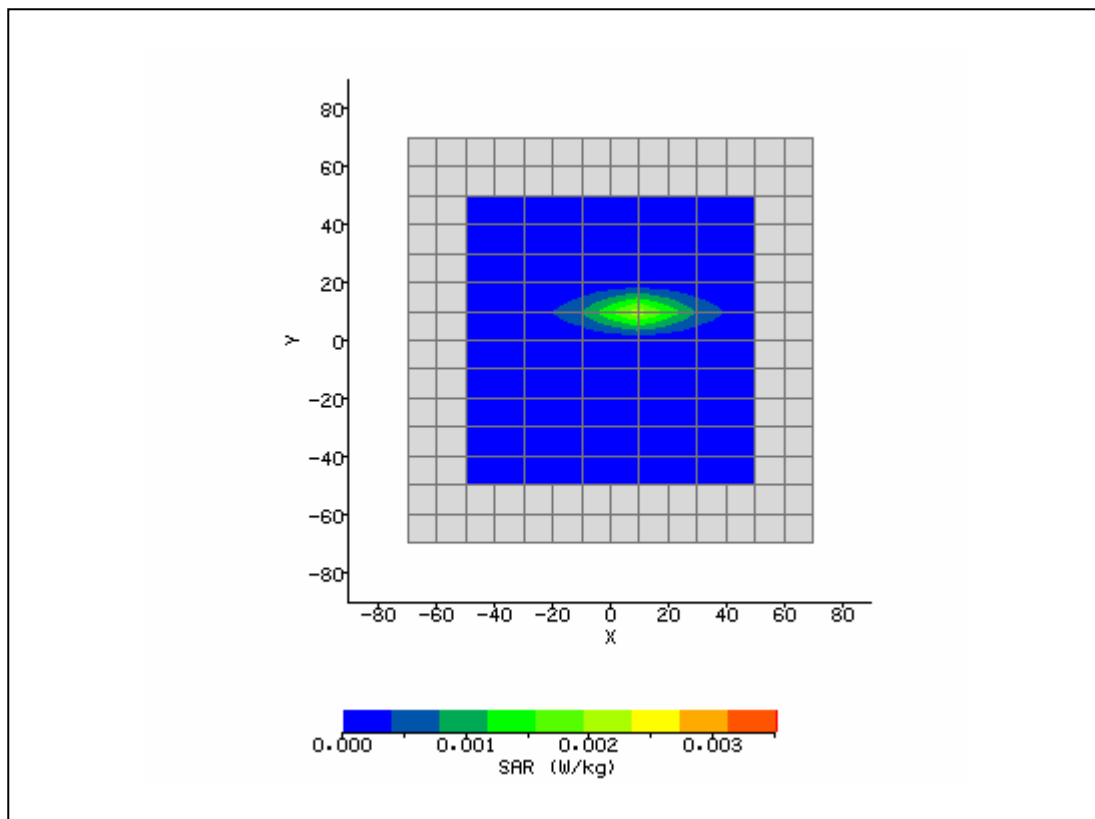



<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/10/2008 8:32:12 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	38.74
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.77
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-3.20 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	0.80 mm
<b>Antenna Configuration:</b>	2450 Dipole	<b>Max E Field:</b>	140.79 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	48.341 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	22.674 W/kg
<b>Conversion Factors:</b>	.569 / .569 / .569	<b>SAR Start:</b>	3.016 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	3.089 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.42 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	3/07/08
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

