




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/29/2008 11:04:14 AM	DUT Battery Model/No:	
Filename:	Top_Aux_6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	2450
Device Under Test:	Ofilant / BCM94312MCG	Relative Permittivity:	51.12
Relative Humidity:	35.9%	Conductivity:	1.921
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	4.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	PIFA; Main	Max E Field:	3.51 V/m
Test Frequency:	2437MHz	SAR 1g:	0.030 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/29/08
Input Power Level:	19dBm	Extrapolation:	poly4

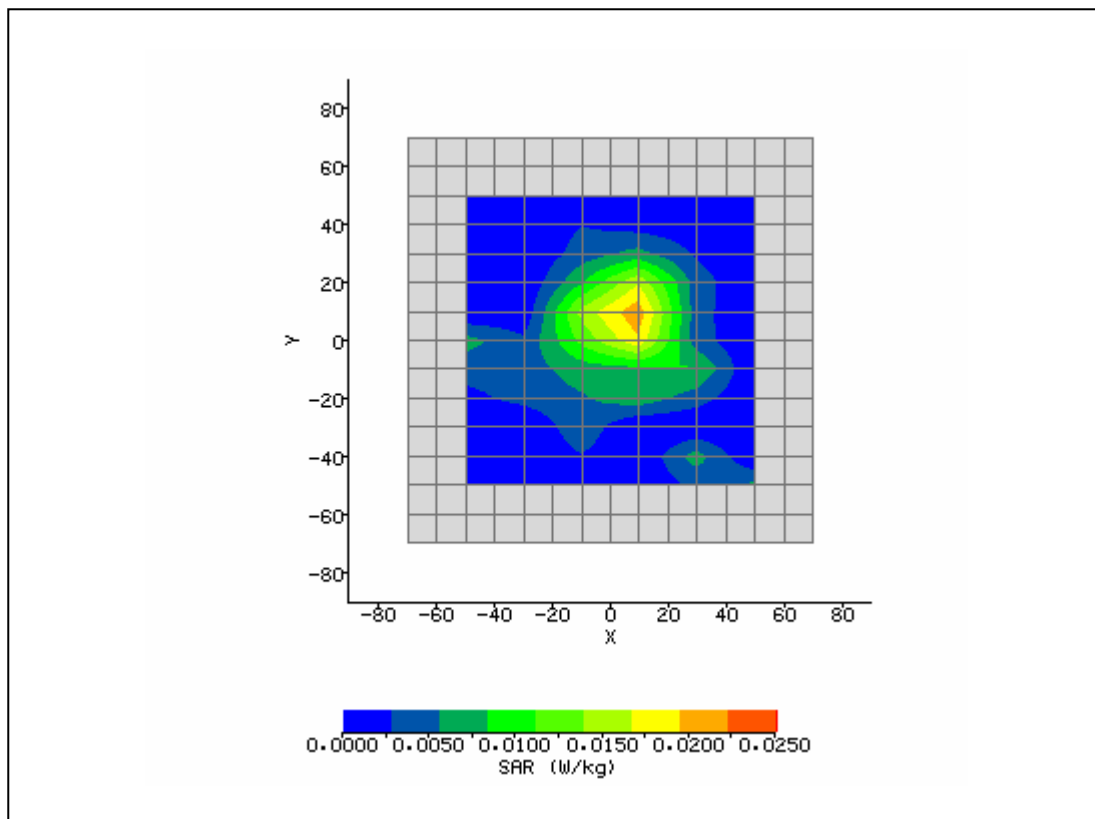

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/29/2008 10:06:31 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	2450
Device Under Test:	Ofilant / BCM94312MCG	Relative Permittivity:	51.12
Relative Humidity:	35.9%	Conductivity:	1.921
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	21.00 mm
Antenna Configuration:	PIFA; Aux	Max E Field:	3.68 V/m
Test Frequency:	2437MHz	SAR 1g:	0.035 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/29/08
Input Power Level:	19dBm	Extrapolation:	poly4

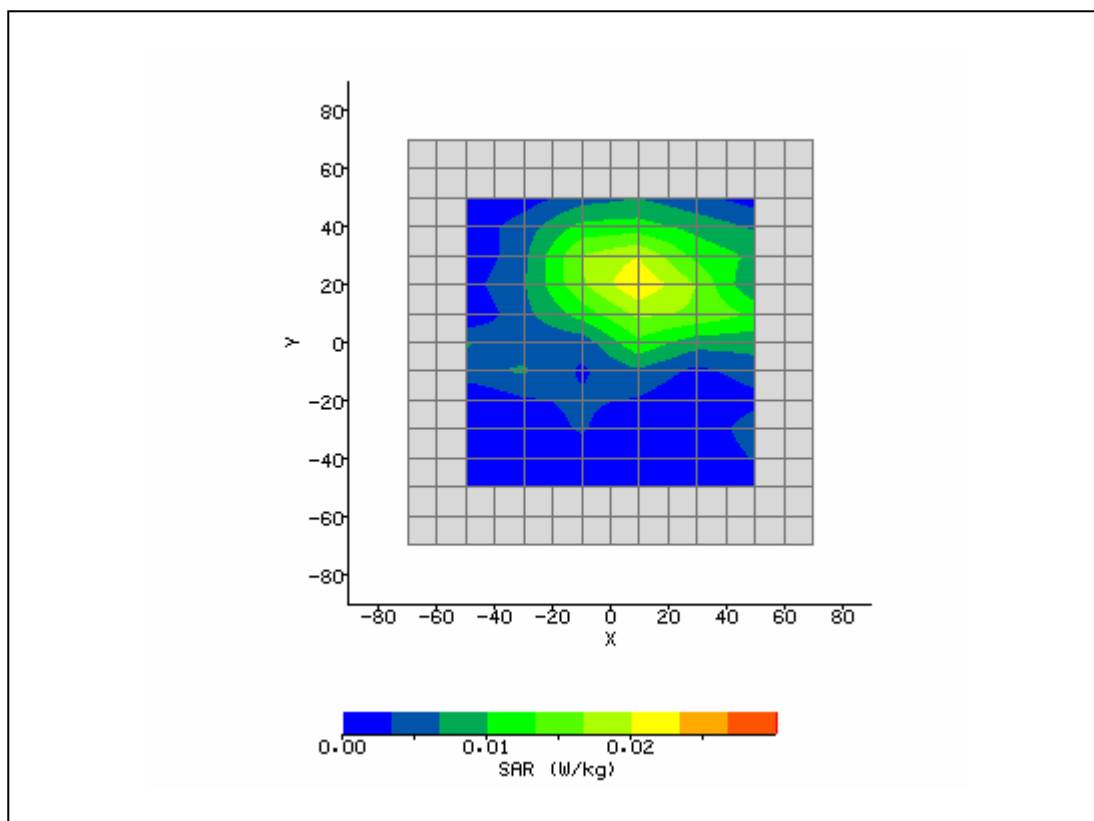

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/29/2008 10:29:20 AM	DUT Battery Model/No:	
Filename:	Left_Aux_6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	2450
Device Under Test:	Ofilant / BCM94312MCG	Relative Permittivity:	51.12
Relative Humidity:	35.9%	Conductivity:	1.921
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Left 0mm	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	PIFA; Aux	Max E Field:	8.23 V/m
Test Frequency:	2437MHz	SAR 1g:	0.160 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.84 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/29/08
Input Power Level:	19dBm	Extrapolation:	poly4

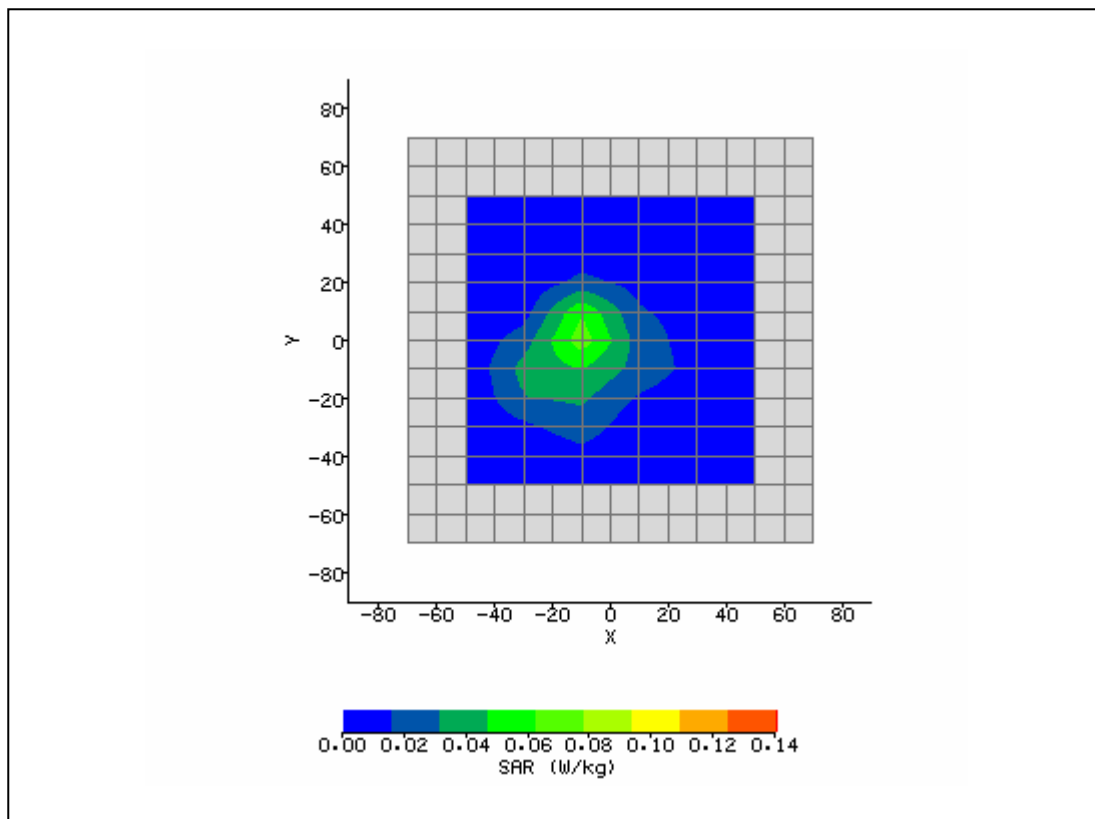

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/29/2008 9:00:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.72
Relative Humidity:	35.9%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	Dipole	Max E Field:	112.39 V/m
Test Frequency:	2450MHz	SAR 1g:	48.081 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	23.216 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.413 W/kg
Type of Modulation:		SAR End:	2.354 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/29/08
Input Power Level:	1W	Extrapolation:	poly4

