



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7
CLASS II PERMISSIVE CHANGE**

CERTIFICATION TEST REPORT

FOR

**BLUETOOTH TRANSCEIVER MODULE
(Adding a higher antenna gain)**

MODEL NUMBER: BCM92046MD

FCC ID: QDS-BRCM1029

IC: 4324A-BRCM1029

REPORT NUMBER: 10U13068-1

ISSUE DATE: FEBRUARY 26, 2010

Prepared for

**BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	02/26/10	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.5. SOFTWARE AND FIRMWARE	6
5.6. WORST-CASE CONFIGURATION AND MODE	6
5.7. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. RADIATED TEST RESULTS	10
7.1. LIMITS AND PROCEDURE	10
7.2. TRANSMITTER ABOVE 1 GHz	11
7.2.1. ENHANCED DATA RATE 8PSK MODULATION	11
7.2.2. RECEIVER ABOVE 1 GHz	16
7.3. WORST-CASE BELOW 1 GHz	17
8. MAXIMUM PERMISSIBLE EXPOSURE	18
9. SETUP PHOTOS	21

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: BLUETOOTH TRANSCEIVER MODULE

MODEL: BCM92046MD

SERIAL NUMBER: 1137470

DATE TESTED: FEBRUARY 18 - 25, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth transceiver module 2.1 + EDR

The radio module is manufactured by Broadcom Corporation.

5.2. MAXIMUM OUTPUT POWER

The test measurement passed within ± 0.5 dBm of the original output power.

5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The major change filed under this application is adding an optional of a higher antenna gain.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an external antenna, with a maximum gain of 6.25 dBi.

5.5. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Broadcom, 2070 Bluetooth rev.5.5.0.7600.

The test utility software used during testing was Blue Tool, rev. 1.2.4.3.

5.6. WORST-CASE CONFIGURATION AND MODE

Based on previous report and by compared the GFSK / 8PSK band edges, there were not significant differences between these two modes. The 8PSK mode is chosen as worst mode to conduct the testing since its data rate is higher than GFSK mode.

The worst-case channel is determined as the channel with the highest output power.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	Lenovo 4446	R8-CAD03 09/08	DoC
AC Adapter	Lenovo	ADP-65YB B	11S42T4458Z1ZF4K96B09D	N/A
Adapter Board	Broadcom	BCM9USB3P3V	1149512	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115V	Unshielded	1m	N/A
2	DC	1	DC	Unshielded	1.5m	N/A
3	Ribbon	1	Ribbon Cable	Unshielded	.3m	EUT / Adapter Board
4	USB	1	USB Connector Adapter	UnShielded		N/A

TEST SETUP

The EUT is connected to a host laptop computer via a 5 VDC adapter board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

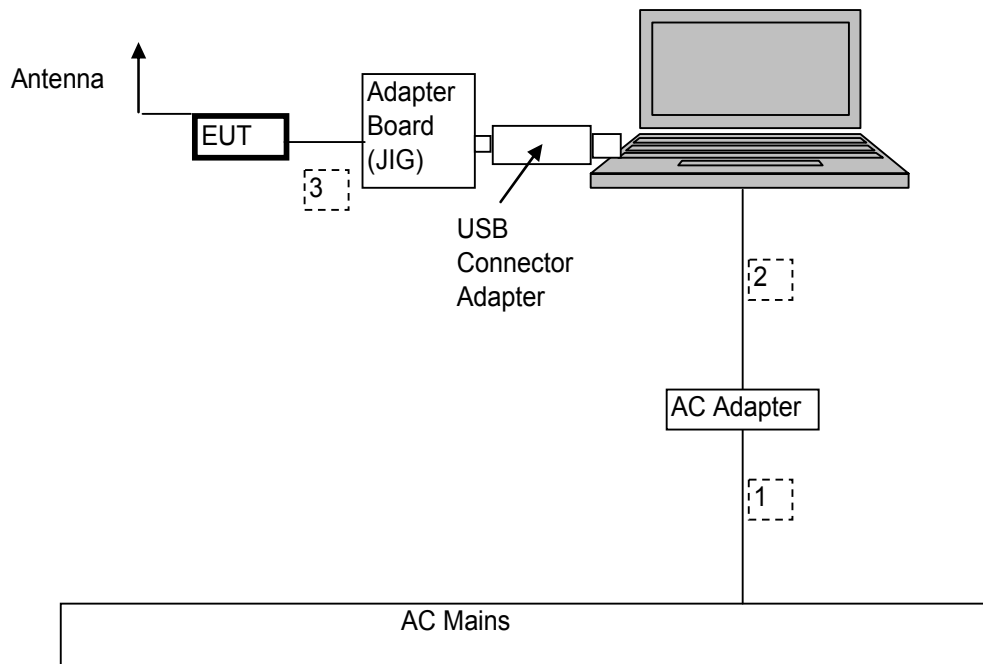

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	01/05/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00945	04/22/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	03/31/10
Preamplifier, 1-26GHz	Agilent / HP	8449B	C01052	07/05/10
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	11/28/10

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



7.2. TRANSMITTER ABOVE 1 GHz

7.2.1. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

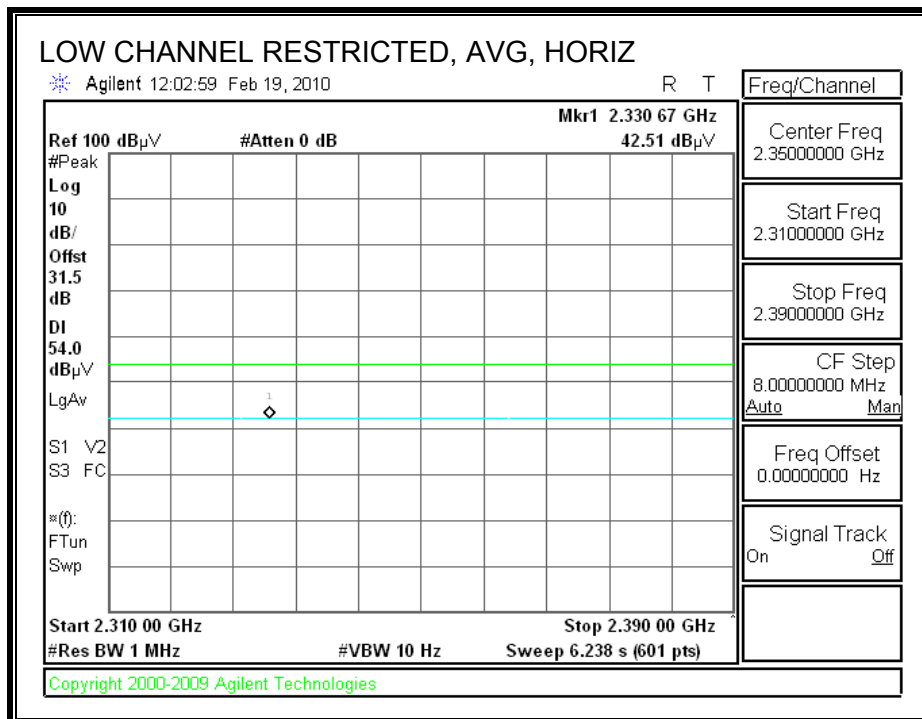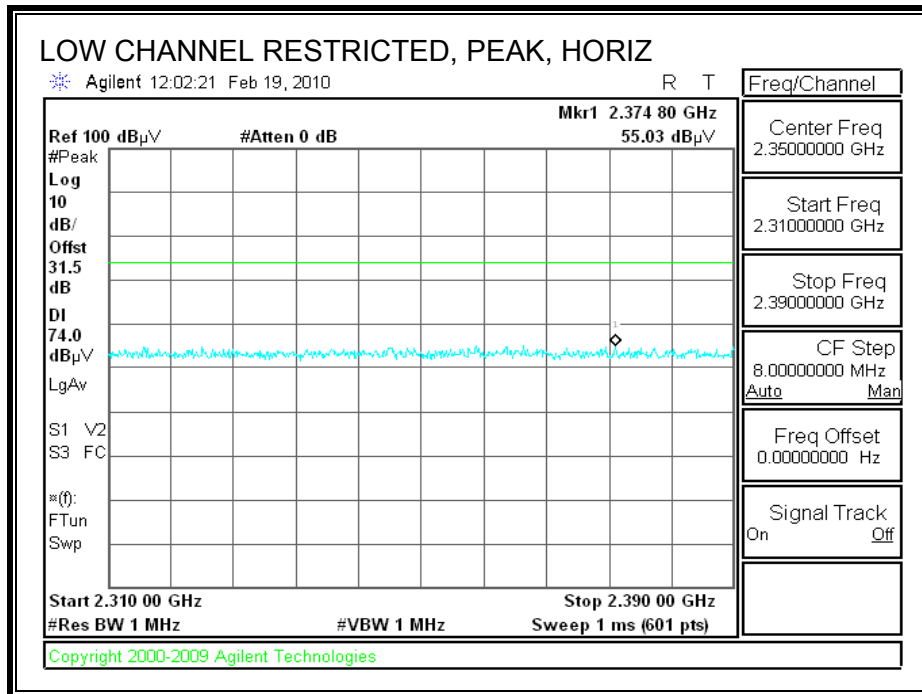



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

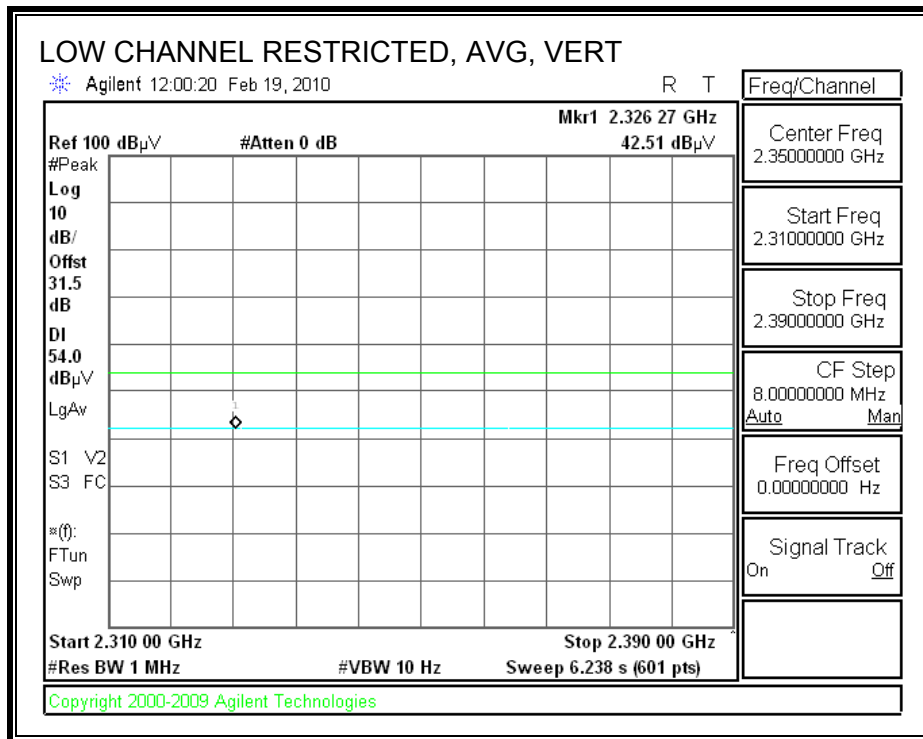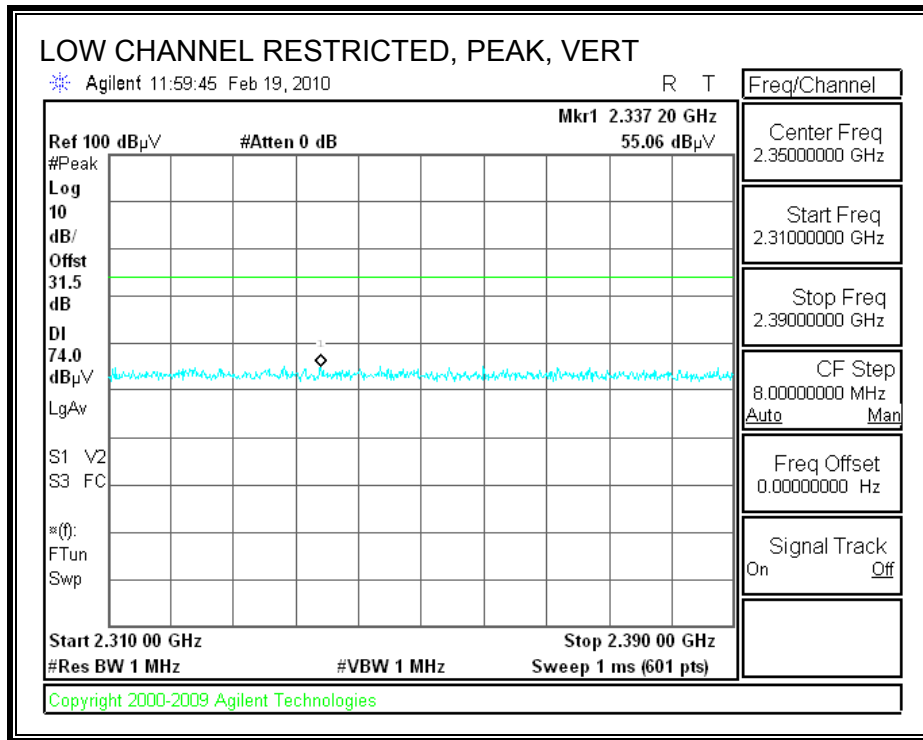

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

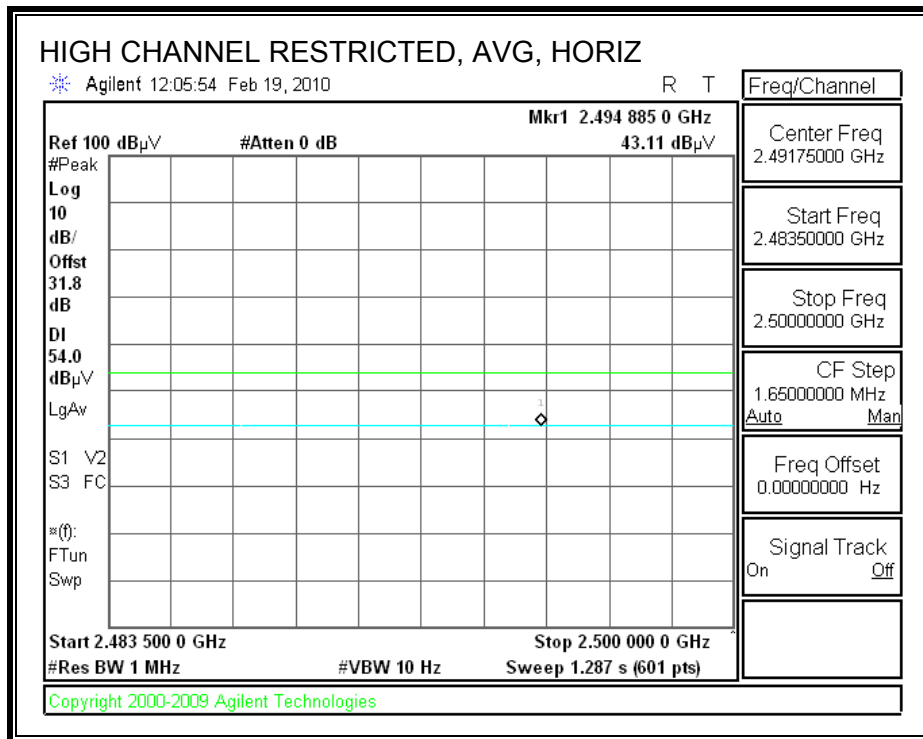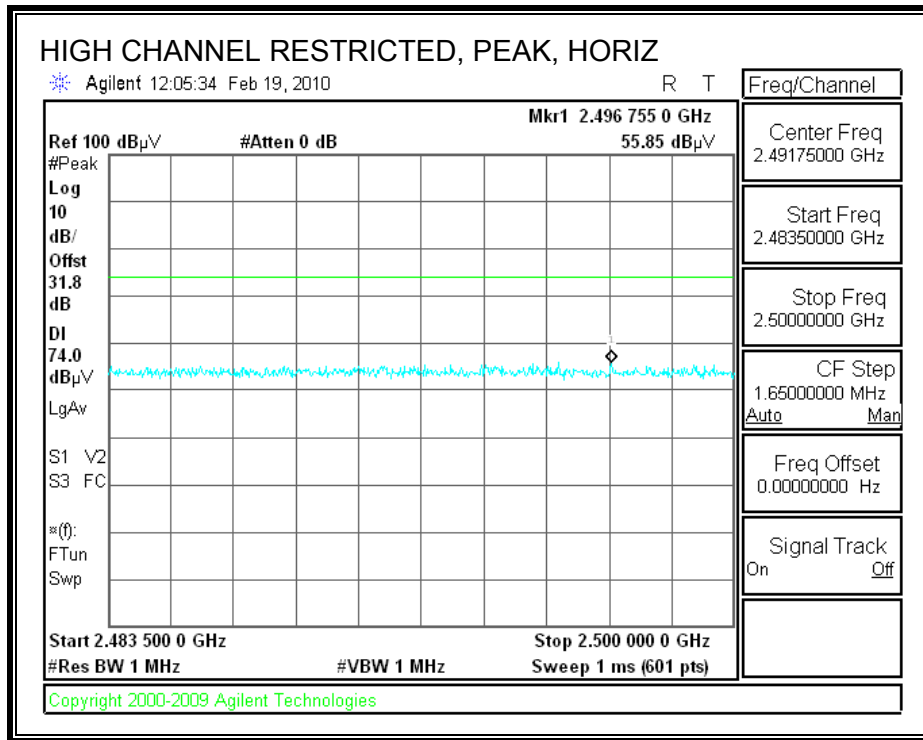

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

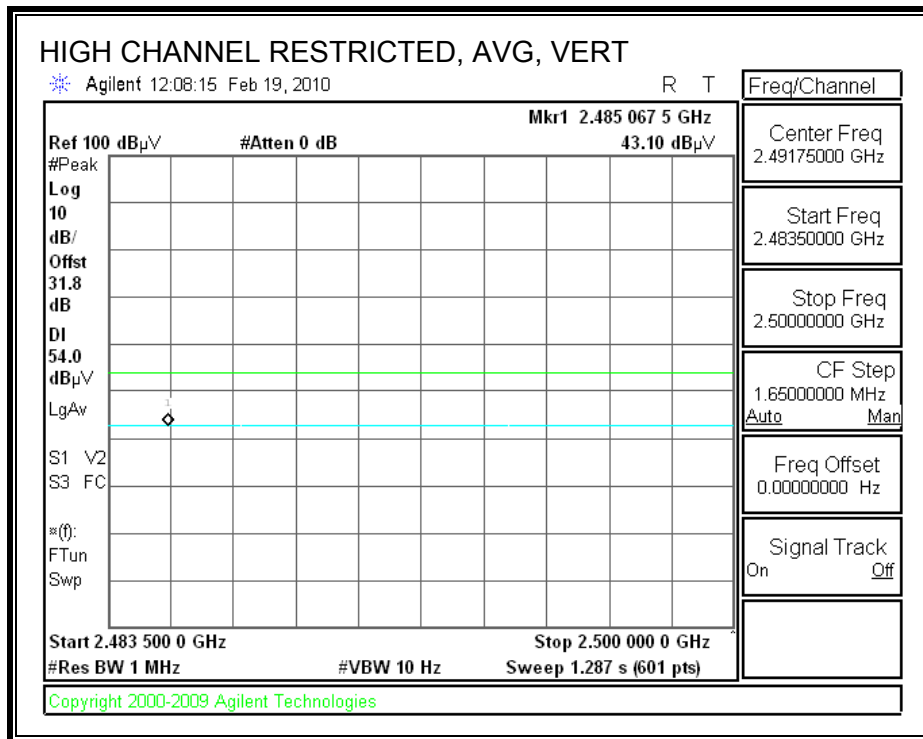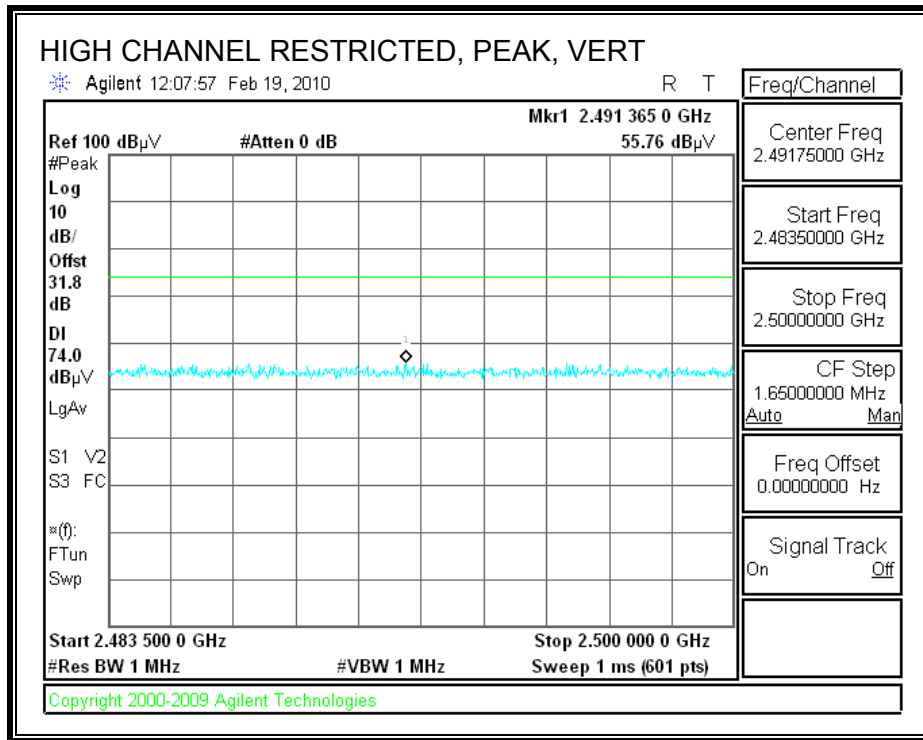

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran
 Date: 02/19/10
 Project #: 10U13068
 Company: Broadcom
 EUT Description: Bluetooth Transceiver Module 2.1 + EDR
 EUT M/N: BCM92064MD
 Test Target: FCC Class B
 Mode Oper: Tx 8PSK

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
 Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
 AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
 CL Cable Loss HPF High Pass Filter

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
Low Channel, 2402MHz													
4.804	3.0	32.0	32.7	5.8	-34.8	0.0	0.0	35.6	74.0	-38.4	V	P	
4.804	3.0	19.6	32.7	5.8	-34.8	0.0	0.0	23.2	54.0	-30.8	V	A	
4.804	3.0	31.4	32.7	5.8	-34.8	0.0	0.0	35.0	74.0	-39.0	H	P	
4.804	3.0	20.0	32.7	5.8	-34.8	0.0	0.0	23.6	54.0	-30.4	H	A	
Mid Channel, 2441MHz													
4.882	3.0	34.4	32.7	5.8	-34.8	0.0	0.0	38.1	74.0	-35.9	V	P	
4.882	3.0	25.2	32.7	5.8	-34.8	0.0	0.0	28.9	54.0	-25.1	V	A	
7.323	3.0	32.9	35.5	7.3	-34.1	0.0	0.0	41.6	74.0	-32.4	V	P	
7.323	3.0	19.7	35.5	7.3	-34.1	0.0	0.0	28.4	54.0	-25.6	V	A	
12.205	3.0	32.8	38.5	9.8	-32.5	0.0	0.0	48.6	74.0	-25.4	V	P	
12.205	3.0	20.6	38.5	9.8	-32.5	0.0	0.0	36.5	54.0	-17.5	V	A	
4.882	3.0	32.0	32.7	5.8	-34.8	0.0	0.0	35.7	74.0	-38.3	H	P	
4.882	3.0	20.7	32.7	5.8	-34.8	0.0	0.0	24.5	54.0	-29.5	H	A	
7.323	3.0	31.4	35.5	7.3	-34.1	0.0	0.0	40.0	74.0	-34.0	H	P	
7.323	3.0	19.3	35.5	7.3	-34.1	0.0	0.0	28.0	54.0	-26.0	H	A	
12.205	3.0	31.7	38.5	9.8	-32.5	0.0	0.0	47.5	74.0	-26.5	H	P	
12.205	3.0	18.2	38.5	9.8	-32.5	0.0	0.0	34.0	54.0	-20.0	H	A	
High Channel, 2480MHz													
4.960	3.0	31.4	32.8	5.9	-34.8	0.0	0.0	35.3	74.0	-38.7	V	P	
4.960	3.0	19.6	32.8	5.9	-34.8	0.0	0.0	23.4	54.0	-30.6	V	A	
7.440	3.0	32.9	35.6	7.3	-34.1	0.0	0.0	41.8	74.0	-32.2	V	P	
7.440	3.0	20.8	35.6	7.3	-34.1	0.0	0.0	29.7	54.0	-24.3	V	A	
12.400	3.0	33.6	38.4	9.9	-32.5	0.0	0.0	49.5	74.0	-24.5	V	P	
12.400	3.0	23.0	38.4	9.9	-32.5	0.0	0.0	38.9	54.0	-15.1	V	A	
4.960	3.0	31.3	32.8	5.9	-34.8	0.0	0.0	35.2	74.0	-38.8	H	P	
4.960	3.0	18.9	32.8	5.9	-34.8	0.0	0.0	22.7	54.0	-31.3	H	A	
7.440	3.0	31.2	35.6	7.3	-34.1	0.0	0.0	40.1	74.0	-33.9	H	P	
7.440	3.0	19.4	35.6	7.3	-34.1	0.0	0.0	28.3	54.0	-25.7	H	A	
12.400	3.0	29.8	38.4	9.9	-32.5	0.0	0.0	45.7	74.0	-28.3	H	P	
12.400	3.0	17.9	38.4	9.9	-32.5	0.0	0.0	33.8	54.0	-20.2	H	A	

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

7.2.2. RECEIVER ABOVE 1 GHz

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Broadcom
 Project #: 10U13068
 Date: 02/19/10
 Test Engineer: Vien Tran
 Configuration: EUT / USB Adapter / Test JIG / Laptop
 Mode: Rx Mode

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T34 HP 8449B			RX RSS 210

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.152	3.0	48.6	35.5	25.0	2.5	-38.0		0.0	38.0	25.0	74	54	-36.0	-29.0	H
1.330	3.0	47.6	34.2	25.6	2.7	-37.8		0.0	38.1	24.7	74	54	-35.9	-29.3	H
1.495	3.0	46.4	33.9	26.1	2.9	-37.6		0.0	37.9	25.4	74	54	-36.1	-28.6	H
1.152	3.0	46.9	34.3	25.0	2.5	-38.0		0.0	36.4	23.8	74	54	-37.6	-30.2	V
1.330	3.0	44.9	32.3	25.6	2.7	-37.8		0.0	35.4	22.8	74	54	-38.6	-31.2	V
1.495	3.0	43.8	31.0	26.1	2.9	-37.6		0.0	35.3	22.5	74	54	-38.7	-31.5	V

f Measurement Frequency	Amp Preamp Gain	Avg Lim Average Field Strength Limit
Dist Distance to Antenna	D Corr Distance Correct to 3 meters	Pk Lim Peak Field Strength Limit
Read Analyzer Reading	Avg Average Field Strength @ 3 m	Avg Mar Margin vs. Average Limit
AF Antenna Factor	Peak Calculated Peak Field Strength	Pk Mar Margin vs. Peak Limit
CL Cable Loss	HPF High Pass Filter	

7.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL & VERTICAL DATA

High Frequency Measurement

Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran
 Date: 02/25/10
 Project #: 10U13068
 Company: Broadcom
 EUT Description: Bluetooth Transceiver Module 2.1 + EDR
 EUT M/N: BCM92064MD
 Test Target: FCC Class B
 Mode Oper: Tx Worst-Case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters
 Read Analyzer Reading Filter Filter Insert Loss
 AF Antenna Factor Corr. Calculated Field Strength
 CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
Horizontal													
71.882	3.0	51.1	8.2	0.7	28.3	0.0	0.0	31.7	40.0	-8.3	H	P	
204.127	3.0	53.1	11.9	1.2	27.4	0.0	0.0	38.8	43.5	-4.7	H	P	
598.583	3.0	37.0	18.4	2.2	28.6	0.0	0.0	29.0	46.0	-17.0	H	P	
997.240	3.0	36.3	22.7	2.9	27.6	0.0	0.0	34.3	54.0	-19.7	H	P	
Vertical													
60.001	3.0	52.4	7.9	0.7	28.3	0.0	0.0	32.7	40.0	-7.3	V	P	
144.005	3.0	46.9	12.9	1.0	27.9	0.0	0.0	33.0	43.5	-10.5	V	P	
432.017	3.0	38.6	15.6	1.8	28.2	0.0	0.0	27.8	46.0	-18.2	V	P	
933.277	3.0	37.9	22.3	2.8	27.8	0.0	0.0	35.2	46.0	-10.8	V	P	
997.120	3.0	37.9	22.7	2.9	27.6	0.0	0.0	35.9	54.0	-18.1	V	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

8. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * \text{D}^2)$$

where

- S = Power density in W/m²
- EIRP = Equivalent Isotropic Radiated Power in W
- D = Separation distance in m

Power density in units of W/m² is converted to units of mWc/m² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

where

- D = Separation distance in m
- EIRP = Equivalent Isotropic Radiated Power in W
- S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

- Px = Power of transmitter x
- Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²
From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	Bluetooth	0.20	5.47	6.25	0.030	0.003