




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 9:52:29 AM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	4.91 V/m
Test Frequency:	2437MHz	SAR 1g:	0.065 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.12 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

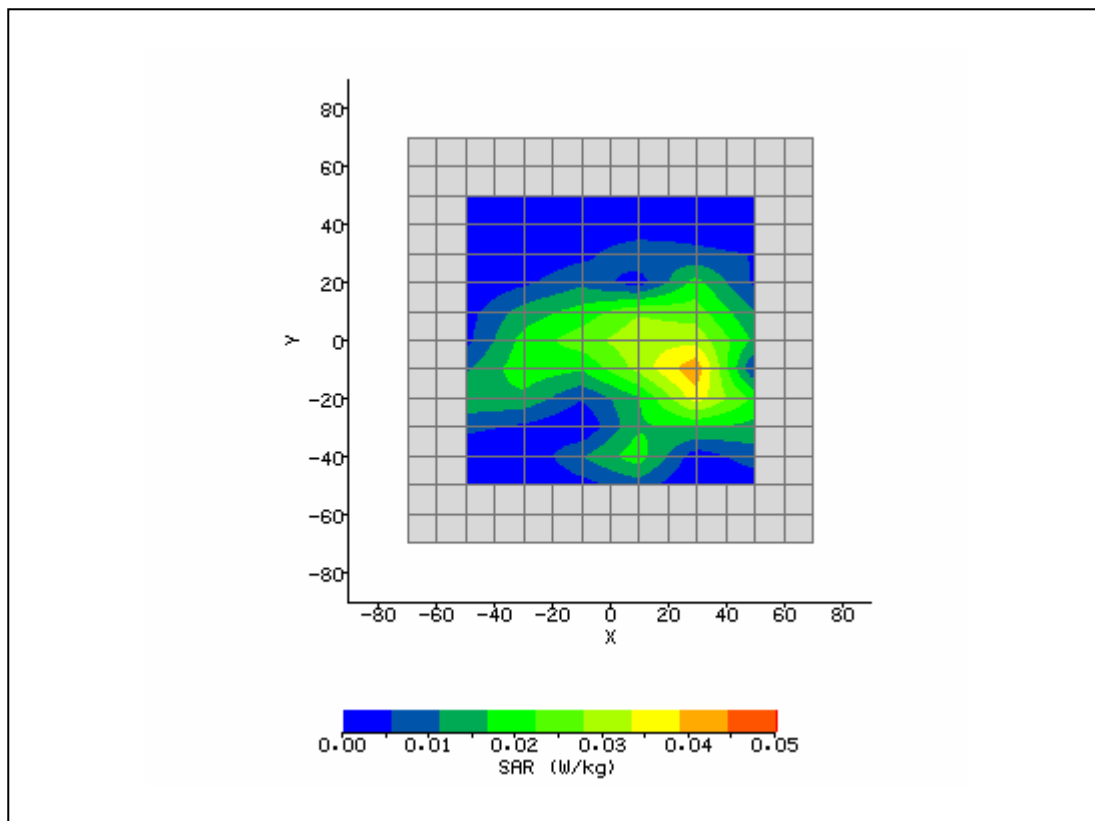


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 9:33:39 AM	DUT Battery Model/No:	
Filename:	Main_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	15.90 V/m
Test Frequency:	2437MHz	SAR 1g:	0.613 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.054 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

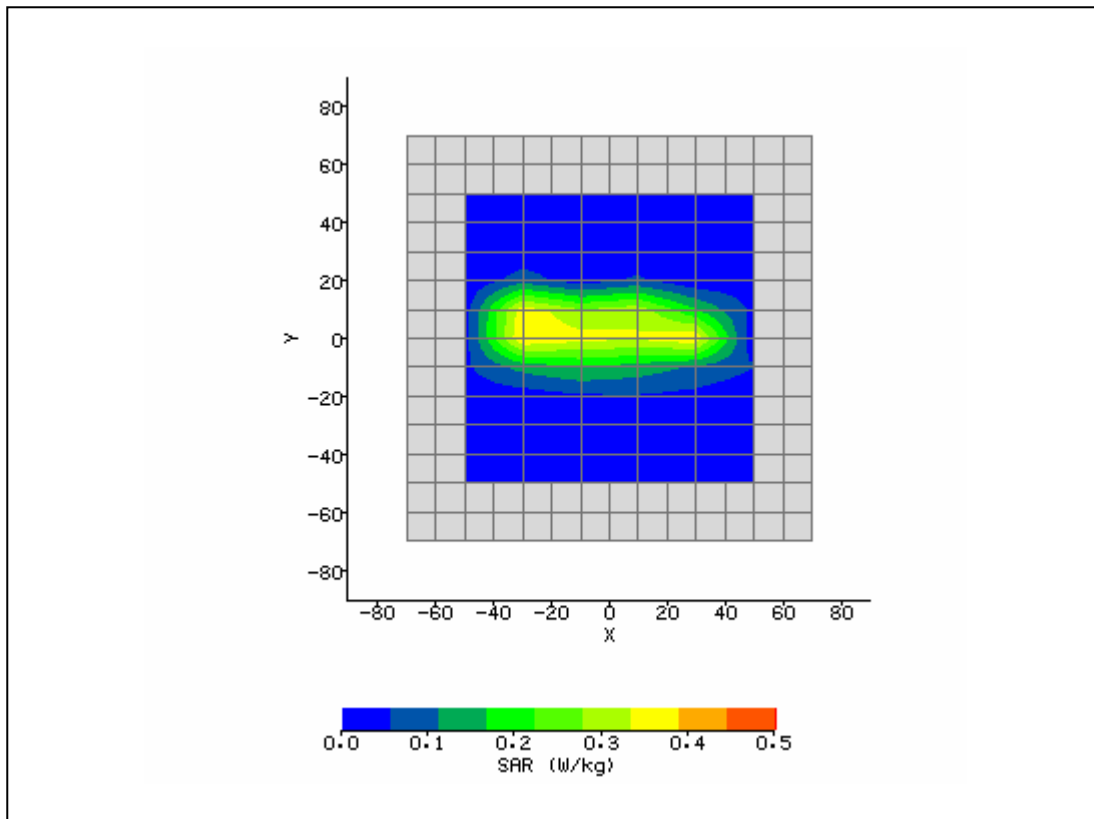


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 10:14:10 AM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.40 mm
DUT Position:	Side	Max SAR Y-axis Location:	6.60 mm
Antenna Configuration:	Main Yageo	Max E Field:	8.23 V/m
Test Frequency:	2437MHz	SAR 1g:	0.187 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

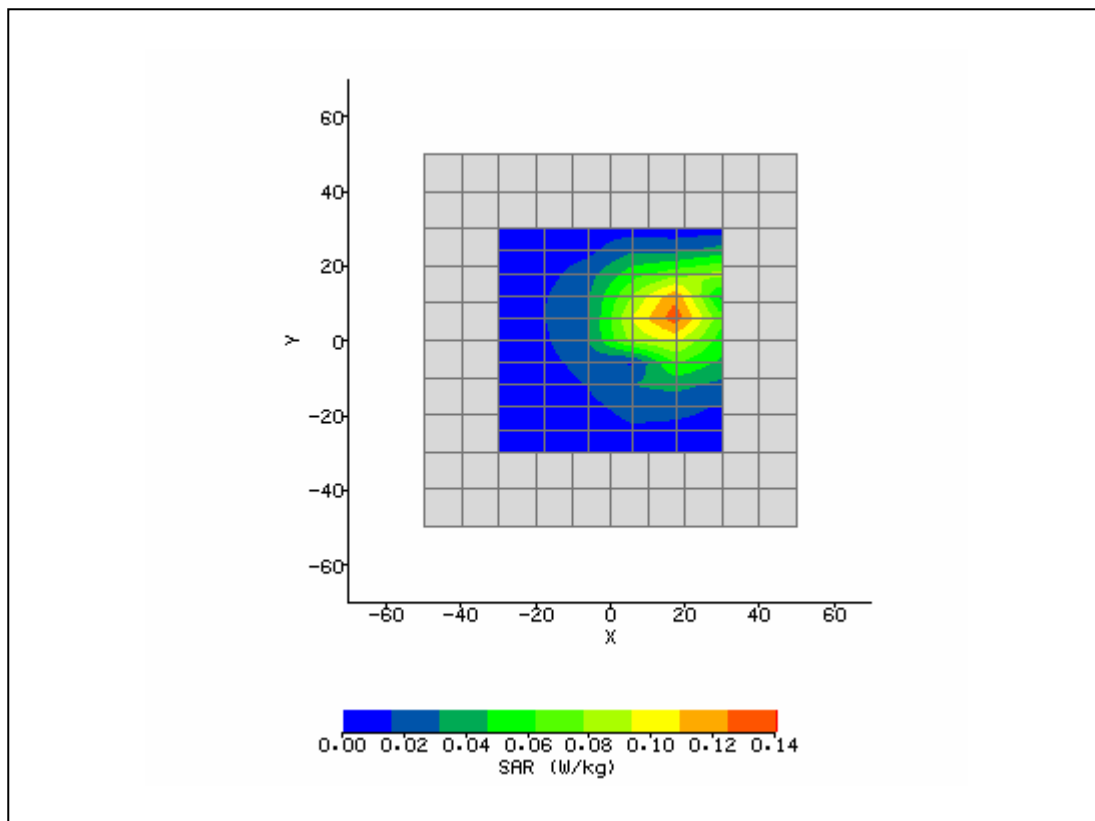


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 10:09:36 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-12.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	7.47 V/m
Test Frequency:	2437MHz	SAR 1g:	0.157 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.011 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

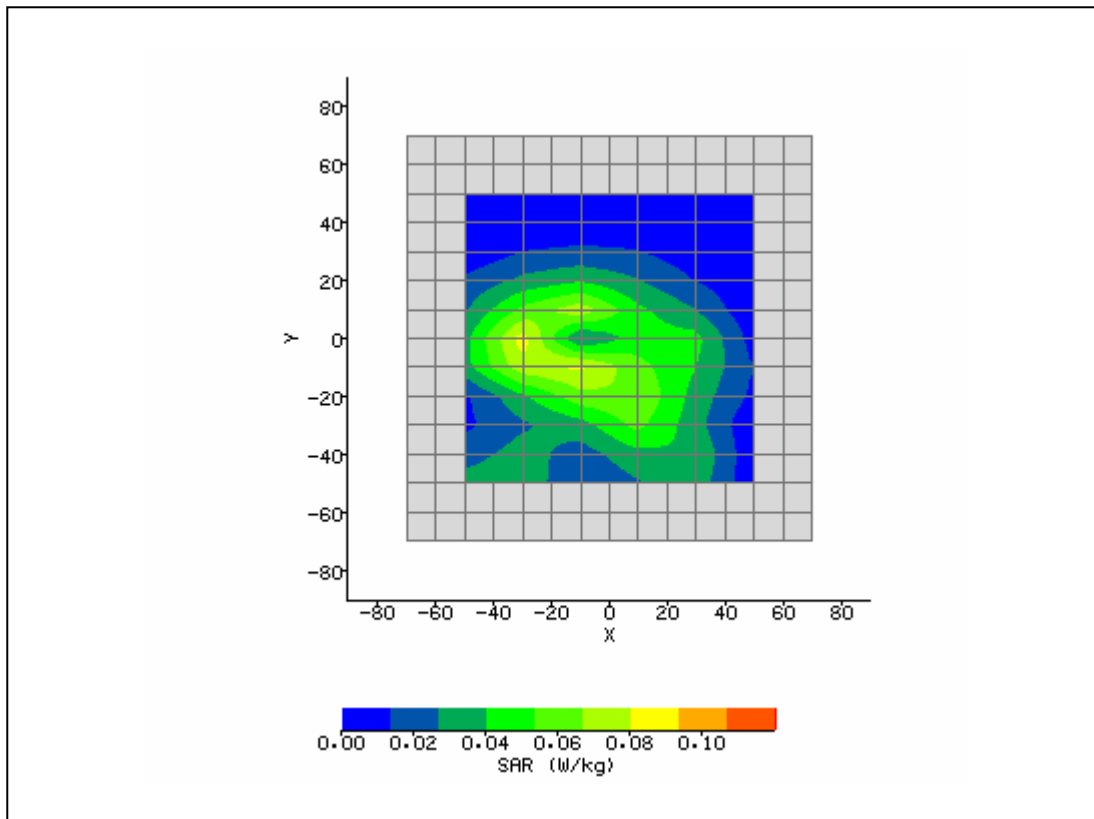


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 10:30:29 AM	DUT Battery Model/No:	
Filename:	Aux_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	13.49 V/m
Test Frequency:	2437MHz	SAR 1g:	0.512 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.051 W/kg
Type of Modulation:		SAR End:	0.049 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

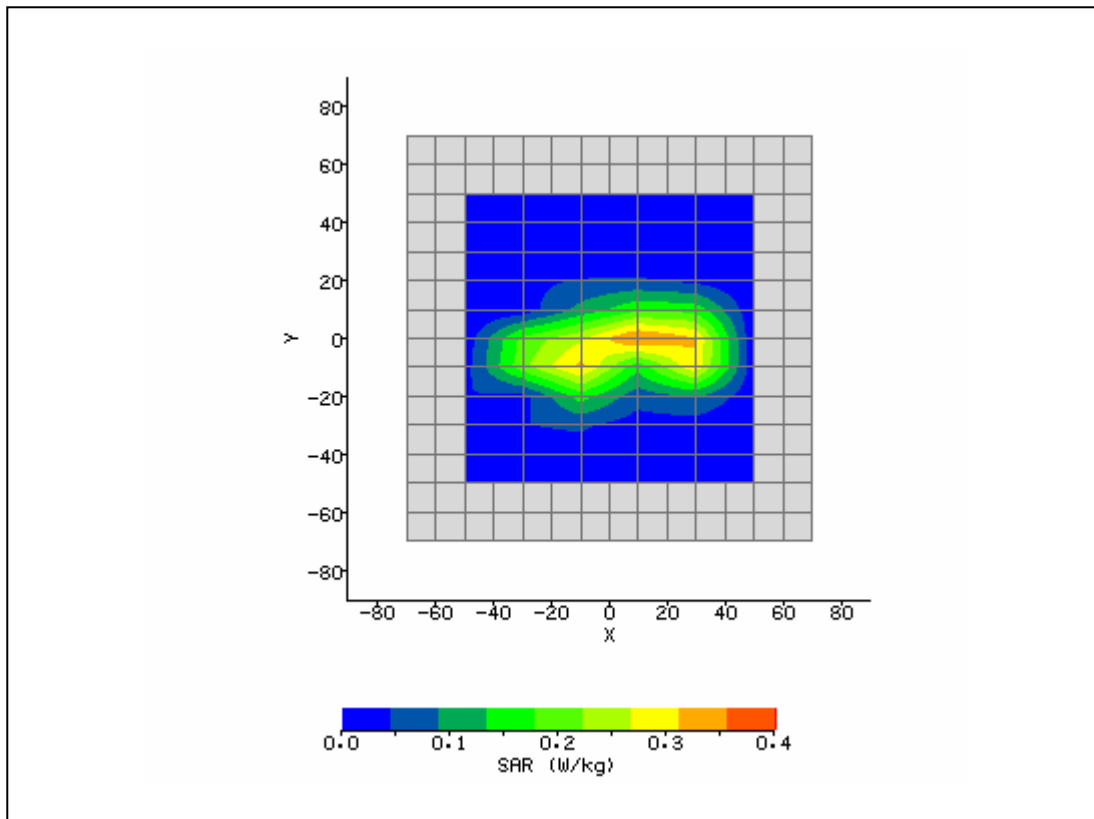


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 10:46:21 AM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	13.20 mm
DUT Position:	Side	Max SAR Y-axis Location:	-5.40 mm
Antenna Configuration:	Aux Yageo	Max E Field:	6.88 V/m
Test Frequency:	2437MHz	SAR 1g:	0.124 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

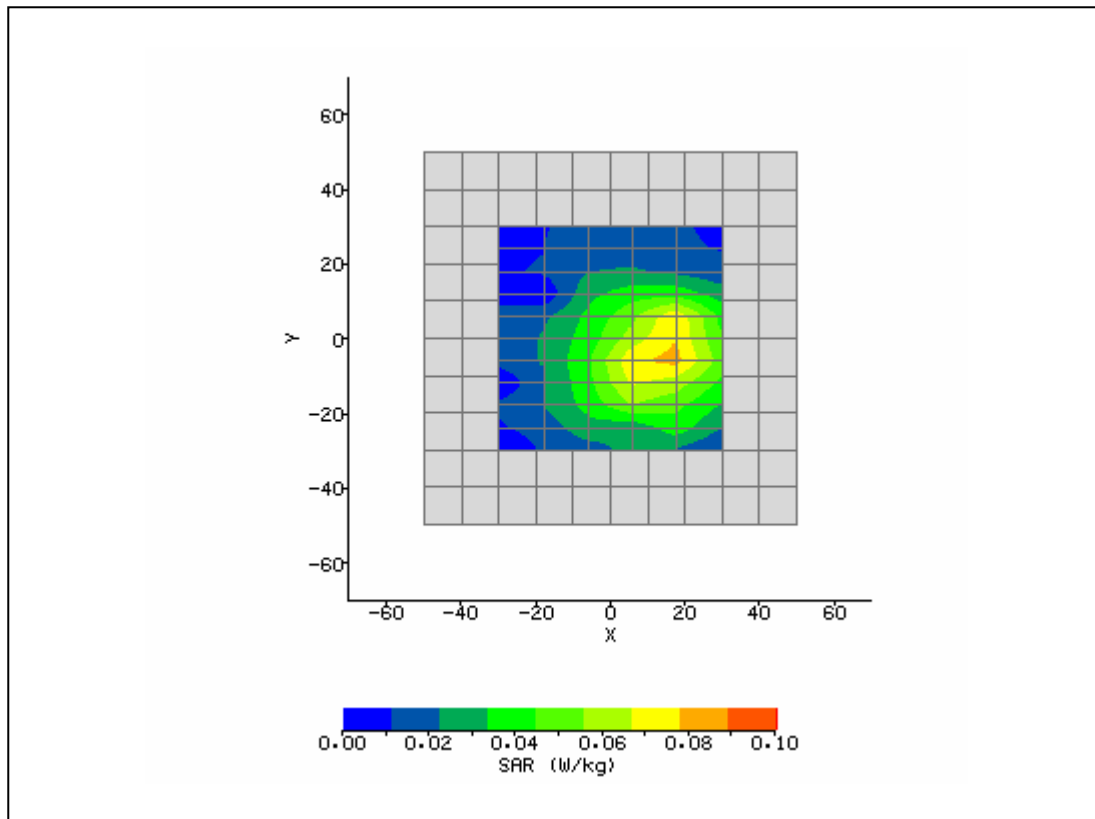


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 1:25:30 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	6.82 V/m
Test Frequency:	2437MHz	SAR 1g:	0.121 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.004 W/kg
Type of Modulation:		SAR End:	0.004 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

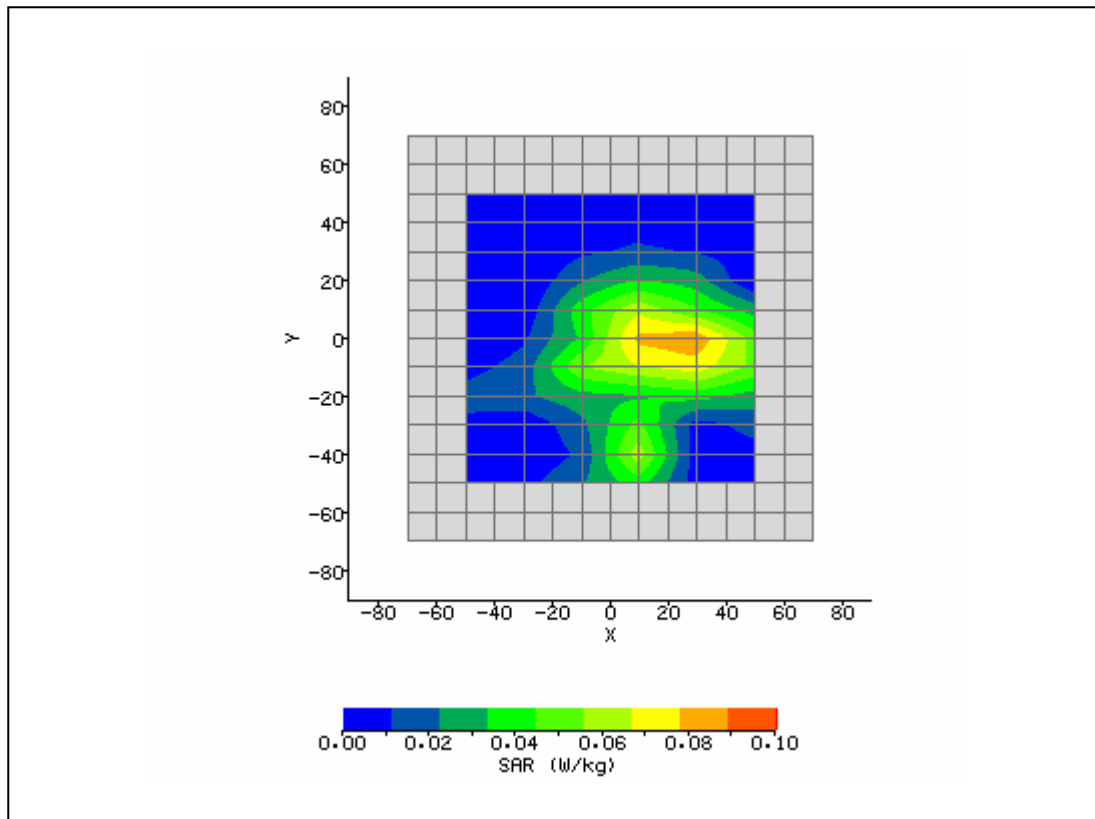


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 1:41:54 PM	DUT Battery Model/No:	
Filename:	Main_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	7.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	13.37 V/m
Test Frequency:	2437MHz	SAR 1g:	0.463 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.028 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

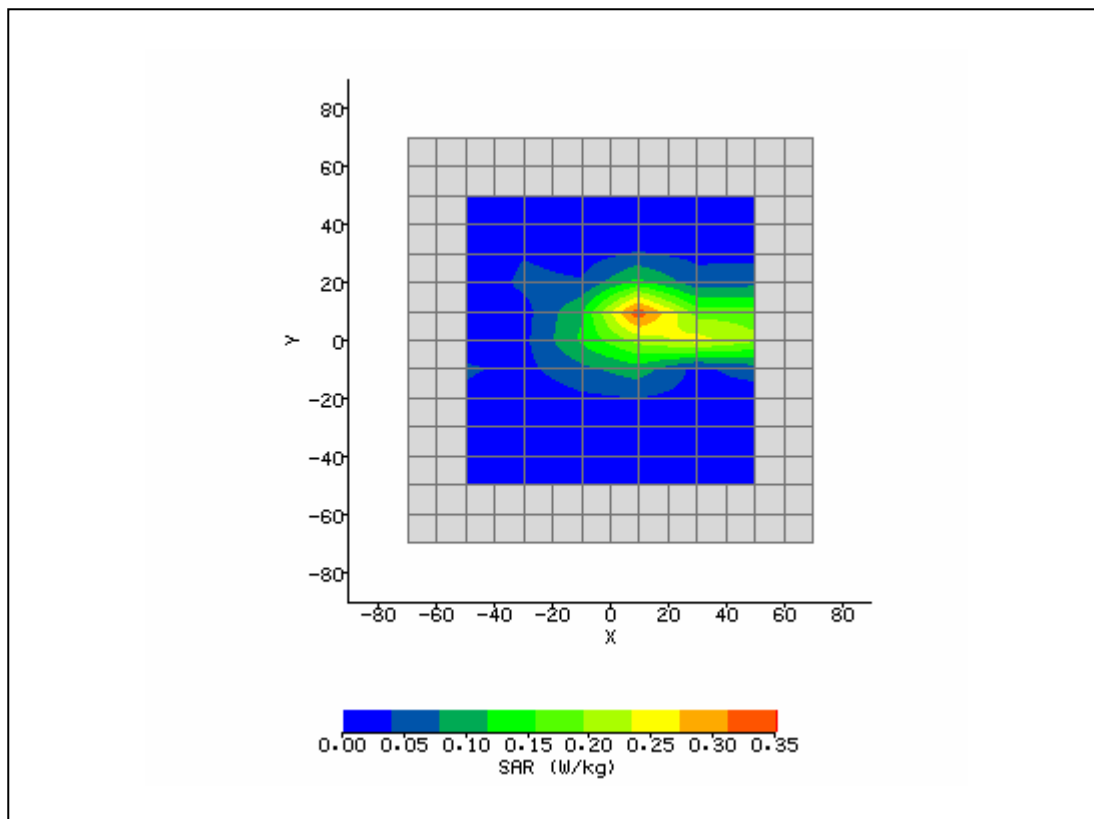


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 2:00:08 PM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	7.21 V/m
Test Frequency:	2437MHz	SAR 1g:	0.135 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

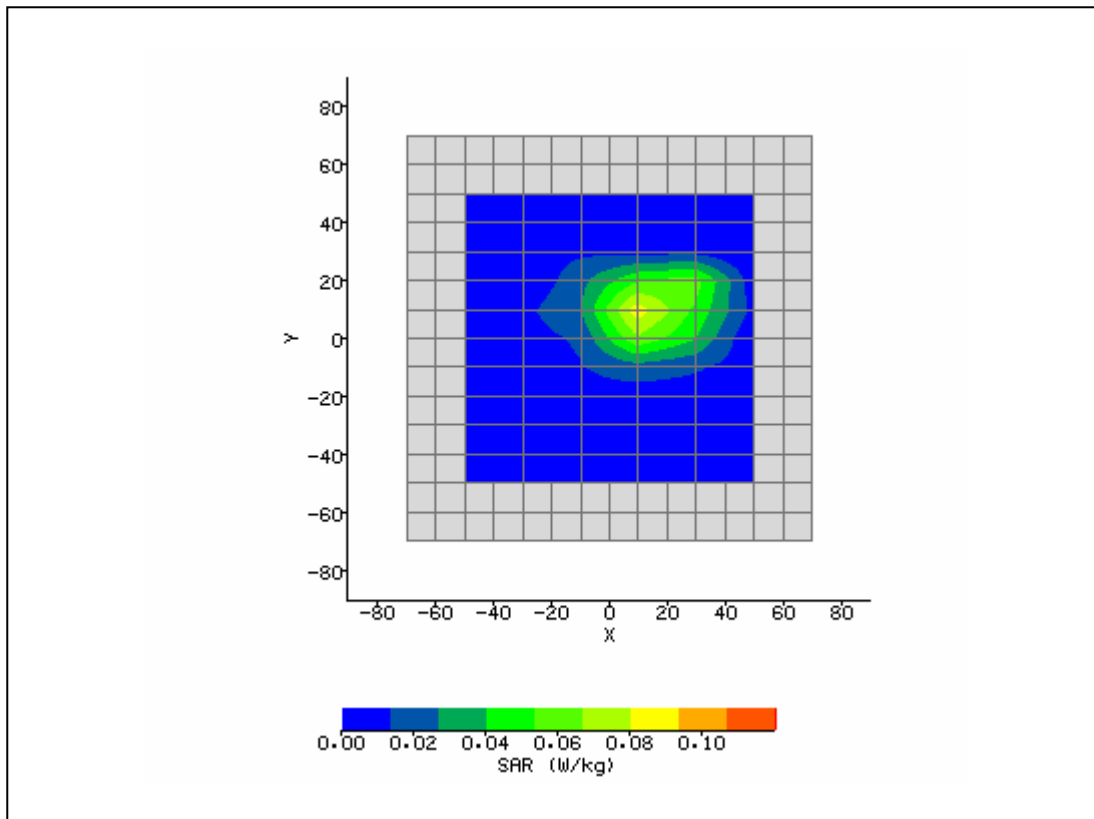


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 2:50:31 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	8.13 V/m
Test Frequency:	2437MHz	SAR 1g:	0.177 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

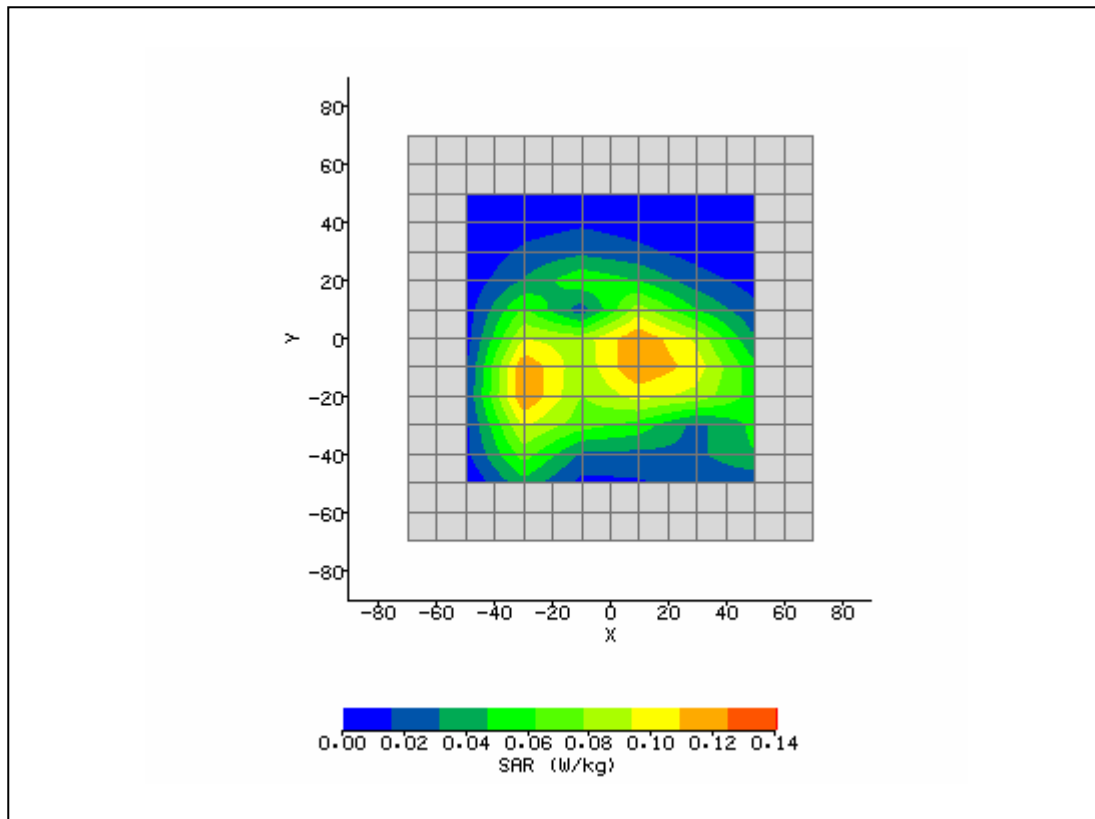


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 11:12:55 AM	DUT Battery Model/No:	
Filename:	Aux_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	17.68 V/m
Test Frequency:	2437MHz	SAR 1g:	0.833 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

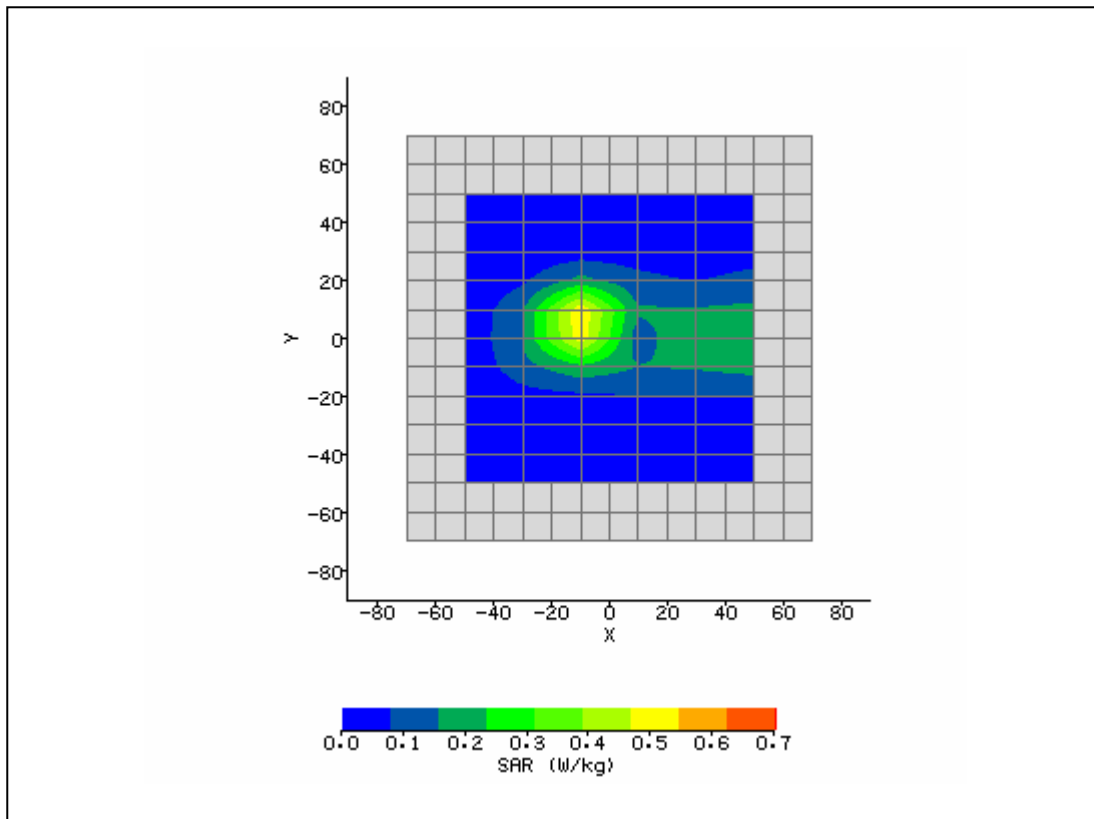


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 2:17:29 PM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	9.40 V/m
Test Frequency:	2437MHz	SAR 1g:	0.229 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.016 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

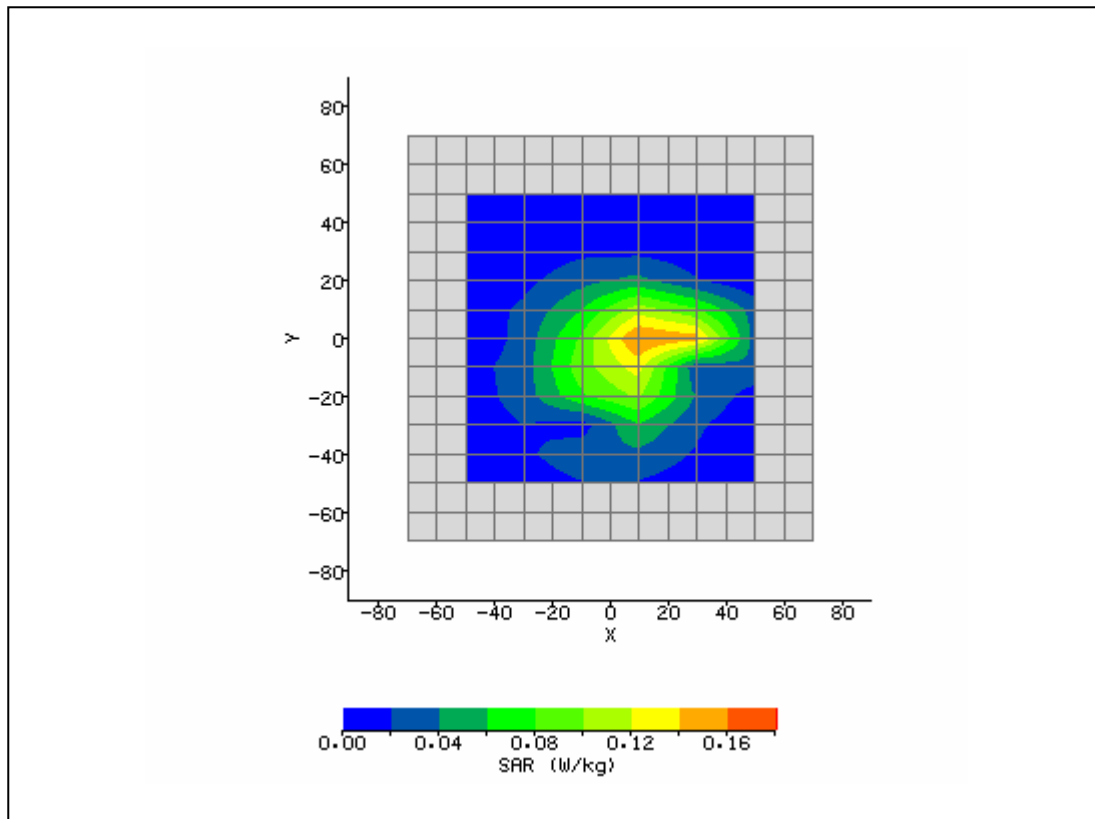


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 11:32:58 AM	DUT Battery Model/No:	
Filename:	Aux_Top_1.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.37
Relative Humidity:	45.6%	Conductivity:	1.93
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	18.11 V/m
Test Frequency:	2412MHz	SAR 1g:	0.765 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.360 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.071 W/kg
Type of Modulation:		SAR End:	0.075 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

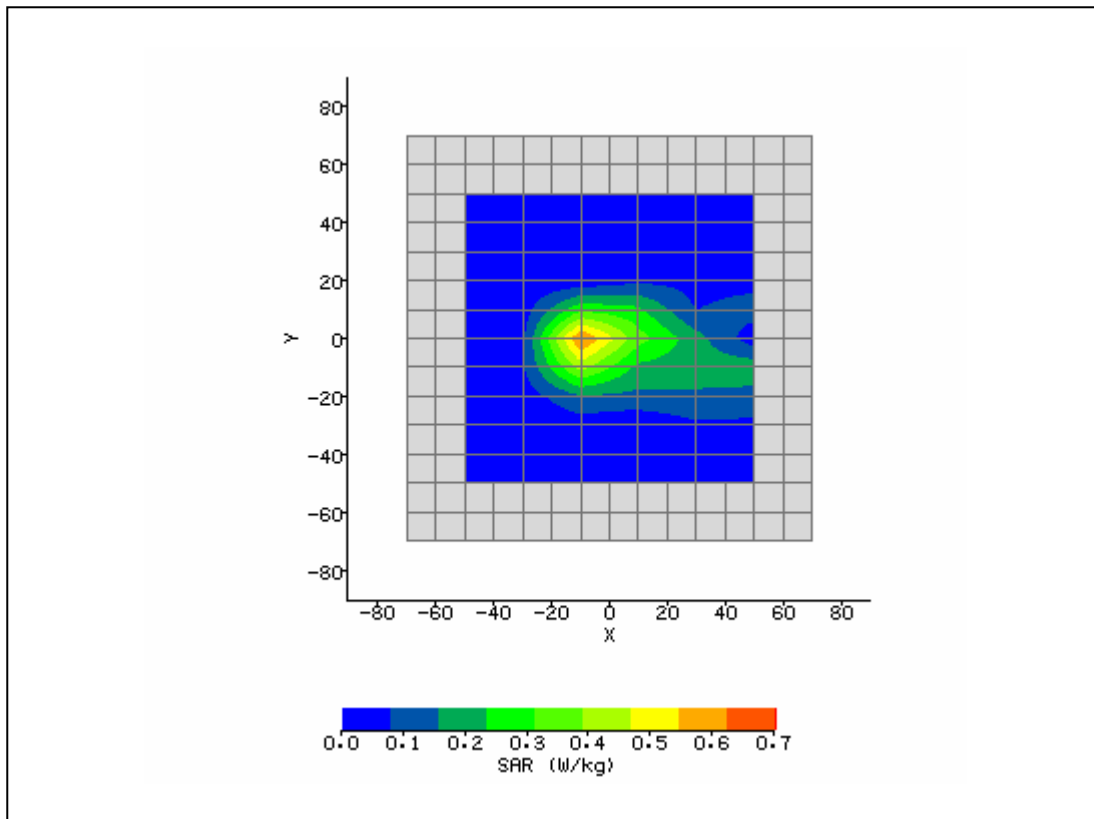


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 11:49:57 AM	DUT Battery Model/No:	
Filename:	Aux_Top_11.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	1.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	18.31 V/m
Test Frequency:	2462MHz	SAR 1g:	0.891 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.071 W/kg
Type of Modulation:		SAR End:	0.070 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.69 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

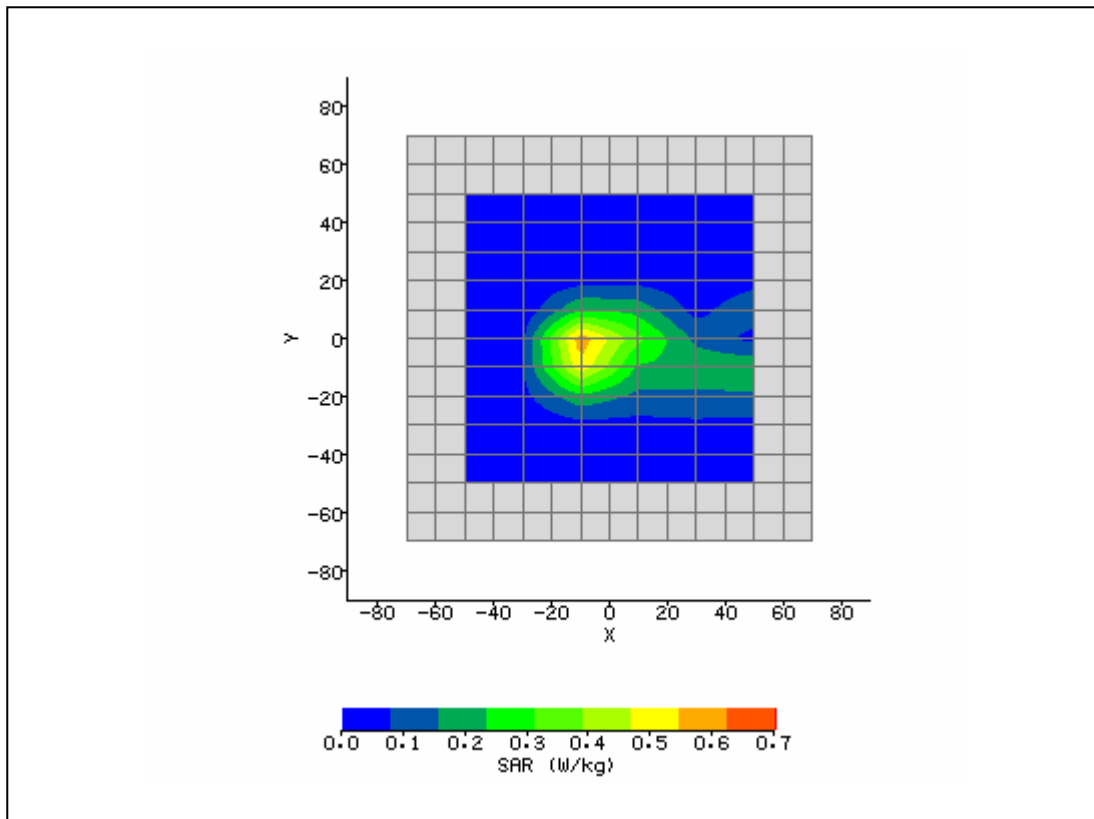


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 9:47:39 AM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	22.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-13.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	6.92 V/m
Test Frequency:	2437MHz	SAR 1g:	0.130 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.068 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.011 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

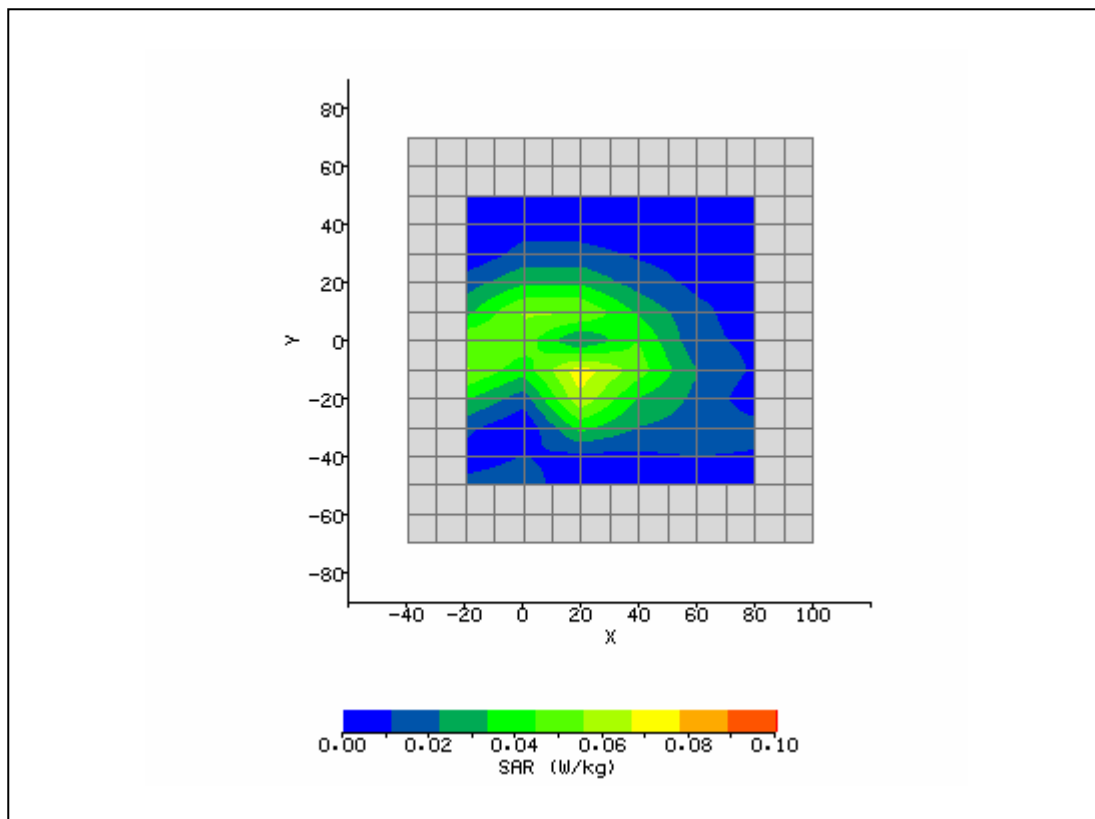


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 3:29:33 PM	DUT Battery Model/No:	
Filename:	Main_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	13.63 V/m
Test Frequency:	2437MHz	SAR 1g:	0.423 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.038 W/kg
Type of Modulation:		SAR End:	0.038 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

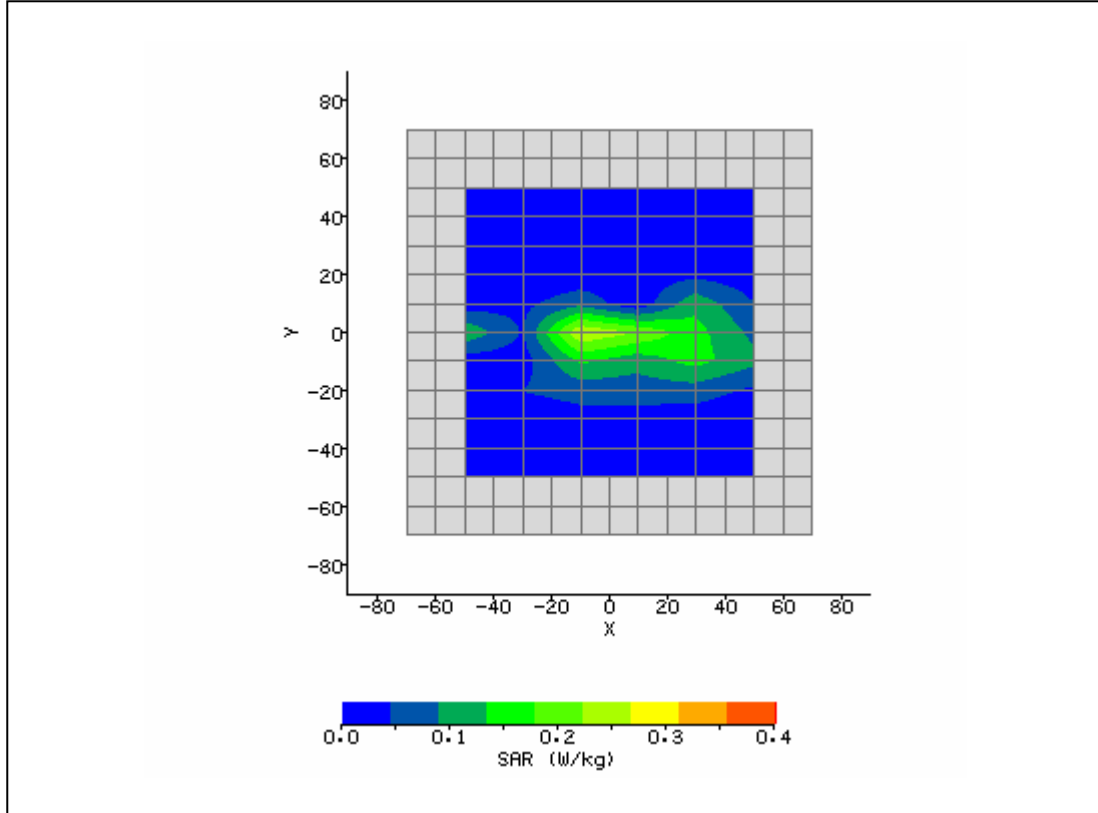


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 1:01:46 PM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.40 mm
DUT Position:	Side	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Main Amphenol	Max E Field:	6.42 V/m
Test Frequency:	2437MHz	SAR 1g:	0.109 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.38 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

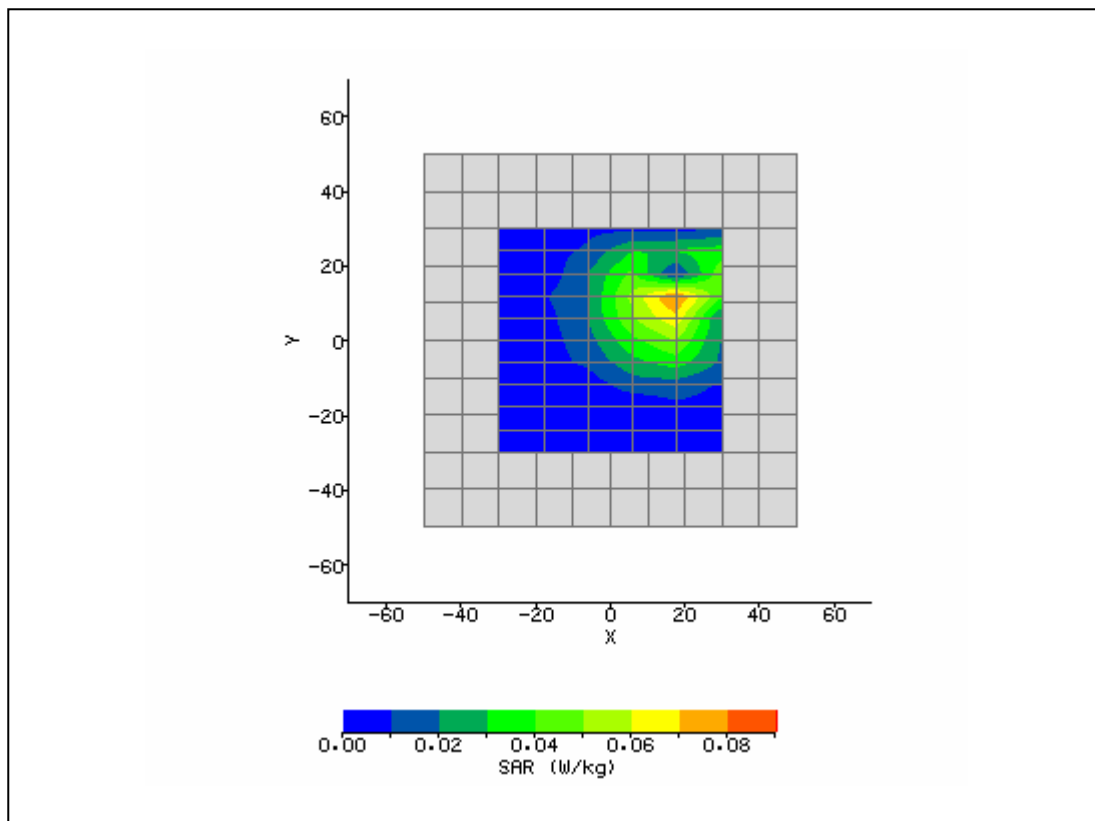


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 1:58:10 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-8.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	5.76 V/m
Test Frequency:	2437MHz	SAR 1g:	0.088 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

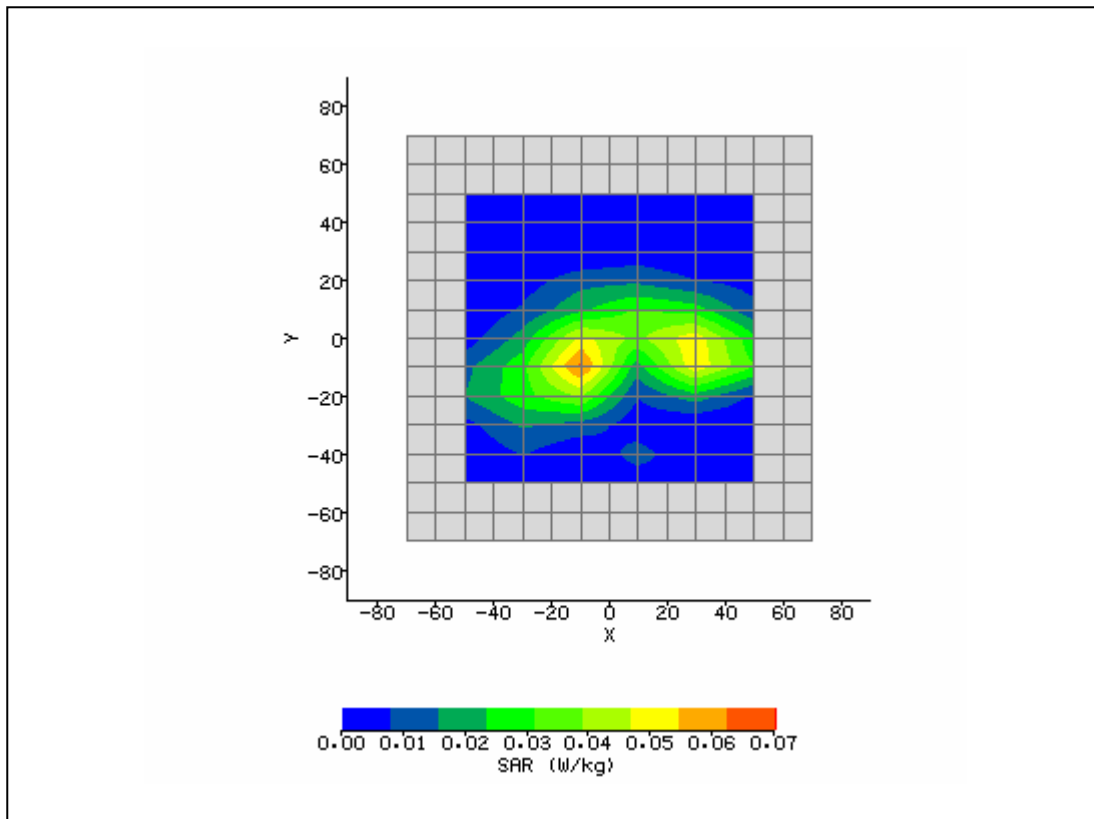


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 1:41:24 PM	DUT Battery Model/No:	
Filename:	Aux_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-32.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	2.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	20.94 V/m
Test Frequency:	2437MHz	SAR 1g:	1.103 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.064 W/kg
Type of Modulation:		SAR End:	0.061 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

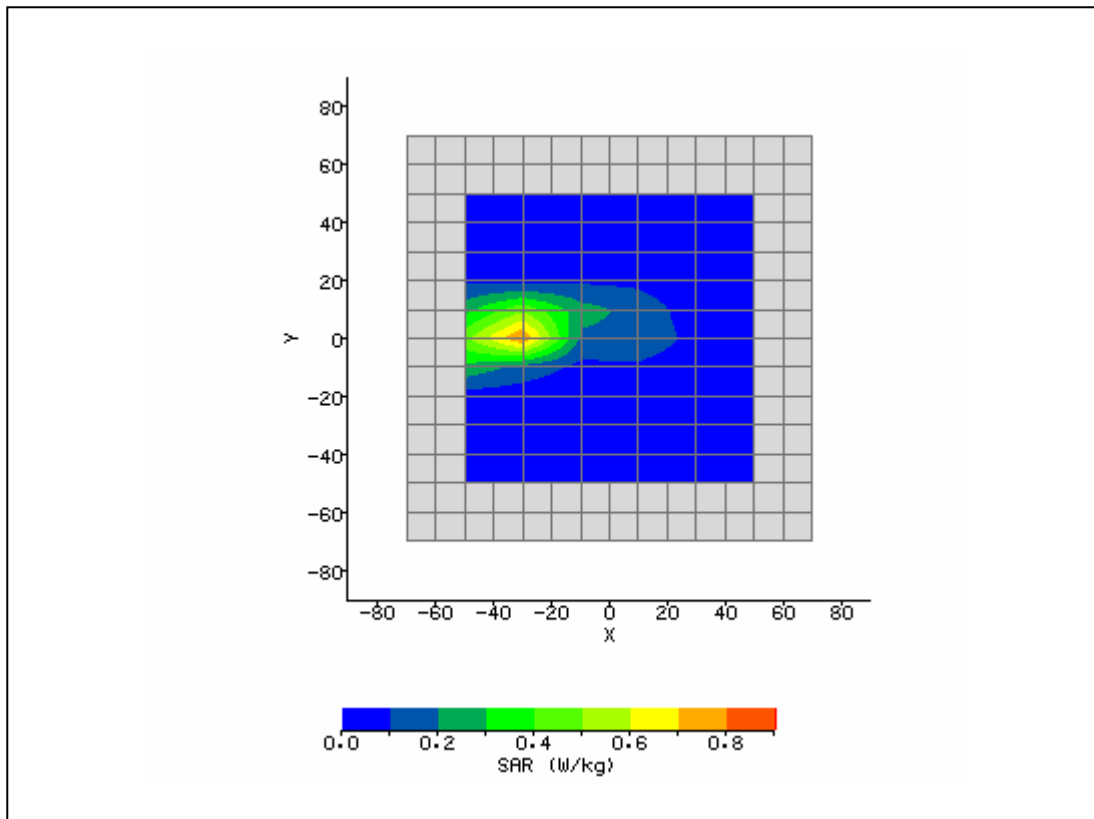


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 1:18:43 PM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.80 mm
DUT Position:	Side	Max SAR Y-axis Location:	-6.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	5.66 V/m
Test Frequency:	2437MHz	SAR 1g:	0.073 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

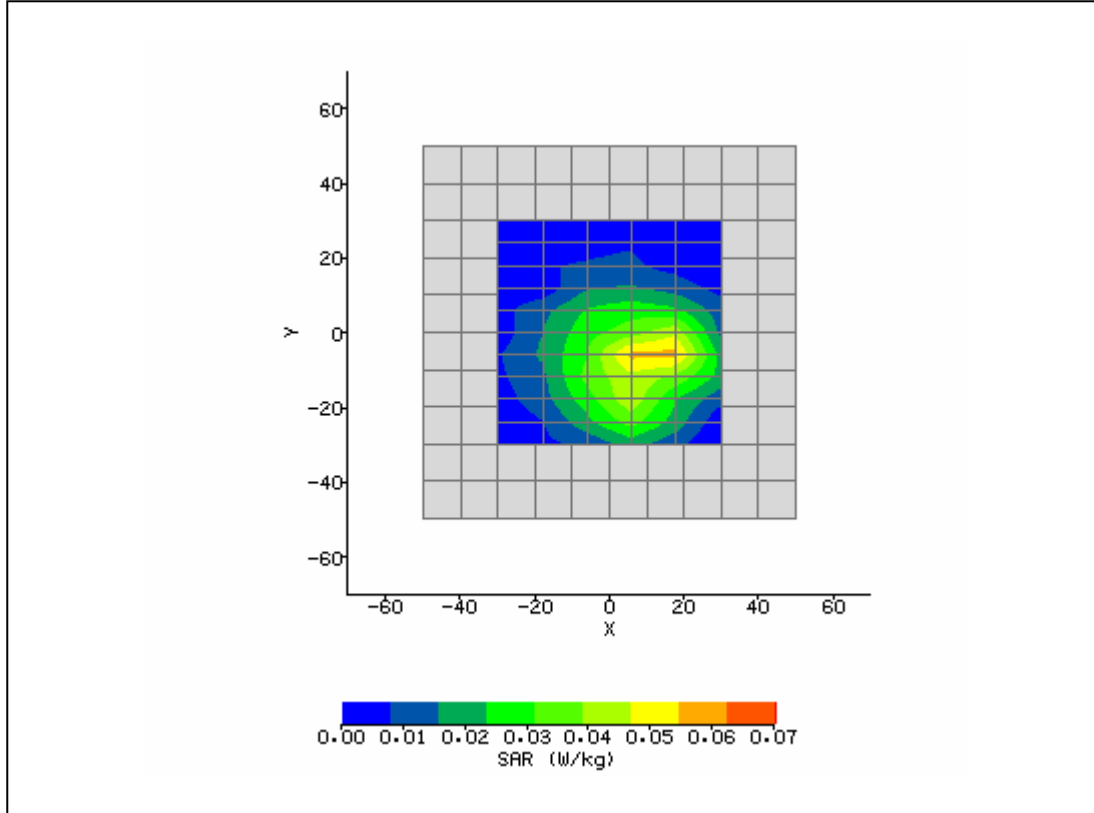


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 10:49:00 AM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-3.60 mm
DUT Position:	Lap	Max SAR Y-axis Location:	1.80 mm
Antenna Configuration:	Main Amphenol	Max E Field:	6.03 V/m
Test Frequency:	2437MHz	SAR 1g:	0.093 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.007 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

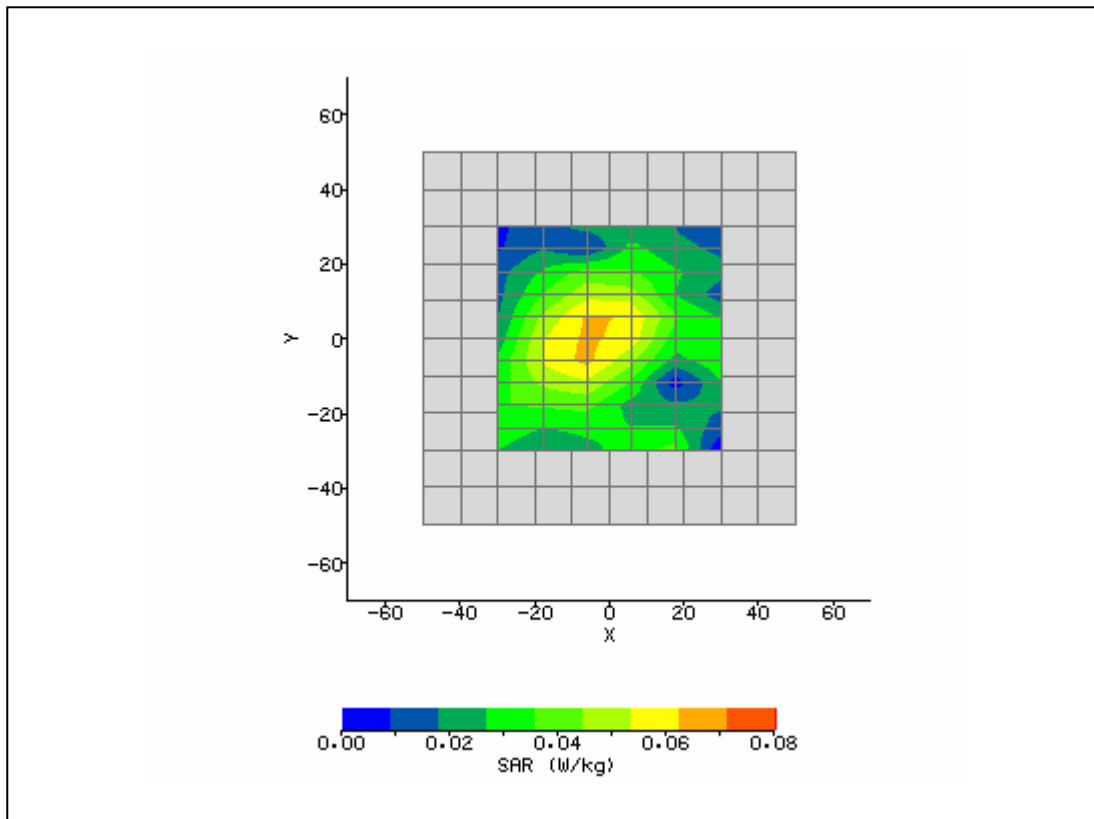


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 11:05:43 AM	DUT Battery Model/No:	
Filename:	Main_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.80 mm
DUT Position:	Top	Max SAR Y-axis Location:	6.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	15.78 V/m
Test Frequency:	2437MHz	SAR 1g:	0.649 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.051 W/kg
Type of Modulation:		SAR End:	0.049 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

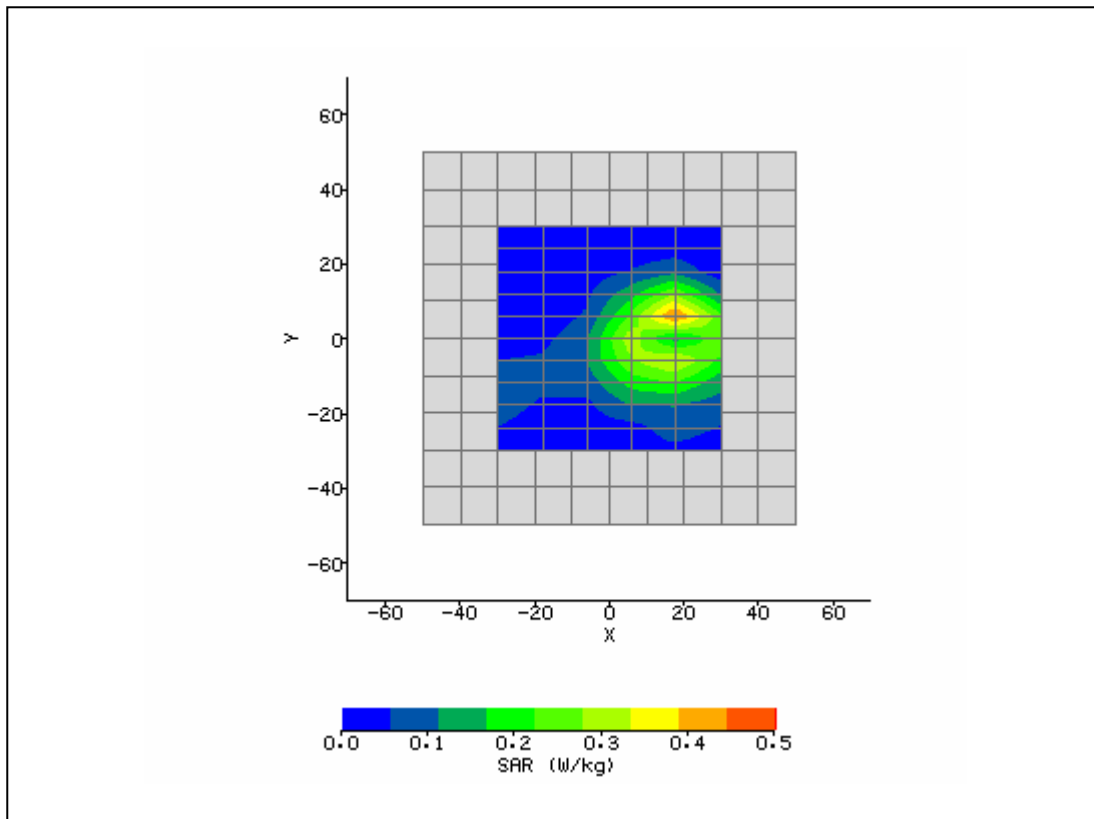


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 10:31:48 AM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	7.20 mm
Antenna Configuration:	Main Amphenol	Max E Field:	5.31 V/m
Test Frequency:	2437MHz	SAR 1g:	0.187 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.083 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

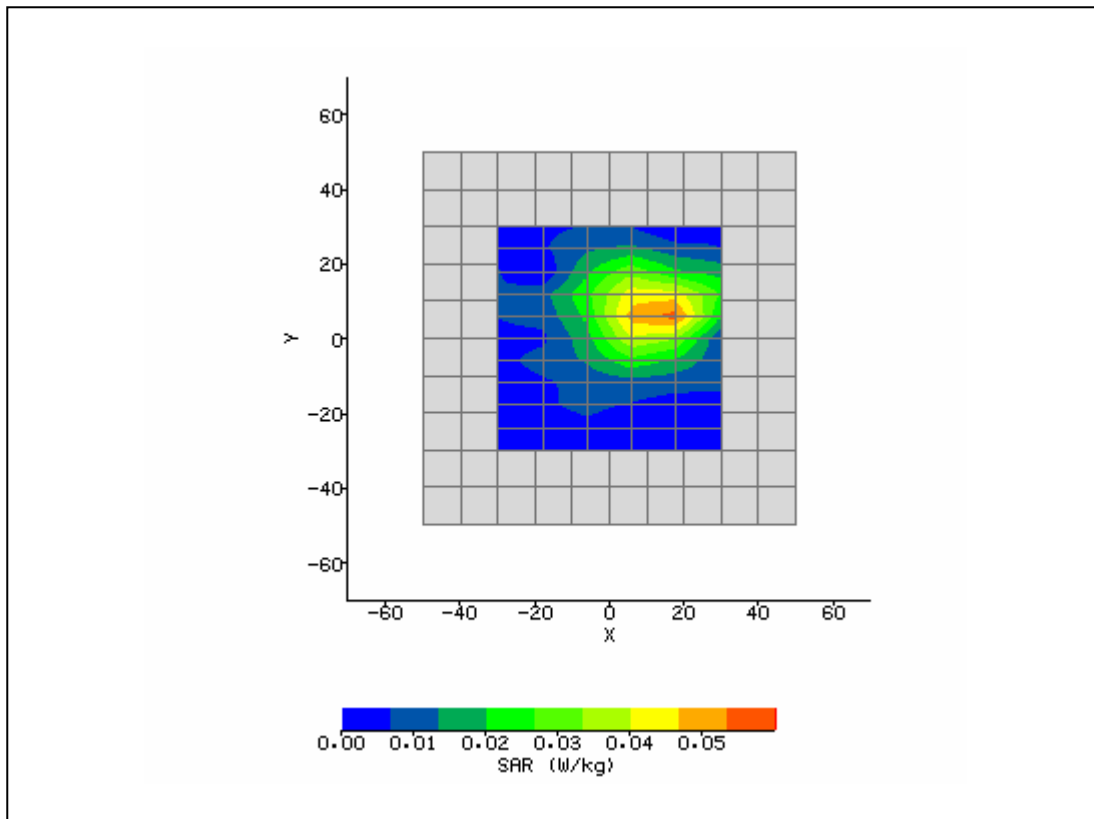


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 12:12:17 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.53 V/m
Test Frequency:	2437MHz	SAR 1g:	0.000 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.000 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

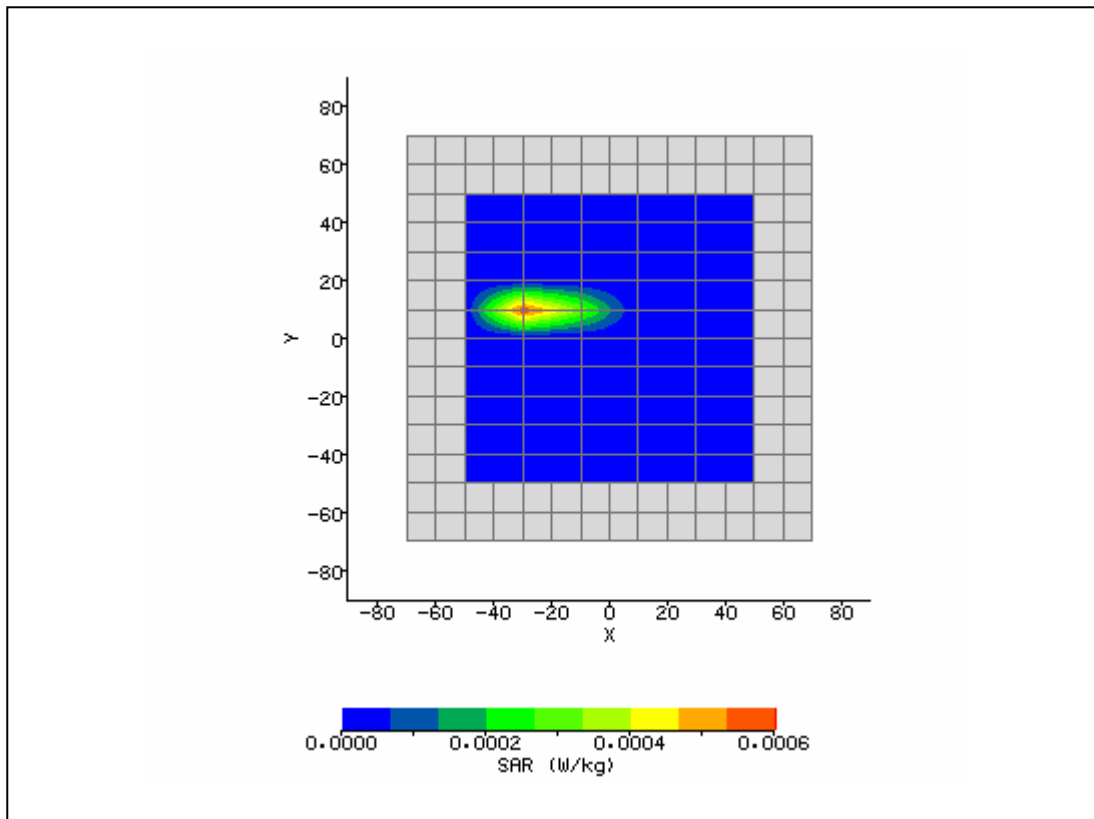


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 11:25:03 AM	DUT Battery Model/No:	
Filename:	Aux_Top_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.80 mm
DUT Position:	Top	Max SAR Y-axis Location:	12.60 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	3.23 V/m
Test Frequency:	2437MHz	SAR 1g:	0.026 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.012 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

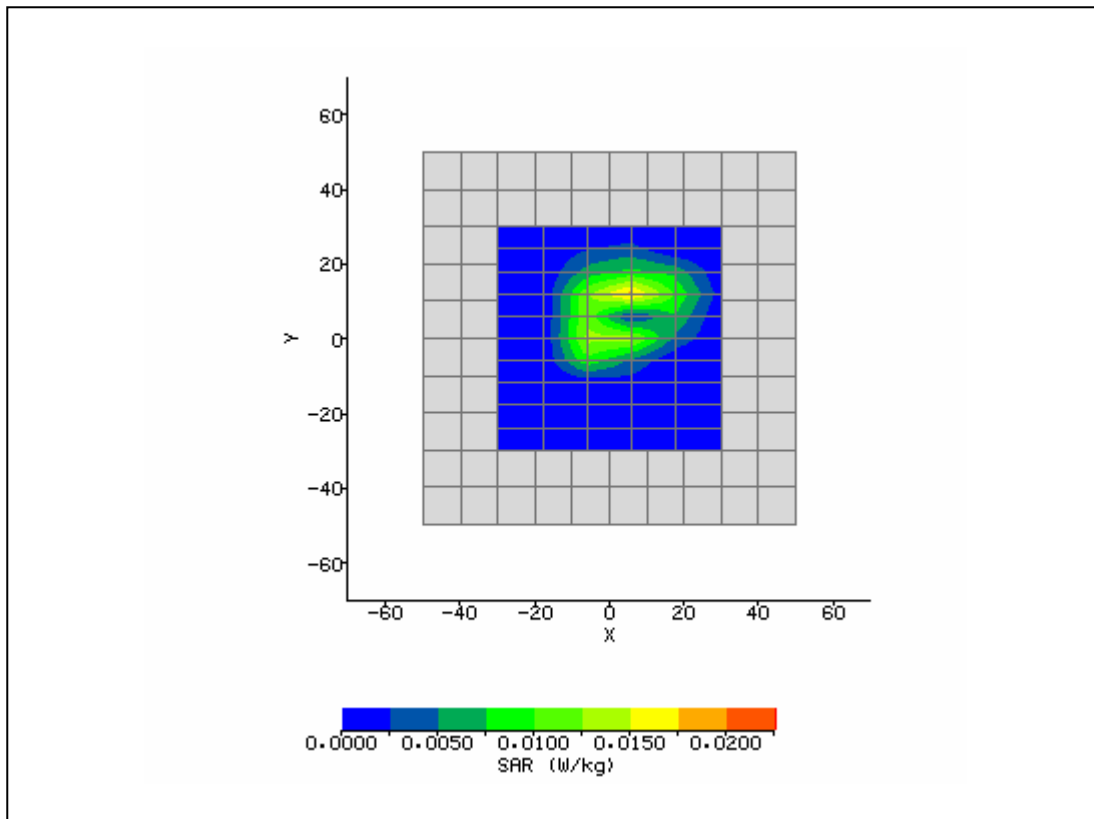


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 11:48:15 AM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-1.20 mm
DUT Position:	Side	Max SAR Y-axis Location:	12.60 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	1.18 V/m
Test Frequency:	2437MHz	SAR 1g:	0.002 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

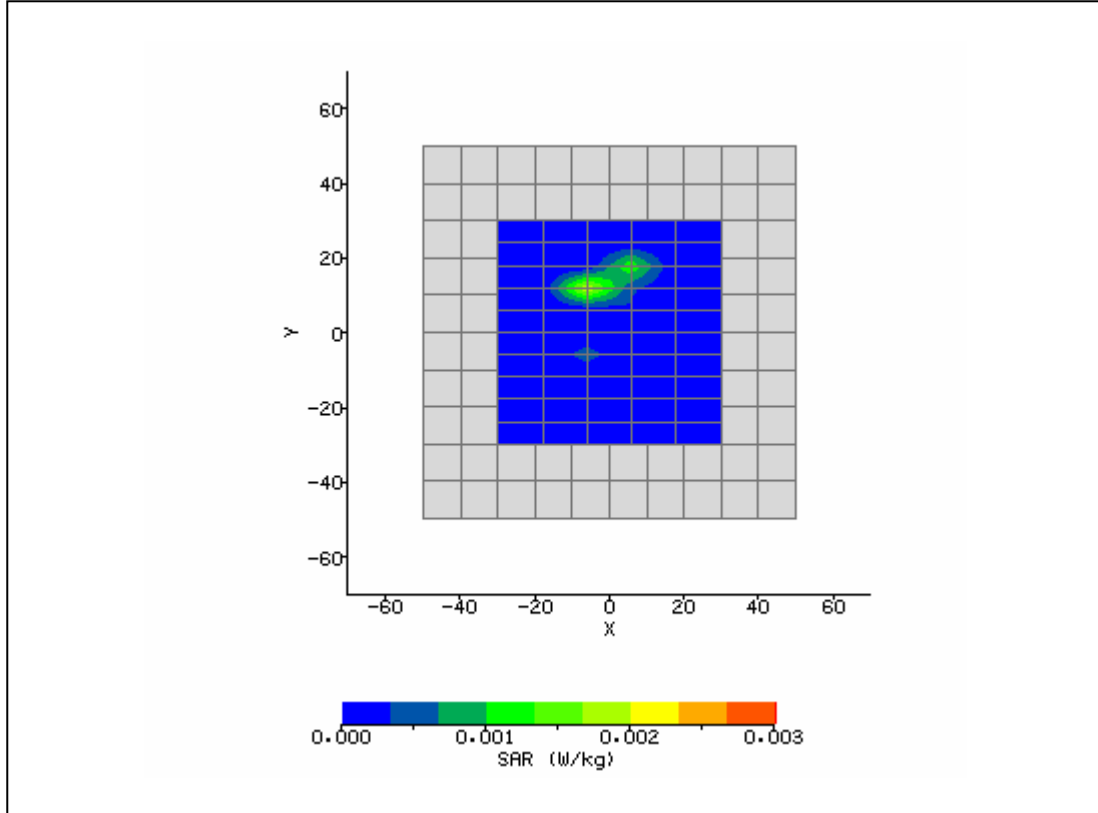


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 2:18:38 PM	DUT Battery Model/No:	
Filename:	Aux_Top_1.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.37
Relative Humidity:	45.6%	Conductivity:	1.93
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-38.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-6.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	21.16 V/m
Test Frequency:	2412MHz	SAR 1g:	1.057 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.069 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.36 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

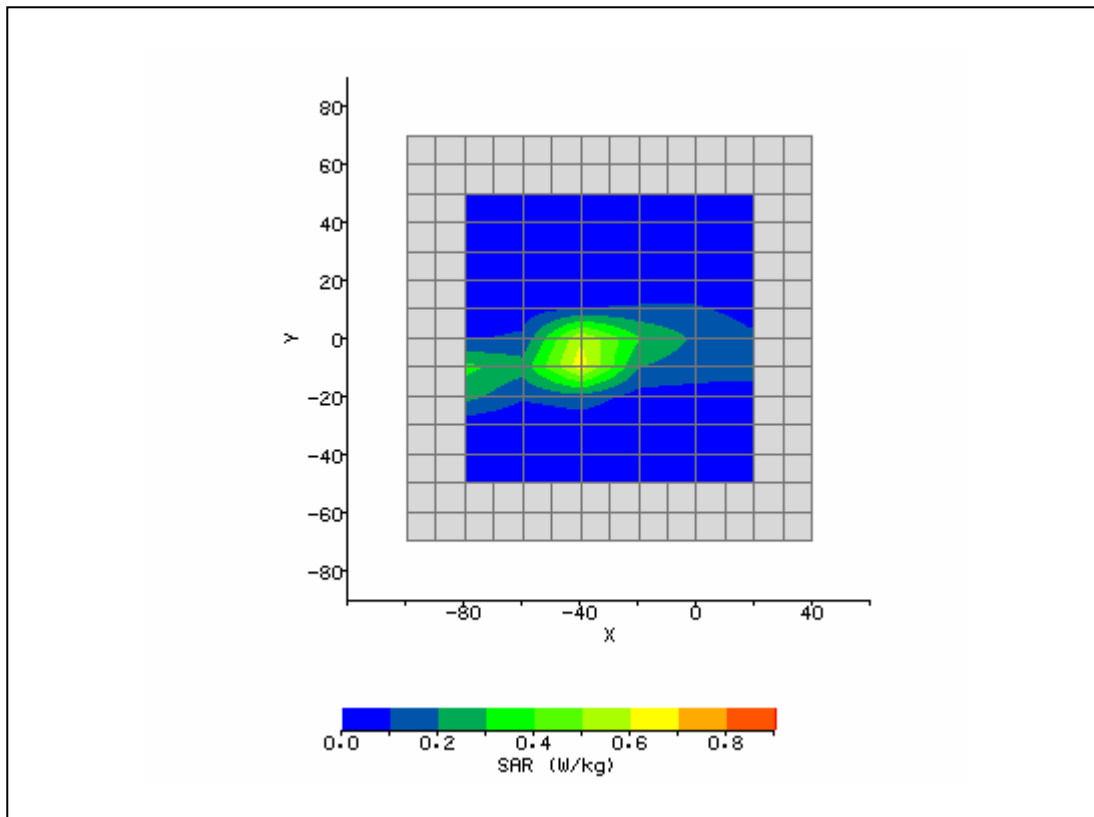

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 2:35:54 PM	DUT Battery Model/No:	
Filename:	Aux_Top_11.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94312HMG Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	1.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-34.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	20.79 V/m
Test Frequency:	2462MHz	SAR 1g:	1.130 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.057 W/kg
Type of Modulation:		SAR End:	0.057 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.75 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

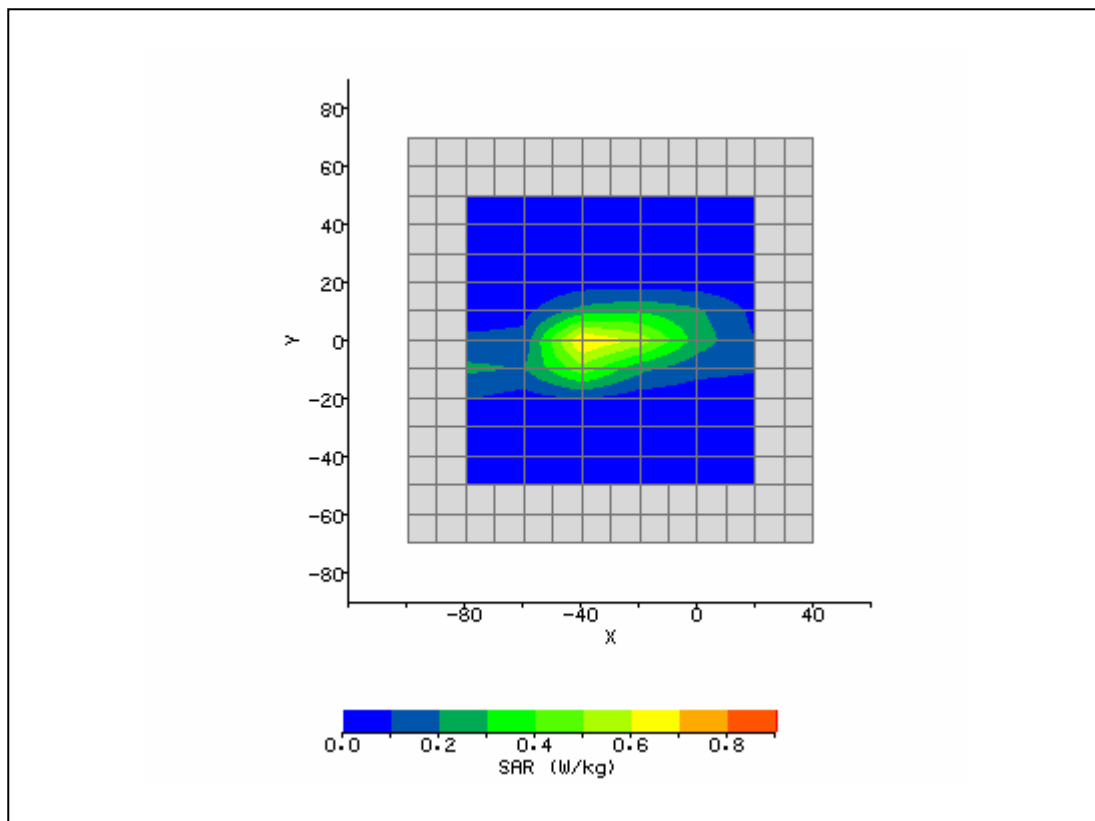

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/14/2008 8:39:46 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.1°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.38
Relative Humidity:	47.3%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-6.00 mm
Antenna Configuration:	Dipole	Max E Field:	148.93 V/m
Test Frequency:	2450MHz	SAR 1g:	53.134 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	24.661 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.896 W/kg
Type of Modulation:		SAR End:	2.883 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	1W	Extrapolation:	poly4

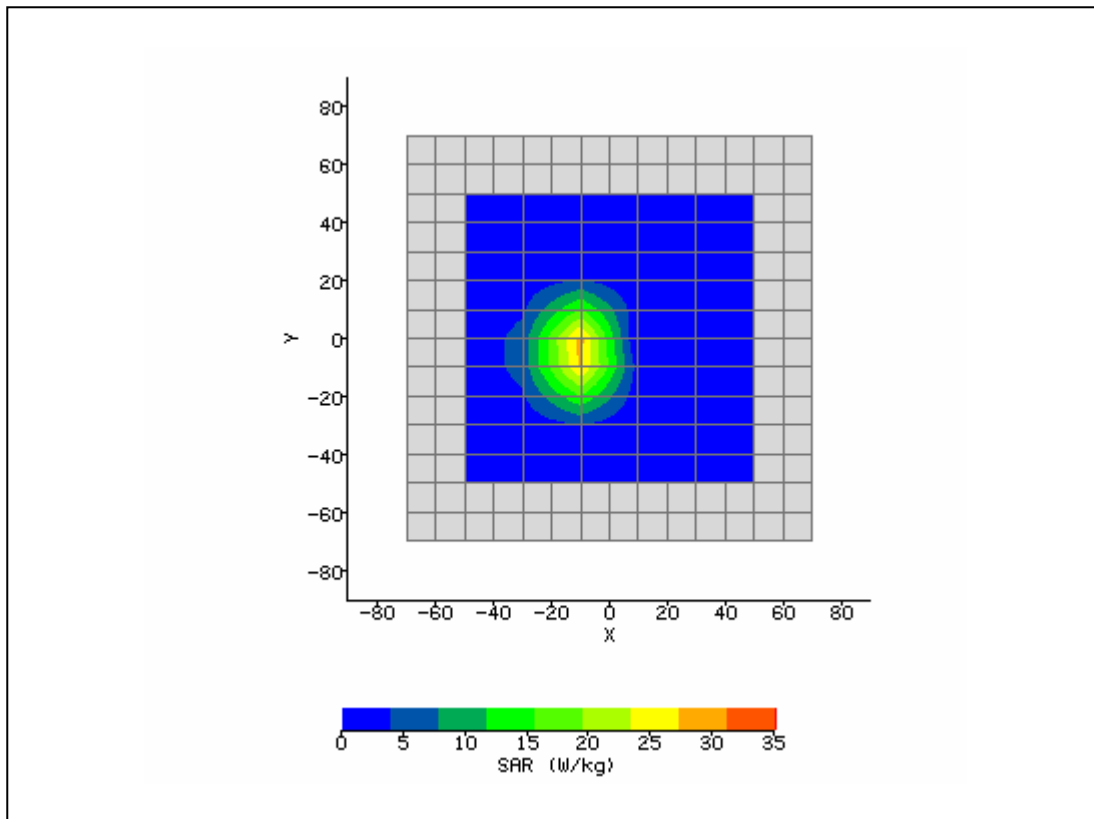

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/17/2008 9:00:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.3°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.38
Relative Humidity:	35.9%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	Dipole	Max E Field:	132.39 V/m
Test Frequency:	2450MHz	SAR 1g:	48.082 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	23.216 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.413 W/kg
Type of Modulation:		SAR End:	2.354 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	1W	Extrapolation:	poly4

