



**PLOT 1**

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/18/2009 8:13:20 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2437_main.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Prescott HMG	<b>Relative Permittivity:</b>	49.33
<b>Relative Humidity:</b>	45%	<b>Conductivity:</b>	1.958
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	16.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	29.60 mm
<b>Antenna Configuration:</b>	Integral Main	<b>Max E Field:</b>	10.22 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.175 W/kg
<b>Air Factors:</b>	2573 / 2262 / 2365	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.487 / .487 / .487	<b>SAR Start:</b>	0.121 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.130 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	7.37 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/18/09
<b>Input Power Level:</b>	Set by software	<b>Extrapolation:</b>	poly4

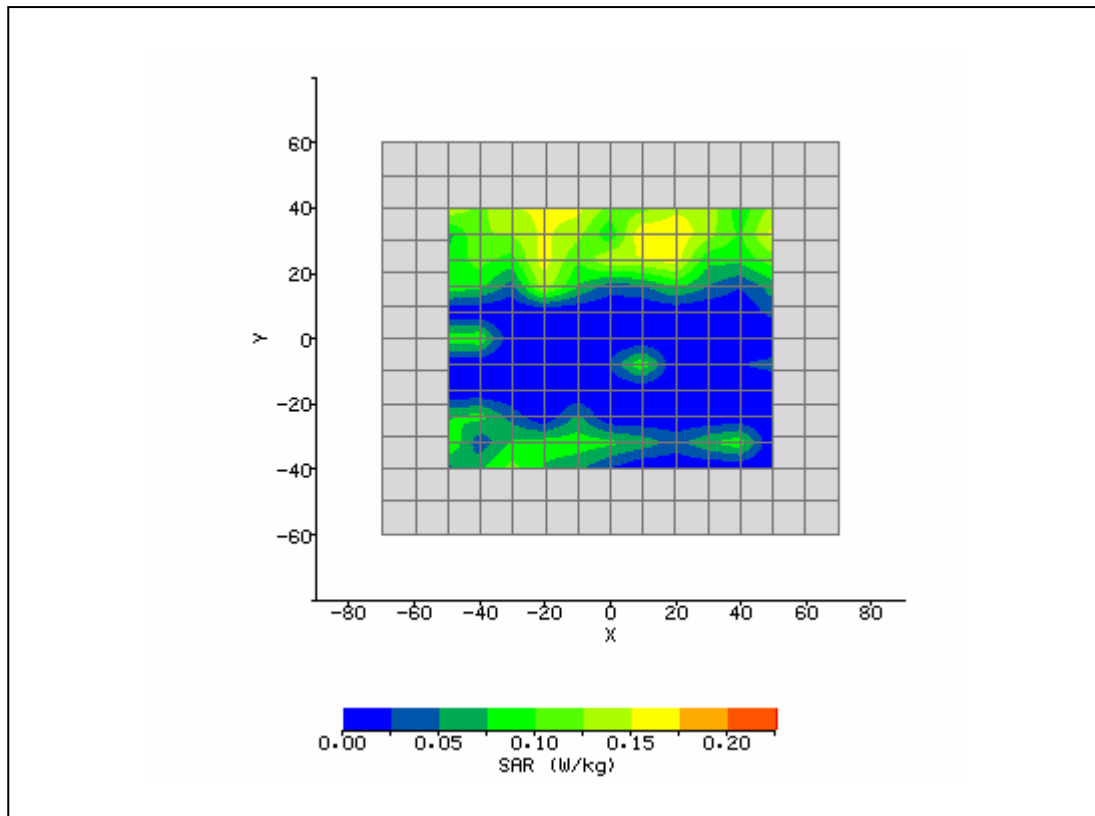

**PLOT 2**

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/18/2009 8:51:48 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2437_aux.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Prescott HMG	<b>Relative Permittivity:</b>	49.33
<b>Relative Humidity:</b>	45%	<b>Conductivity:</b>	1.958
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	46.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	24.80 mm
<b>Antenna Configuration:</b>	Integral Aux	<b>Max E Field:</b>	10.58 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.169 W/kg
<b>Air Factors:</b>	2573 / 2262 / 2365	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.487 / .487 / .487	<b>SAR Start:</b>	0.115 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.122 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	5.57 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/18/09
<b>Input Power Level:</b>	Set by software	<b>Extrapolation:</b>	poly4

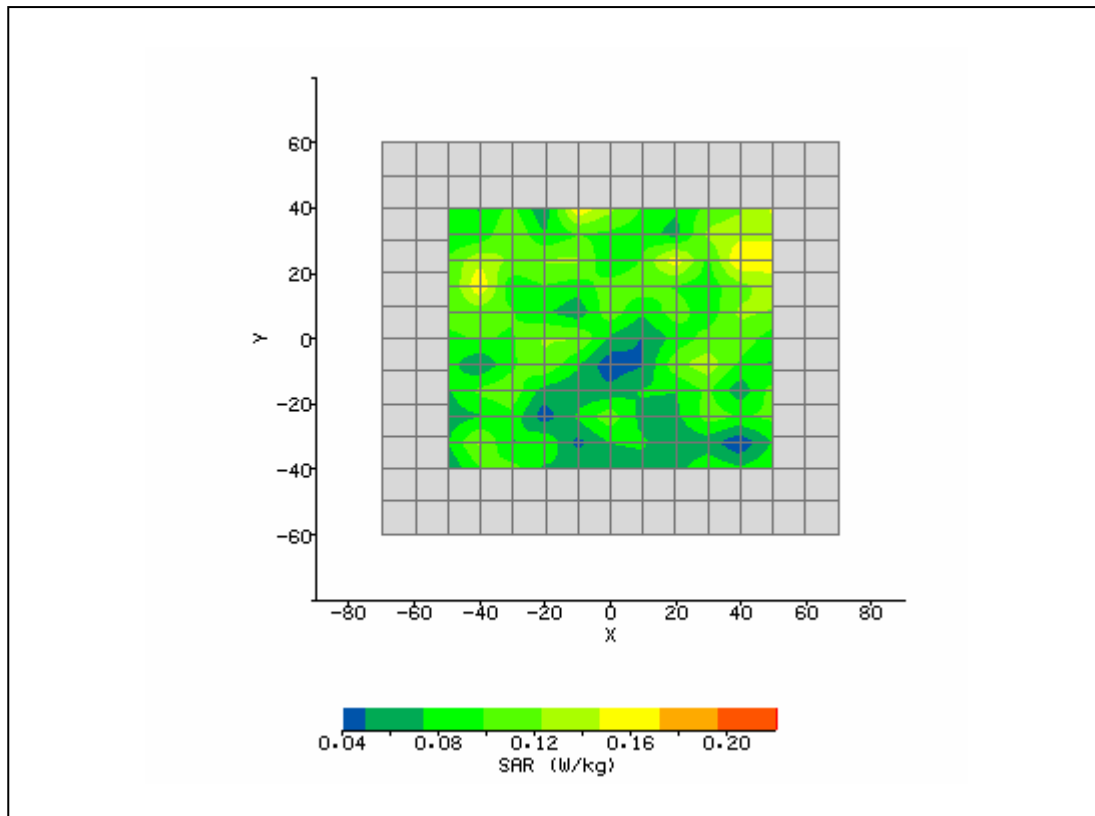

**PLOT 3**

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	7/18/2009 3:33:56 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2437_aux.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	49.33
<b>Relative Humidity:</b>	45%	<b>Conductivity:</b>	1.958
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	10mm	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>Antenna Configuration:</b>	Dipole	<b>Max E Field:</b>	151.68 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	54.742 W/kg
<b>Air Factors:</b>	2573 / 2262 / 2365	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.487 / .487 / .487	<b>SAR Start:</b>	5.143 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	5.411 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.25 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	07/18/09
<b>Input Power Level:</b>	1 W	<b>Extrapolation:</b>	poly4

