



**FCC OET BULLETIN 65 SUPPLEMENT C
CLASS II PERMISSIVE CHANGE
IC RSS-102 ISSUE 2**

SAR EVALUATION REPORT

FOR

**Broadcom 802.11g WLAN PCI-E Mini Card
(Tested inside of Dell PP15S)**

MODEL: BCM94312HMG

**FCC ID: QDS-BRCM1030
IC: 4324A-BRCM1030**

REPORT NUMBER: 08U11947-2

ISSUE DATE: AUGUST 7, 2008

Prepared for

**BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, USA**



NVLAP LAB CODE 200065-0

Revision History

| Rev. | Issued date | Revisions | Revised By |
|------|----------------|---------------|------------|
| -- | August 7, 2008 | Initial issue | -- |

TABLE OF CONTENTS

| | | |
|------|----------------------------------------------------------------|----|
| 1 | ATTESTATION OF TEST RESULTS | 4 |
| 2 | TEST METHODOLOGY | 5 |
| 3 | FACILITIES AND ACCREDITATION | 5 |
| 4 | CALIBRATION AND UNCERTAINTY | 5 |
| 4.1 | MEASURING INSTRUMENT CALIBRATION | 5 |
| 5 | MEASUREMENT UNCERTAINTY | 5 |
| 6 | DEVICE UNDER TEST (DUT) DESCRIPTION | 7 |
| 7 | SYSTEM DESCRIPTION | 8 |
| 7.1 | COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS | 9 |
| 8 | SIMULATING LIQUID PARAMETERS CHECK | 10 |
| 8.1 | SIMULATING LIQUID PARAMETER CHECK RESULT | 11 |
| 9 | SYSTEM PERFORMANCE CHECK | 12 |
| 9.1 | SYSTEM PERFORMANCE CHECK RESULTS | 13 |
| 10 | PROCEDURE USED TO ESTABLISH TEST SIGNAL | 14 |
| 11 | SAR TEST RESULTS | 15 |
| 11.1 | SAR TEST RESULT FOR THE BAND 2400 – 2483.5 MHZ | 15 |
| 12 | ATTACHMENTS | 17 |
| 13 | PHOTOS | 18 |

1 ATTESTATION OF TEST RESULTS


| COMPANY NAME: | BROADCOM CORPORATION 190 MATHILDA PLACE SUNNYVALE, CA 94086 | | |
|--------------------------------|------------------------------------------------------------------------|----------------------------------|--------------|
| EUT DESCRIPTION: | Broadcom 802.11g WLAN PCI-E Mini Card (Tested inside of Dell PP15S) | | |
| MODEL: | BCM94312HMG | | |
| DEVICE CATEGORY: | Portable | | |
| EXPOSURE CATEGORY: | General Population/Uncontrolled Exposure | | |
| DATE TESTED: | August 7, 2008 | | |
| THE HIGHEST SAR VALUES: | See Table below | | |
| FCC / IC Rule Parts | Frequency Range [MHz] | The Highest SAR Values (1g_mW/g) | Limit (mW/g) |
| 15.247 / RSS-102 | 2400 – 2483.5 | 0.056 | 1.6 |
| | 5725 – 5850 | n/a | |
| 15.407 / RSS-102 | 5150 – 5250 | n/a | 1.6 |
| | 5250 – 5350 | n/a | |
| | 5470 – 5725 | n/a | |

| APPLICABLE STANDARDS | |
|----------------------------------|--------------|
| STANDARD | TEST RESULTS |
| FCC OET BULLETIN 65 SUPPLEMENT C | Pass |
| RSS-102 ISSUE 2 | Pass |

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:




SUNNY SHIH
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CAROL BAUMANN
SAR ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2 TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C, Specific FCC Procedure KDB 248227 SAR Measurement Procedure for 820.11abg Transmitters May 2007 and IC RSS 102 Issue 2: NOVEMBER 2005.

3 FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4 CALIBRATION AND UNCERTAINTY

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5 MEASUREMENT UNCERTAINTY

Measurement uncertainty for 300 MHz – 3000 MHz

| Uncertainty component | Tol. (±%) | Probe Dist. | Div. | Ci (1g) | Ci (10g) | Std. Unc.(±%) | |
|----------------------------------------------------------------------------------|-----------|-------------|-------|---------|----------|---------------|---------|
| | | | | | | Ui (1g) | Ui(10g) |
| Measurement System | | | | | | | |
| Probe Calibration | 4.80 | N | 1 | 1 | 1 | 4.80 | 4.80 |
| Axial Isotropy | 4.70 | R | 1.732 | 0.707 | 0.707 | 1.92 | 1.92 |
| Hemispherical Isotropy | 9.60 | R | 1.732 | 0.707 | 0.707 | 3.92 | 3.92 |
| Boundary Effects | 1.00 | R | 1.732 | 1 | 1 | 0.58 | 0.58 |
| Linearity | 4.70 | R | 1.732 | 1 | 1 | 2.71 | 2.71 |
| System Detection Limits | 1.00 | R | 1.732 | 1 | 1 | 0.58 | 0.58 |
| Readout Electronics | 1.00 | N | 1 | 1 | 1 | 1.00 | 1.00 |
| Response Time | 0.80 | R | 1.732 | 1 | 1 | 0.46 | 0.46 |
| Integration Time | 2.60 | R | 1.732 | 1 | 1 | 1.50 | 1.50 |
| RF Ambient Conditions - Noise | 1.59 | R | 1.732 | 1 | 1 | 0.92 | 0.92 |
| RF Ambient Conditions - Reflections | 0.00 | R | 1.732 | 1 | 1 | 0.00 | 0.00 |
| Probe Positioner Mechanical Tolerance | 0.40 | R | 1.732 | 1 | 1 | 0.23 | 0.23 |
| Probe Positioning With Respect to Phantom Shell | 2.90 | R | 1.732 | 1 | 1 | 1.67 | 1.67 |
| Extrapolation, interpolation, and integration algorithms for max. SAR evaluation | 3.90 | R | 1.732 | 1 | 1 | 2.25 | 2.25 |
| Test sample Related | | | | | | | |
| Test Sample Positioning | 1.10 | N | 1 | 1 | 1 | 1.10 | 1.10 |
| Device Holder Uncertainty | 3.60 | N | 1 | 1 | 1 | 3.60 | 3.60 |
| Power and SAR Drift Measurement | 5.00 | R | 1.732 | 1 | 1 | 2.89 | 2.89 |
| Phantom and Tissue Parameters | | | | | | | |
| Phantom Uncertainty | 4.00 | R | 1.732 | 1 | 1 | 2.31 | 2.31 |
| Liquid Conductivity - Target | 5.00 | R | 1.732 | 0.64 | 0.43 | 1.85 | 1.24 |
| Liquid Conductivity - Meas. | 8.60 | N | 1 | 0.64 | 0.43 | 5.50 | 3.70 |
| Liquid Permittivity - Target | 5.00 | R | 1.732 | 0.6 | 0.49 | 1.73 | 1.41 |
| Liquid Permittivity - Meas. | 3.30 | N | 1 | 0.6 | 0.49 | 1.98 | 1.62 |
| Combined Standard Uncertainty | | | RSS | | | 11.44 | 10.49 |
| Expanded Uncertainty (95% Confidence Interval) | | | K=2 | | | 22.87 | 20.98 |

Notes for table

1. Tol. - tolerance in influence quantity
2. N - Nomal
3. R - Rectangular
4. Div. - Divisor used to obtain standard uncertainty
5. Ci - is te sensitivity coefficient

Measurement uncertainty for 3 GHz – 6 GHz

| Uncertainty component | Tol. (±%) | Probe Dist. | Div. | Ci (1g) | Ci (10g) | Std. Unc.(±%) | |
|----------------------------------------------------------------------------------|-----------|-------------|-------|---------|----------|---------------|---------|
| | | | | | | Ui (1g) | Ui(10g) |
| Measurement System | | | | | | | |
| Probe Calibration | 4.80 | N | 1 | 1 | 1 | 4.80 | 4.80 |
| Axial Isotropy | 4.70 | R | 1.732 | 0.707 | 0.707 | 1.92 | 1.92 |
| Hemispherical Isotropy | 9.60 | R | 1.732 | 0.707 | 0.707 | 3.92 | 3.92 |
| Boundary Effects | 1.00 | R | 1.732 | 1 | 1 | 0.58 | 0.58 |
| Linearity | 4.70 | R | 1.732 | 1 | 1 | 2.71 | 2.71 |
| System Detection Limits | 1.00 | R | 1.732 | 1 | 1 | 0.58 | 0.58 |
| Readout Electronics | 1.00 | N | 1 | 1 | 1 | 1.00 | 1.00 |
| Response Time | 0.80 | R | 1.732 | 1 | 1 | 0.46 | 0.46 |
| Integration Time | 2.60 | R | 1.732 | 1 | 1 | 1.50 | 1.50 |
| RF Ambient Conditions - Noise | 3.00 | R | 1.732 | 1 | 1 | 1.73 | 1.73 |
| RF Ambient Conditions - Reflections | 3.00 | R | 1.732 | 1 | 1 | 1.73 | 1.73 |
| Probe Positioner Mechanical Tolerance | 0.40 | R | 1.732 | 1 | 1 | 0.23 | 0.23 |
| Probe Positioning With Respect to Phantom Shell | 2.90 | R | 1.732 | 1 | 1 | 1.67 | 1.67 |
| Extrapolation, interpolation, and integration algorithms for max. SAR evaluation | 3.90 | R | 1.732 | 1 | 1 | 2.25 | 2.25 |
| Test sample Related | | | | | | | |
| Test Sample Positioning | 1.10 | N | 1 | 1 | 1 | 1.10 | 1.10 |
| Device Holder Uncertainty | 3.60 | N | 1 | 1 | 1 | 3.60 | 3.60 |
| Power and SAR Drift Measurement | 5.00 | R | 1.732 | 1 | 1 | 2.89 | 2.89 |
| Phantom and Tissue Parameters | | | | | | | |
| Phantom Uncertainty | 4.00 | R | 1.732 | 1 | 1 | 2.31 | 2.31 |
| Liquid Conductivity - Target | 5.00 | R | 1.732 | 0.64 | 0.43 | 1.85 | 1.24 |
| Liquid Conductivity - Meas. | 8.60 | N | 1 | 0.64 | 0.43 | 5.50 | 3.70 |
| Liquid Permittivity - Target | 5.00 | R | 1.732 | 0.6 | 0.49 | 1.73 | 1.41 |
| Liquid Permittivity - Meas. | 3.30 | N | 1 | 0.6 | 0.49 | 1.98 | 1.62 |
| Combined Standard Uncertainty | RSS | | | | | 11.66 | 10.73 |
| Expanded Uncertainty (95% Confidence Interval) | K=2 | | | | | 23.32 | 21.46 |


Notes for table

1. Tol. - tolerance in influence quantity
2. N - Nomal
3. R - Rectangular
4. Div. - Divisor used to obtain standard uncertainty
5. Ci - is te sensitivity coefficient

6 DEVICE UNDER TEST (DUT) DESCRIPTION

| | | | |
|------------------------------------------------------------------------|--------------------------------------------------------------------------|----------------------|-------------------|
| Broadcom 802.11g WLAN PCI-E Mini Card (Tested inside of Dell PP15S) | | | |
| Normal operation: | Lap-held only Note: SAR test with display open at 90° to the keyboard | | |
| Host device: | Dell PP15S | | |
| Antenna tested: | The radio has been tested with the following antennas combination: | | |
| | No | Antenna Manufacturer | Antenna type |
| | | | Model number |
| | 1* | GALTRONICS | PIFA |
| | | | 06-7015-03 (MAIN) |
| | | | 06-7016-03 (AUX) |
| | 2 | GALTRONICS | PIFA |
| | | | 06-7015-03 (MAIN) |
| | | | 06-7016-03 (AUX) |
| | 3 | GALTRONICS | PIFA |
| | | | 06-7018-03 (MAIN) |
| | | | 06-7031-03 (AUX) |
| | 4* | Tyco Electronics | PIFA |
| | | | 2023987-1(TX1) |
| | | | 2023987-1(TX2) |
| | 5 | Tyco Electronics | PIFA |
| | | | 2023987-1(TX1) |
| | | | 2023986-1(TX2) |
| | 6 | Tyco Electronics | PIFA |
| | | | 2023989-1(TX1) |
| | | | 2023988-1(TX2) |
| | *: Antenna under testing. | | |
| Power supply: | Power supplied through laptop computer (host device) | | |

7 SYSTEM DESCRIPTION

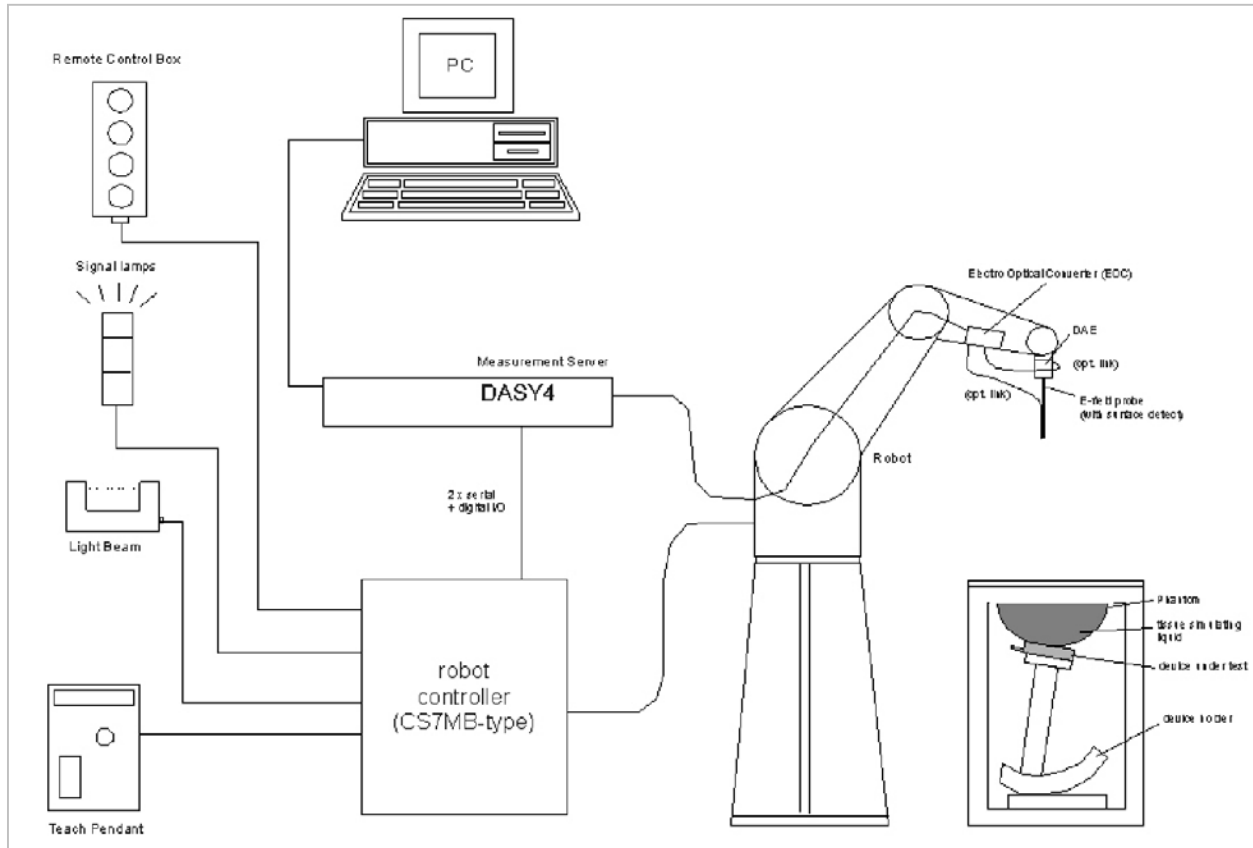

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

7.1 COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Ingredients (% by weight) | Frequency (MHz) | | | | | | | | | |
|------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
| | 450 | | 835 | | 915 | | 1900 | | 2450 | |
| Tissue Type | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body |
| Water | 38.56 | 51.16 | 41.45 | 52.4 | 41.05 | 56.0 | 54.9 | 40.4 | 62.7 | 73.2 |
| Salt (NaCl) | 3.95 | 1.49 | 1.45 | 1.4 | 1.35 | 0.76 | 0.18 | 0.5 | 0.5 | 0.04 |
| Sugar | 56.32 | 46.78 | 56.0 | 45.0 | 56.5 | 41.76 | 0.0 | 58.0 | 0.0 | 0.0 |
| HEC | 0.98 | 0.52 | 1.0 | 1.0 | 1.0 | 1.21 | 0.0 | 1.0 | 0.0 | 0.0 |
| Bactericide | 0.19 | 0.05 | 0.1 | 0.1 | 0.1 | 0.27 | 0.0 | 0.1 | 0.0 | 0.0 |
| Triton X-100 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 36.8 | 0.0 |
| DGBE | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 44.92 | 0.0 | 0.0 | 26.7 |
| Dielectric Constant | 43.42 | 58.0 | 42.54 | 56.1 | 42.0 | 56.8 | 39.9 | 54.0 | 39.8 | 52.5 |
| Conductivity (S/m) | 0.85 | 0.83 | 0.91 | 0.95 | 1.0 | 1.07 | 1.42 | 1.45 | 1.88 | 1.78 |

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity


HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

8 SIMULATING LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below.

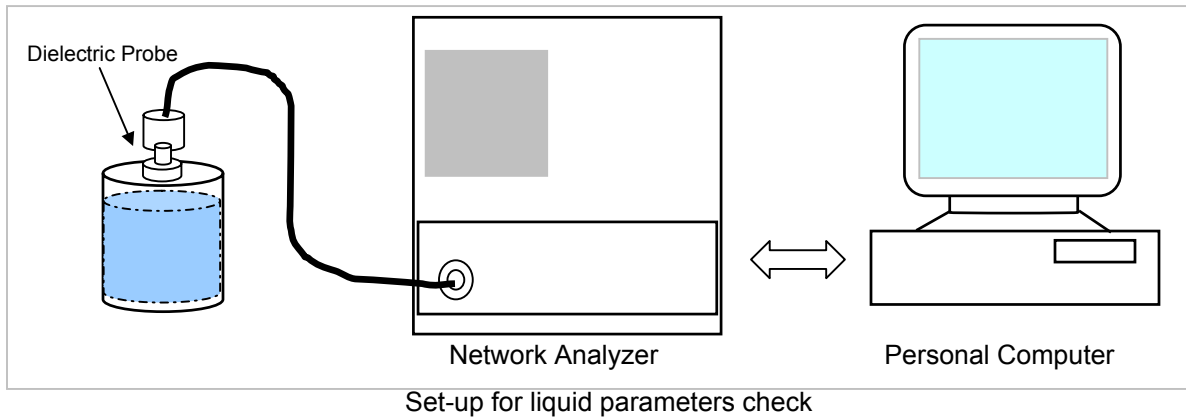

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

| Target Frequency (MHz) | Head | | Body | |
|------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 – 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

8.1 SIMULATING LIQUID PARAMETER CHECK RESULT

Simulating Liquid Dielectric Parameter Check Result @ Muscle 2450 MHz

Room Ambient Temperature = 25°C; Relative humidity = 37%

Measured by: Carol Baumann

| Simulating Liquid | | | Parameters | | Measured | Target | Deviation (%) | Limit (%) |
|-------------------|------------|------------|------------|------------------------------------------|----------|--------|---------------|-----------|
| f (MHz) | Temp. (°C) | Depth (cm) | e' | Relative Permittivity (ε _r): | | | | |
| 2450 | 24 | 15 | e' | 52.4045 | 52.4045 | 52.7 | -0.56 | ± 5 |
| | | | e'' | 14.2671 | | | | |

Liquid Check

Ambient temperature: 26 deg. C; Liquid temperature: 24 deg. C

August 07, 2008 08:26 AM

| Frequency | e' | e'' |
|--------------------|----------------|----------------|
| 2400000000. | 52.5557 | 14.1747 |
| 2405000000. | 52.6511 | 14.2074 |
| 2410000000. | 52.4050 | 14.1236 |
| 2415000000. | 52.5207 | 14.2249 |
| 2420000000. | 52.4273 | 14.1984 |
| 2425000000. | 52.4001 | 14.2317 |
| 2430000000. | 52.3196 | 14.1818 |
| 2435000000. | 52.3857 | 14.2517 |
| 2440000000. | 52.3906 | 14.3094 |
| 2445000000. | 52.4327 | 14.2654 |
| 2450000000. | 52.4045 | 14.2671 |
| 2455000000. | 52.3201 | 14.2958 |
| 2460000000. | 52.3579 | 14.4180 |
| 2465000000. | 52.3341 | 14.3989 |
| 2470000000. | 52.3171 | 14.3903 |
| 2475000000. | 52.2402 | 14.4527 |
| 2480000000. | 52.2305 | 14.5076 |
| 2485000000. | 52.2532 | 14.4818 |
| 2490000000. | 52.1483 | 14.5133 |
| 2495000000. | 52.2120 | 14.5411 |
| 2500000000. | 52.1665 | 14.5677 |

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$\epsilon_0 = 8.854 * 10^{-12}$

9 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (2.4 GHz) fine cube was chosen for cube integration and Special 8x8x10 (5 GHz) fine cube was chosen for cube integration
- Distance between probe sensors and phantom surface was set to 4 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5mm
- The dipole input power (forward power) was 250 mW $\pm 3\%$.
- The results are normalized to 1 W input power.

450 to 2450 MHz Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using the finite-difference time-domain method and the geometry parameters.

| Dipole Type | Distance (mm) | Frequency (MHz) | SAR (1g) [W/kg] | SAR (10g) [W/kg] | SAR (peak) [W/kg] |
|-------------|---------------|-----------------|-----------------|------------------|-------------------|
| D450V2 | 15 | 450 | 5.01 | 3.36 | 7.22 |
| D835V2 | 15 | 835 | 9.71 | 6.38 | 14.1 |
| D900V2 | 15 | 900 | 11.1 | 7.17 | 16.3 |
| D1450V2 | 10 | 1450 | 29.6 | 16.6 | 49.8 |
| D1800V2 | 10 | 1800 | 38.5 | 20.3 | 67.5 |
| D1900V2 | 10 | 1900 | 39.8 | 20.8 | 69.6 |
| D2000V2 | 10 | 2000 | 40.9 | 21.2 | 71.5 |
| D2450V2 | 10 | 2450 | 51.2 | 23.7 | 97.6 |

Note: All SAR values normalized to 1 W forward power.

5 GHz Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using finite-difference time-domain FDTD method (feed point-impedance set to 50 ohms) and the mechanical dimensions of the D5GHzV2 dipole (manufactured by SPEAG).

| f (MHz) | Head Tissue | | Body Tissue | | |
|---------|-------------------|--------------------|-------------------|--------------------|---------------------|
| | SAR _{1g} | SAR _{10g} | SAR _{1g} | SAR _{10g} | SAR _{Peak} |
| 5000 | 72.9 | 20.7 | 68.1 | 19.2 | 260.3 |
| 5100 | 74.6 | 21.1 | 78.8 | 19.6 | 272.3 |
| 5200 | 76.5 | 21.6 | 71.8 | 20.1 | 284.7 |
| 5500 | 83.3 | 23.4 | 79.1 | 22.0 | 326.3 |
| 5800 | 78.0 | 21.9 | 74.1 | 20.5 | 324.7 |

Note: All SAR values normalized to 1 W forward power.

9.1 SYSTEM PERFORMANCE CHECK RESULTS**System Validation Dipole: D2450V2 SN: 748****The dipole input power (forward power): 250 mW****Results**

Date: August 7, 2008

Ambient Temperature = 25°C; Relative humidity = 38%

Measured by: Carol Baumann

| Body Simulating Liquid | | | SAR (mW/g) | Normalized to 1 W | Target | Deviation (%) | Limit (%) |
|------------------------|------------|------------|------------|-------------------|--------|---------------|-----------|
| f (MHz) | Temp. (°C) | Depth (cm) | | | | | |
| 2450 | 24 | 15 | 1g | 48.2 | 51.2 | -5.86 | ± 10 |
| | | | 10g | 22.7 | 23.7 | -4.22 | ± 10 |

10 PROCEDURE USED TO ESTABLISH TEST SIGNAL

The following procedures had been used to prepare the EUT for the SAR test.

The client provided a special driver and program, w1_tools, which enable a user to control the frequency and output power of the module.

The cable assembly insertion loss of 20.3 dB (including attenuator and connectors) was entered as an offset in the power meter to allow for direct reading of power.

RF Conducted Output Power Measurement Results:

See Broadcom's Operational Description document for Average Power information.

11 SAR TEST RESULTS**11.1 SAR TEST RESULT FOR THE BAND 2400 – 2483.5 MHZ**

| Tyco Antenna | | | | | |
|----------------|----------|-----------------|------------|---------------------------|-------|
| Mode | Channel | f (MHz) | Antenna | Measured SAR 1g (mW/g) | Limit |
| 802.11b | 6 | 2437 (M) | Aux | 0.056 | 1.6 |
| 802.11b | 6 | 2437 (M) | Main | 0.047 | 1.6 |
| 802.11g | 6 | 2437 (M) | Aux | 0.053 | 1.6 |

| Galtronics Antenna | | | | | |
|--------------------|---------|----------|---------|---------------------------|-------|
| Mode | Channel | f (MHz) | Antenna | Measured SAR 1g (mW/g) | Limit |
| 802.11b | 6 | 2437 (M) | Aux | 0.028 | 1.6 |
| 802.11g | 6 | 2437 (M) | Aux | 0.025 | 1.6 |

Notes:

- 1) The modes with highest output power channel were chosen for the testing.
- 2) Test configuration: Lapheld with display open at 90° to the keyboard.
- 3) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.

The Highest SAR Plot & Data for 2.4 GHz Band

Date/Time: 8/7/2008 11:57:27 AM

Test Laboratory: Compliance Certification Services

Lapheld Position Tyco Antenna

DUT: Dell ; Type: PP15S; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 1.93057$ mho/m, $\epsilon_r = 52.3857$; $\rho = 1$ kg/m³ Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(7.91, 7.91, 7.91); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

802.11b M-ch Tyco Aux Antenna/Area Scan (11x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of Ux (measured) = 124.6 uV

802.11b M-ch Tyco Aux Antenna/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 4.11 V/m; Power Drift = 0.076 dB
 Peak SAR (extrapolated) = 0.088 W/kg
SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.033 mW/g
[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 0.070 mW/g

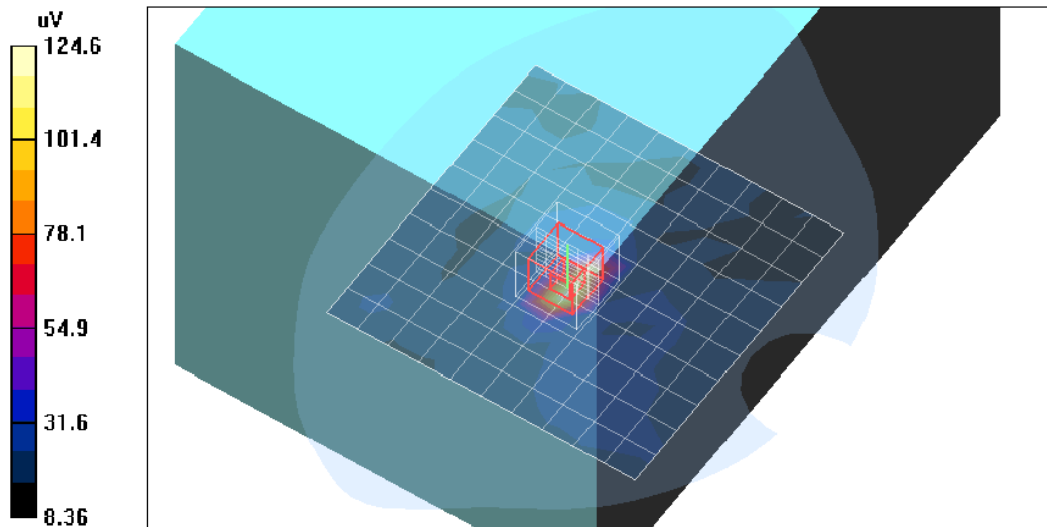


12 ATTACHMENTS

| No. | Contents | No. Of Pages |
|------------|----------------------------------------------------------|---------------------|
| 1 | System Performance Check Plots | 2 |
| 2 | SAR Test Plots for 2.4 GHz Band | 5 |
| 3 | Certificate of E-Field Probe - EX3DV3SN3531 | 10 |
| 4 | Certificate of System Validation Dipole - D2450V2 SN:748 | 6 |

13 PHOTOS


Setup Photo with SAM Phantom (2.4 GHz band)



WiFi Module

Host Device

Antenna locations



End of Report