



**FCC CFR47 PART 15 SUBPART F  
CERTIFICATION TEST REPORT**

**FOR**

**BROADCOM WIRELESS BLUETOOTH AND UWB MINICARD**

**MODEL NUMBER: BCM92046mPCle\_UWB**

**FCC ID: QDS-BRCM1035**

**REPORT NUMBER: 07U11428-1A**

**ISSUE DATE: JANUARY 16, 2008**

*PREPARED FOR*  
**BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086**

*PREPARED BY*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	11/21/07	Initial Issue	M. Heckrotte
A	01/16/2008	Added test results for low power setting	M. Heckrotte

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. SCOPE</b> .....	<b>5</b>
<b>3. TEST METHODOLOGY</b> .....	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
5.2. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>6. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
6.1. <i>DESCRIPTION OF EUT</i> .....	6
6.2. <i>OPERATING FREQUENCY RANGE</i> .....	6
6.3. <i>MAXIMUM OUTPUT POWER</i> .....	6
6.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	6
6.5. <i>SOFTWARE AND FIRMWARE</i> .....	7
6.6. <i>WORST-CASE CONFIGURATION</i> .....	7
6.7. <i>OPERATING MODE</i> .....	7
6.8. <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>7. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>10</b>
<b>8. LIMITS AND RESULTS</b> .....	<b>11</b>
8.1. <i>RESULTS FOR HIGH POWER SETTING</i> .....	11
8.1.1. <i>UWB BANDWIDTH, CENTER FREQUENCY, AND FRACTIONAL BW</i> .....	11
8.1.2. <i>PEAK POWER</i> .....	18
8.1.3. <i>RADIATED EMISSIONS ABOVE 960 MHz</i> .....	20
8.1.4. <i>RADIATED EMISSIONS BELOW 960 MHz</i> .....	42
8.2. <i>RESULTS FOR LOW POWER SETTING</i> .....	46
8.2.1. <i>UWB BANDWIDTH, CENTER FREQUENCY, AND FRACTIONAL BW</i> .....	46
8.2.2. <i>PEAK POWER</i> .....	53
8.2.3. <i>RADIATED EMISSIONS ABOVE 960 MHz</i> .....	55
8.2.4. <i>RADIATED EMISSIONS BELOW 960 MHz</i> .....	77
8.3. <i>AC POWER LINE CONDUCTED EMISSIONS</i> .....	81
<b>9. SETUP PHOTOS</b> .....	<b>85</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086

**EUT DESCRIPTION:** Broadcom Wireless Bluetooth and UWB Minicard

**MODEL:** BCM92046mPCIe\_UWB

**SERIAL NUMBER:** 016 and 001E4CE5FE68

**DATE TESTED:** NOVEMBER 5, 2007 – JANUARY 15, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart F	No Non-Compliance Noted

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



---

MICHAEL HECKROTTE  
ENGINEERING MANAGER  
COMPLIANCE CERTIFICATION SERVICES

---

THANH NGUYEN  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. SCOPE

This report documents the test results of the UWB portion of the EUT.

The test results of the Bluetooth portion of the EUT are documented in a separate report. The Bluetooth is the dominant transmitter, therefore the co-located test results are presented in the Bluetooth report.

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 6. EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF EUT

The EUT is a combination Bluetooth transceiver and Ultra Wide Band transceiver module in which both transceivers share a single antenna. The EUT is intended for handheld use. The UWB radio uses hopping and non-hopping coding and modulation rates as defined in the Theory of Operation.

The radio module is manufactured by Broadcom.

### 6.2. OPERATING FREQUENCY RANGE

The UWB radio operates over a nominal frequency range of 3100 to 4800 MHz. The measured UWB bandwidths of all three channels lie within this range.

### 6.3. MAXIMUM OUTPUT POWER

The power is adjustable, and may be set to either of two levels. The high power level is applicable to antenna gains of 3.55 dBi or less, and the low power level is applicable to antenna gains of 5.1 dBi or less.

The UWB transmitter has a maximum radiated output power, for the each power setting, as follows:

Power Setting	Max Antenna Gain (dBi)	RMS Output Power (dBm/MHz EIRP)	RMS Output Power (uW/MHz EIRP)
High	3.55	-41.50	0.071
Low	5.10	-42.40	0.058

### 6.4. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes a TYCO IFA antenna, with a maximum gain of 3.55 dBi over the 3100 to 4800 MHz frequency range of the UWB radio, applicable to the high power setting.

The EUT may also utilize a TYCO IFA antenna, with a maximum gain of 5.1 dBi over the 3100 to 4800 MHz frequency range of the UWB radio, applicable to the low power setting.

All antennas are integral to end products.

## **6.5. SOFTWARE AND FIRMWARE**

The software, driver, firmware, and tools package installed in the EUT during testing was SSP 1.3.123.0.

## **6.6. WORST-CASE CONFIGURATION**

Preliminary investigations were performed at all coding, modulation rates and channels as defined in the Theory of Operation. The worst-case mode was determined to be TFC4 at 53.3Mb/s.

## **6.7. OPERATING MODE**

The EUT was tested in its normal operating (hopping) mode in accordance with the waiver documented in ET Docket 04-352. Test results demonstrate that the EUT does not operate within the 5030 to 5650 MHz band.

## 6.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Inspiron 1720	9955271197	DoC
AC/DC Adapter	Dell	DA90PS1-00	48661-78J-9M4Q	DoC
Mini PCI Test Jig	WiQuest	Rev03.00	T3801	N/A
AC/DC Adapter	Cincon	TR25120	25120-0023430	N/A

### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	1.5m	N/A
2	DC	1	DC Plug	Un-shielded	1.5m	Ferrite bead at each end
3	USB	1	USB	Shielded	1.5m	N/A


The ferrite beads on the power supply cable to the test jig are required to reduce emissions from the test jig itself, these emissions are present without the EUT installed.

### TEST SETUP

The EUT is installed in a test jig that is connected to a control computer during the tests. Test software exercised the radio card.



**SETUP DIAGRAM FOR TESTS**

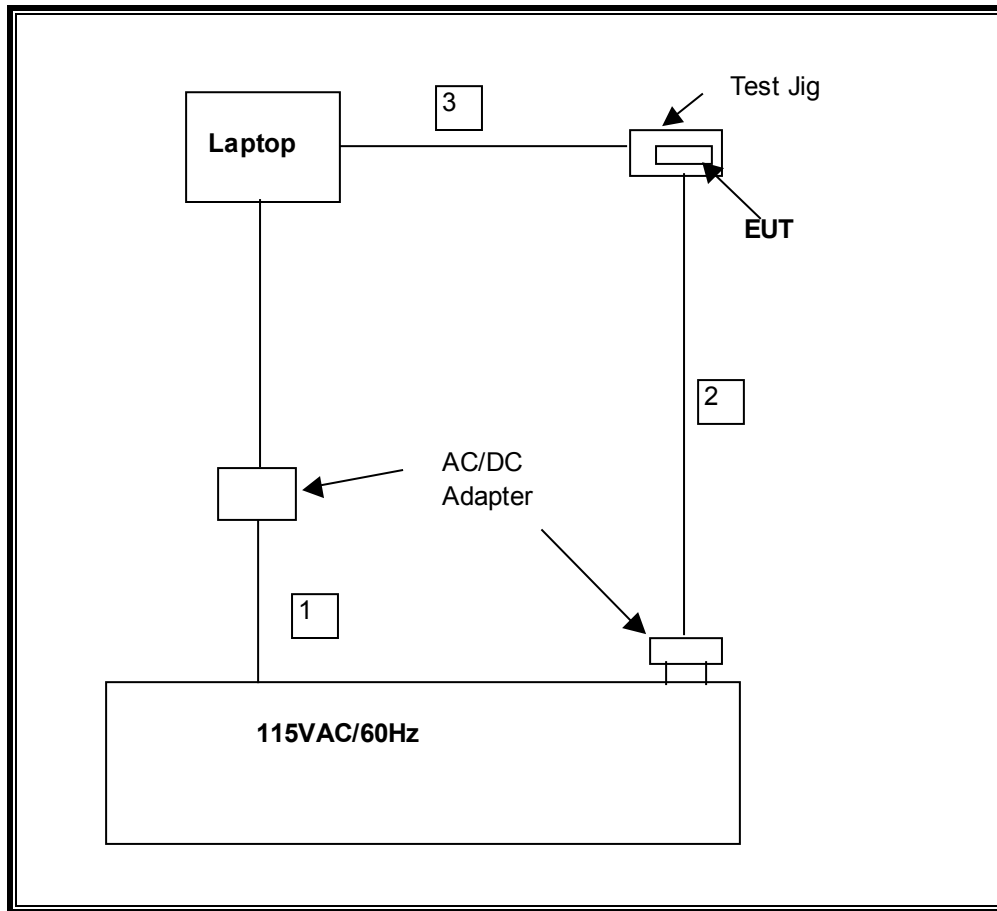

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A0022704	9/28/2008
Antenna, Microwave Horn	ARA	AT4002A	322899	12/10/2008
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/15/2008
Antenna, Horn 18 ~ 26 GHz	ARA	SWH-28	1007	9/26/2008
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	4/11/2008
Preamplifier, 1300 MHz	Agilent / HP	8447D	1937A02062	5/9/2008
Preamplifier, 1 ~ 2 GHz	Miteq	AFS3-01000200	1199462	8/14/2008
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00931	8/14/2008
Preamplifier, 26 ~ 40 GHz	Miteq	NSP4000-SP2	924343	8/14/2008
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	6/12/2008
RF Filter Section	Agilent / HP	85420E	3705A00256	6/12/2008
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42510266	10/26/2008
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	9/15/2008
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	9/15/2008
EMI Test Receiver	R & S	ESHS 20	827129/006	1/27/2008

## 8. LIMITS AND RESULTS

### 8.1. RESULTS FOR HIGH POWER SETTING

#### 8.1.1. UWB BANDWIDTH, CENTER FREQUENCY, AND FRACTIONAL BW

##### DEFINITIONS AND LIMITS

§15.503 Definitions.

(a) UWB Bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ . The frequency at which the highest radiated emission occurs is designated  $f_M$ .

(b) Center frequency. The center frequency,  $f_C$ , equals  $(f_H + f_L)/2$ .

(c) Fractional bandwidth. The fractional bandwidth equals  $2(f_H - f_L)/(f_H + f_L)$ .

(d) Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

§15.519 (b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

##### TEST PROCEDURE

Radiated measurements are made using the procedures described above. The detection mode is set to peak detection, the sweep time is AUTO, and the Max Hold trace function is utilized. The frequency range from 3.1 to 10.6 GHz is measured, and corrected from raw values to Peak EIRP.

The frequency at which the maximum EIRP is measured is designated as  $f_M$ . A major graticule line of the plot is adjusted to exactly equal the peak EIRP at  $f_M$ . The spectral envelope at the major graticule line that is 10 dB below the reference graticule is examined to determine the frequency band bounded by the points that are 10 dB below the highest radiated emission. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ .

The center frequency,  $f_C$ , is calculated as  $(f_H + f_L)/2$ .

The antenna polarization that yields the highest EIRP at  $f_M$  is used to calculate the above parameters.

Calculations are made independently for each of the three channels.

**LOW CHANNEL RESULTS (HORIZONTAL POLARIZATION)**

<b>f Max (GHz)</b>	<b>Reference EIRP at f Max (dBm)</b>	<b>10 dB down from Reference EIRP (dBm)</b>
3.590	-29.6	-39.6


<b>f Low (GHz)</b>	<b>Minimum f Low (GHz)</b>
3.184	3.1

<b>f High (GHz)</b>	<b>Maximum f High (GHz)</b>
3.687	10.6

<b>f Center (GHz)</b>
3.436

<b>UWB BW (MHz)</b>	<b>Minimum UWB BW (MHz)</b>
503	500

**PLOT WITH REFERENCE GRATICULE ADJUSTED FOR LOW CHANNEL F MAX**

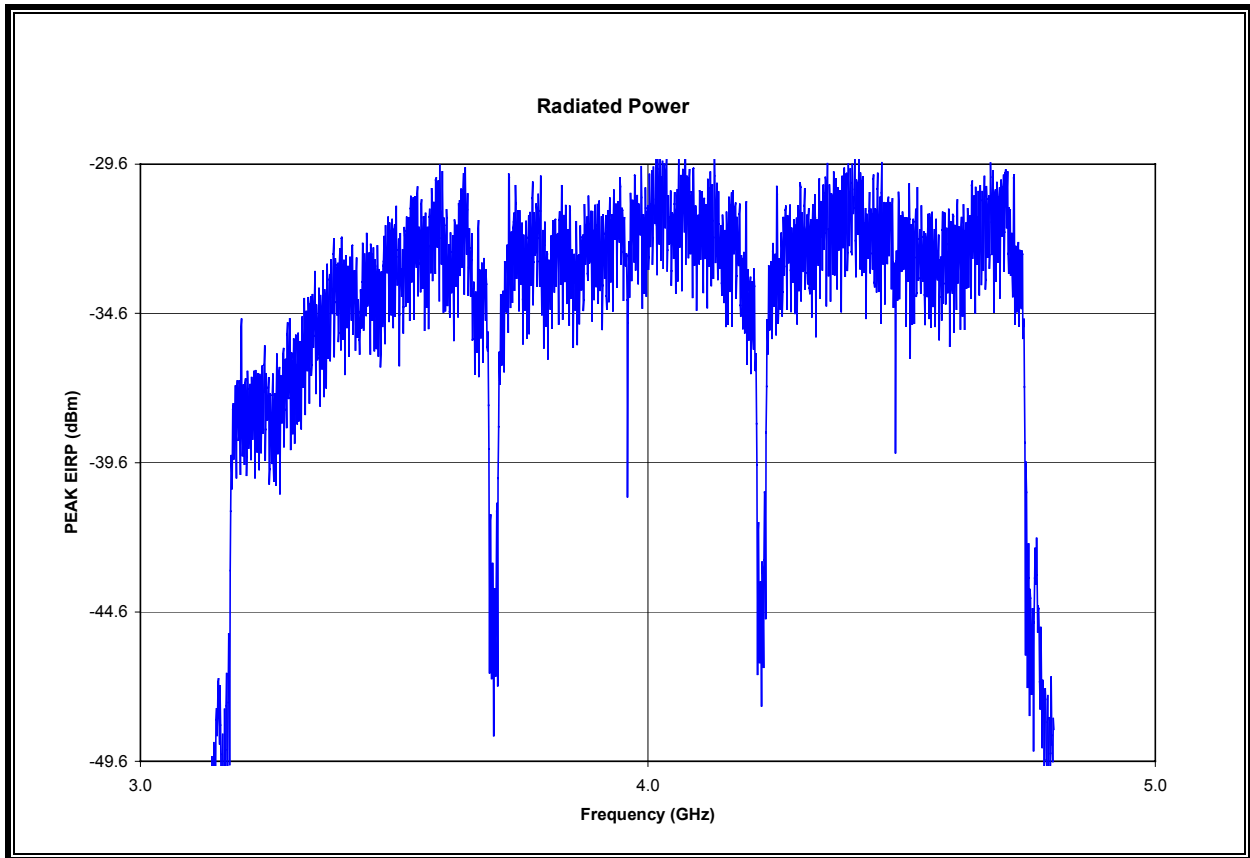

**MID CHANNEL RESULTS (VERTICAL POLARIZATION)**

<b>f Max (GHz)</b>	<b>Reference EIRP at f Max (dBm)</b>	<b>10 dB down from Reference EIRP (dBm)</b>
4.131	-27.9	-37.9


<b>f Low (GHz)</b>	<b>Minimum f Low (GHz)</b>
3.714	3.1

<b>f High (GHz)</b>	<b>Maximum f High (GHz)</b>
4.215	10.6

<b>f Center (GHz)</b>
3.965

<b>UWB BW (MHz)</b>	<b>Minimum UWB BW (MHz)</b>
501	500

**PLOT WITH REFERENCE GRATICULE ADJUSTED FOR MID CHANNEL F MAX**

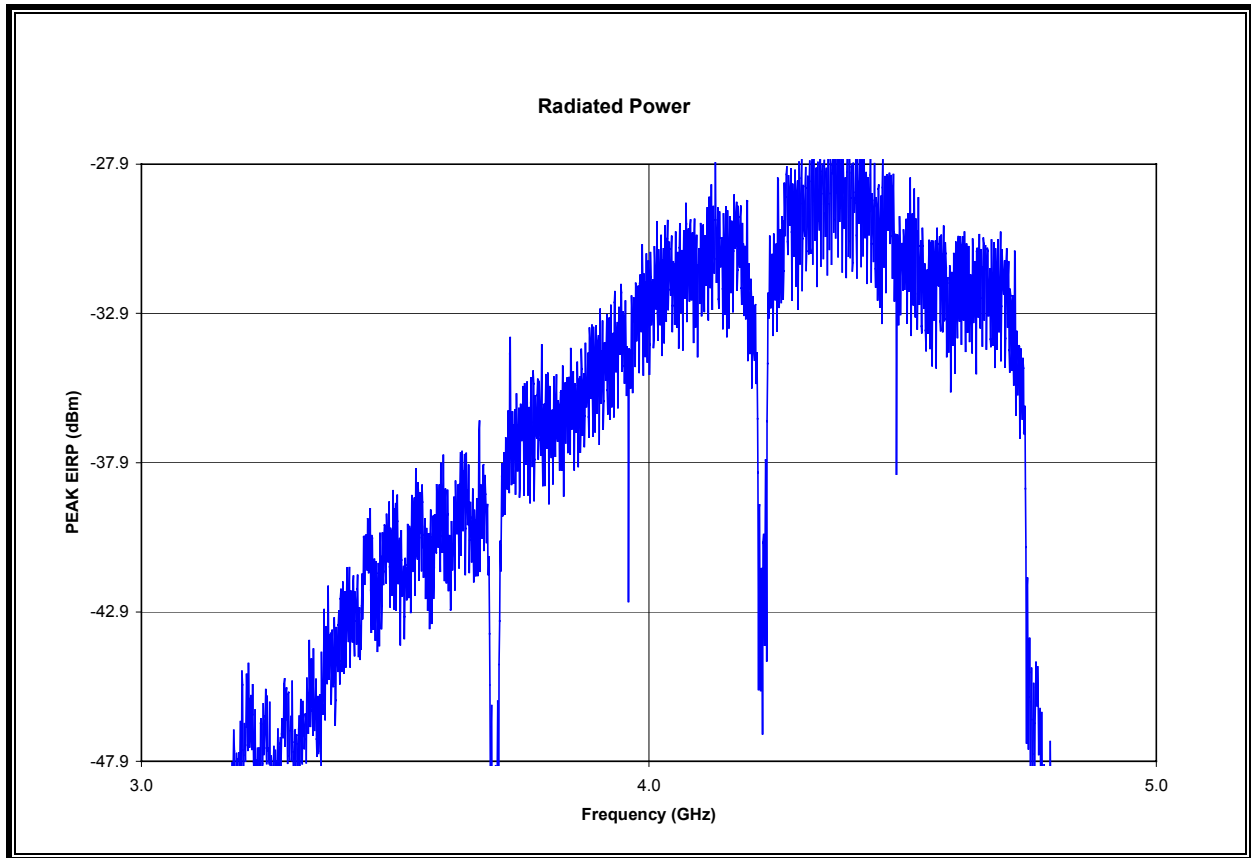

**HIGH CHANNEL RESULTS (VERTICAL POLARIZATION)**

<b>f Max (GHz)</b>	<b>Reference EIRP at f Max (dBm)</b>	<b>10 dB down from Reference EIRP (dBm)</b>
4.366	-26.6	-36.6

<b>f Low (GHz)</b>	<b>Minimum f Low (GHz)</b>
4.233	3.1


<b>f High (GHz)</b>	<b>Maximum f High (GHz)</b>
4.739	10.6

<b>f Center (GHz)</b>
4.486

<b>UWB BW (MHz)</b>	<b>Minimum UWB BW (MHz)</b>
506	500



**PLOT WITH REFERENCE GRATICULE ADJUSTED FOR HIGH CHANNEL F MAX**

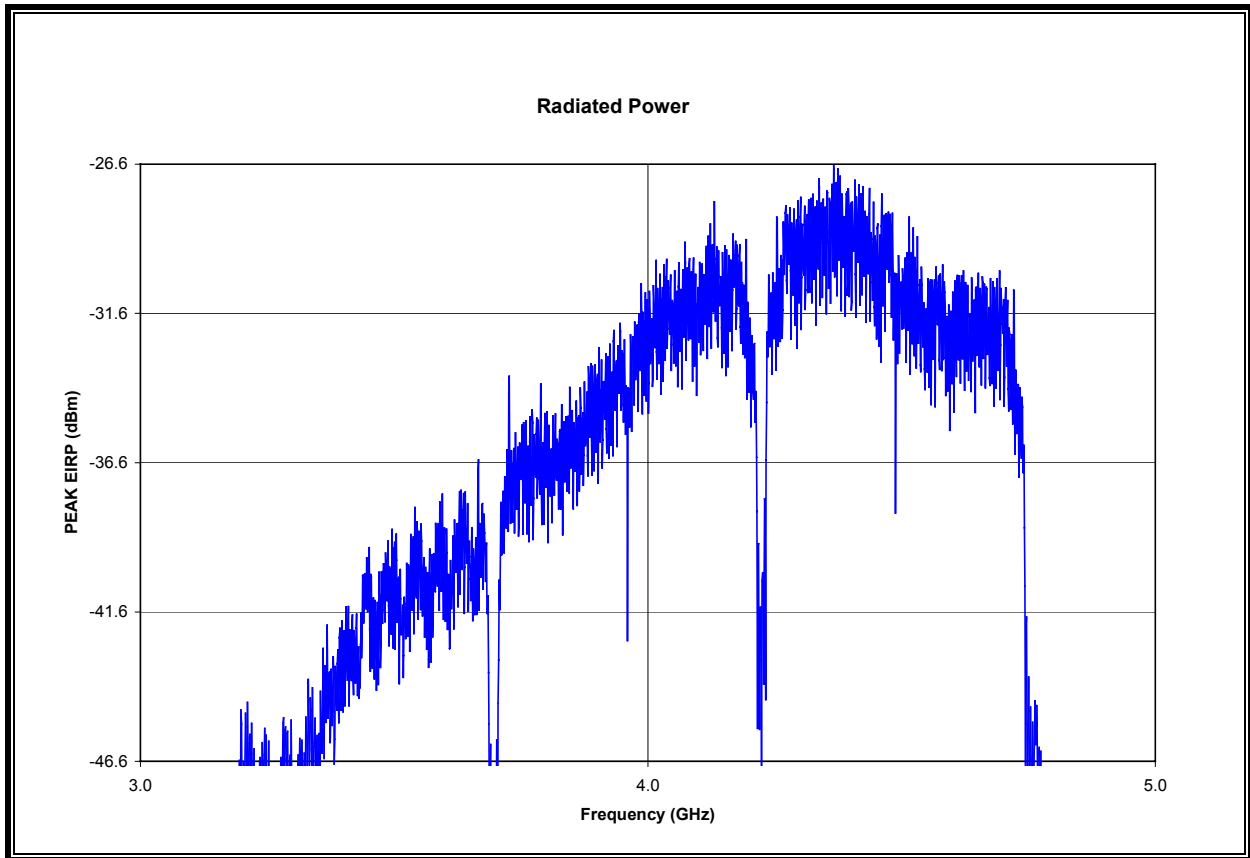

## 8.1.2. PEAK POWER

### LIMIT

§15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_M$ . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

§15.521 (g) When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs,  $f_M$ . If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be  $20 \log (RBW/50)$  dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using  $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2$ . If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

§15.521 (e) The frequency at which the highest radiated emission occurs,  $f_M$ , must be contained within the UWB bandwidth.

### TEST PROCEDURE

Radiated measurements are made using the procedures described above.

The spectrum analyzer center frequency is set to  $f_M$ . The frequency span is set to 50 MHz. The RBW and VBW are both set to 8 MHz. The detector function is set to peak.

The test procedure and the calibration of the test setup are both identical to that for which a 1 or 3 MHz RBW is specified. The instrumentation is an Agilent PSA series spectrum analyzer, model E4446A, which includes a standard RBW of 8 MHz.

**RESULTS**

RBW =	8	Limit =	-15.92	Distance =	3.0
-------	---	---------	--------	------------	-----

**Low Channel**

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
3.59	72.9	30.50	7.50	-36.90	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
74.00	-95.20	-21.20	-15.92	-5.28

**Mid Channel**

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
4.131	72.8	31.70	8.20	-36.60	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
76.10	-95.20	-19.10	-15.92	-3.18

**High Channel**

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
4.366	74	31.90	8.40	-36.50	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
77.80	-95.20	-17.40	-15.92	-1.48

### 8.1.3. RADIATED EMISSIONS ABOVE 960 MHz

#### LIMITS

§15.519 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960–1610	- 75.3
1610–1990	- 63.3
1990–3100	- 61.3
3100–10600	- 41.3
Above 10600	- 61.3

§15.519 (d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164–1240	- 85.3
1559–1610	- 85.3

§15.521 (d) Within the tables in §§15.509, 15.511, 15.513, 15.515, 15.517, and 15.519, the tighter emission limit applies at the band edges. Radiated emission levels above 960 MHz are based on RMS average measurements over a 1 MHz resolution bandwidth. The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

§15.521 (e) The frequency at which the highest radiated emission occurs,  $f_M$ , must be contained within the UWB bandwidth.

#### TEST PROCEDURE

Radiated measurements are made using the procedures described above. The number of points on the horizontal axis of the spectrum analyzer is set to (frequency span in MHz + 1) and the sweep time is set to (frequency span in MHz) milliseconds, the RBW is set to 1 MHz and the detector function is set to RMS average.

For the requirements of §15.519 (d), an RBW of 10 kHz is utilized.

**RESULTS**


The highest radiated emission at  $f_M$  is as follows:

Polarization =	Vertical	Distance =	3.0
----------------	----------	------------	-----


f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
4.362	50.0	31.9	8.4	-36.6	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm/MHz)	EIRP Limit (dBm/MHz)	Margin (dB)
53.70	-95.2	-41.5	-41.3	-0.2


**EIRP 0.960 TO 1.610 GHz, 1 MHz BW, HORIZONTAL**

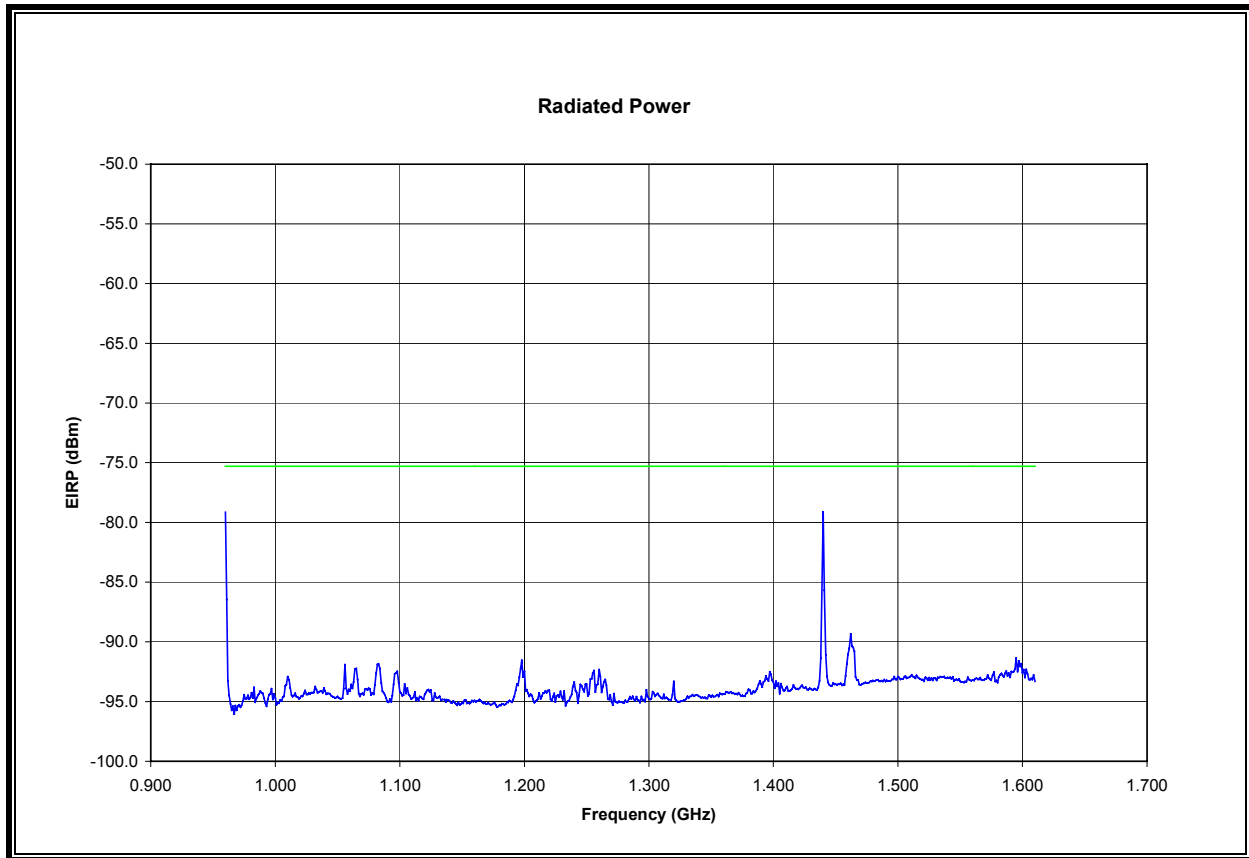

**EIRP 0.960 TO 1.610 GHz, 1 MHz BW, VERTICAL**

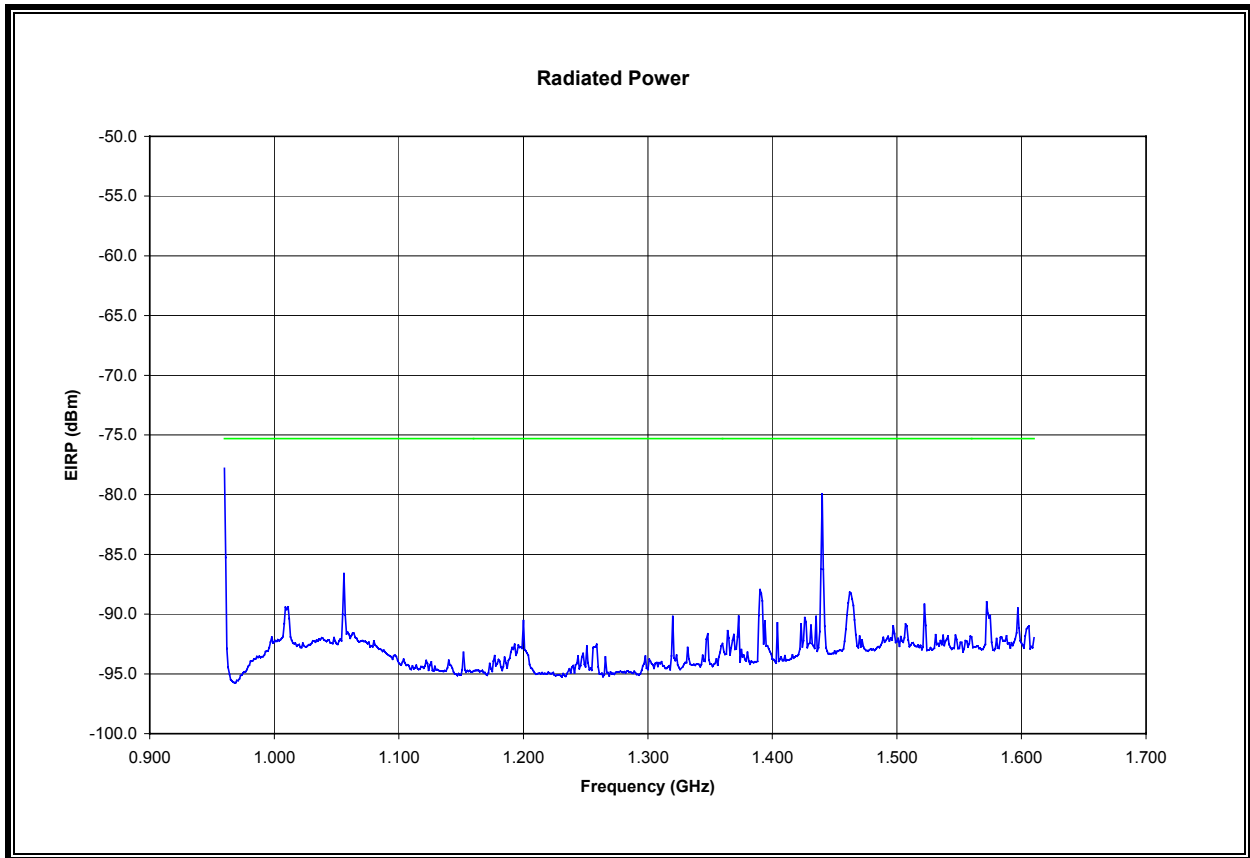


**EIRP 1.610 TO 1.990 GHz, 1 MHz BW, HORIZONTAL**

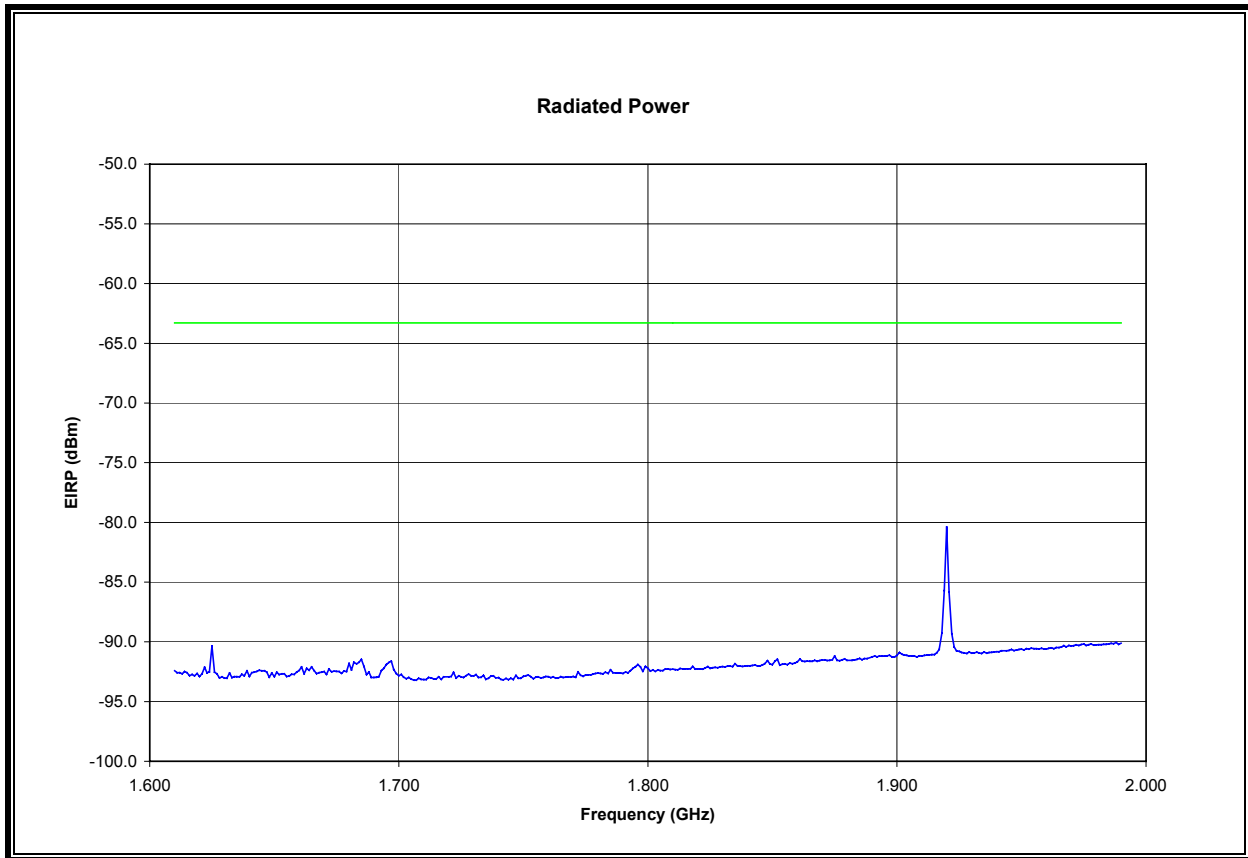





**EIRP 1.610 TO 1.990 GHz, 1 MHz BW, VERTICAL**

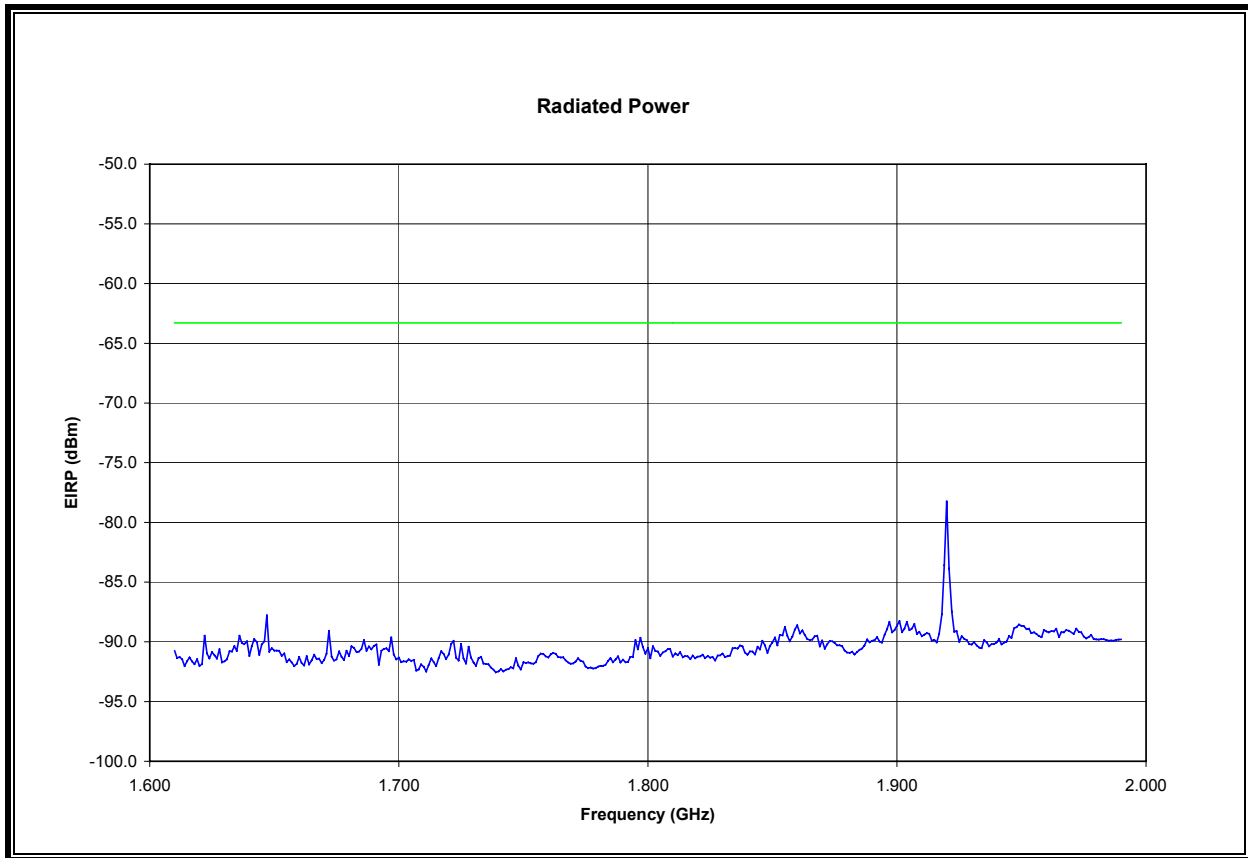


**EIRP 1.990 TO 3.100 GHz, 1 MHz BW, HORIZONTAL**

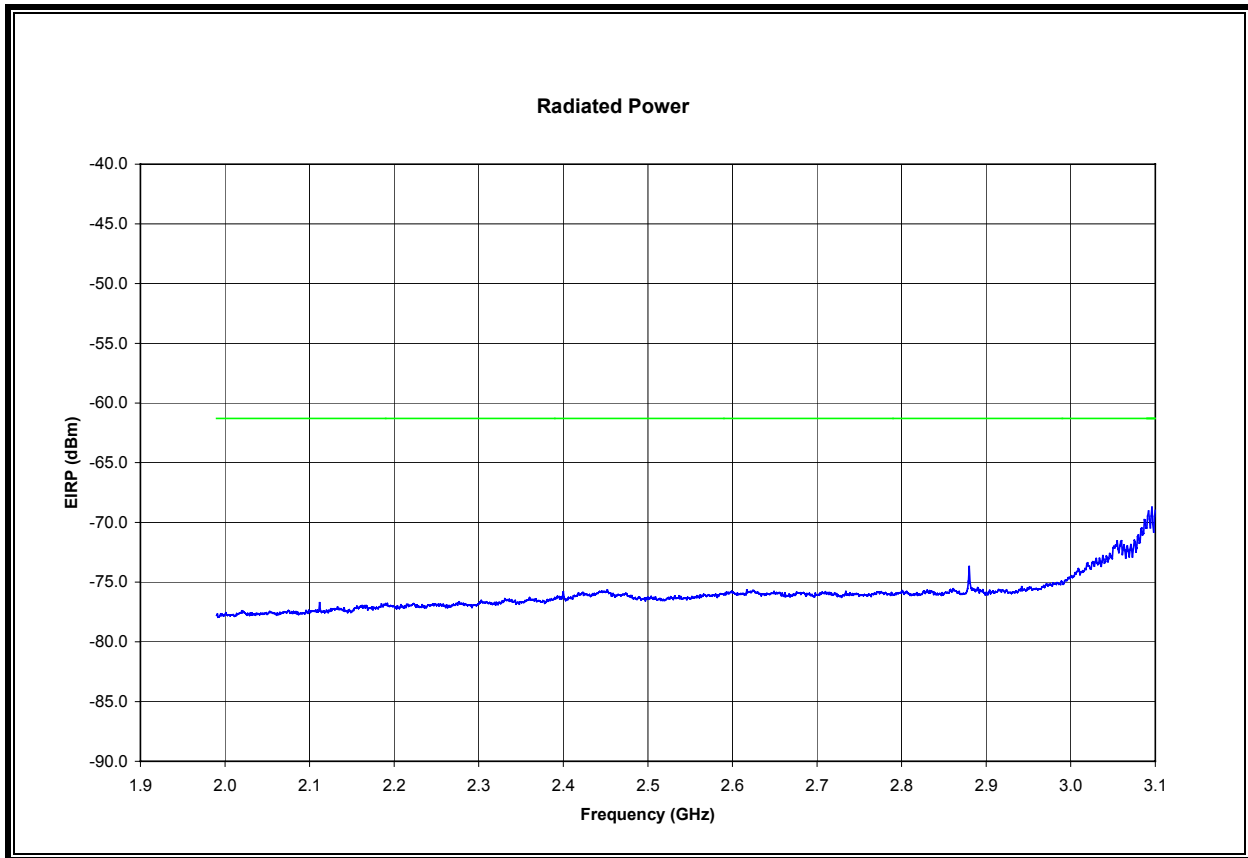


**EIRP 1.990 TO 3.100 GHz, 1 MHz BW, VERTICAL**

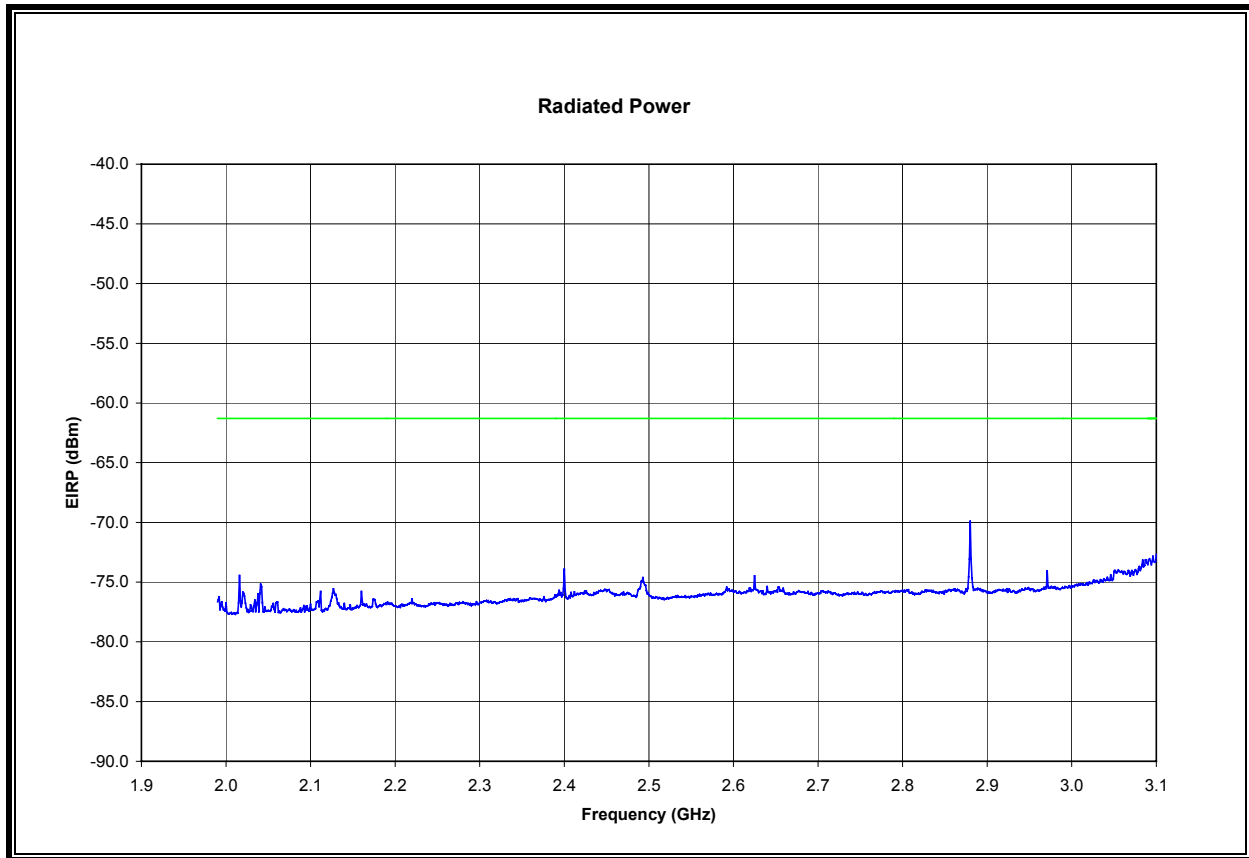


**EIRP 3.1 TO 10.6 GHz, 1 MHz BW, HORIZONTAL**

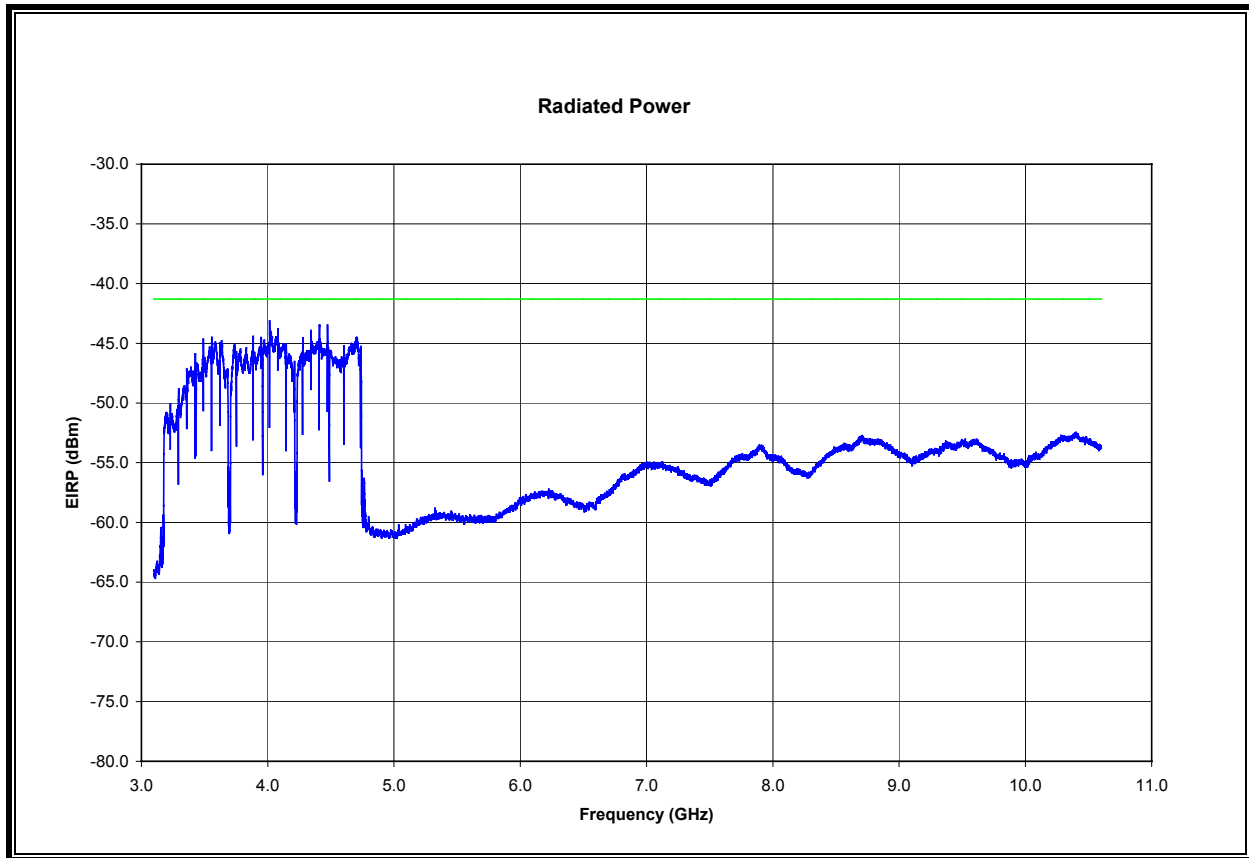


**EIRP 3.1 TO 10.6 GHz, 1 MHz BW, VERTICAL**

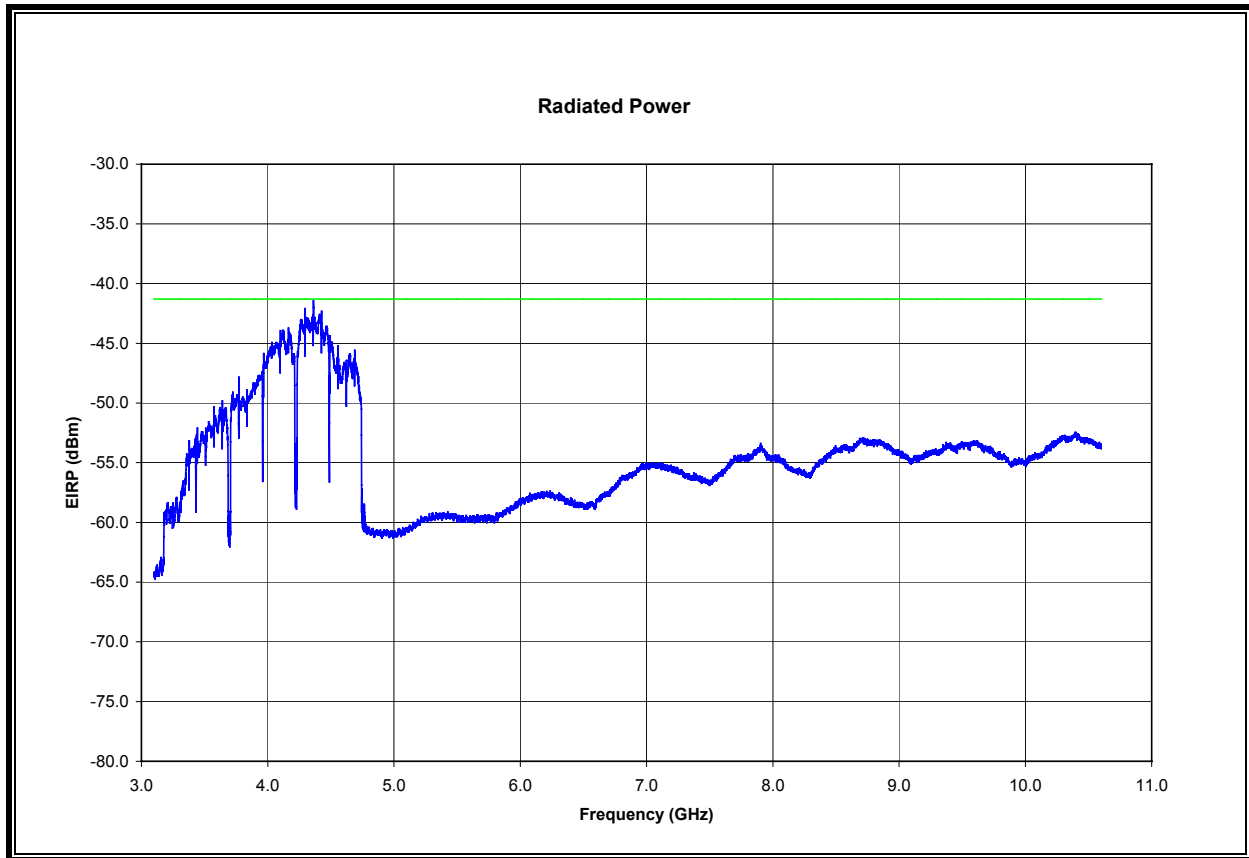


**EIRP 10.6 TO 18 GHz, 1 MHz BW, HORIZONTAL**

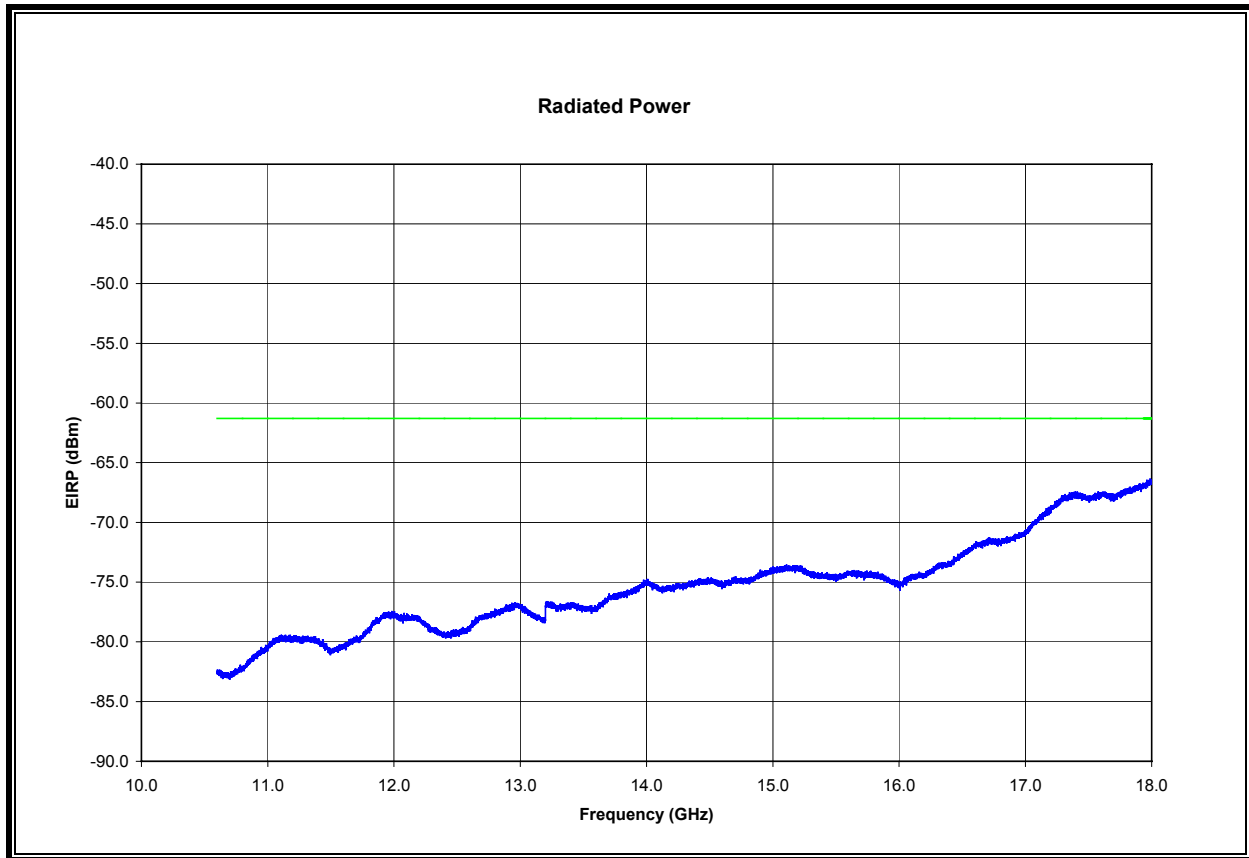

**EIRP 10.6 TO 18 GHz, 1 MHz BW, VERTICAL**

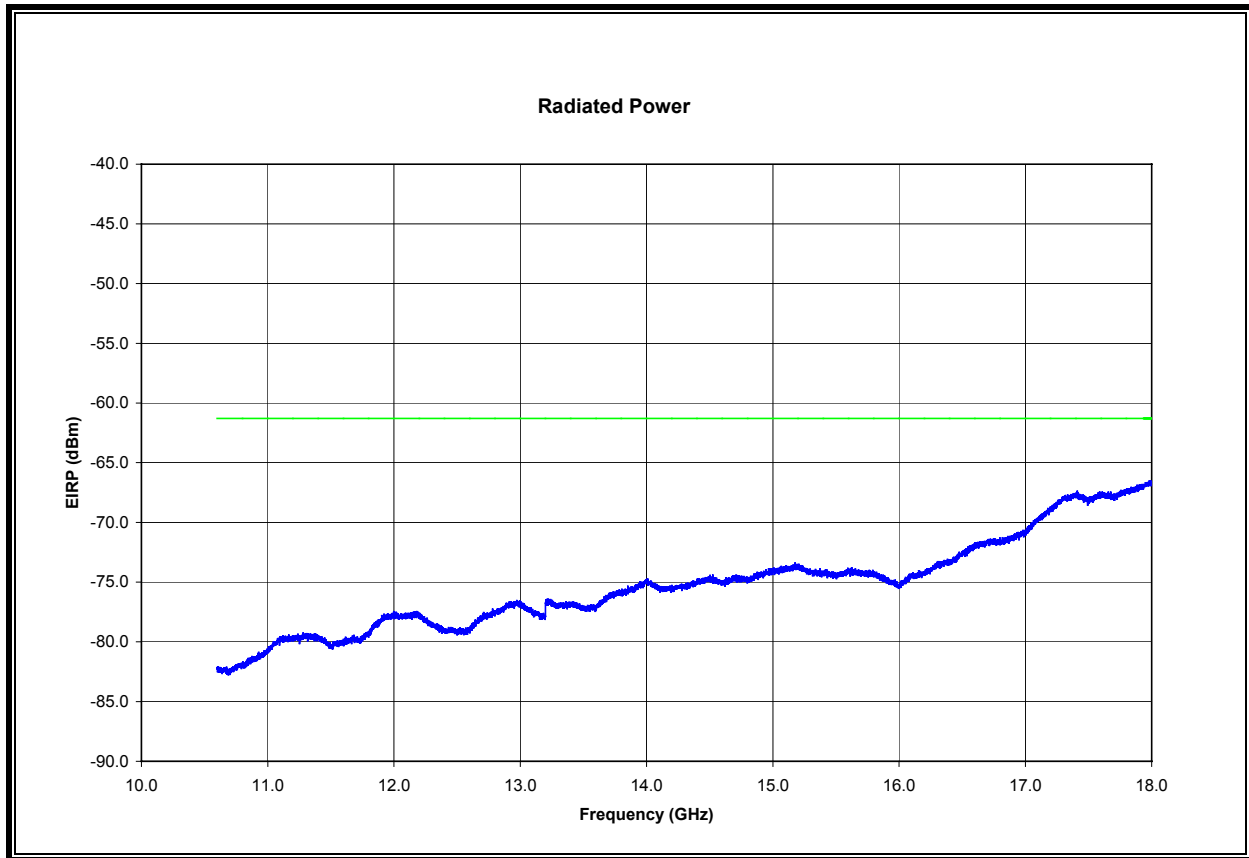


**EIRP 18 TO 26 GHz, 1 MHz BW, HORIZONTAL**

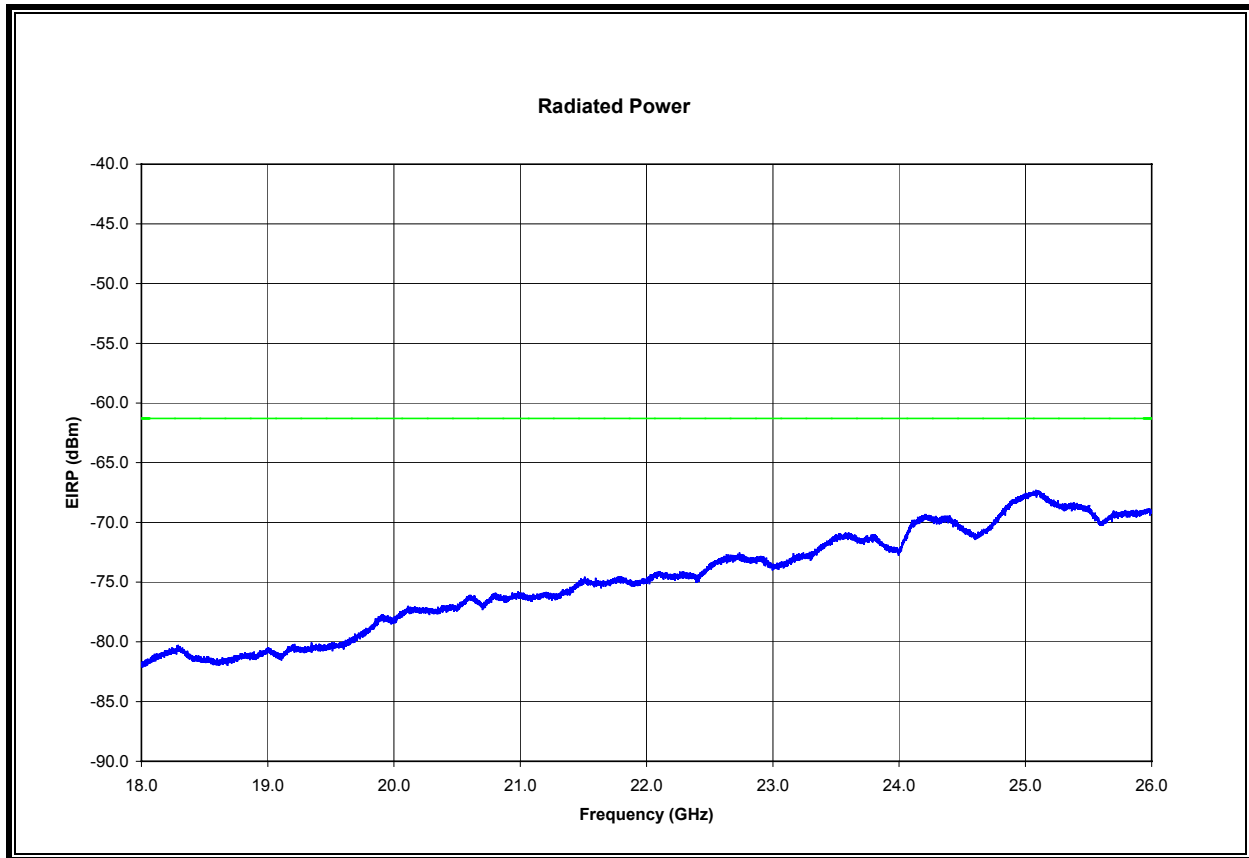





**EIRP 18 TO 26 GHz, 1 MHz BW, VERTICAL**

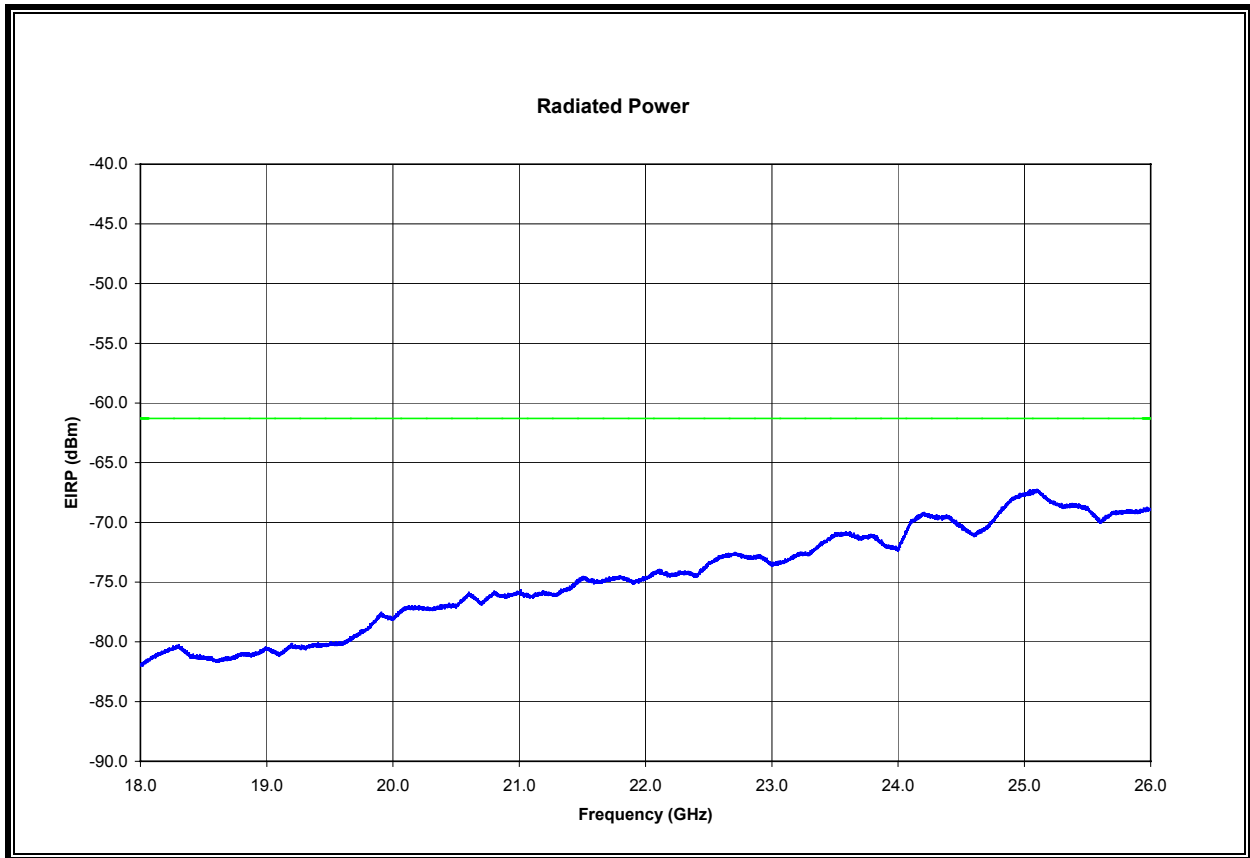


**EIRP 26 TO 33 GHz, 1 MHz BW, HORIZONTAL**

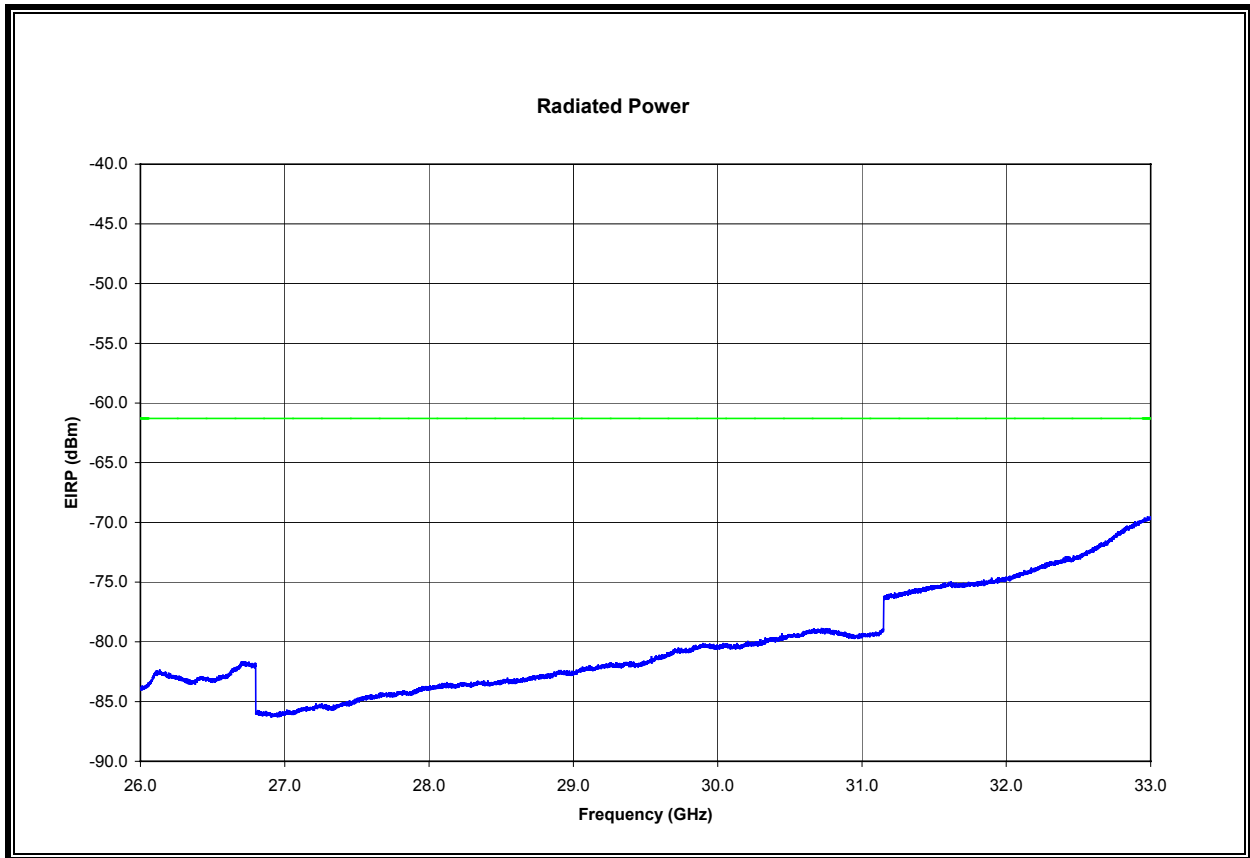


**EIRP 26 TO 33 GHz, 1 MHz BW, VERTICAL**

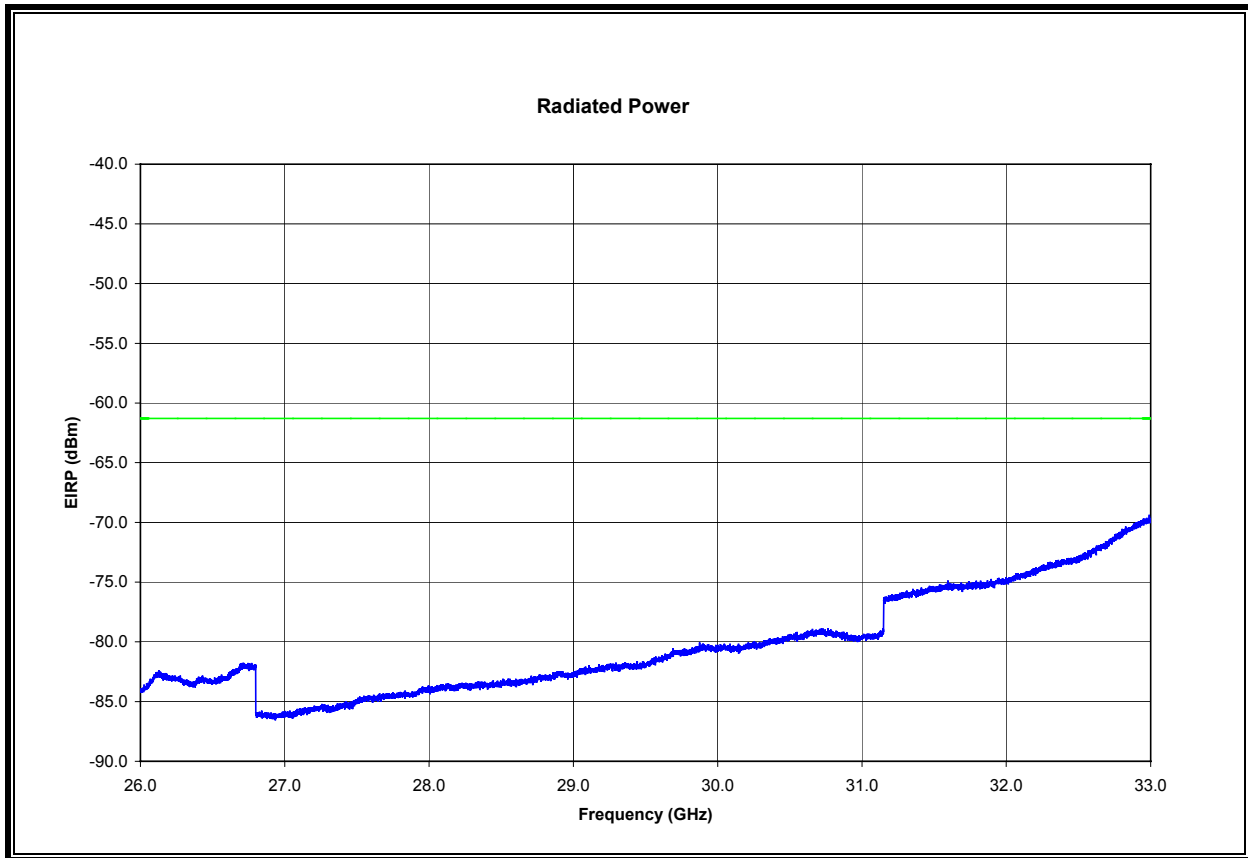


**EIRP 33 TO 40 GHz, 1 MHz BW, HORIZONTAL**

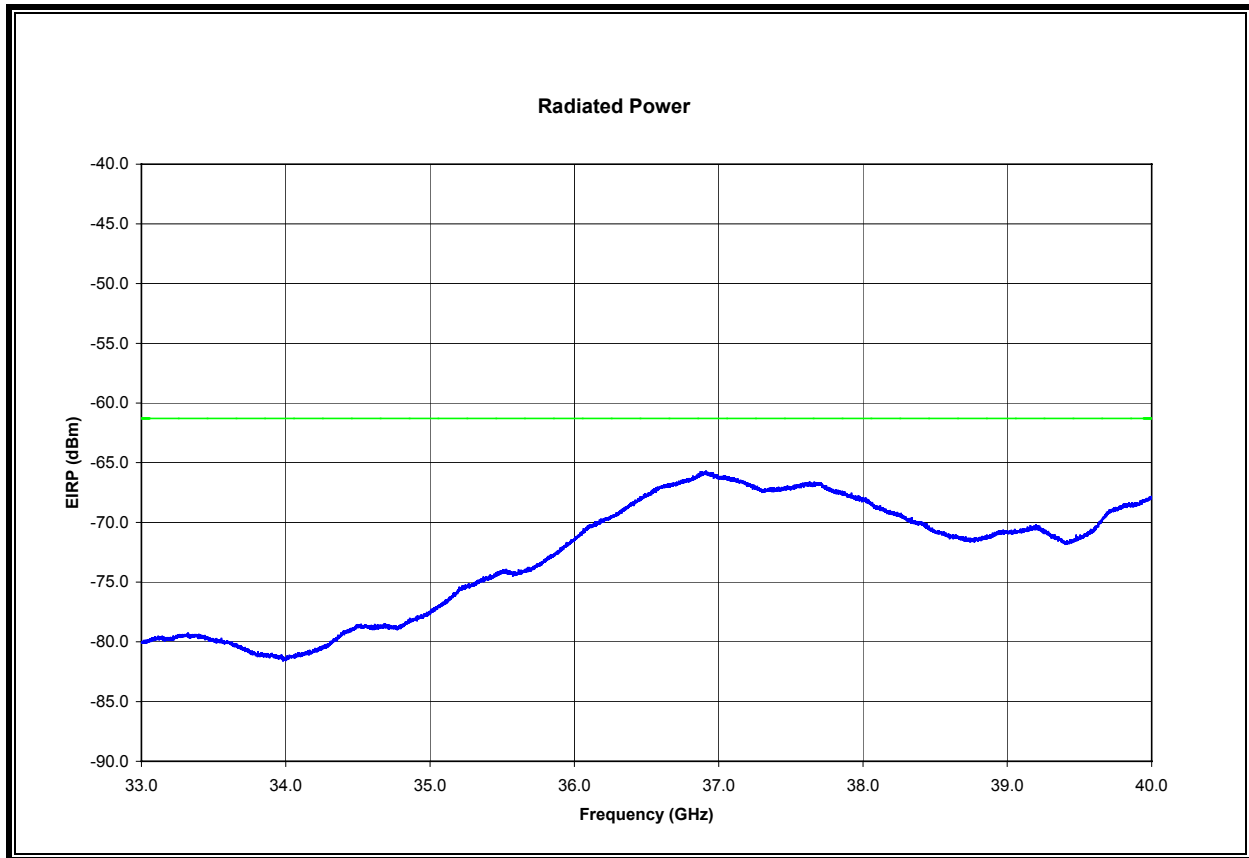


**EIRP 33 TO 40 GHz, 1 MHz BW, VERTICAL**

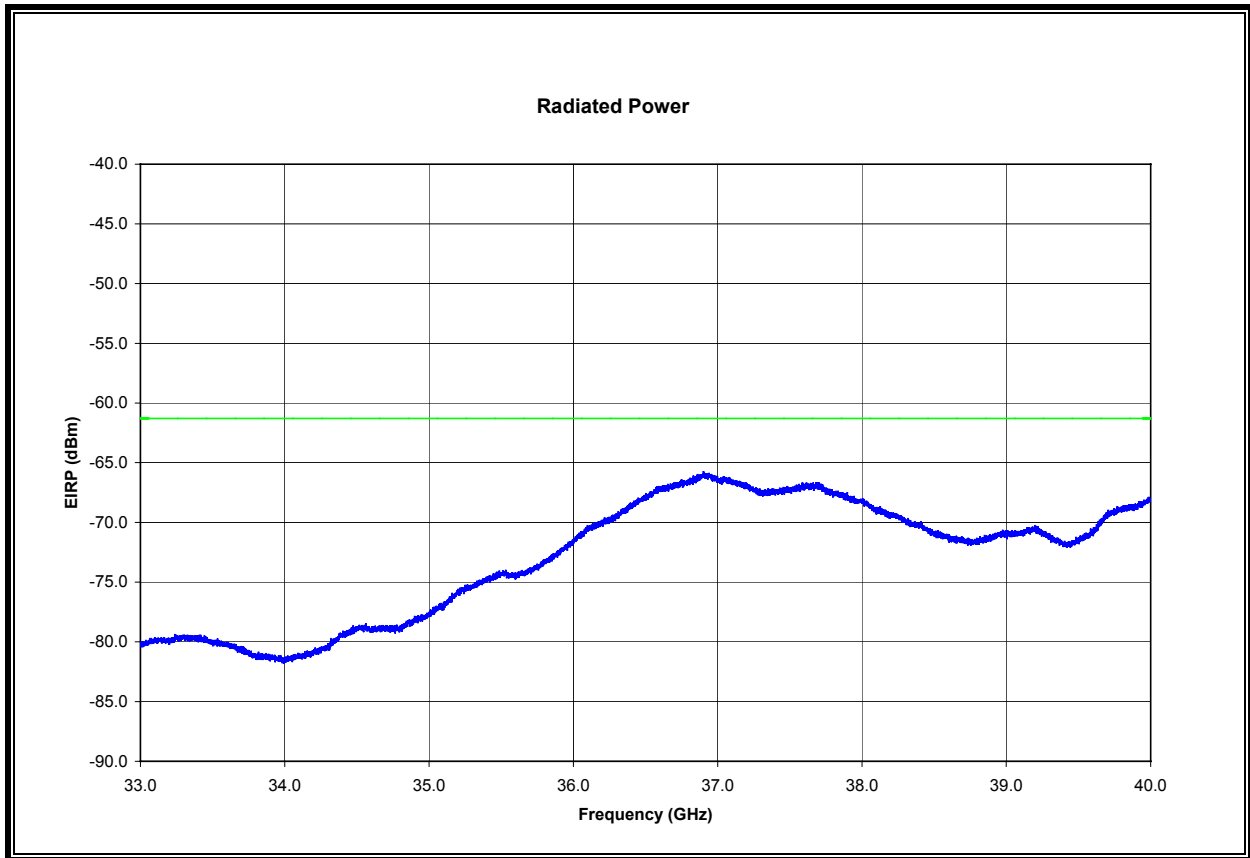


**EIRP 1.164 TO 1.240 GHz, 1 kHz BW, HORIZONTAL**

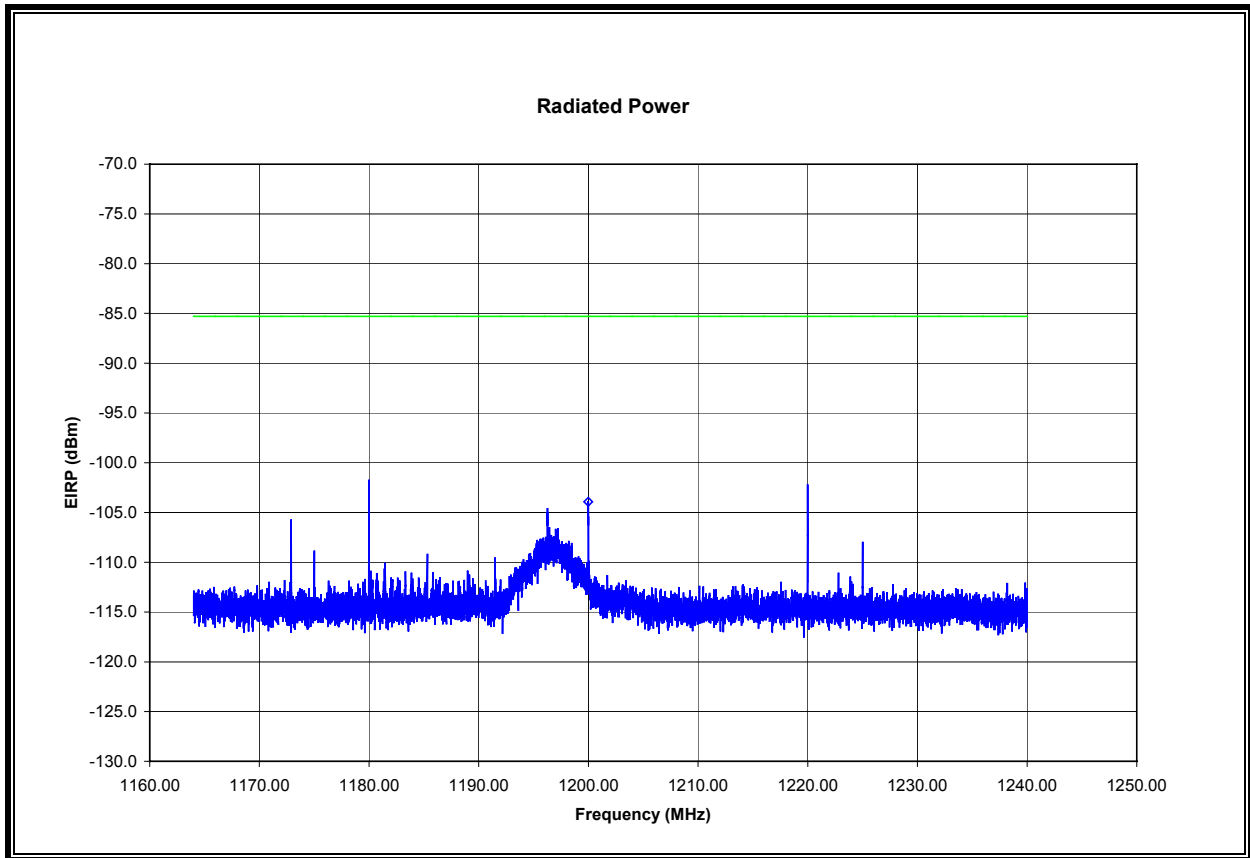

**EIRP 1.164 TO 1.240 GHz, 1 kHz BW, VERTICAL**

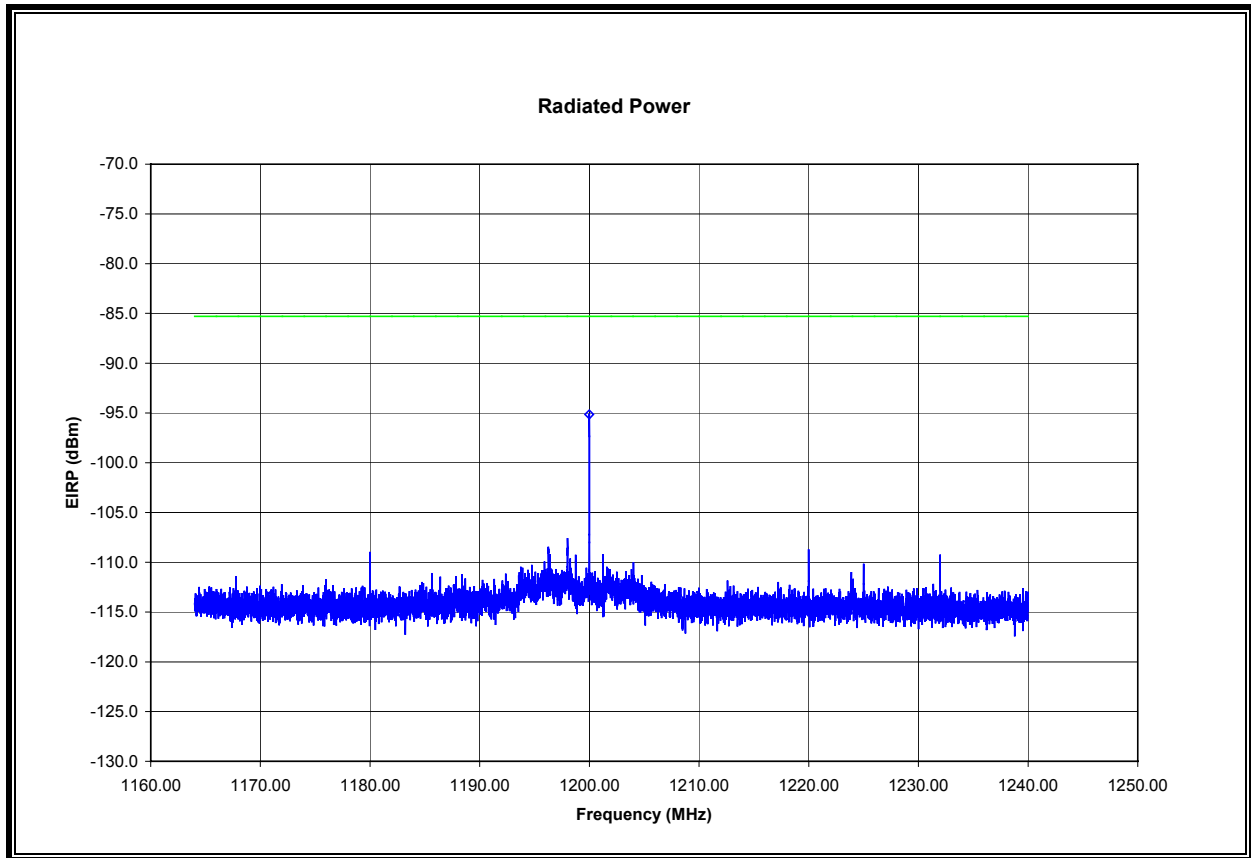


**EIRP 1.559 TO 1.610 GHz, 1 kHz BW, HORIZONTAL**

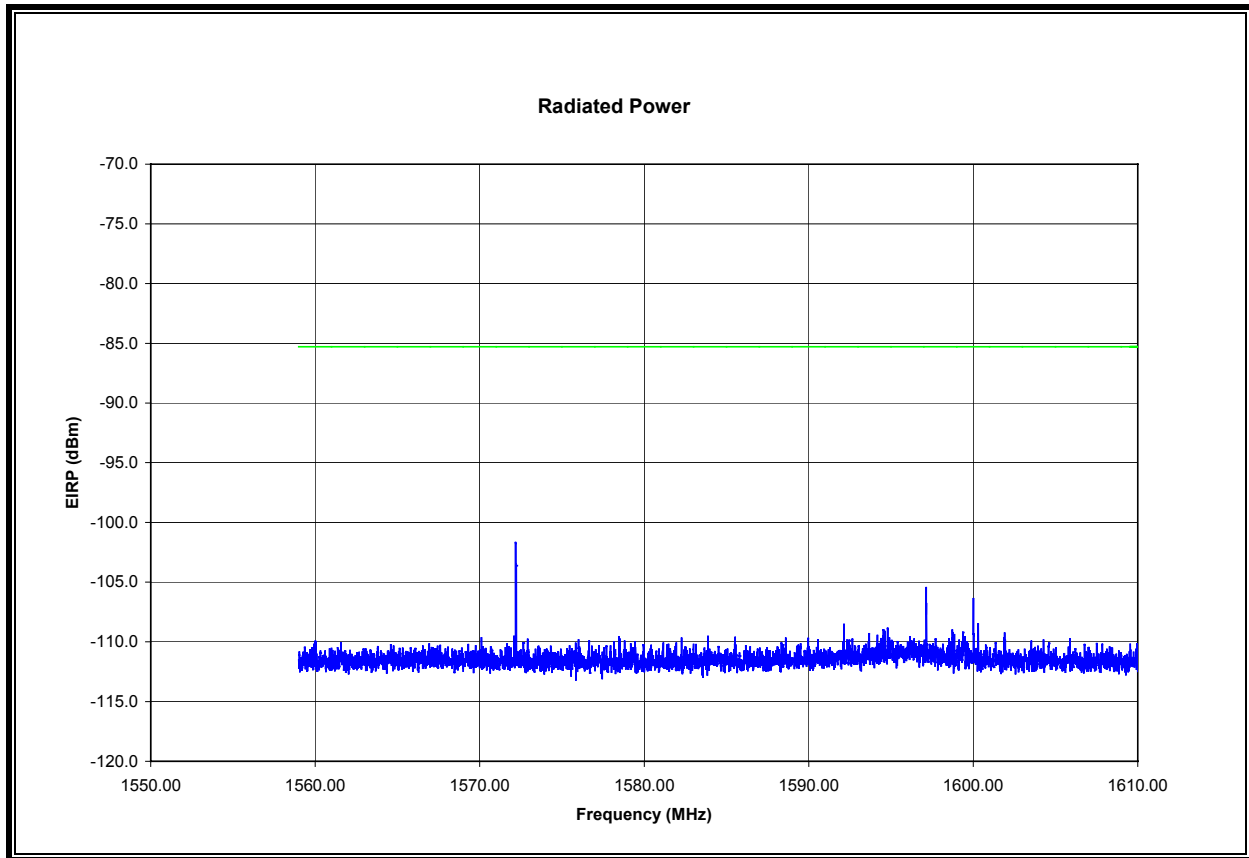




**EIRP 1.559 TO 1.610 GHz, 1 kHz BW, VERTICAL**

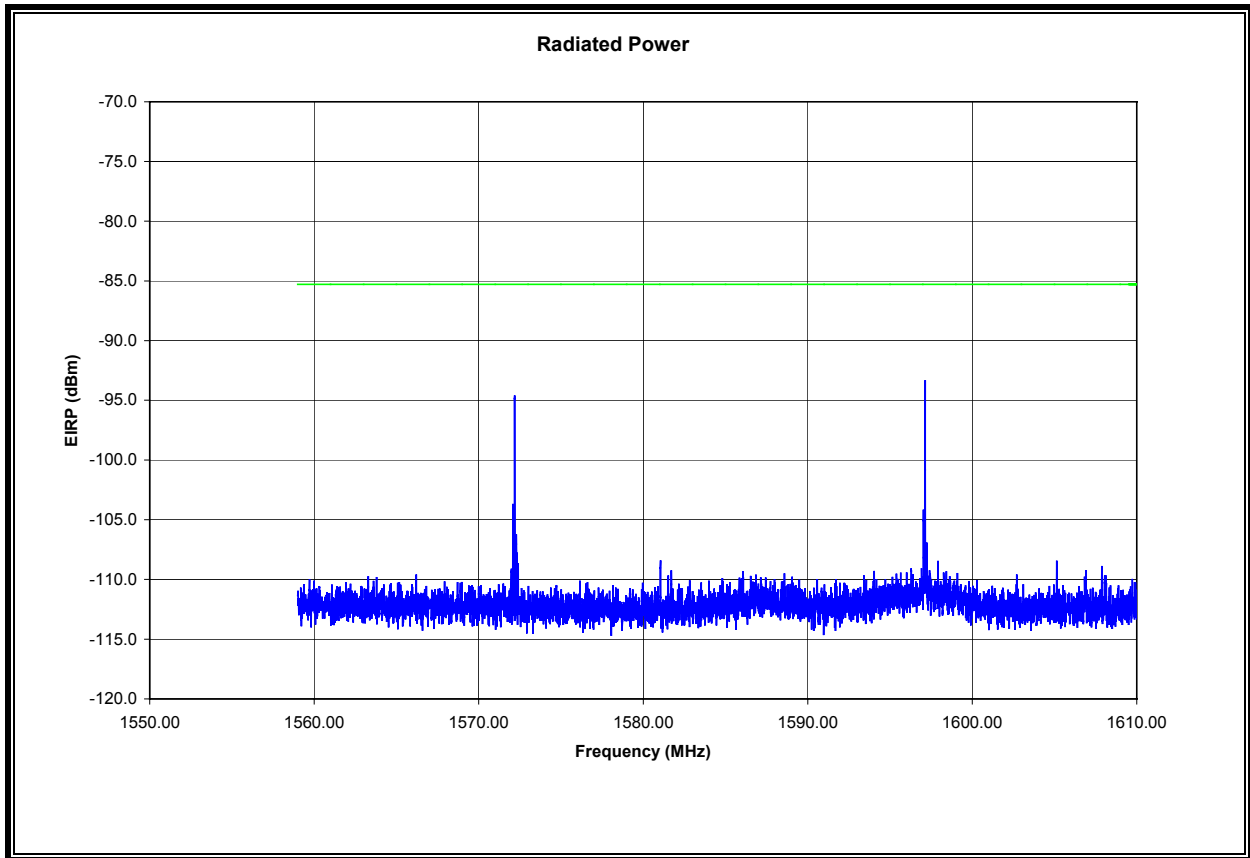

### 8.1.4. RADIATED EMISSIONS BELOW 960 MHz

§15.519 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209.


#### SPURIOUS EMISSIONS 30 TO 960 MHz (HORIZONTAL)

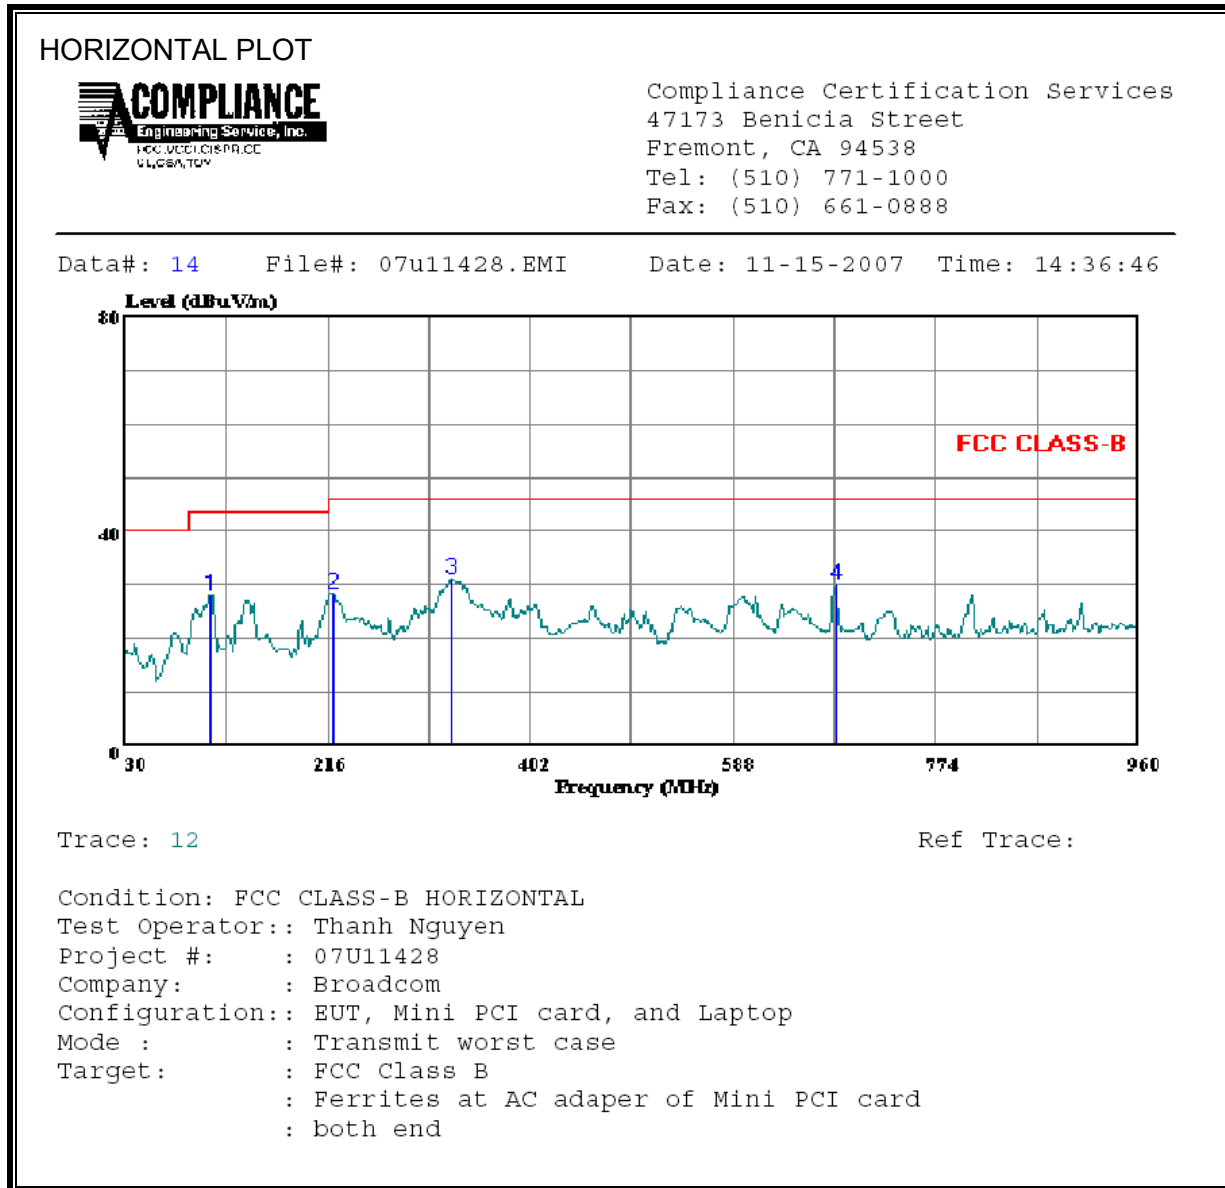

HORIZONTAL DATA

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV/m	dB	dBuV/m	dB	
1	108.570	47.17	28.16	-19.01	43.50	-15.34	Peak
2	221.090	47.12	28.28	-18.84	46.00	-17.72	Peak
3	329.730	46.16	31.24	-14.92	46.00	-14.76	Peak
4	681.840	38.88	30.15	-8.73	46.00	-15.85	Peak

**SPURIOUS EMISSIONS 30 TO 960 MHz (VERTICAL)**

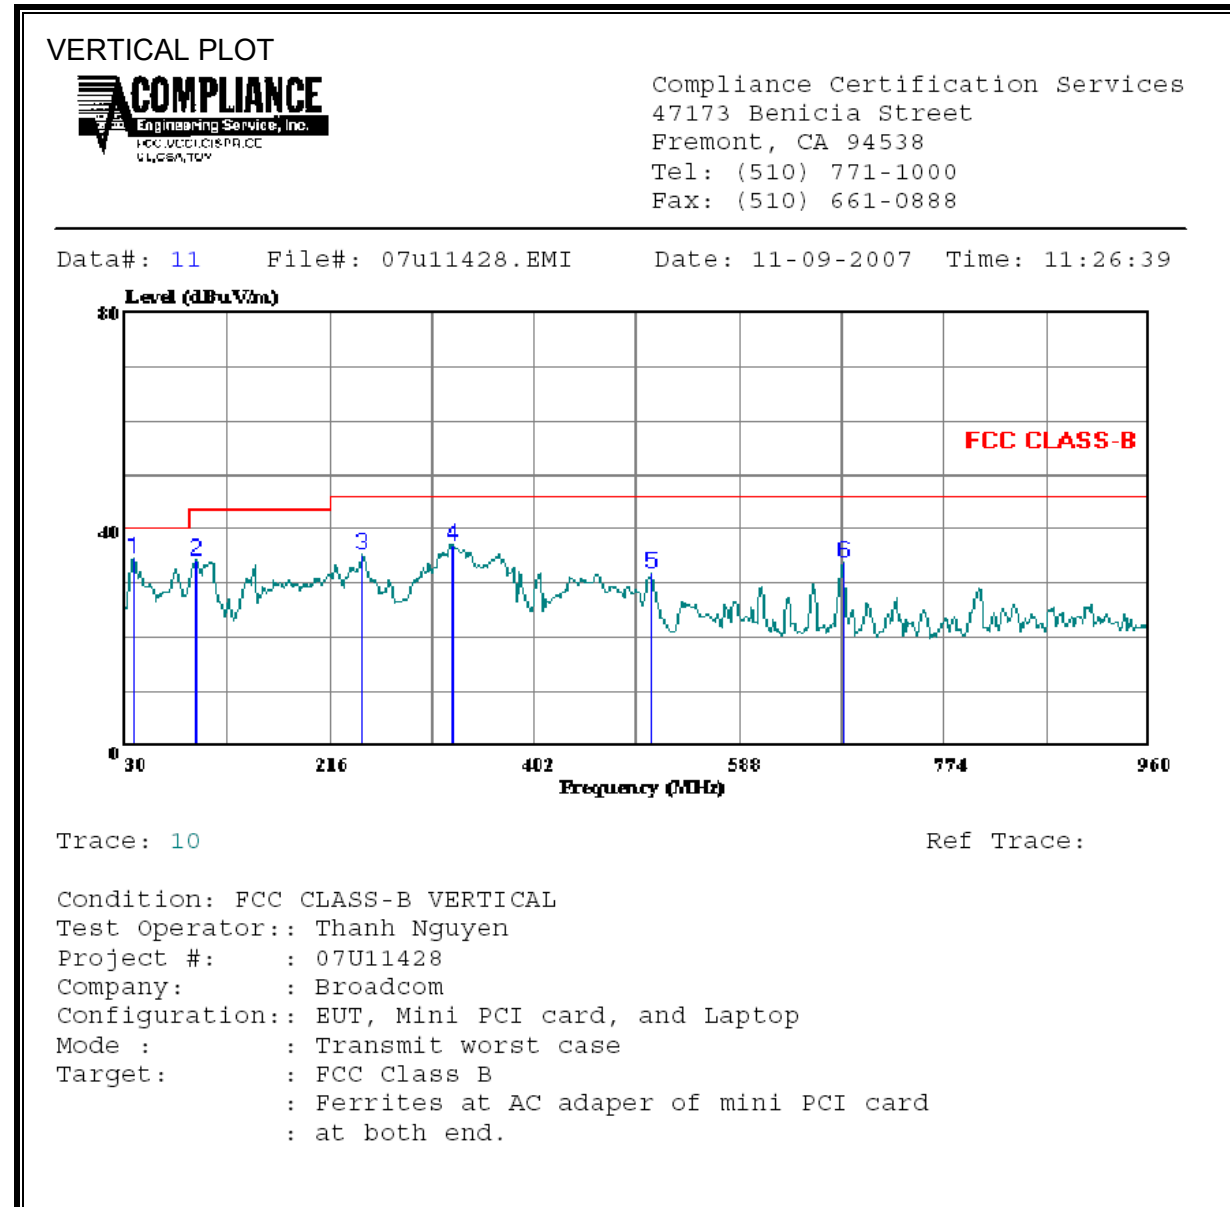

VERTICAL DATA

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV/m	dB	dBuV/m	dB	
1	38.730	49.57	34.71	-14.86	40.00	-5.29	Peak
2	94.990	56.07	34.28	-21.79	43.50	-9.22	Peak
3	245.340	53.36	35.38	-17.98	46.00	-10.62	Peak
4	327.790	52.10	36.98	-15.12	46.00	-9.02	Peak
5	507.240	42.95	31.76	-11.19	46.00	-14.24	Peak
6	681.840	42.83	34.10	-8.73	46.00	-11.90	Peak

## 8.2. RESULTS FOR LOW POWER SETTING

### 8.2.1. UWB BANDWIDTH, CENTER FREQUENCY, AND FRACTIONAL BW

#### DEFINITIONS AND LIMITS

§15.503 Definitions.

(a) UWB Bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ . The frequency at which the highest radiated emission occurs is designated  $f_M$ .

(b) Center frequency. The center frequency,  $f_C$ , equals  $(f_H + f_L)/2$ .

(c) Fractional bandwidth. The fractional bandwidth equals  $2(f_H - f_L)/(f_H + f_L)$ .

(d) Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

§15.519 (b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

#### TEST PROCEDURE

Radiated measurements are made using the procedures described above. The detection mode is set to peak detection, the sweep time is AUTO, and the Max Hold trace function is utilized. The frequency range from 3.1 to 10.6 GHz is measured, and corrected from raw values to Peak EIRP.

The frequency at which the maximum EIRP is measured is designated as  $f_M$ . A major graticule line of the plot is adjusted to exactly equal the peak EIRP at  $f_M$ . The spectral envelope at the major graticule line that is 10 dB below the reference graticule is examined to determine the frequency band bounded by the points that are 10 dB below the highest radiated emission. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ .

The center frequency,  $f_C$ , is calculated as  $(f_H + f_L)/2$ .

The antenna polarization that yields the highest EIRP at  $f_M$  is used to calculate the above parameters.

Calculations are made independently for each of the three channels.

**LOW CHANNEL RESULTS (HORIZONTAL POLARIZATION)**

<b>f Max (GHz)</b>	<b>Reference EIRP at f Max (dBm)</b>	<b>10 dB down from Reference EIRP (dBm)</b>
3.591	-36.1	-46.1


<b>f Low (GHz)</b>	<b>Minimum f Low (GHz)</b>
3.186	3.1

<b>f High (GHz)</b>	<b>Maximum f High (GHz)</b>
3.688	10.6

<b>f Center (GHz)</b>
3.437

<b>UWB BW (MHz)</b>	<b>Minimum UWB BW (MHz)</b>
502	500

**PLOT WITH REFERENCE GRATICULE ADJUSTED FOR LOW CHANNEL F MAX**

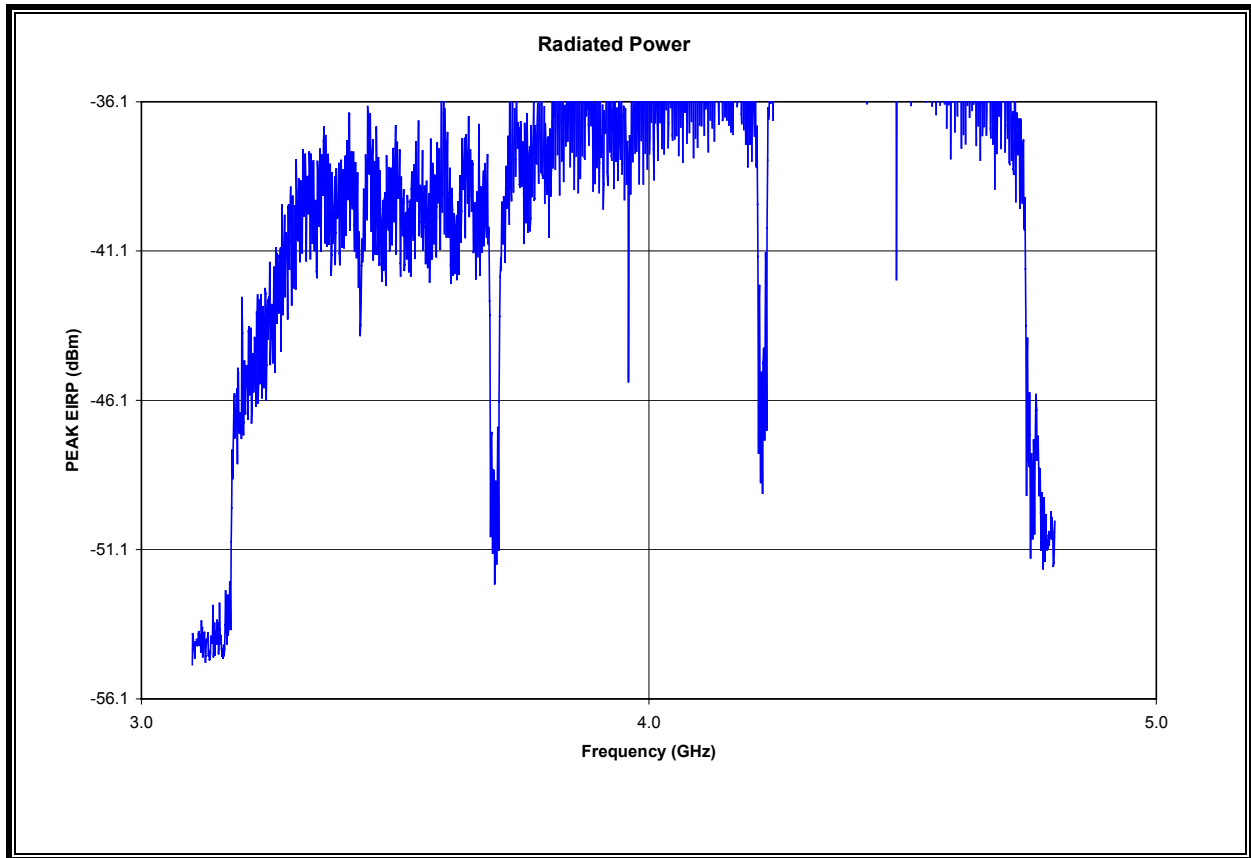



**MID CHANNEL RESULTS (HORIZONTAL POLARIZATION)**

<b>f Max (GHz)</b>	<b>Reference EIRP at f Max (dBm)</b>	<b>10 dB down from Reference EIRP (dBm)</b>
4.193	-32.9	-42.9


<b>f Low (GHz)</b>	<b>Minimum f Low (GHz)</b>
3.706	3.1

<b>f High (GHz)</b>	<b>Maximum f High (GHz)</b>
4.217	10.6

<b>f Center (GHz)</b>
3.962

<b>UWB BW (MHz)</b>	<b>Minimum UWB BW (MHz)</b>
511	500

**PLOT WITH REFERENCE GRATICULE ADJUSTED FOR MID CHANNEL F MAX**

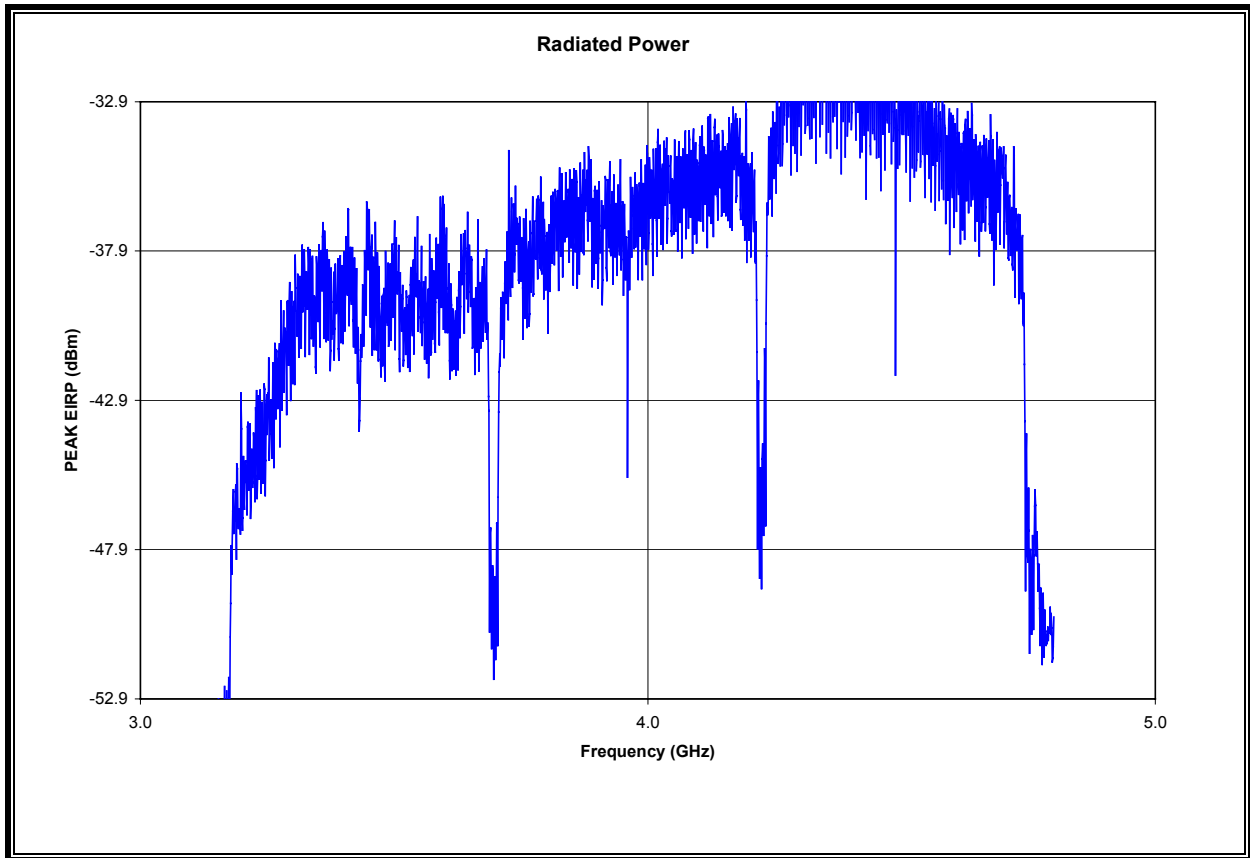

**HIGH CHANNEL RESULTS (HORIZONTAL POLARIZATION)**

<b>f Max (GHz)</b>	<b>Reference EIRP at f Max (dBm)</b>	<b>10 dB down from Reference EIRP (dBm)</b>
4.346	-30.0	-40.0


<b>f Low (GHz)</b>	<b>Minimum f Low (GHz)</b>
4.233	3.1

<b>f High (GHz)</b>	<b>Maximum f High (GHz)</b>
4.739	10.6

<b>f Center (GHz)</b>
4.486

<b>UWB BW (MHz)</b>	<b>Minimum UWB BW (MHz)</b>
506	500

**PLOT WITH REFERENCE GRATICULE ADJUSTED FOR HIGH CHANNEL F MAX**

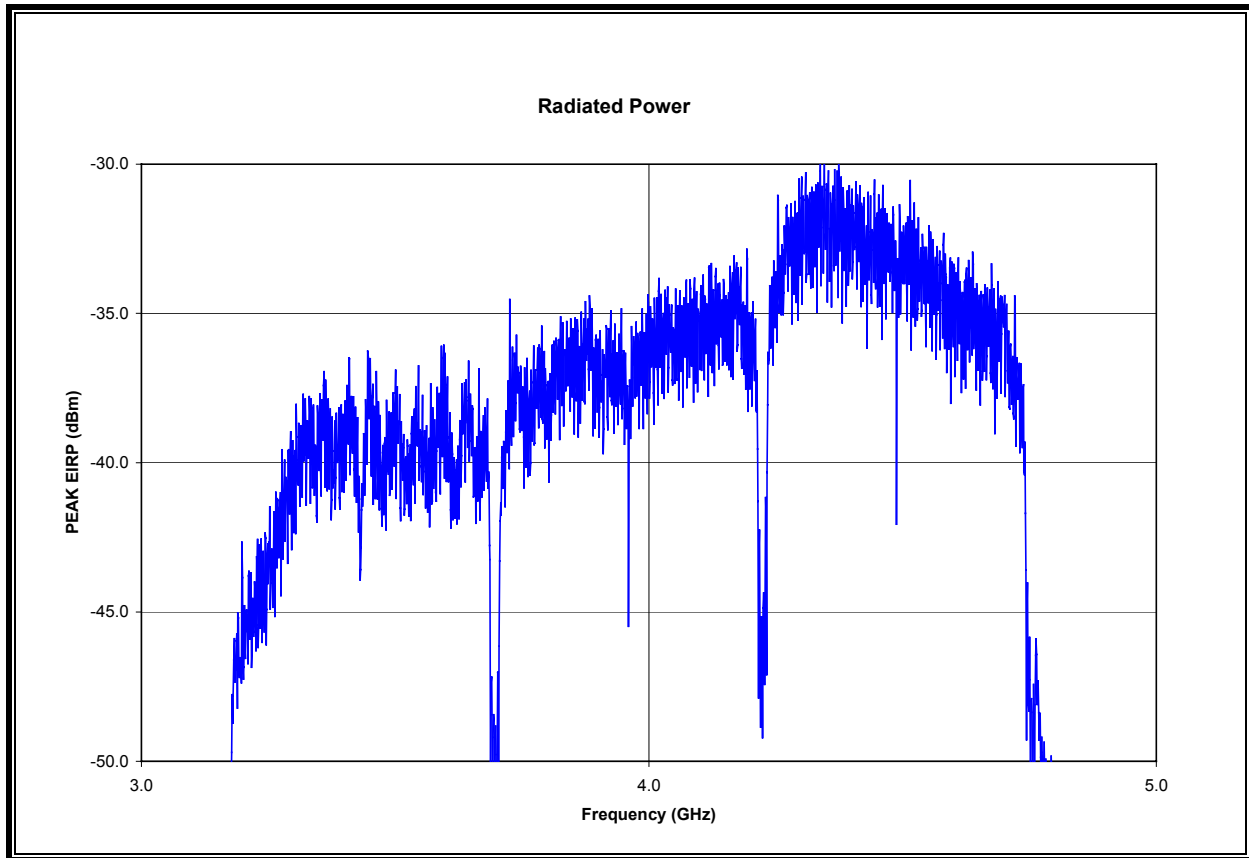

## 8.2.2. PEAK POWER

### LIMIT

§15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_M$ . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

§15.521 (g) When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs,  $f_M$ . If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be  $20 \log (RBW/50)$  dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using  $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2$ . If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

§15.521 (e) The frequency at which the highest radiated emission occurs,  $f_M$ , must be contained within the UWB bandwidth.

### TEST PROCEDURE

Radiated measurements are made using the procedures described above.

The spectrum analyzer center frequency is set to  $f_M$ . The frequency span is set to 50 MHz. The RBW and VBW are both set to 3 MHz. The detector function is set to peak.

**RESULTS**

RBW =	3	Limit =	-24.44	Distance =	3.0
-------	---	---------	--------	------------	-----

**Low Channel**

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
3.598	59.6	30.50	7.50	-36.90	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
60.70	-95.20	-34.50	-24.44	-10.06

**Mid Channel**

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
4.131	63.2	31.70	8.20	-36.60	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
66.50	-95.20	-28.70	-24.44	-4.26

**High Channel**

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
4.374	64.4	31.90	8.40	-36.50	0.00

Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
68.20	-95.20	-27.00	-24.44	-2.56

### 8.2.3. RADIATED EMISSIONS ABOVE 960 MHz

#### LIMITS

§15.519 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960–1610	- 75.3
1610–1990	- 63.3
1990–3100	- 61.3
3100–10600	- 41.3
Above 10600	- 61.3

§15.519 (d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164–1240	- 85.3
1559–1610	- 85.3

§15.521 (d) Within the tables in §§15.509, 15.511, 15.513, 15.515, 15.517, and 15.519, the tighter emission limit applies at the band edges. Radiated emission levels above 960 MHz are based on RMS average measurements over a 1 MHz resolution bandwidth. The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

§15.521 (e) The frequency at which the highest radiated emission occurs,  $f_M$ , must be contained within the UWB bandwidth.

#### TEST PROCEDURE

Radiated measurements are made using the procedures described above. The number of points on the horizontal axis of the spectrum analyzer is set to (frequency span in MHz + 1) and the sweep time is set to (frequency span in MHz) milliseconds, the RBW is set to 1 MHz and the detector function is set to RMS average.

For the requirements of §15.519 (d), an RBW of 10 kHz is utilized.

**RESULTS**

The highest radiated emission at  $f_M$  is as follows:


Polarization =	Horizontal	Distance =	3.0
----------------	------------	------------	-----

f Max (GHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable (dB)	Preamp (dB)	Distance Factor (dB)
4.353	49.0	31.9	8.4	-36.5	0.00


Field Strength at 3 meters (dBuV/m)	EIRP Conversion Factor	EIRP (dBm/MHz)	EIRP Limit (dBm/MHz)	Margin (dB)
52.80	-95.2	-42.4	-41.3	-1.1




**EIRP 0.960 TO 1.610 GHz, 1 MHz BW, HORIZONTAL**

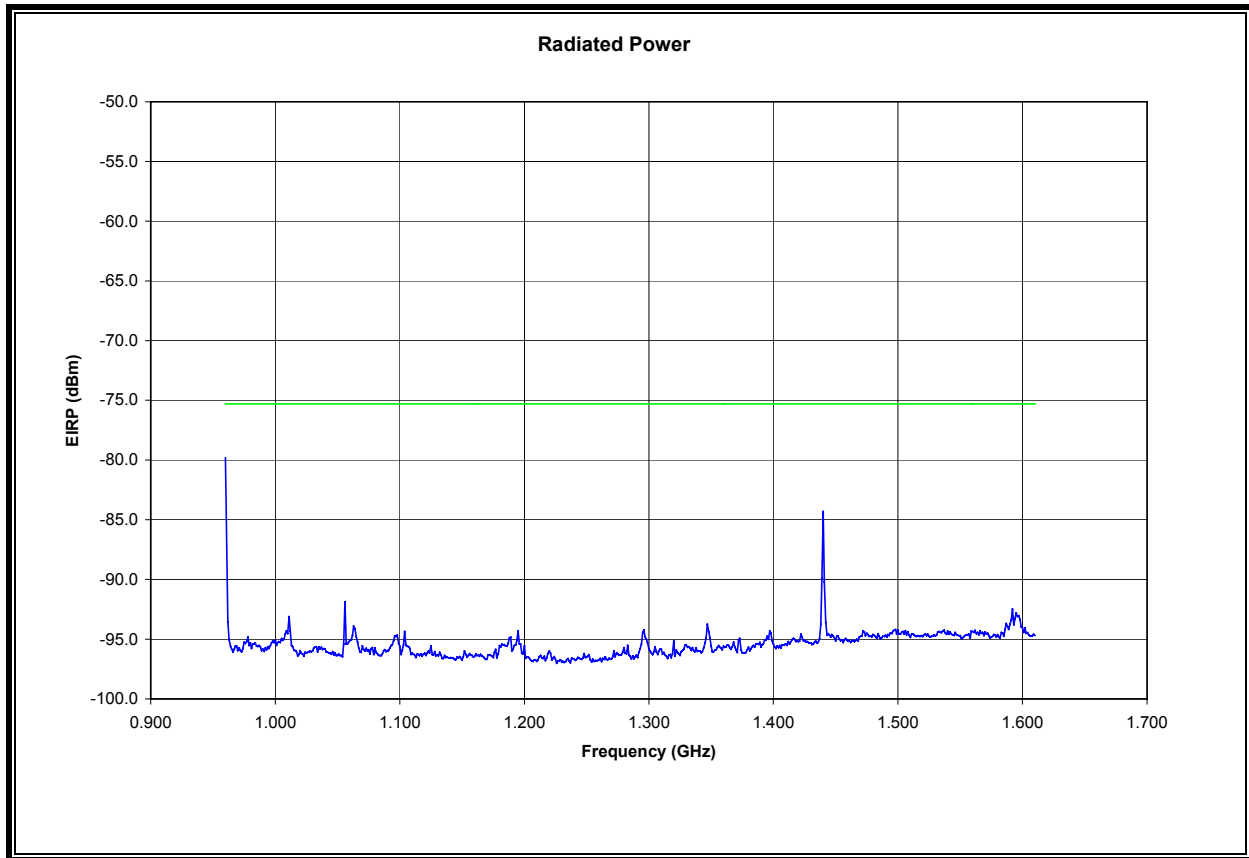


**EIRP 0.960 TO 1.610 GHz, 1 MHz BW, VERTICAL**

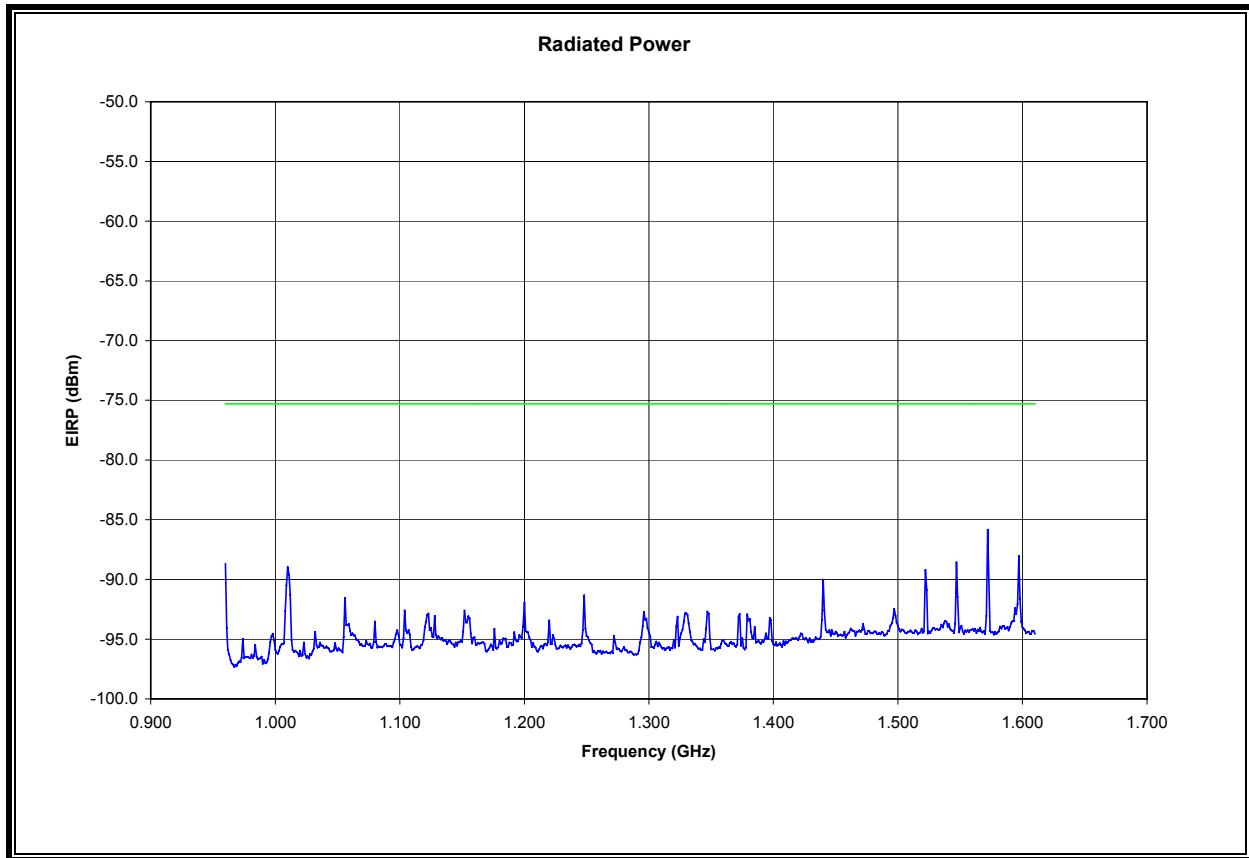


**EIRP 1.610 TO 1.990 GHz, 1 MHz BW, HORIZONTAL**

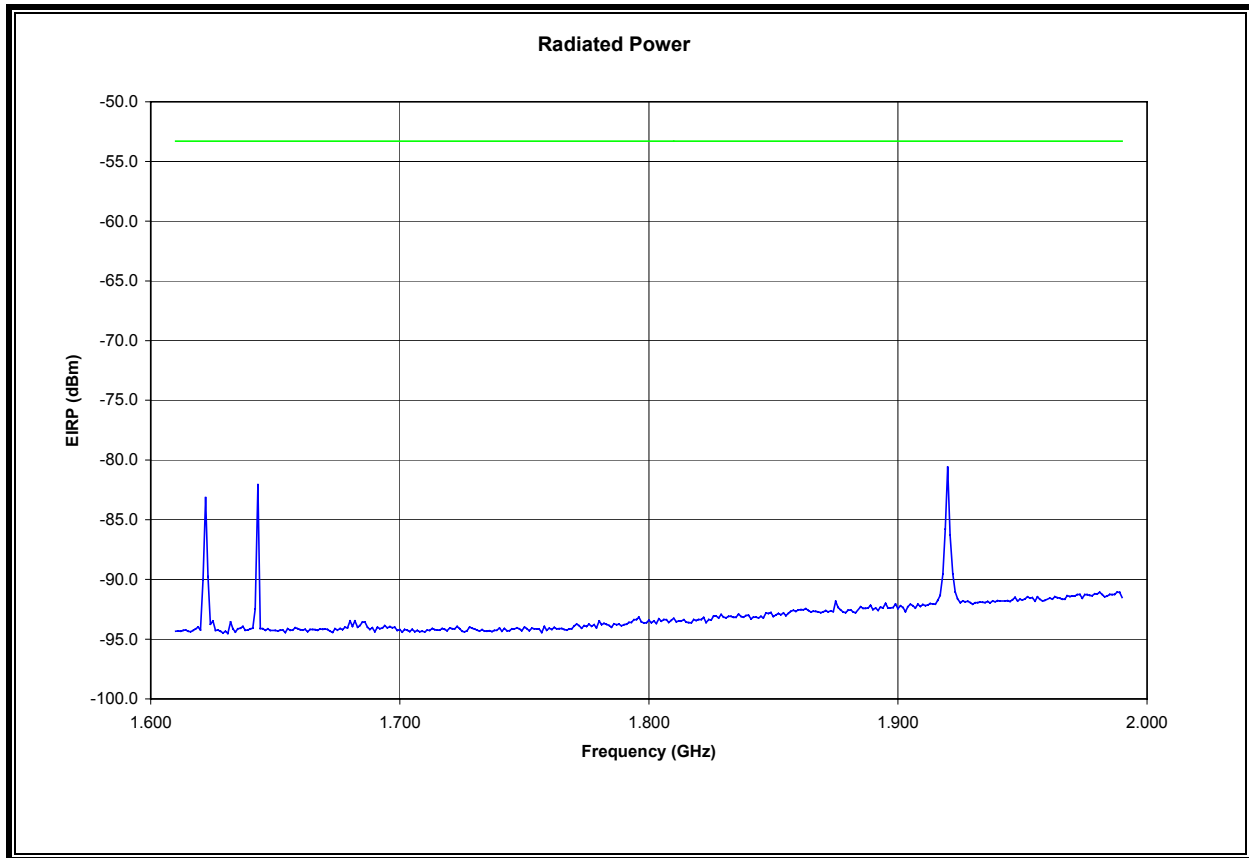


**EIRP 1.610 TO 1.990 GHz, 1 MHz BW, VERTICAL**

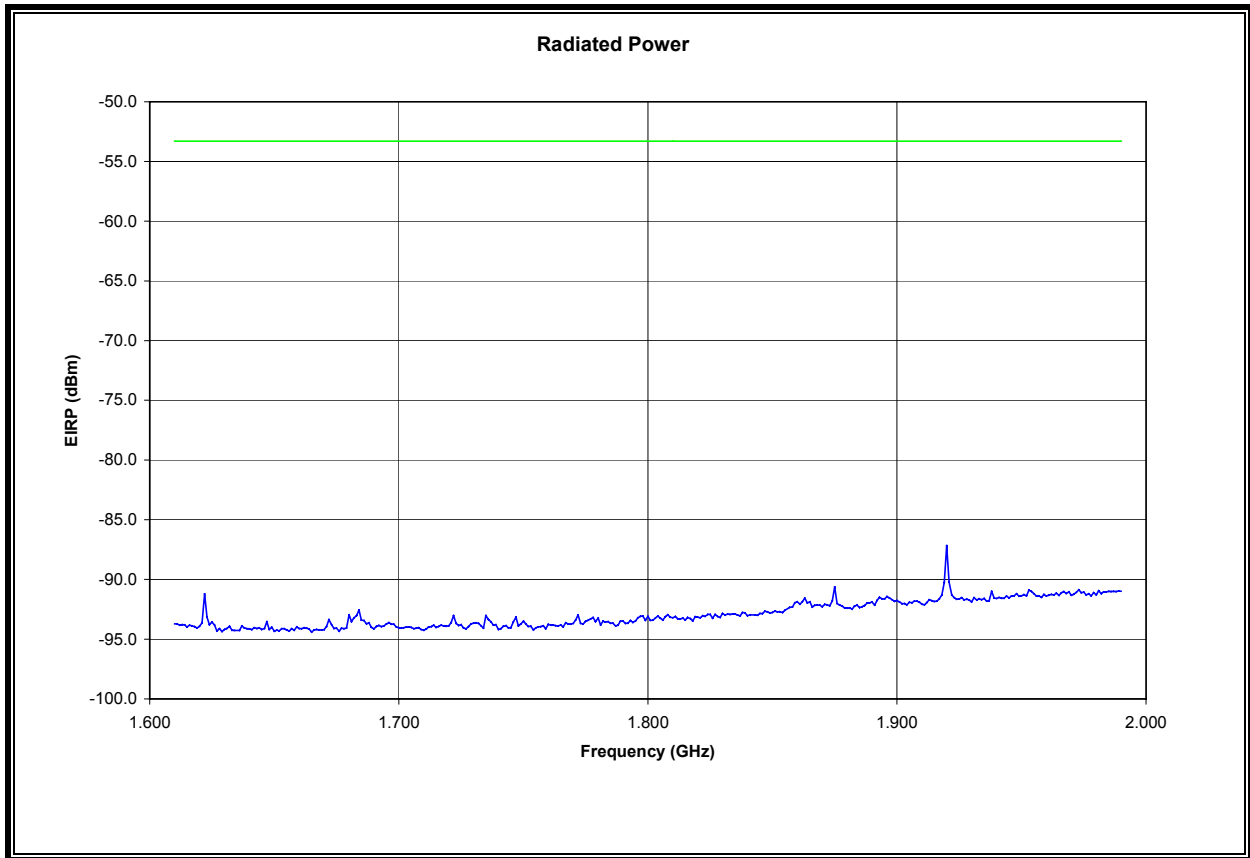


**EIRP 1.990 TO 3.100 GHz, 1 MHz BW, HORIZONTAL**

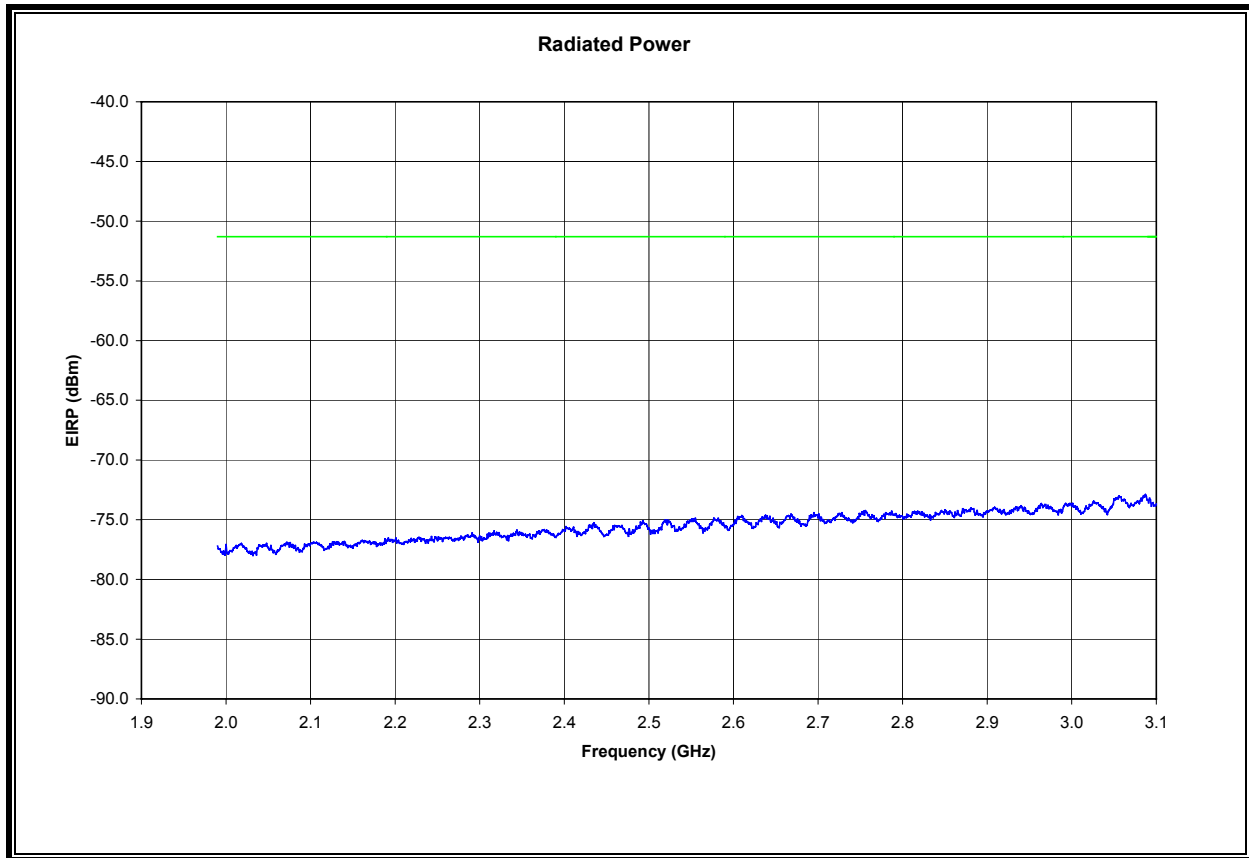


**EIRP 1.990 TO 3.100 GHz, 1 MHz BW, VERTICAL**

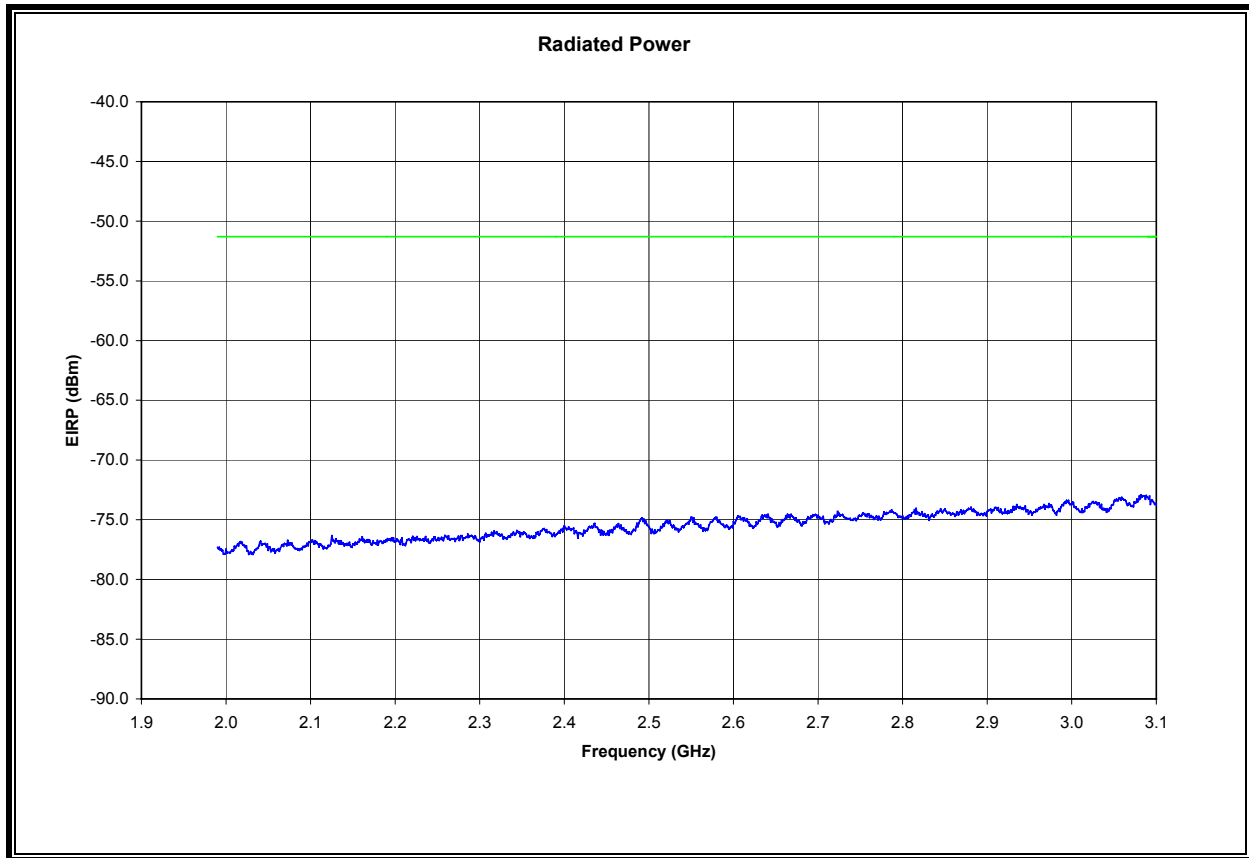

**EIRP 3.1 TO 10.6 GHz, 1 MHz BW, HORIZONTAL**

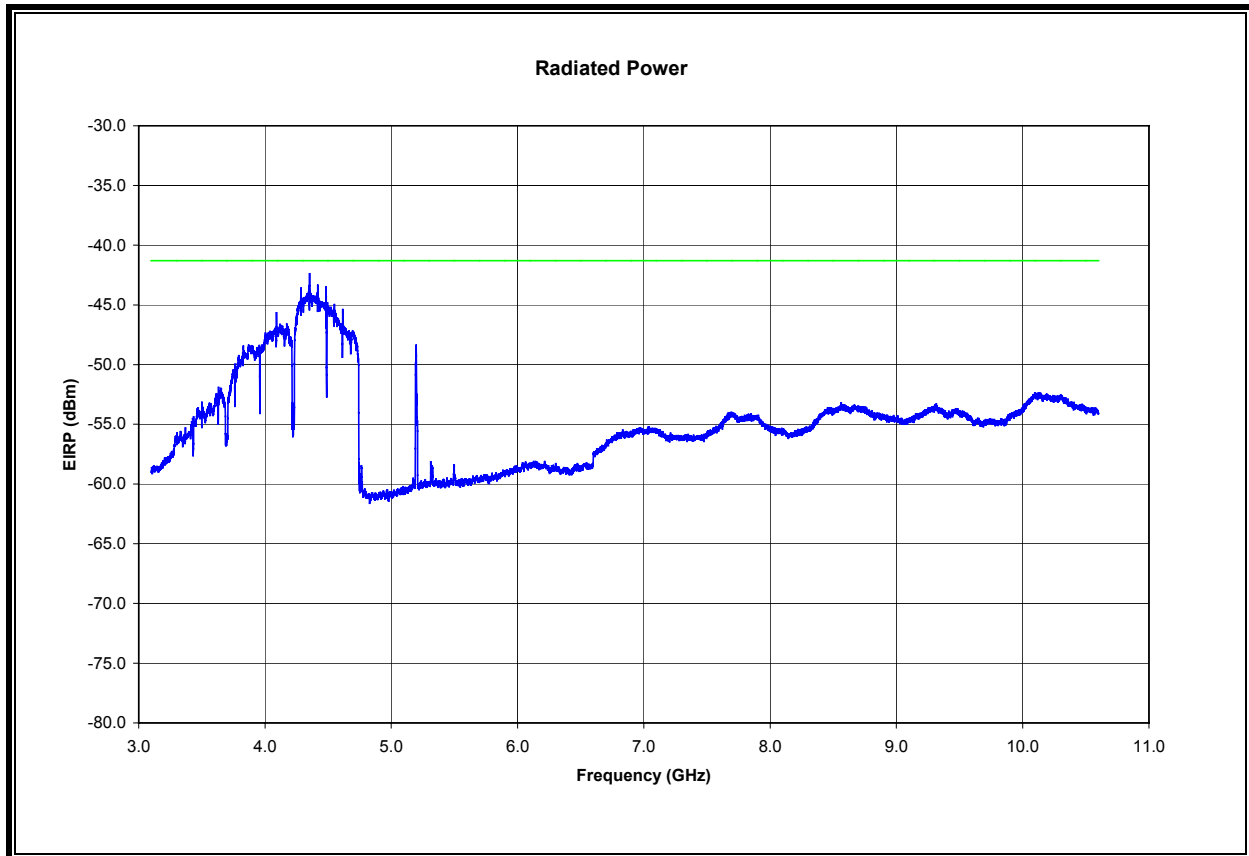


**EIRP 3.1 TO 10.6 GHz, 1 MHz BW, VERTICAL**

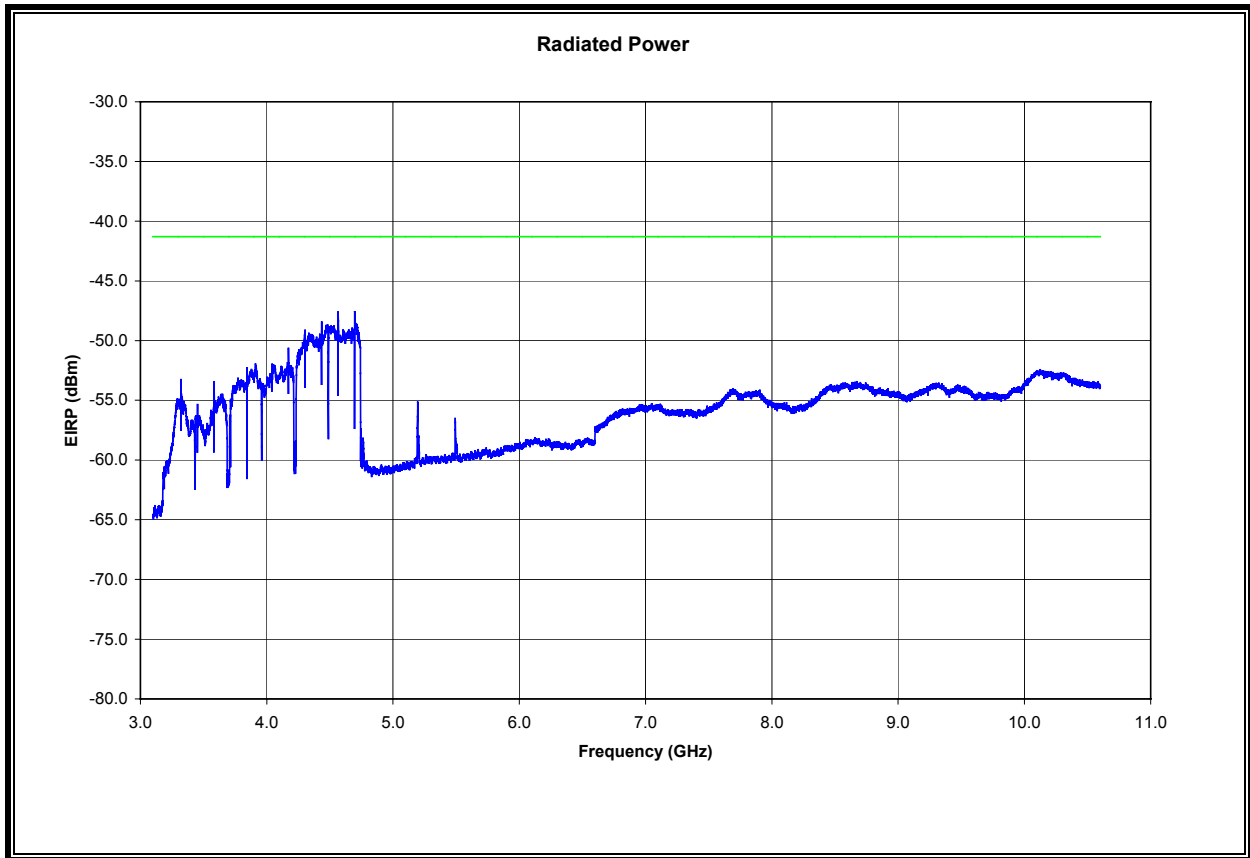





**EIRP 10.6 TO 18 GHz, 1 MHz BW, HORIZONTAL**

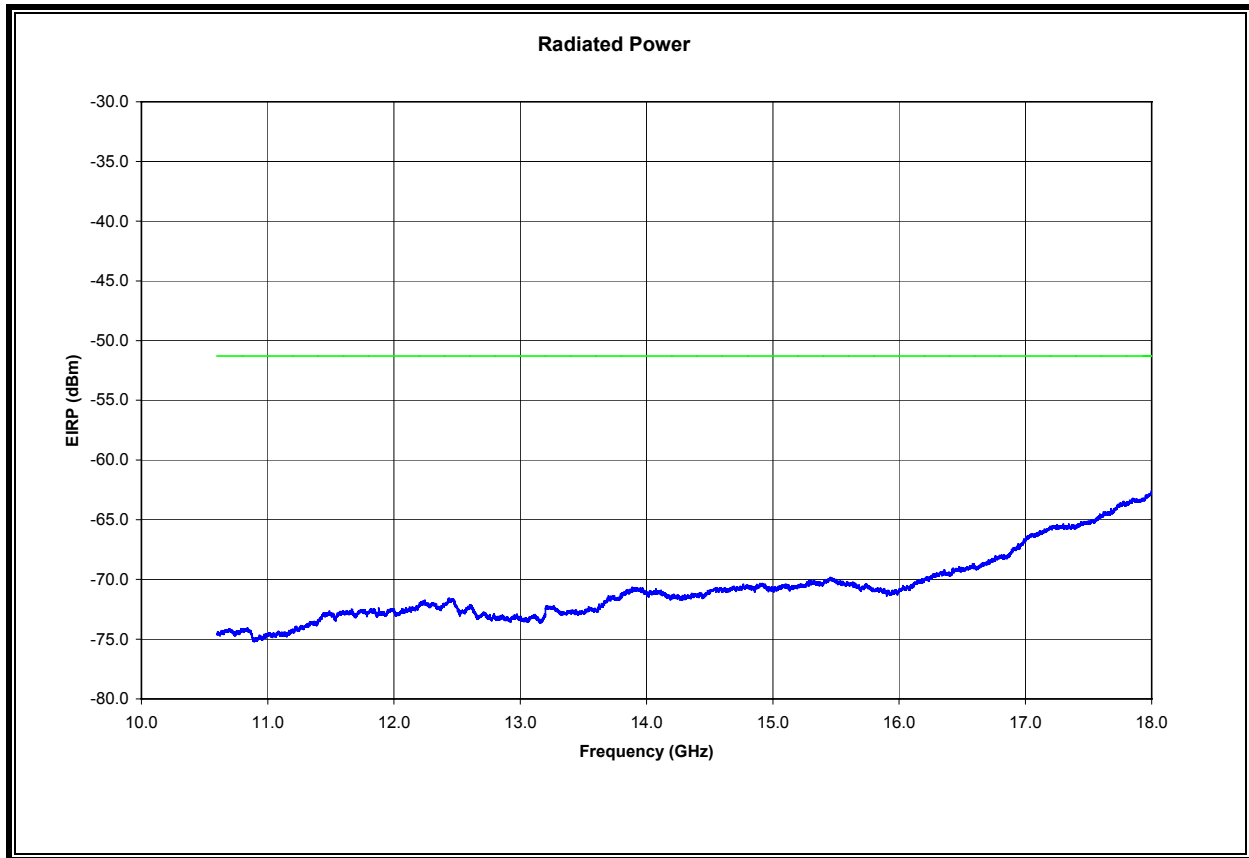


**EIRP 10.6 TO 18 GHz, 1 MHz BW, VERTICAL**

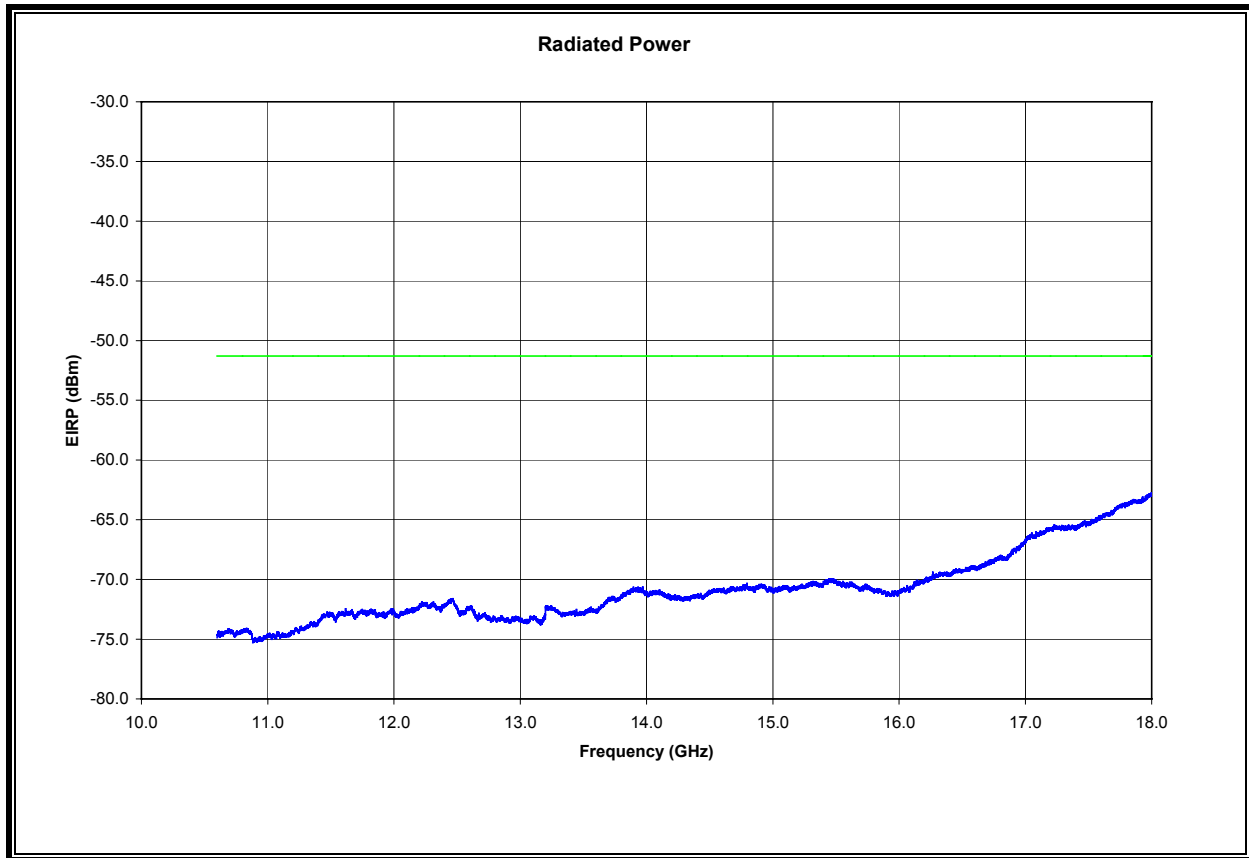


**EIRP 18 TO 26 GHz, 1 MHz BW, HORIZONTAL**

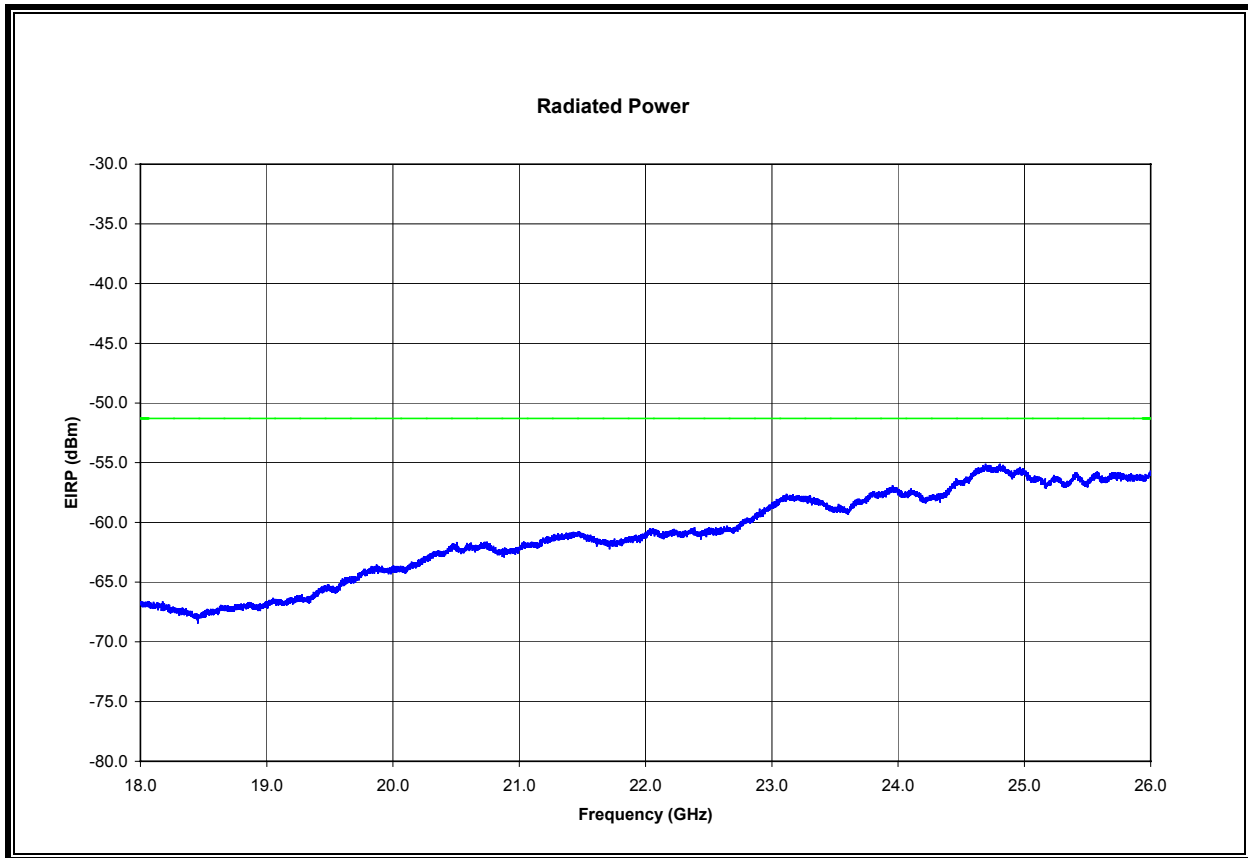


**EIRP 18 TO 26 GHz, 1 MHz BW, VERTICAL**

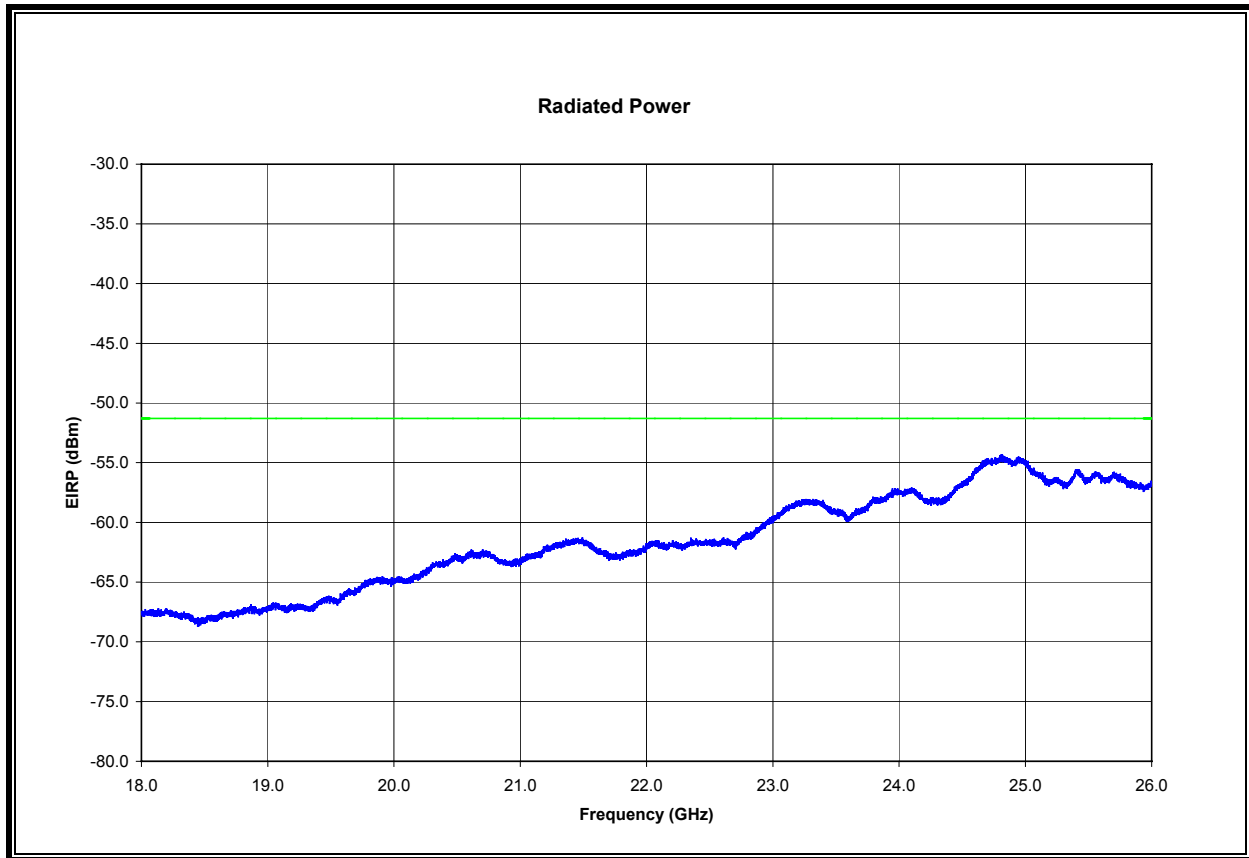


**EIRP 26 TO 33 GHz, 1 MHz BW, HORIZONTAL**

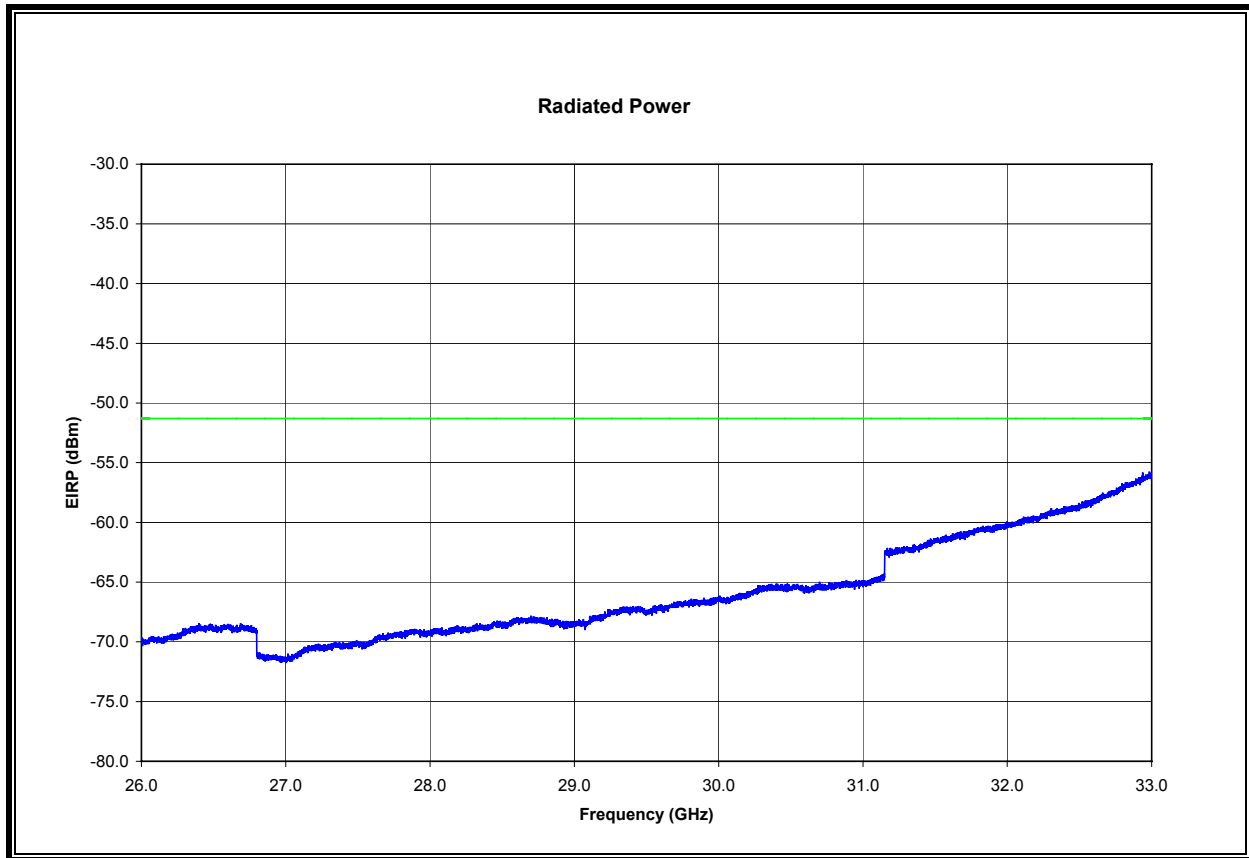


**EIRP 26 TO 33 GHz, 1 MHz BW, VERTICAL**

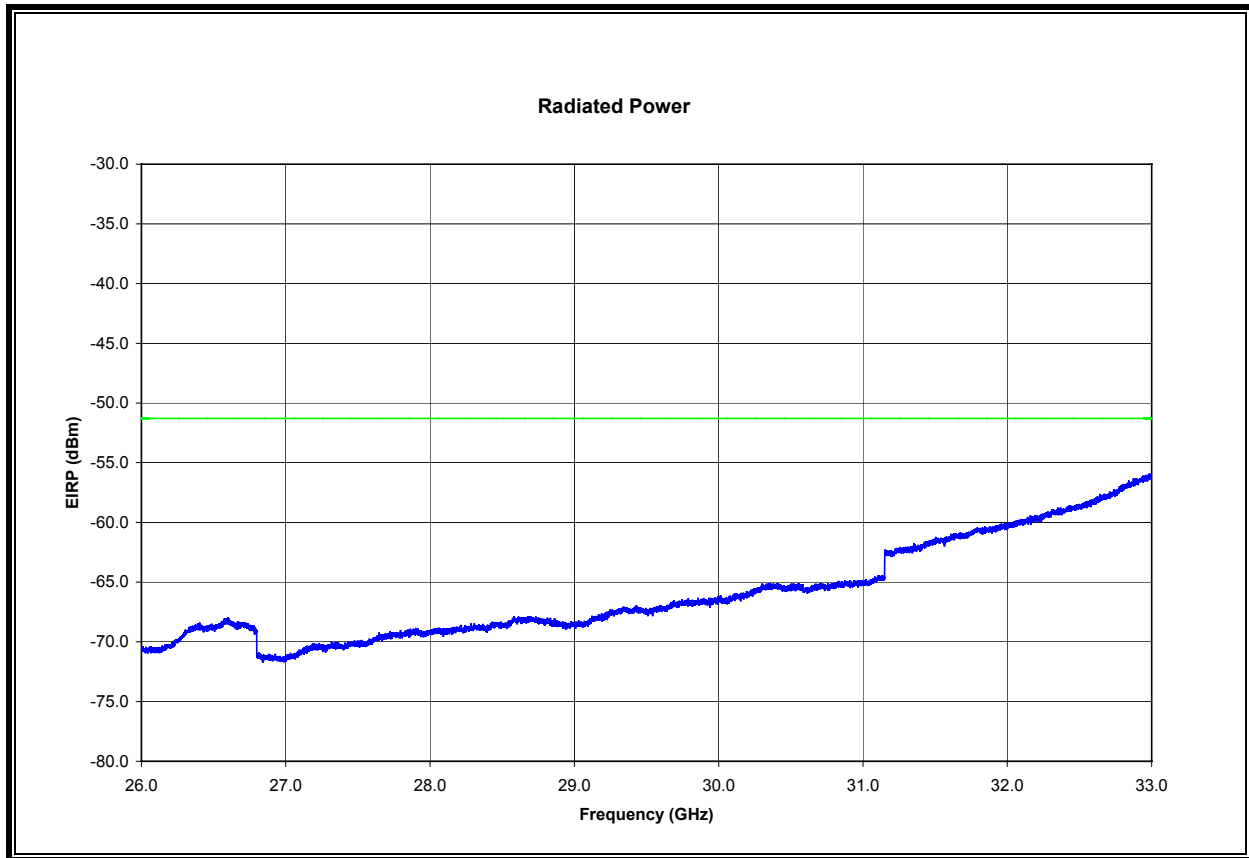

**EIRP 33 TO 40 GHz, 1 MHz BW, HORIZONTAL**

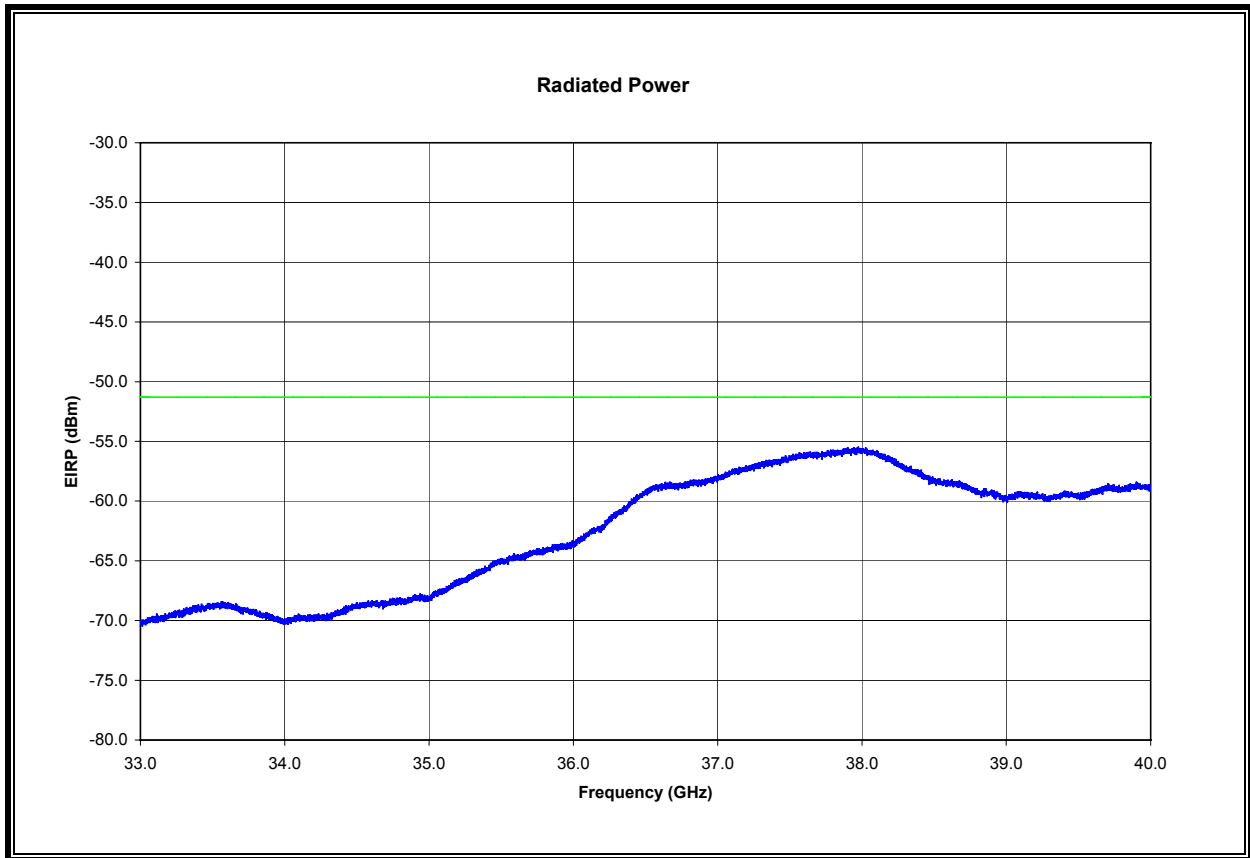


**EIRP 33 TO 40 GHz, 1 MHz BW, VERTICAL**

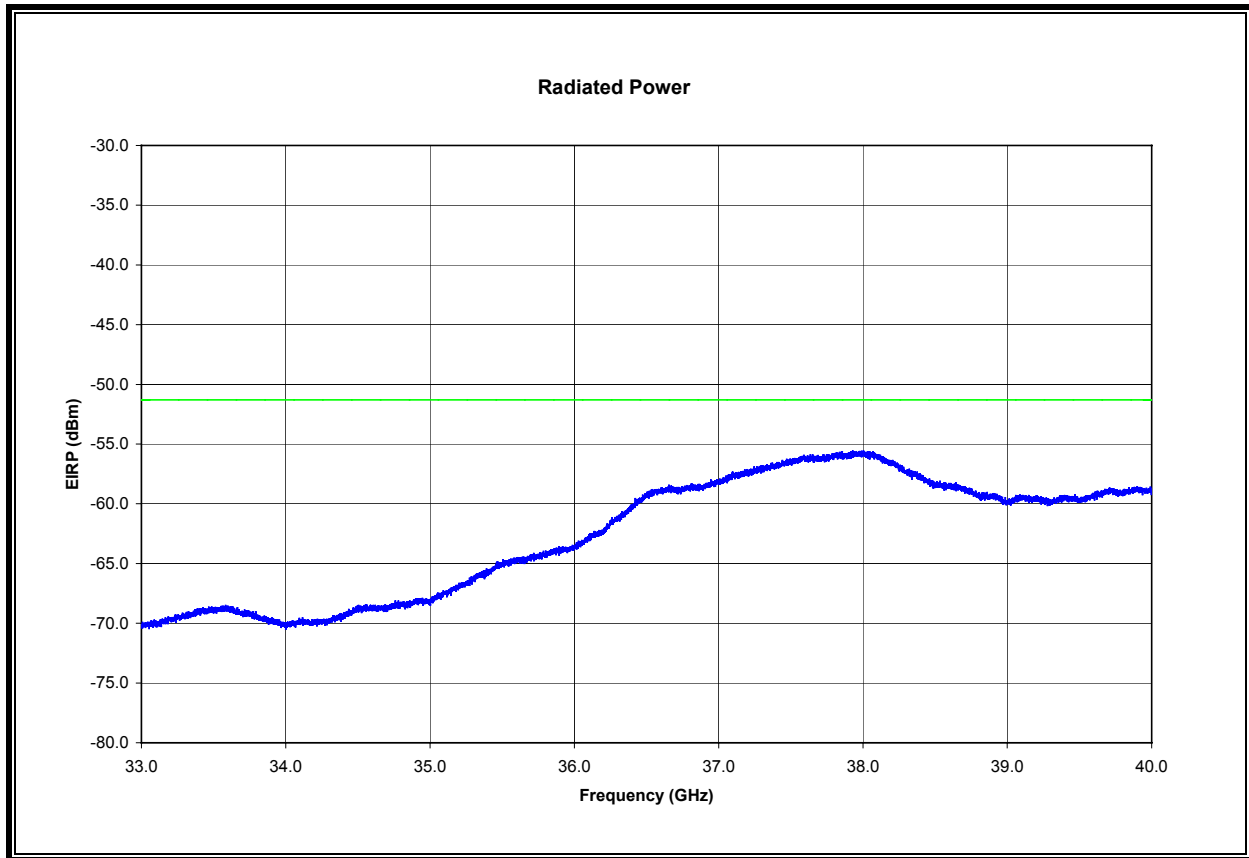





**EIRP 1.164 TO 1.240 GHz, 1 kHz BW, HORIZONTAL**

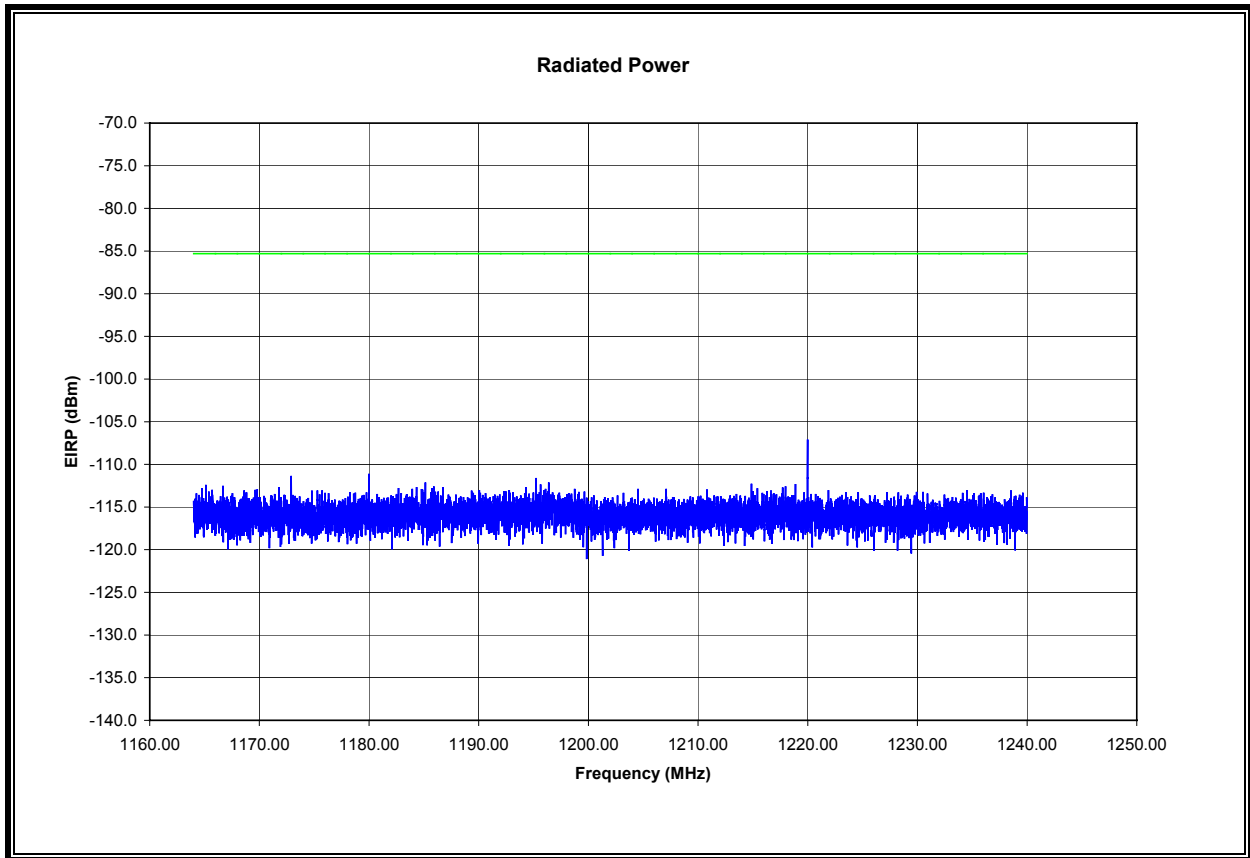


**EIRP 1.164 TO 1.240 GHz, 1 kHz BW, VERTICAL**

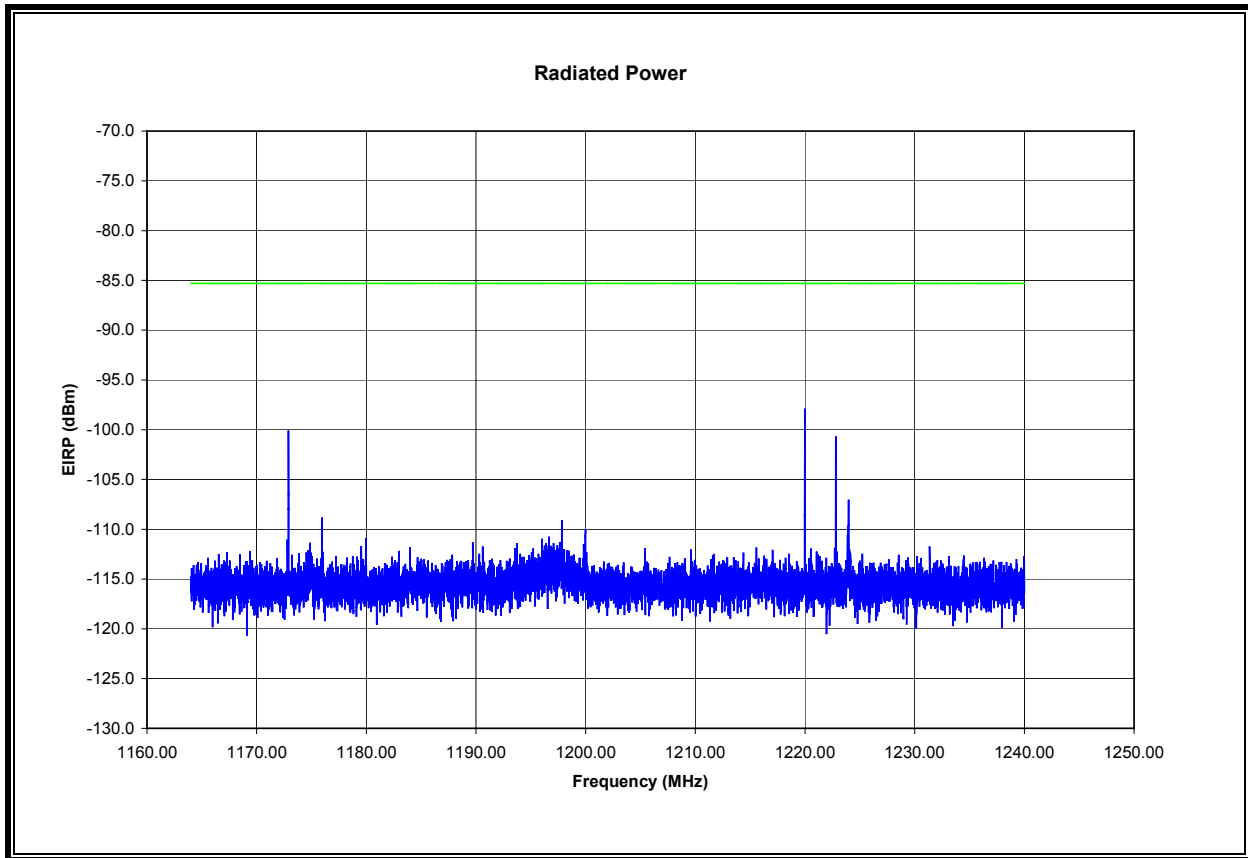

**EIRP 1.559 TO 1.610 GHz, 1 kHz BW, HORIZONTAL**

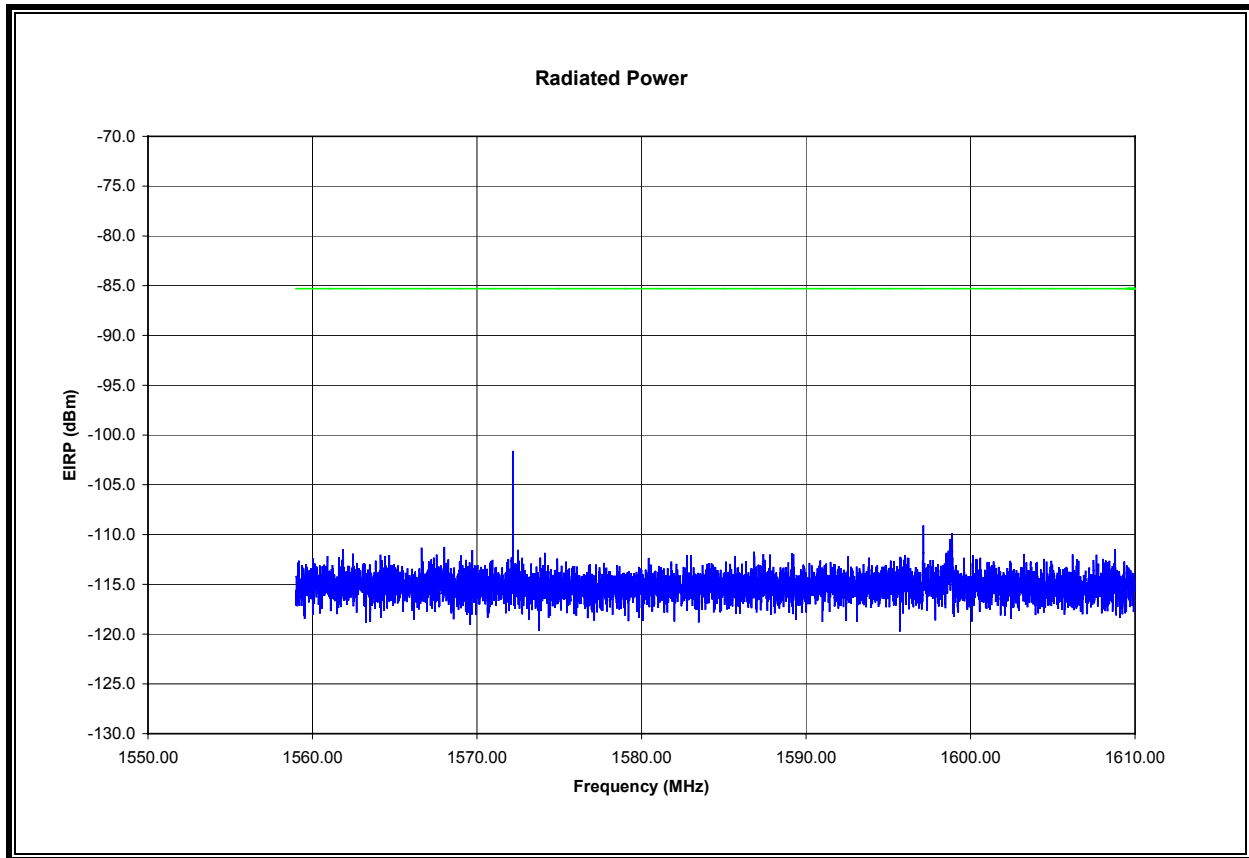


**EIRP 1.559 TO 1.610 GHz, 1 kHz BW, VERTICAL**

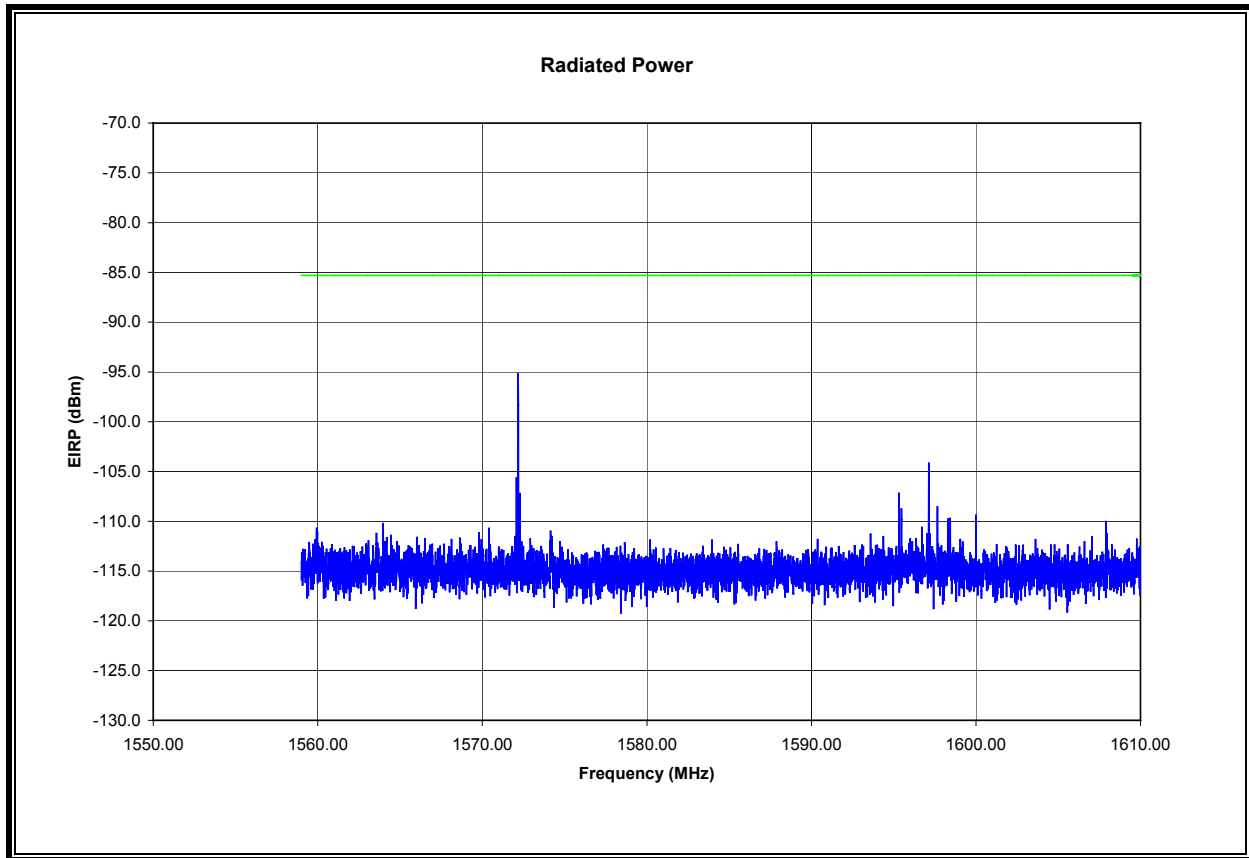

### 8.2.4. RADIATED EMISSIONS BELOW 960 MHz

§15.519 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209.

#### SPURIOUS EMISSIONS 30 TO 960 MHz (HORIZONTAL)

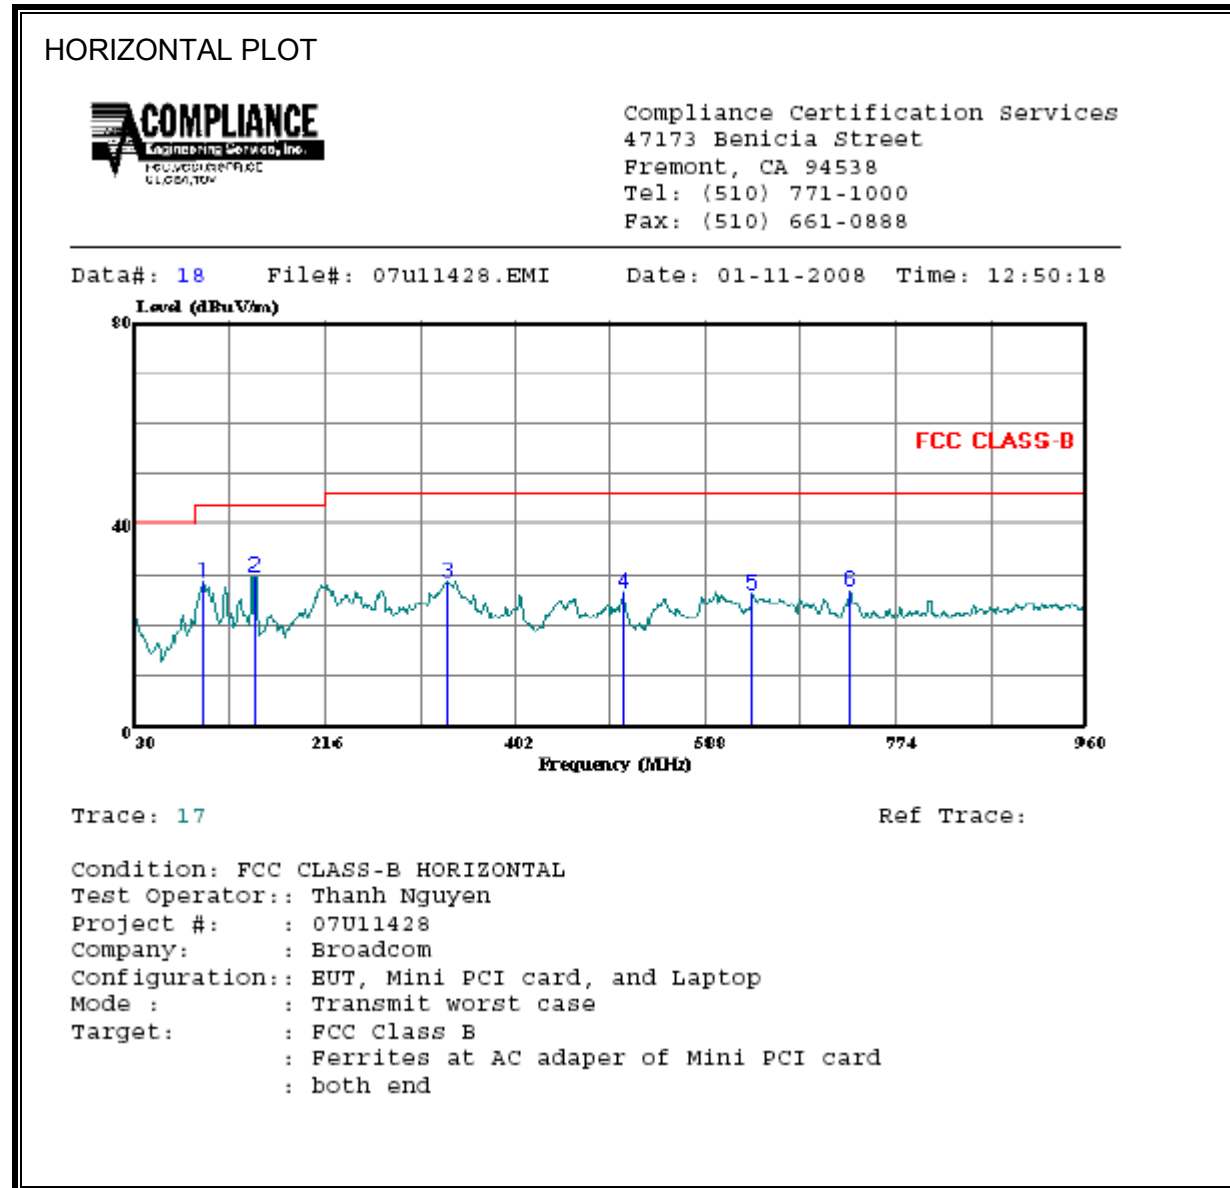

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	96.960	46.57	-17.82	28.75	43.50	-14.75	Peak
2	146.250	43.46	-13.67	29.79	43.50	-13.71	Peak
3	335.970	39.96	-11.37	28.59	46.00	-17.41	Peak
4	508.020	33.83	-7.19	26.64	46.00	-19.36	Peak
5	633.570	31.10	-4.77	26.33	46.00	-19.67	Peak
6	729.360	29.95	-3.06	26.89	46.00	-19.11	Peak


**SPURIOUS EMISSIONS 30 TO 960 MHz (VERTICAL)**

VERTICAL PLOT



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 20 File#: 07u11428.EMI Date: 01-11-2008 Time: 12:57:27

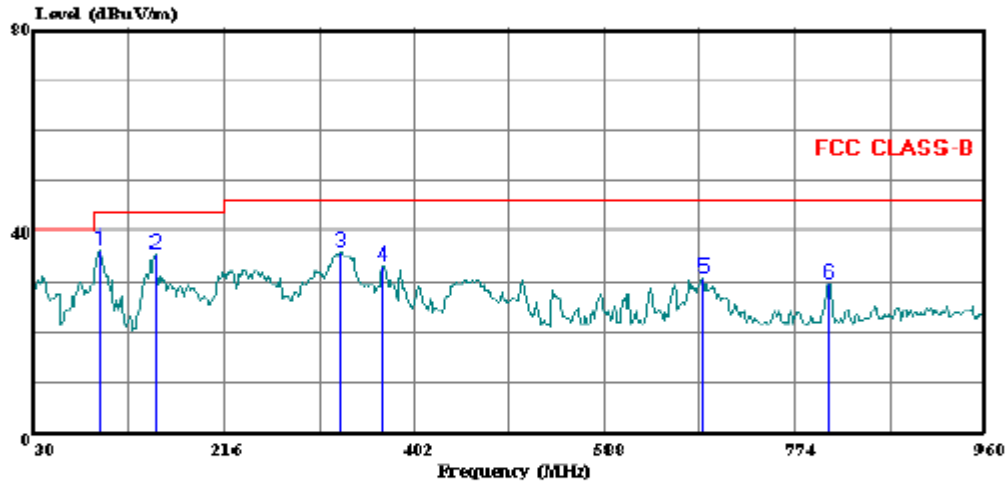

Trace: 19

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: Thanh Nguyen  
Project #: 07U11428  
Company: Broadcom  
Configuration: EUT, Mini PCI card, and Laptop  
Mode: Transmit worst case  
Target: FCC Class B  
: Ferrites at AC adapter of Mini PCI card  
: both end

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	94.170	54.79	-18.52	36.27	43.50	-7.23	Peak
2	148.110	49.41	-13.81	35.60	43.50	-7.90	Peak
3	329.460	47.71	-11.53	36.18	46.00	-9.82	Peak
4	371.310	43.80	-10.56	33.25	46.00	-12.75	Peak
5	684.720	34.65	-3.80	30.85	46.00	-15.15	Peak
6	807.480	31.85	-2.02	29.83	46.00	-16.17	Peak



### 8.3. AC POWER LINE CONDUCTED EMISSIONS

#### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

#### RESULTS

**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Class (dB)	Limit		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)		QP	AV	QP (dB)	AV (dB)	
0.16	55.38	--	39.99	0.00	65.31	55.31	-9.93	-15.32	L1
0.72	36.58	--	29.79	0.00	56.00	46.00	-19.42	-16.21	L1
3.19	39.58	--	29.02	0.00	56.00	46.00	-16.42	-16.98	L1
0.20	52.80	--	43.02	0.00	63.82	53.82	-11.02	-10.80	L2
0.99	37.10	--	31.73	0.00	56.00	46.00	-18.90	-14.27	L2
2.33	39.28	--	35.48	0.00	56.00	46.00	-16.72	-10.52	L2
6 Worst Data									

**LINE 1 RESULTS**

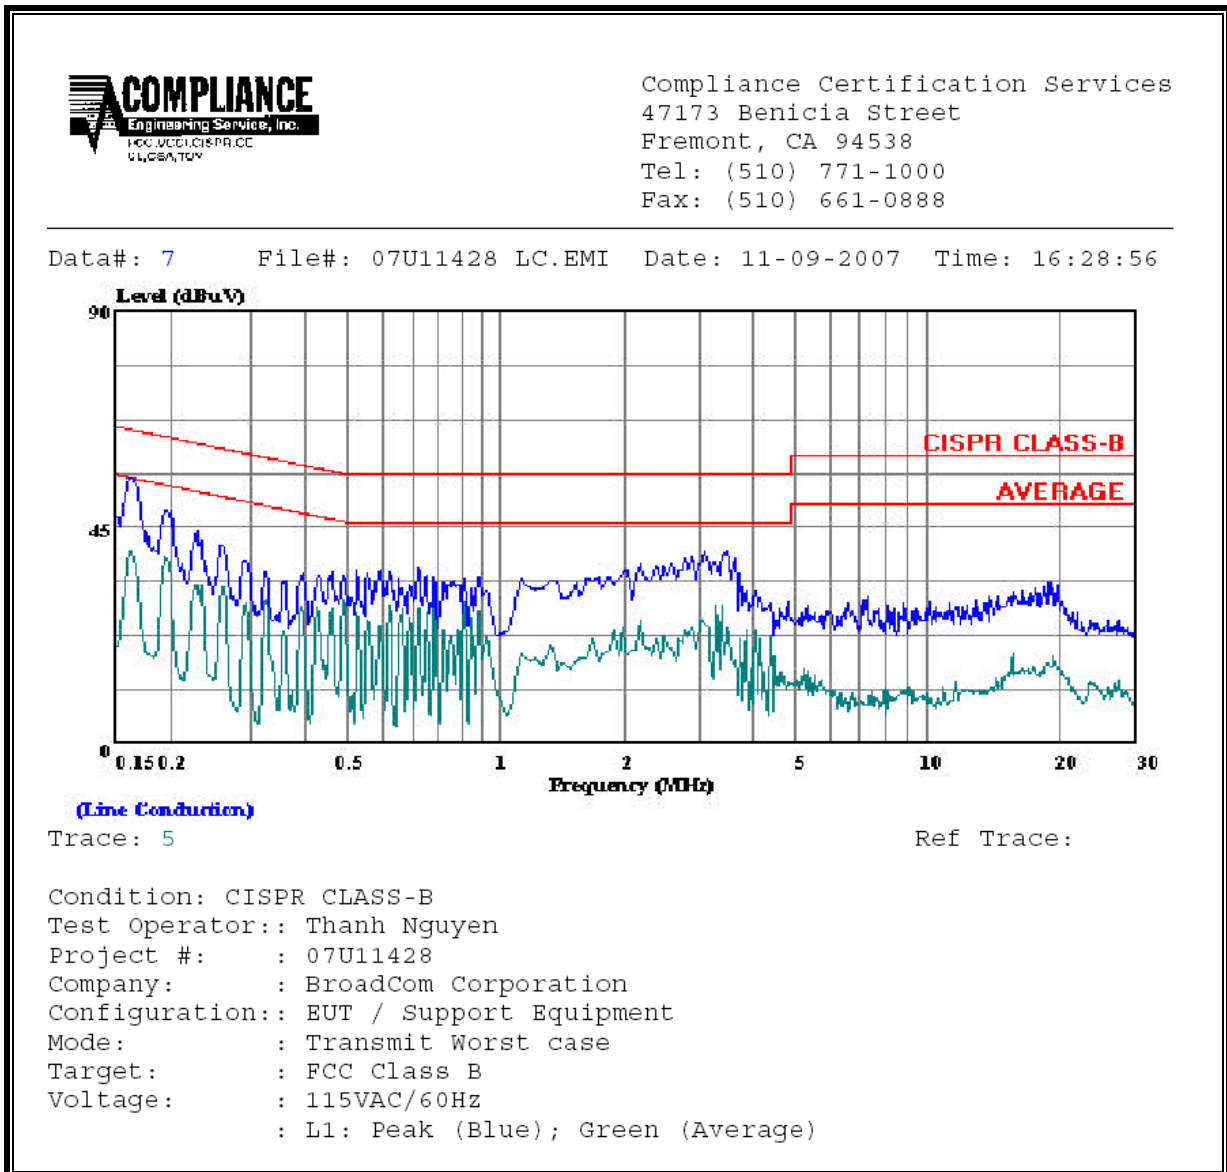


**LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 14 File#: 07U11428 LC.EMI Date: 11-09-2007 Time: 16:39:54

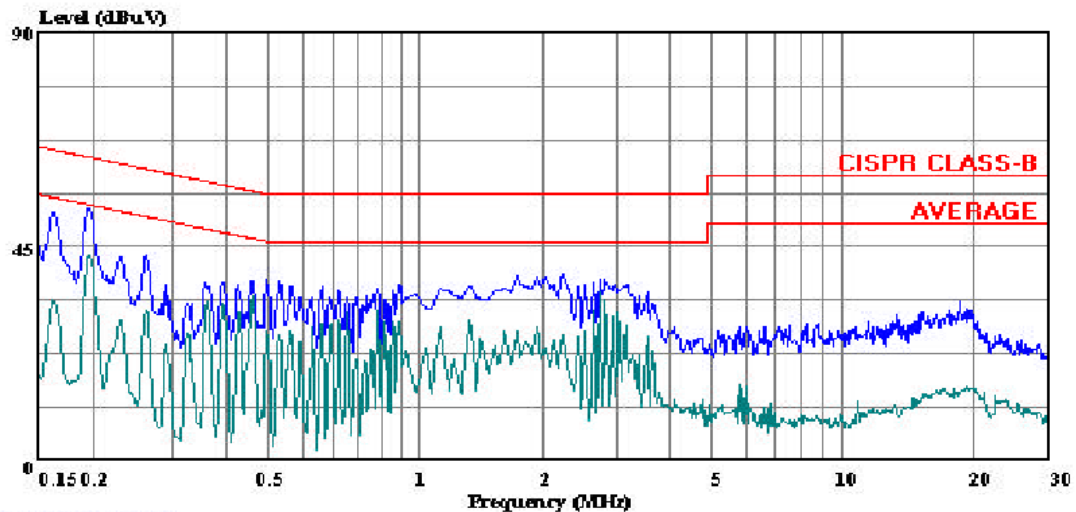

(Line Conduction)

Trace: 12

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator:: Thanh Nguyen  
Project #: : 07U11428  
Company: : BroadCom Corporation  
Configuration: EUT / Support Equipment  
Mode: : Transmit Worst case  
Target: : FCC Class B  
Voltage: : 115VAC/60Hz  
: L2: Peak (Blue); Green (Average)