



**FCC CFR47 PART 15 SUBPART C
CLASS II PERMISSIVE CHANGE**

CERTIFICATION TEST REPORT

FOR

**802.11g/DRAFT 802.11n WIRELESS LAN PCI-E MINICARD
(Tested inside HP tablet PC HSTNN-I77C)**

MODEL NUMBER: BCM94313HMG2L

FCC ID: QDS-BRCM1050

REPORT NUMBER: 10U13051-1, Revision A

ISSUE DATE: MARCH 11, 2010

Prepared for

**BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
---	02/22/10	Initial Issue	T. Chan
A	03/11/10	Replaced All Test Data Channel 11 to Channel 13	V. Tran

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE</i>	6
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.5. <i>SOFTWARE AND FIRMWARE</i>	6
5.6. <i>NUMBER OF TRANSMIT CHAINS</i>	6
5.7. <i>WORST-CASE CONFIGURATION AND MODE</i>	6
5.8. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. RADIATED TEST RESULTS	10
7.1. <i>LIMITS AND PROCEDURE</i>	10
7.2. <i>TRANSMITTER ABOVE 1 GHz</i>	11
7.2.1. <i>802.11b MODE</i>	11
7.2.2. <i>802.11g MODE</i>	16
7.3. <i>WORST-CASE BELOW 1 GHz</i>	20
8. SETUP PHOTOS	23

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11g/Draft 802.11n WLAN PCI-E Mini Card
(Tested inside HP tablet PC HSTNN-I77C)

MODEL: BCM94313HMG2L

SERIAL NUMBER: P209

DATE TESTED: FEBRUARY 05 - 22, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Broadcom 802.11g/Draft 802.11n WLAN PCI-E Minicard and installed inside HP tablet laptop. The radio module is manufactured by Broadcom.

5.2. MAXIMUM OUTPUT POWER

The test measurement passed within ± 0.5 dBm of the original output power.

5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The major change filed under this application is adding tablet platform, HSTNN-I77C.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an 802.11bg WLAN antenna, with a maximum gain of 0.29dBi at tablet mode.

5.5. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom, rev. 5.60.48.31
The test utility software used during testing was wl_tool, rev. 5.60.48.31.

5.6. NUMBER OF TRANSMIT CHAINS

Selected measurements were performed on the Main and Auxiliary chains for 802.11b/g mode; however only one of these chains will be transmitting at any time.

5.7. WORST-CASE CONFIGURATION AND MODE

Worst-Case data rates were utilized from preliminary testing of the chipset, worst-case data rates used during the testing are as follows:

_802.11b Mode (20 MHz BW operation): 1 Mbps, CCK.
_802.11g Mode (20 MHz BW operation): 6 Mbps, OFDM.

Since the EUT was certified as modular approval with highest antenna gain of 3.9dBi; therefore only the tablet laptop mode was selected to investigate on band edge, worst case of harmonic and below 1GHz.

The tablet laptop was investigated under potable positions (X, Y, and Z) to determine the worst case and the Y-axis position was the worse case to test.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMEN

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP	PCAA21ZAD000	79913SIO26S	DoC
AC Adapter	HP	PPP009H	F1-09083224330A	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identica Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115V	Unshielded	1.5m	N/A
2	DC	1	DC	Unshielded	1.5m	N/A

TEST SETUP

The EUT is installed inside a host tablet PC during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

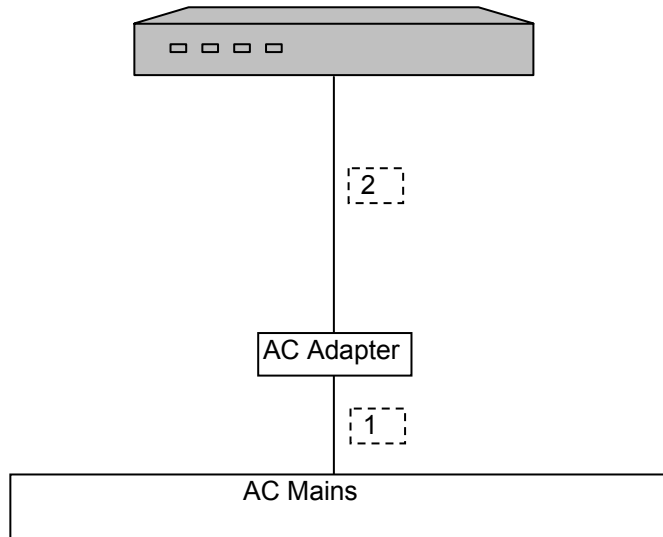

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	01/05/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00945	04/22/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	03/31/10
Preamplifier, 1-26GHz	Agilent / HP	8449B	C01052	07/05/10
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	11/28/10

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS



7.2. TRANSMITTER ABOVE 1 GHz

7.2.1. 802.11b MODE



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

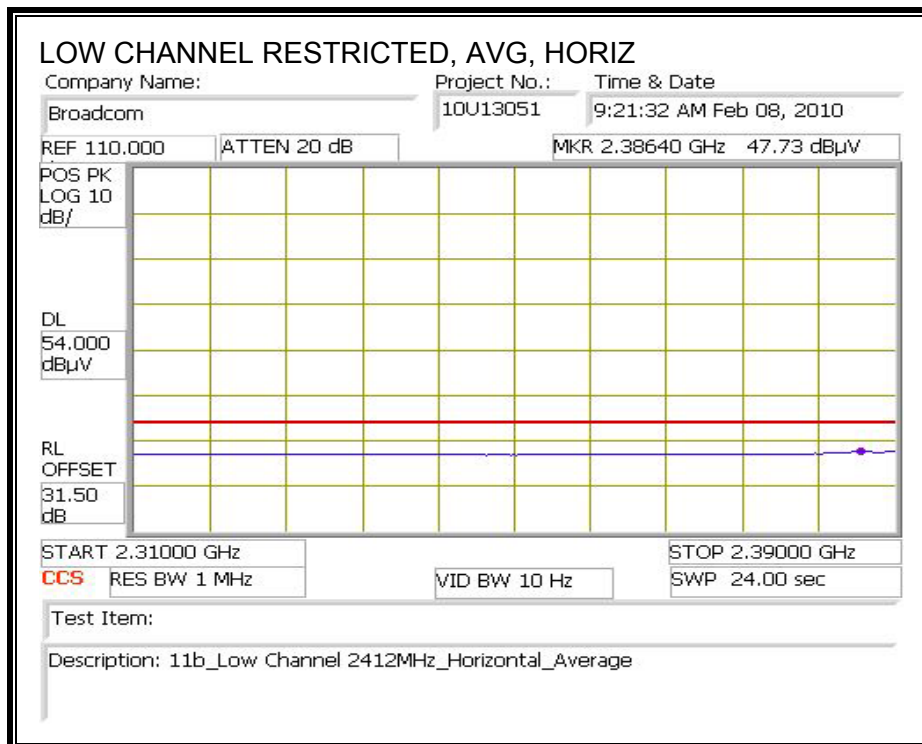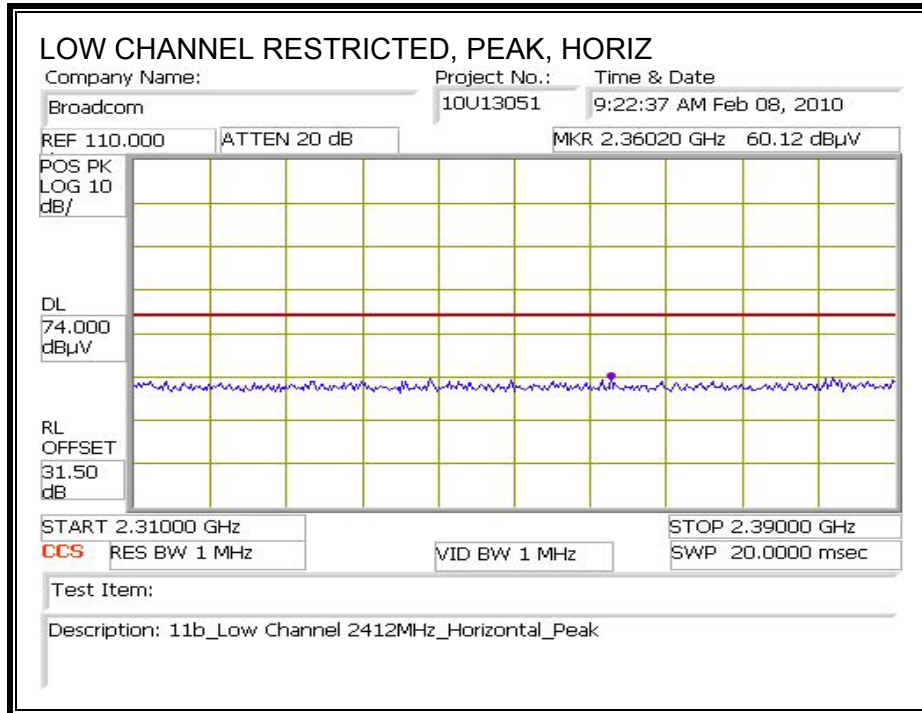



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

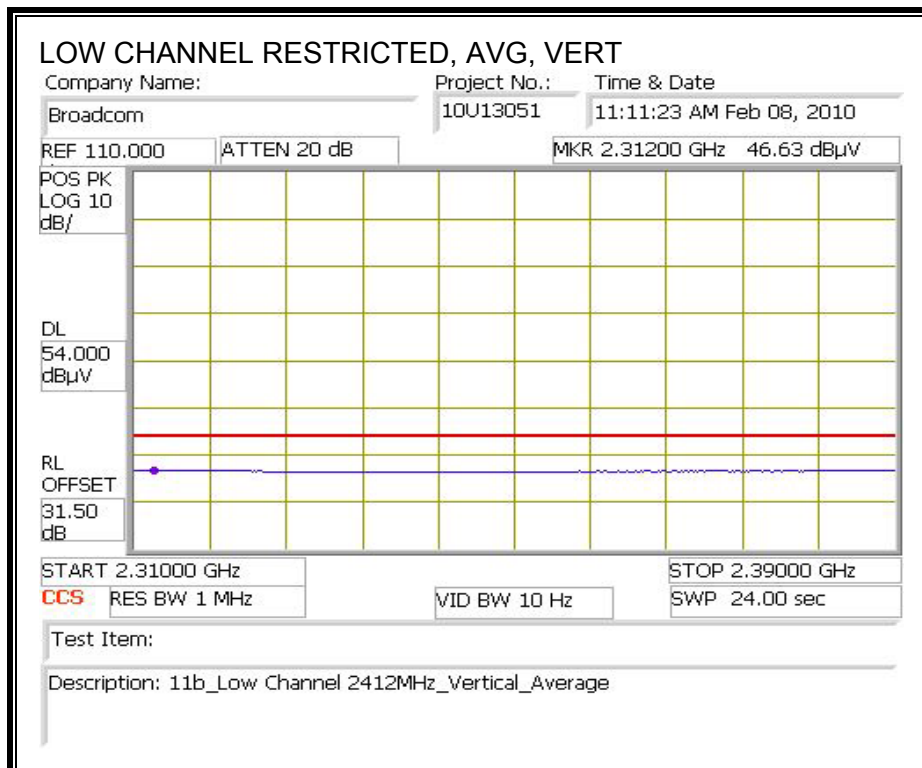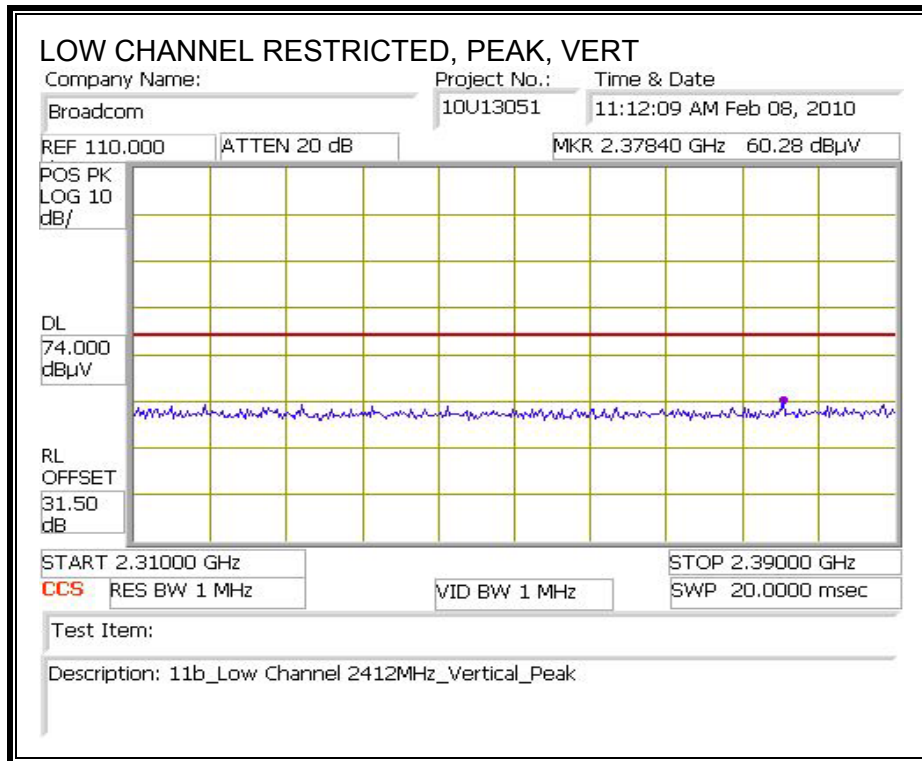

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

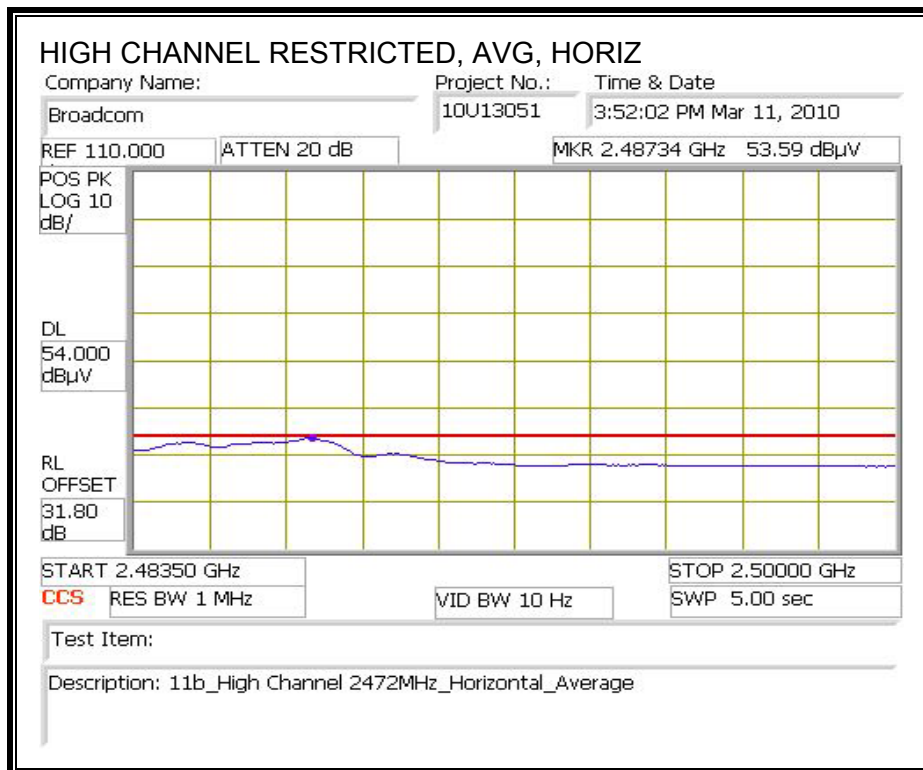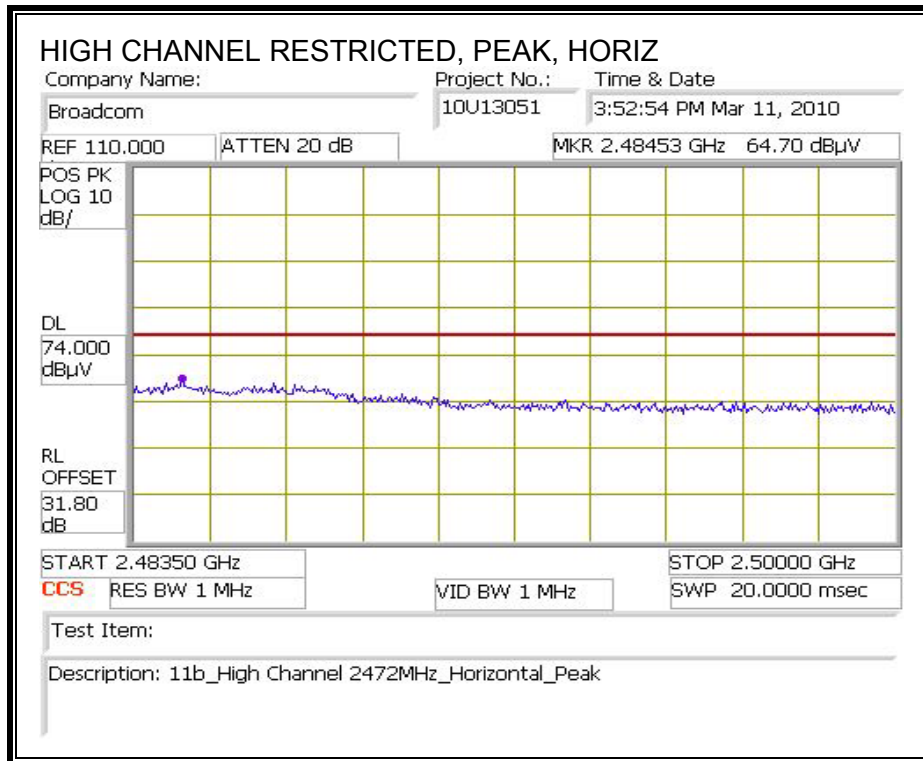

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

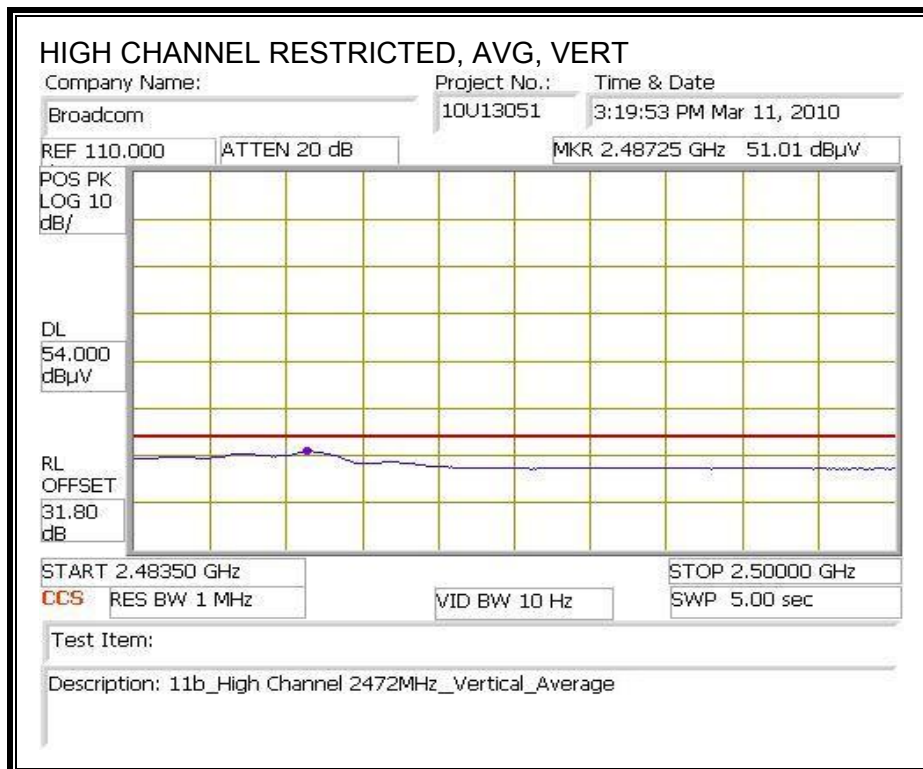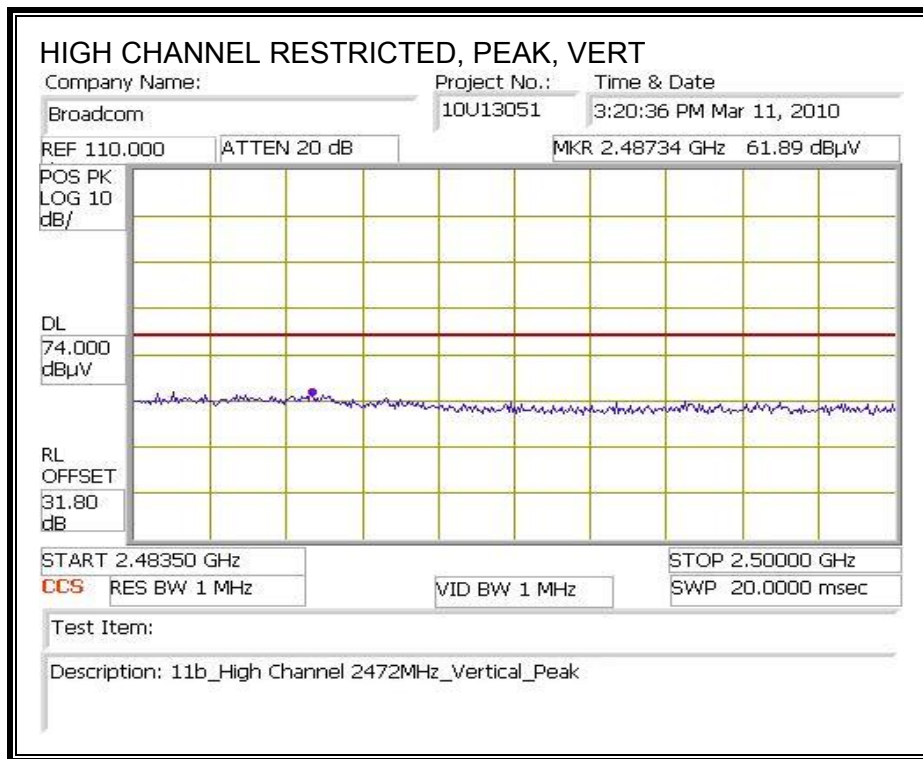



HARMONICS AND SPURIOUS EMISSIONS

WORST-CASE: 11b Mode



High Frequency Measurement													
Compliance Certification Services, Fremont 3m Chamber													
Test Engr:		Vien Tran											
Date:		03/11/10											
Project #:		10U13051											
Company:		Broadcom											
EUT Description:		802.11g/Draft 802.11n WLAN PCI-E, tested inside portable tablet											
EUT M/N:		BCM94313HMG2L											
Test Target:		FCC Class B											
Mode Oper:		Tx 11b Mode_Worst-Case											
f	Measurement Frequency			Amp	Preamp Gain			Average Field Strength Limit					
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Peak Field Strength Limit					
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Margin vs. Average Limit					
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Margin vs. Peak Limit					
CL	Cable Loss			HPF	High Pass Filter								
f	Dist	Read	AF	CL	Amp	D Corr	Ftr	Corr.	Limit	Margin	Ant. Pol	Det	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	
Low Channel, 2412MHz													
4.824	3.0	41.5	32.7	5.8	-34.8	0.0	0.0	45.1	74.0	-28.9	V	P	
4.824	3.0	38.2	32.7	5.8	-34.8	0.0	0.0	41.8	54.0	-12.2	V	A	
4.824	3.0	39.1	32.7	5.8	-34.8	0.0	0.0	42.8	74.0	-31.2	H	P	
4.824	3.0	35.4	32.7	5.8	-34.8	0.0	0.0	39.1	54.0	-14.9	H	A	
Mid Channel, 2437MHz													
4.874	3.0	39.5	32.7	5.8	-34.8	0.0	0.0	43.2	74.0	-30.8	V	P	
4.874	3.0	36.9	32.7	5.8	-34.8	0.0	0.0	40.6	54.0	-13.4	V	A	
7.311	3.0	36.7	35.5	7.3	-34.1	0.0	0.0	45.4	74.0	-28.6	V	P	
7.311	3.0	30.3	35.5	7.3	-34.1	0.0	0.0	39.0	54.0	-15.0	V	A	
12.185	3.0	39.1	38.5	9.8	-32.5	0.0	0.0	54.9	74.0	-19.1	V	P	
12.185	3.0	34.1	38.5	9.8	-32.5	0.0	0.0	50.0	54.0	-4.0	V	A	
4.874	3.0	39.0	32.7	5.8	-34.8	0.0	0.0	42.7	74.0	-31.3	H	P	
4.874	3.0	35.1	32.7	5.8	-34.8	0.0	0.0	38.8	54.0	-15.2	H	A	
7.311	3.0	34.4	35.5	7.3	-34.1	0.0	0.0	43.1	74.0	-30.9	H	P	
7.311	3.0	25.2	35.5	7.3	-34.1	0.0	0.0	33.8	54.0	-20.2	H	A	
12.185	3.0	34.6	38.5	9.8	-32.5	0.0	0.0	50.4	74.0	-23.6	H	P	
12.185	3.0	26.7	38.5	9.8	-32.5	0.0	0.0	42.5	54.0	-11.5	H	A	
High Channel, 2472MHz													
4.944	3.0	43.7	32.8	5.9	-36.5	0.0	0.0	45.9	74.0	-28.1	V	P	
4.944	3.0	41.2	32.8	5.9	-36.5	0.0	0.0	43.4	54.0	-10.6	V	A	
7.416	3.0	38.3	35.6	7.3	-36.2	0.0	0.0	45.0	74.0	-29.0	V	P	
7.416	3.0	31.3	35.6	7.3	-36.2	0.0	0.0	38.0	54.0	-16.0	V	A	
12.360	3.0	36.2	38.5	9.9	-35.4	0.0	0.0	49.1	74.0	-24.9	V	P	
12.360	3.0	29.5	38.5	9.9	-35.4	0.0	0.0	42.5	54.0	-11.5	V	A	
4.944	3.0	42.1	32.8	5.9	-36.5	0.0	0.0	44.3	74.0	-29.7	H	P	
4.944	3.0	38.9	32.8	5.9	-36.5	0.0	0.0	41.1	54.0	-12.9	H	A	
7.416	3.0	36.1	35.6	7.3	-36.2	0.0	0.0	42.8	74.0	-31.2	H	P	
7.416	3.0	27.6	35.6	7.3	-36.2	0.0	0.0	34.3	54.0	-19.7	H	A	
12.360	3.0	33.2	38.5	9.9	-35.4	0.0	0.0	46.1	74.0	-27.9	H	P	
12.360	3.0	23.4	38.5	9.9	-35.4	0.0	0.0	36.3	54.0	-17.7	H	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

7.2.2. 802.11g MODE



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

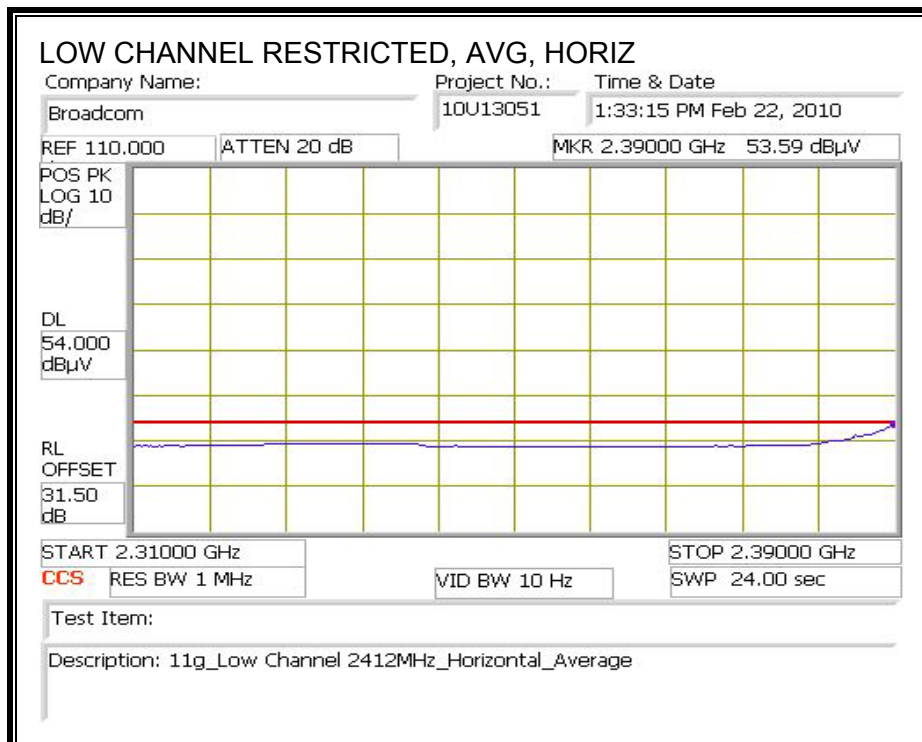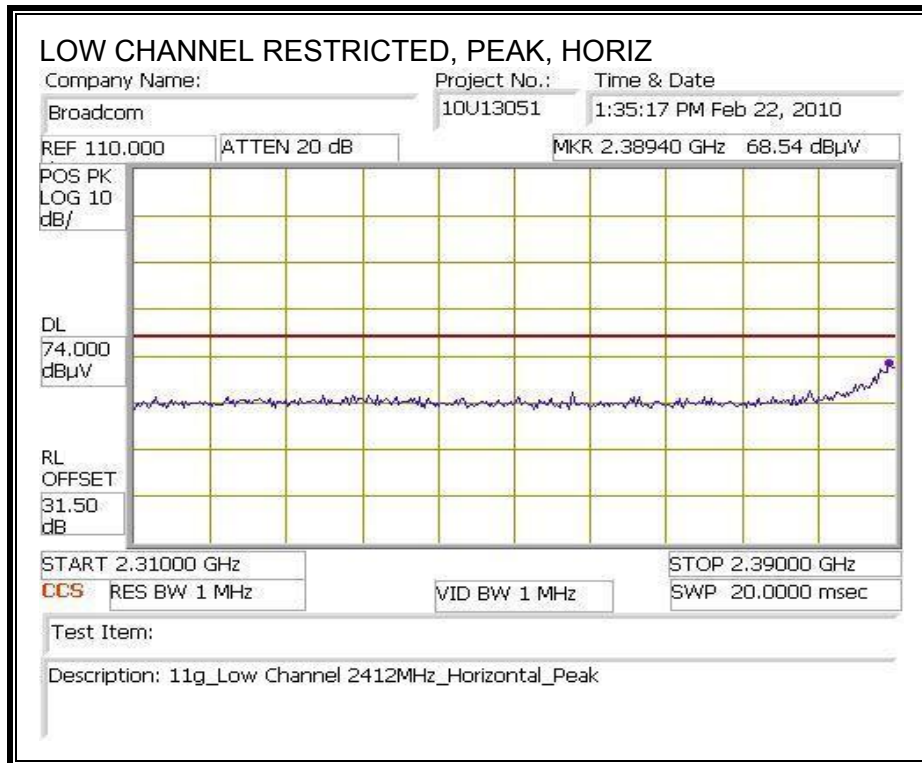



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

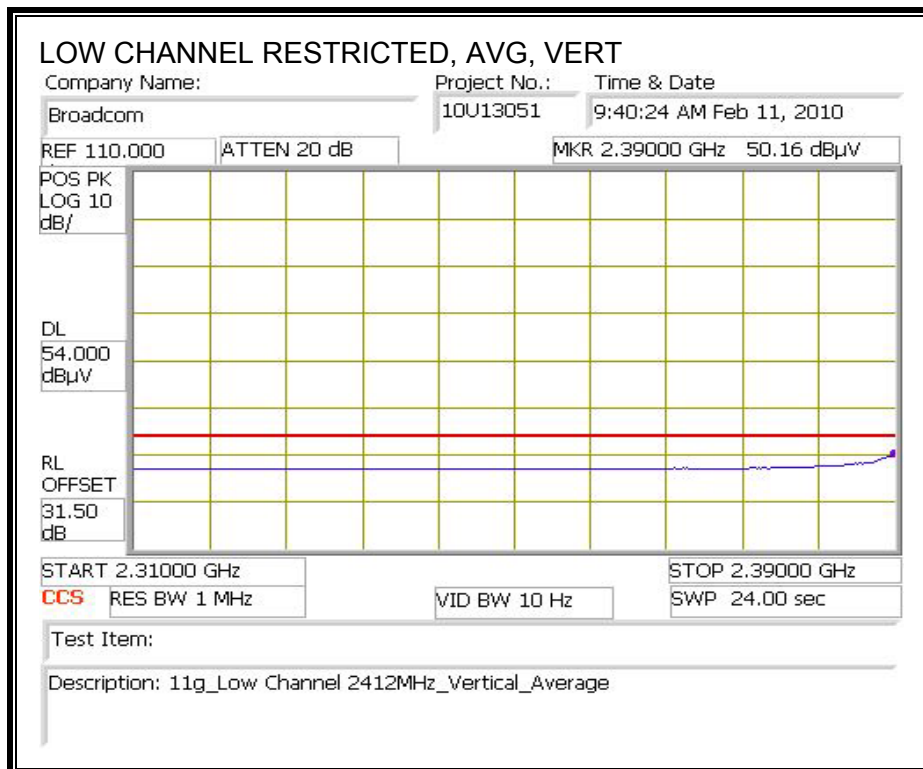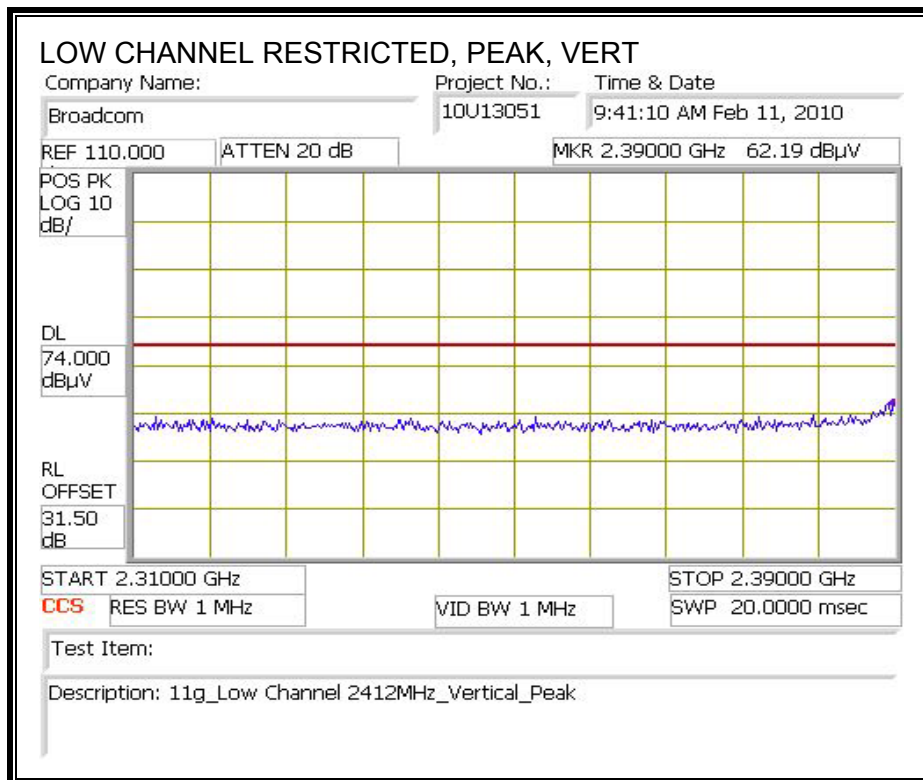

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

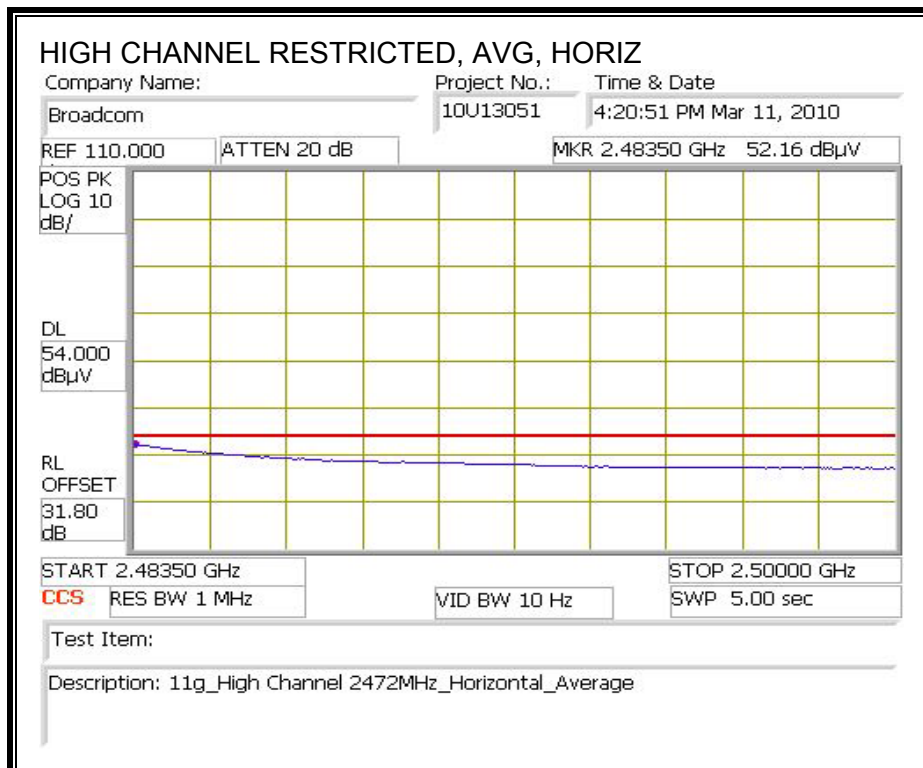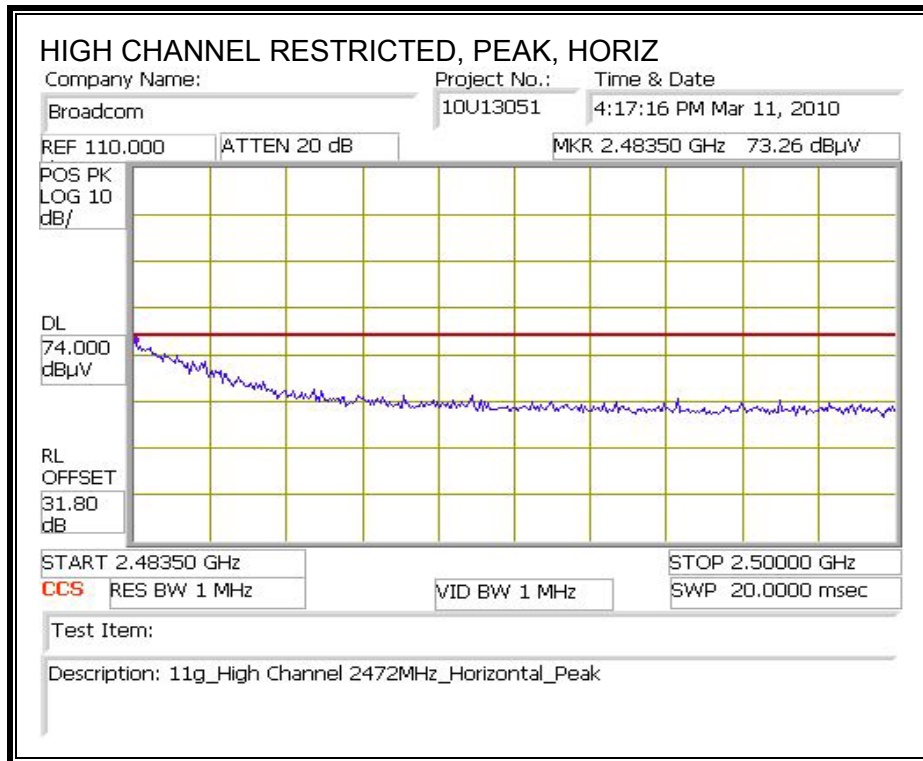


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

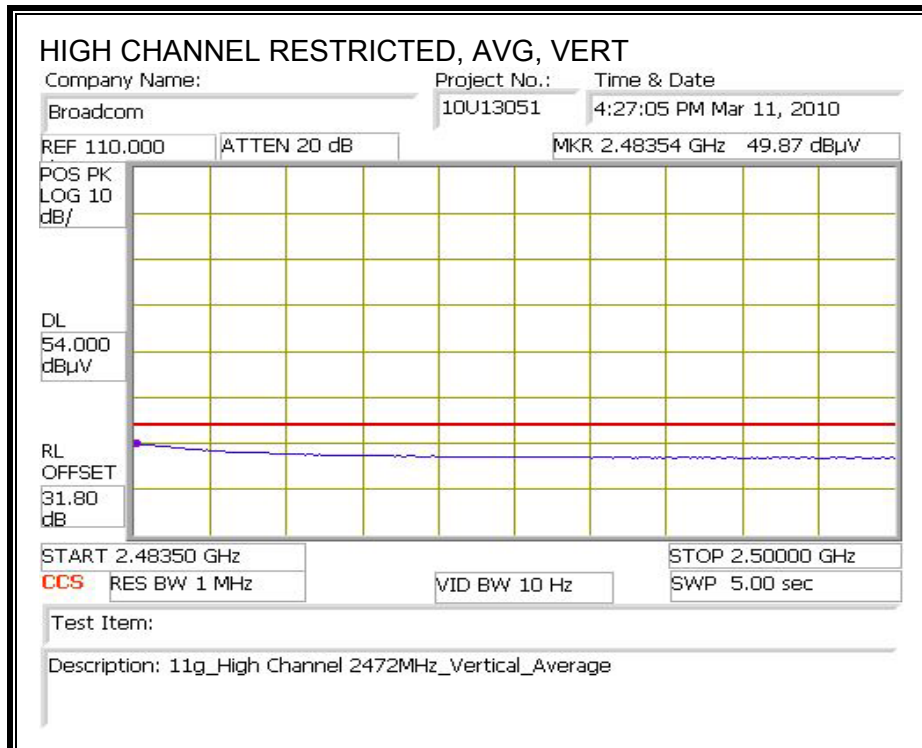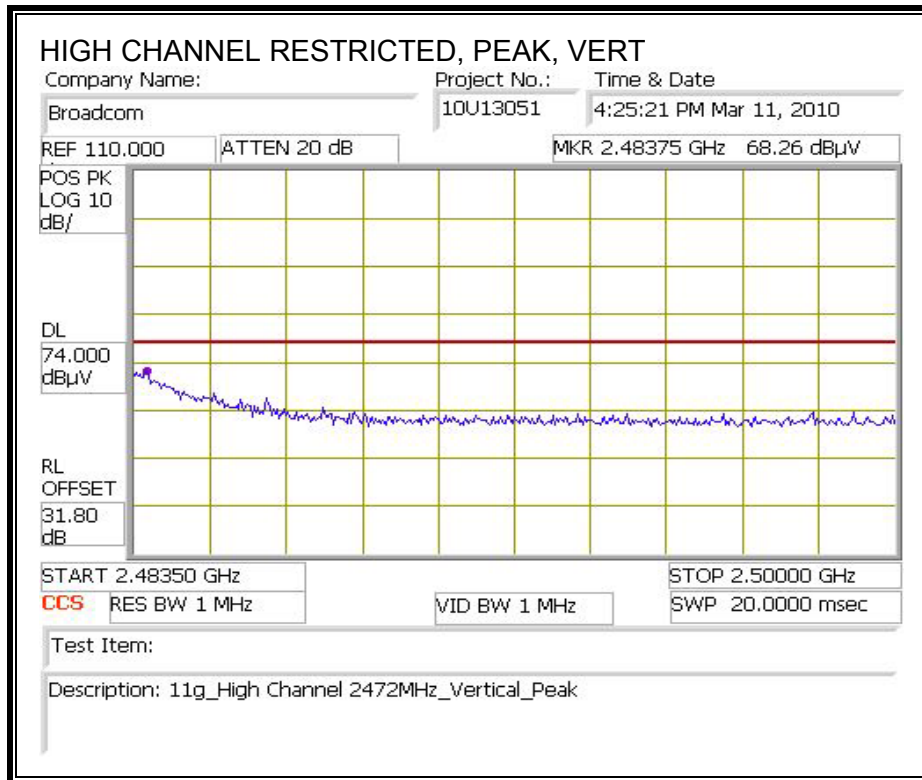


7.3. WORST-CASE BELOW 1 GHz

2.4GHz BAND SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

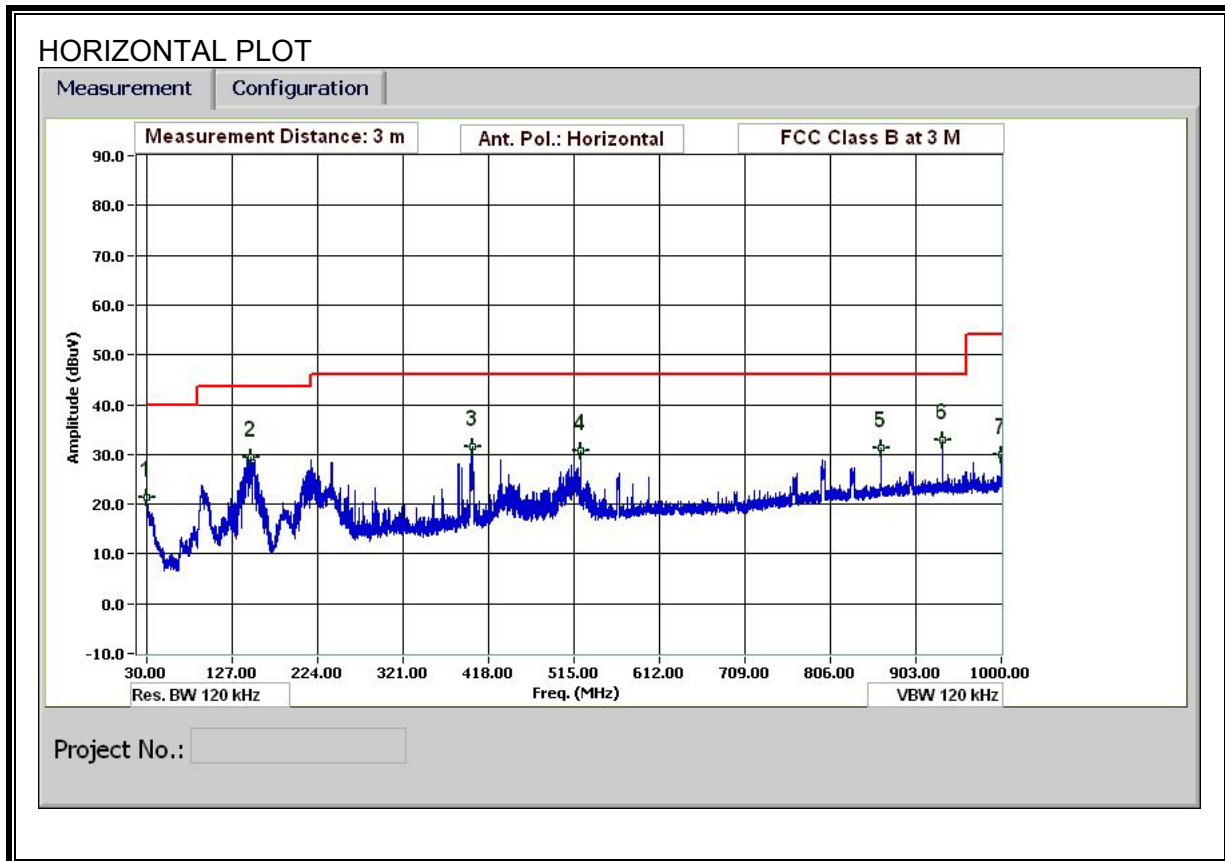

2.4GHz BAND SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

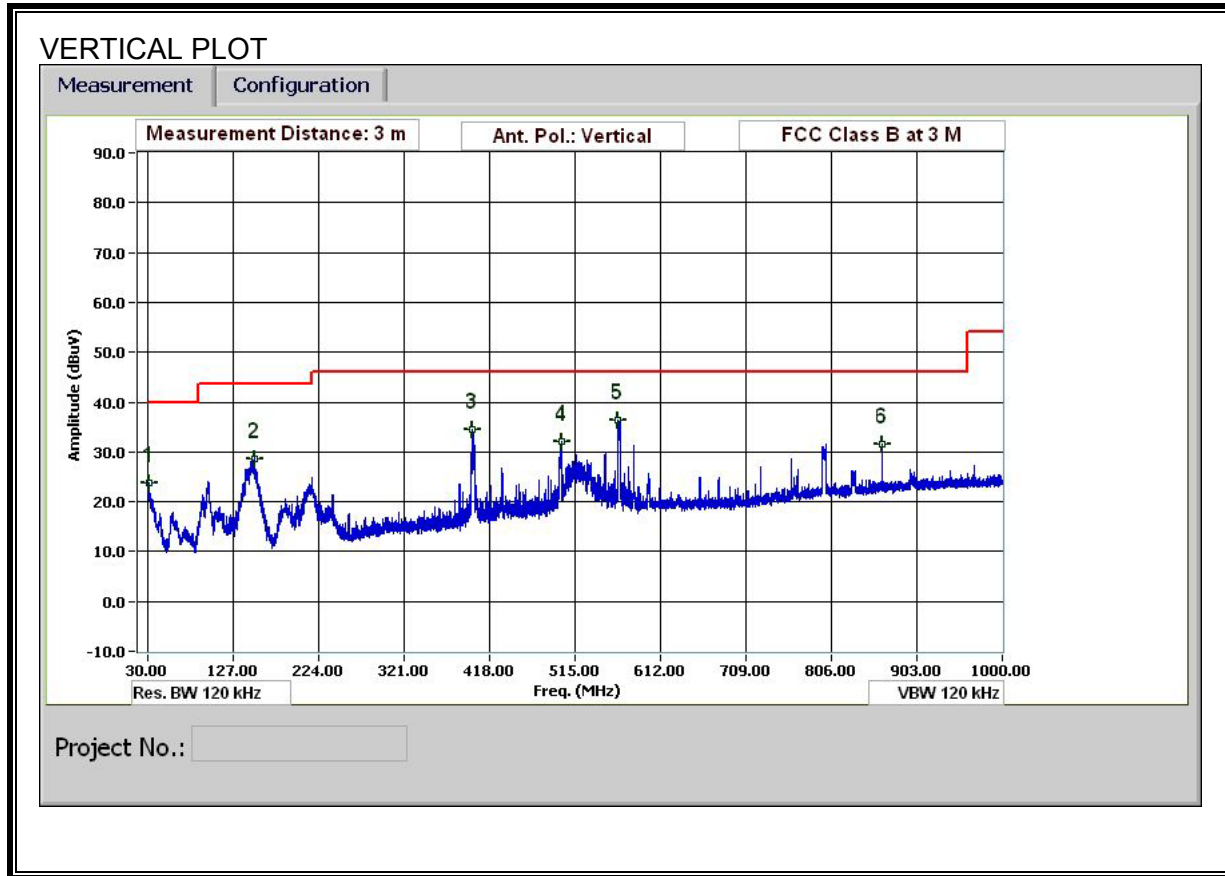

HORIZONTAL & VERTICAL DATA

30-1000MHz Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran
 Date: 02/08/10
 Project #: 10U13051
 Company: Broadcom
 EUT Description: 802.11g/Draft 802.11n WLAN PCI-E, tested inside portable tablet
 EUT M/N: BCM94313HMC2L
 Test Target: FCC Class B
 Mode Oper: Tx Below 1GHz_Worst-Case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters
 Read Analyzer Reading Filter Filter Insert Loss
 AF Antenna Factor Corr. Calculated Field Strength
 CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
Horizontal													
30.360	3.0	29.5	19.8	0.5	28.4	0.0	0.0	21.3	40.0	-18.7	H	P	
148.085	3.0	43.4	12.8	1.0	27.8	0.0	0.0	29.3	43.5	-14.2	H	P	
399.375	3.0	42.8	15.0	1.7	28.0	0.0	0.0	31.5	46.0	-14.5	H	P	
522.620	3.0	40.2	17.2	2.0	28.6	0.0	0.0	30.8	46.0	-15.2	H	P	
864.034	3.0	35.0	21.6	2.7	28.0	0.0	0.0	31.4	46.0	-14.6	H	P	
933.277	3.0	35.6	22.3	2.8	27.8	0.0	0.0	32.9	46.0	-13.1	H	P	
999.400	3.0	31.8	22.7	2.9	27.6	0.0	0.0	29.8	54.0	-24.2	H	P	
Vertical													
31.080	3.0	32.2	19.5	0.5	28.4	0.0	0.0	23.8	40.0	-16.2	V	P	
151.205	3.0	42.7	12.7	1.0	27.8	0.0	0.0	28.6	43.5	-14.9	V	P	
398.295	3.0	45.9	15.0	1.7	28.0	0.0	0.0	34.6	46.0	-11.4	V	P	
499.579	3.0	41.9	16.8	2.0	28.6	0.0	0.0	32.0	46.0	-14.0	V	P	
564.142	3.0	44.9	17.9	2.1	28.6	0.0	0.0	36.3	46.0	-9.7	V	P	
864.034	3.0	35.1	21.6	2.7	28.0	0.0	0.0	31.5	46.0	-14.5	V	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.