



**FCC CFR47 PART 15 SUBPART B
DECLARATION OF CONFORMITY TEST REPORT
FOR**

802.11g/DRAFT 802.11n WLAN + BLUETOOTH PCI-E MINICARD

MODEL NUMBER: BCM94313HMGB

REPORT NUMBER: 09U12871-3, Revision A

ISSUE DATE: NOVEMBER 09, 2009

**Prepared for
BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	10/25/09	Initial Issue	T. Chan
A	11/09/09	Addressed TCB Question on Date Tested	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>GENERAL INFORMATION</i>	6
5.3. <i>PRELIMINARY TEST CONFIGURATIONS</i>	6
5.4. <i>MODE(s) OF OPERATION</i>	6
5.5. <i>SOFTWARE AND FIRMWARE</i>	6
5.6. <i>DETAILS OF TESTED SYSTEM</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. APPLICABLE LIMITS AND TEST RESULTS	10
7.1. <i>RADIATED EMISSIONS</i>	10
7.1.1. <i>RADIATED EMISSIONS 30 to 1000 MHz</i>	11
7.2. <i>AC MAINS LINE CONDUCTED EMISSIONS</i>	12
8. SETUP PHOTOS	15

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORP.
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11g/DRAFT 802.11n WLAN + BLUETOOTH
PCI-E MINICARD

MODEL: BCM94313HMGB

SERIAL NUMBER: 110 (P102)

DATE TESTED: OCTOBER 21 - 23, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART B	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11g/Draft 802.11n Wireless LAN + Bluetooth PCI-E Mini Card.
The radio module is manufactured by Broadcom.

5.2. GENERAL INFORMATION

Power Requirements	100-240 VAC / 50-60 Hz
List of frequencies generated or used by the EUT	20 MHz

5.3. PRELIMINARY TEST CONFIGURATIONS

The following configuration was investigated during testing:

EUT Configuration	Description
Typical Configuration	EUT connected to laptop via extended board with minimum configuration such as printer, USB mouse.

5.4. MODE(s) OF OPERATION

Mode	Description
EMC Test & TX	All I/O ports activate with H' patterns scrolling on the screen display with TX on.

5.5. SOFTWARE AND FIRMWARE

For WLAN:

The EUT driver software installed during testing was BCMWL5, rev. 5.60.18.37.

The test utility software used during testing was wl_tool, rev. 5.60.18.18.

For Bluetooth:

The EUT driver software installed during testing was Broadcom BCM2070 Bluetooth 2.1+EDR USB Device, rev. 5.5.0.4600.

The test utility software used during testing was Blue Tool, rev. 1.2.4.3.

5.6. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT & PERIPHERALS

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	4446	R8-CAC56 09/08	DoC
AC Adapter	Lenovo	ADP 65YB B	N/A	DoC
Printer	HP	7850	MY56K1304B	DoC
Mouse	Dell	0YH958	HC6450C2BP9	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Shielded	1.5m	NA
2	DC	2	DC	Un-shielded	1.5m	Ferrite at laptop's end
3	USB	1	Printer	Un-shielded	2.0m	Bundle
4	USB	1	USB	Un-shielded	2.0m	USB Mouse

TEST SETUP

The EUT connected to a Laptop via extended board with a typical configuration.

TEST SETUP DIAGRAM

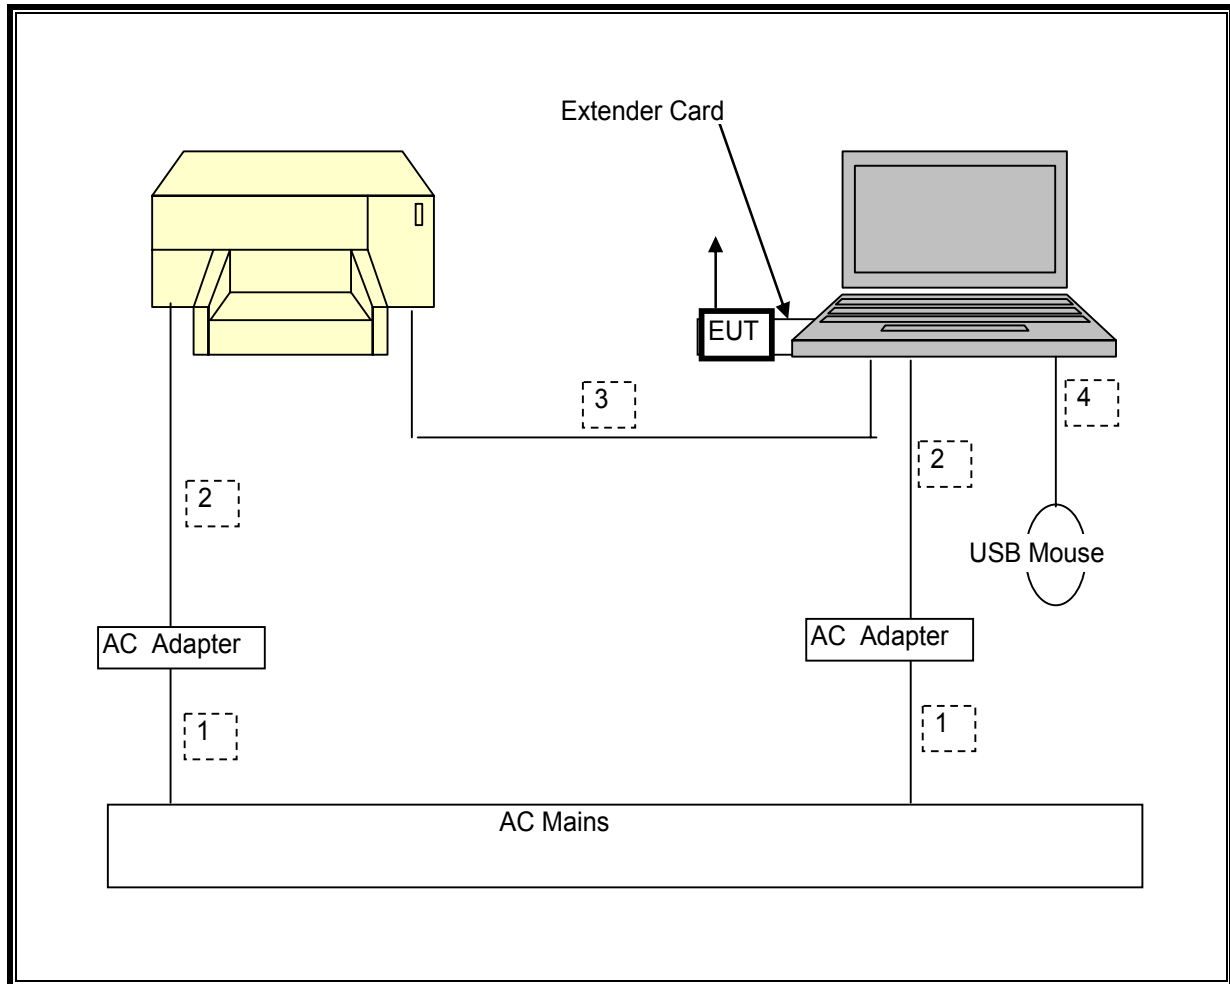

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	01/14/10
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01161	08/06/10
Preamp, 1000MHz	Agilent / HP	8447D	C00558	03/31/10
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	10/29/09
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	02/06/10

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4

The highest clock frequency generated or used in the EUT is 20 MHz; therefore the frequency range was investigated from 30 MHz to 1 GHz.

LIMIT

§15.109 (a) except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.

RESULTS

7.1.1. RADIATED EMISSIONS 30 to 1000 MHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

High Frequency Measurement													
Compliance Certification Services, Fremont 3m Chamber													
Test Engr:		Vien Tran											
Date:		10/22/09											
Project #:		09U12871											
Company:		Broadcom											
EUT Description:		802.g/Draft 802.11n WLAN + BT PCI-E MINICARD											
EUT M/N:		BCM94343HMGB											
Test Target:		FCC Part 15B											
Mode Oper:		Digital											
f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit								
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters										
Read	Analyzer Reading	Filter	Filter Insert Loss										
AF	Antenna Factor	Corr.	Calculated Field Strength										
CL	Cable Loss	Limit	Field Strength Limit										
f	Dist	Read	AF	CL	Amp	D Corr	Filter	Corr.	Limit	Margin	Ant. Pol.	Det.	Notes
MHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	
Horizontal													
264.610	3.0	52.5	12.3	1.4	27.4	0.0	0.0	38.7	46.0	-7.3	H	EP	
369.014	3.0	50.7	14.5	1.7	27.8	0.0	0.0	39.0	46.0	-7.0	H	EP	
498.739	3.0	46.4	16.8	2.0	28.6	0.0	0.0	36.6	46.0	-9.4	H	EP	
829.353	3.0	41.3	21.2	2.6	28.1	0.0	0.0	37.0	46.0	-9.0	H	EP	
845.554	3.0	39.0	21.4	2.6	28.1	0.0	0.0	35.0	46.0	-11.0	H	EP	
Vertical													
36.480	3.0	46.7	16.3	0.5	28.4	0.0	0.0	35.2	40.0	-4.8	V	EP	
199.807	3.0	47.8	11.9	1.2	27.4	0.0	0.0	33.5	43.5	-10.0	V	EP	
230.768	3.0	48.0	11.8	1.3	27.4	0.0	0.0	33.8	46.0	-12.3	V	EP	
398.295	3.0	47.3	15.0	1.7	28.0	0.0	0.0	36.1	46.0	-9.9	V	EP	
998.920	3.0	36.7	22.7	2.9	27.6	0.0	0.0	34.7	54.0	-19.3	V	EP	
Rev. 1.27.09													
Note: No other emissions were detected above the system noise floor.													

7.2. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.4

LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Notes:
 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

RESULTS

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC B AV	Margin		Remark L1 / L2
	PK (dB μ V)	QP (dB μ V)	AV (dB μ V)				QP (dB)	AV (dB)	
0.19	51.43	--	38.09	0.00	63.91	53.91	-12.48	-15.82	L1
0.59	30.76	--	26.20	0.00	56.00	46.00	-25.24	-19.80	L1
9.65	34.07	--	24.65	0.00	60.00	50.00	-25.93	-25.35	L1
0.19	50.30	--	37.63	0.00	63.91	53.91	-13.61	-16.28	L2
0.59	31.13	--	25.33	0.00	56.00	46.00	-24.87	-20.67	L2
9.65	33.99	--	22.70	0.00	60.00	50.00	-26.01	-27.30	L2
6 Worst Data									

LINE 1 RESULTS

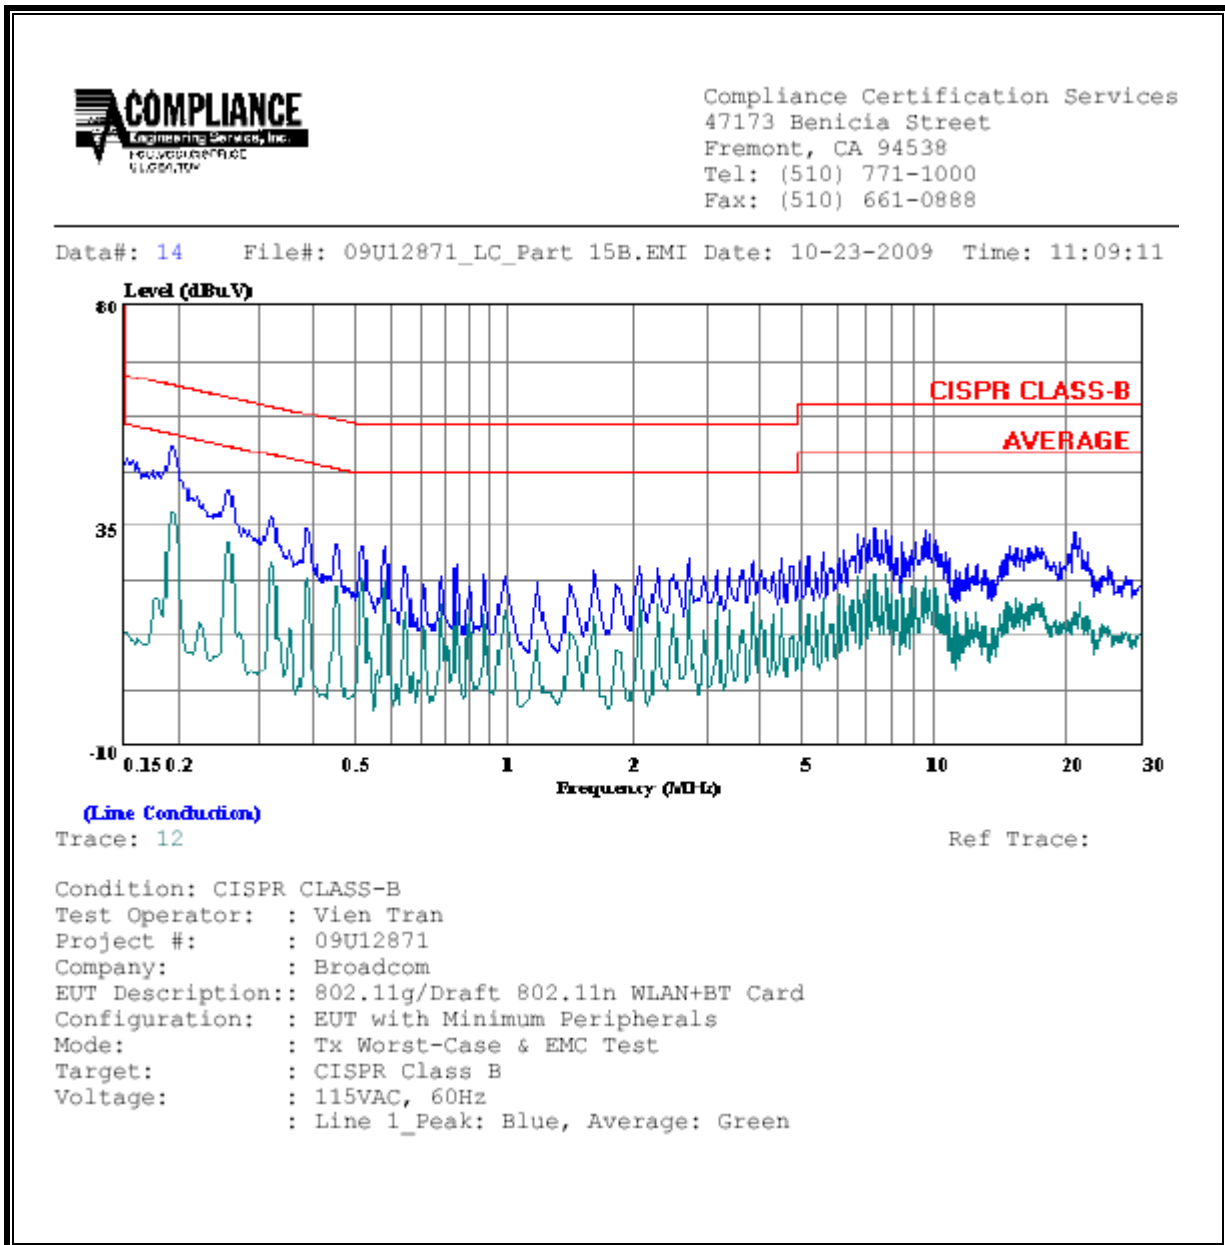

LINE 2 RESULTS

