



FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2003
TEST REPORT (Class II Permissive Change Report)

For

802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard

Model : BCM94313HMGB

Trade Name : Broadcom

Issued for

BROADCOM CORPORATION

190 MATHILDA PLACE SUNNYVALE, CA 94086, U.S.A.

Issued by

Compliance Certification Services Inc.
Hsinchu Lab.

**NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**
TEL: +886-3-5921698
FAX: +886-3-5921108

<http://www.ccsrf.com>
E-Mail : service@ccsrf.com

Issued Date: March 01, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	03/01/2012	Initial Issue	All Page 54	Winnie Chen

**TABLE OF CONTENTS**

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF CLASS II CHANGE.....	6
4. DESCRIPTION OF TEST MODES	6-7
5. TEST METHODOLOGY	8
6. FACILITIES AND ACCREDITATION.....	8
6.1 FACILITIES	8
6.2 ACCREDITATIONS.....	8
6.3 MEASUREMENT UNCERTAINTY	9
7. SETUP OF EQUIPMENT UNDER TEST.....	10-11
8. FCC PART 15.247 REQUIREMENTS.....	12
8.1 MAXIMUM PEAK OUTPUT POWER (WIFI)	12-17
8.2 MAXIMUM PEAK OUTPUT POWER (BLUETOOTH)	18-19
8.3 RADIATED EMISSION.....	20-53
APPENDIX SETUP PHOTOS	54



1. TEST REPORT CERTIFICATION

Applicant : BROADCOM CORPORATION
Address : 190 MATHILDA PLACE SUNNYVALE, CA 94086, U.S.A.
Equipment Under Test : 802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard
Model : BCM94313HMGB
Trade Name : Broadcom
Tested Date : February 14 ~ 29, 2012

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.4:2003	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Rex Liao
Deputy Section Manager

Reviewed by:

Jacky Chen
Deputy Section Manager



2. EUT DESCRIPTION

Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard
Model Number	BCM94313HMGB
Identify Number	T111230122
Received Date	February 14, 2012
Frequency Range	IEEE 802.11b/g : 2412MHz~2462MHz Bluetooth : 2402MHz ~ 2480MHz $f = 2402 + n\text{MHz}$, $n = 0, \dots, 78$
Transmit Power	IEEE 802.11b : 19.17dBm (0.0826 W) IEEE 802.11g : 23.65dBm (0.2317 W) Bluetooth : 4.23dBm (0.0025W)
Channel Spacing	IEEE 802.11b/g : 5MHz Bluetooth : 1MHz
Channel Number	IEEE 802.11b/g : 11 Channels Bluetooth : 79 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps Bluetooth : GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps)
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) Bluetooth : Frequency Hopping Spread Spectrum
Frequency Selection	by software / firmware
Antenna Type	WiFi : PIFA Antenna, Antenna Gain 1.73dBi Bluetooth : PIFA Antenna, Antenna Gain -0.24dBi
Power Rating	20Vdc, 4.5A (From Power Adapter)
Test Voltage	120Vac/60Hz
DC Power Cable Type	Non-shielded cable 1.8m (Non-detachable)
I/O Port	USB 2.0 Port x 2, RJ-45 Port x 1, HDMI Port x 1, USB 3.0 Port x 2, Audio In Port x 1, Audio Out Port x 1, SD Card Port x 1, VGA Port x 1, Power Port x 1

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	lenovo	ADP-90DD B	100-240Vac, 50/60Hz, 1.5A	20Vdc, 4.5A

Remark :

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: QDS-BRCM1051I filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. DESCRIPTION OF CLASS II CHANGE

The major change filed under this application is:

Add portable Condition compliance to the grant so that the module may be used in qualified host PC(s) and implementation of module-notebook authentication.

Product name: Notebook Computer

Brand name: lenovo

Model: 20152, 2617, Lenovo IdeaPad Z585

The above model numbers have the same specifications.

4. DESCRIPTION OF TEST MODES

The EUT is an 802.11b/g transceiver in 802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard form factor. The antenna configuration is an antenna for Wi-Fi use, the other antenna for Bluetooth use, and these two are the PIFA antenna.

Radiated Emission Test (Below 1 GHz)

TX Mode

Conducted / Radiated Emission Test (Above 1 GHz)

IEEE 802.11b, 802.11g, 802.11n HT20 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode : Covered by the worst case 802.11g Mode Legacy testing.



Bluetooth

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2402
Middle	2441
High	2480

Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

Bandedge Measurement :

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, High	FHSS	GFSK	DH5
Low, High	FHSS	8-DPSK	3-DH5

Antenna Port Conducted Measurement :

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5



5. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47, 15.207, 15.209 and 15.247.

6. FACILITIES AND ACCREDITATION

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2003 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

6.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



6.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 30 to 1000 MHz	+/- 3.0371
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 1 to 18GHz	+/- 2.5258
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 18 to 26 GHz	+/- 2.5012
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 26 to 40 GHz	+/- 2.7846

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2006, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.



7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

N/A

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

WiFi

1. Setup all computers like the setup diagram.

2. Select the following settings.

3. net stop wlansvc.

timeout 1

net start wlansvc

timeout 4

wl out

wl up

wl antdiv 0

wl txant 0

wl mpc 0

wl frameburst 1

wl down

wl ampdu 1

wl country ALL

wl band b

wl up

wl chanspec -c 1 -b 2 -w 20 -s 0

timeout 4

wl wsec 0

timeout 4

wl join testb imode adhoc

timeout 4

wl legacylink

timeout 6

wl nrate -r 1

wl cck_txbw 2

wl txpwr1 -o -q 75

timeout 4

epi_ttcp -tsuHfm -l 8760 -n 10000000 192.168.66.255

4. Run Tx Test software.

5. All of the functions are under run.

6. Start test.



Bluetooth

1. Setup all computers like the setup diagram.
2. Run BlueTool Test software.
3. Select the following settings.
4. Tx mode
 - 7.3: Host Controller & Baseband Commands (3 key)
 - Reset
 - 0: Vendor-specific Commands (0 key)
 - Set Tx Carrier Frequency Arm
 - a. Carrier on
 - b. Desired output frequency
 - c. Select PRBS9
 - d. Select GFSK or 8PSK
 - e. Select Specify Power Table index
5. All of the functions are under run.
6. Start test.



8. FCC PART 15.247 REQUIREMENTS

8.1 MAXIMUM PEAK OUTPUT POWER (WIFI)

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	US41443108	08/09/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The spectrum shall be set as follows :

Span : 1.5 times channel integration bandwidth.

RBW : 1MHz

VBW : 3MHz

Detector : Peak

Sweep : Single trace

2. Compute the combined power of all signal responses contained in the trace by covering all the data points.

3. The peak output power is the channel power integrated over 26dB bandwidth.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	19.16	0.0824	30	1	PASS
Middle	2437	19.17	0.0826	30	1	PASS
High	2462	13.92	0.0247	30	1	PASS

Remark:


1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


IEEE 802.11g Mode


Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	23.65	0.2317	30	1	PASS
Middle	2437	23.59	0.2286	30	1	PASS
High	2462	18.47	0.0703	30	1	PASS


Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

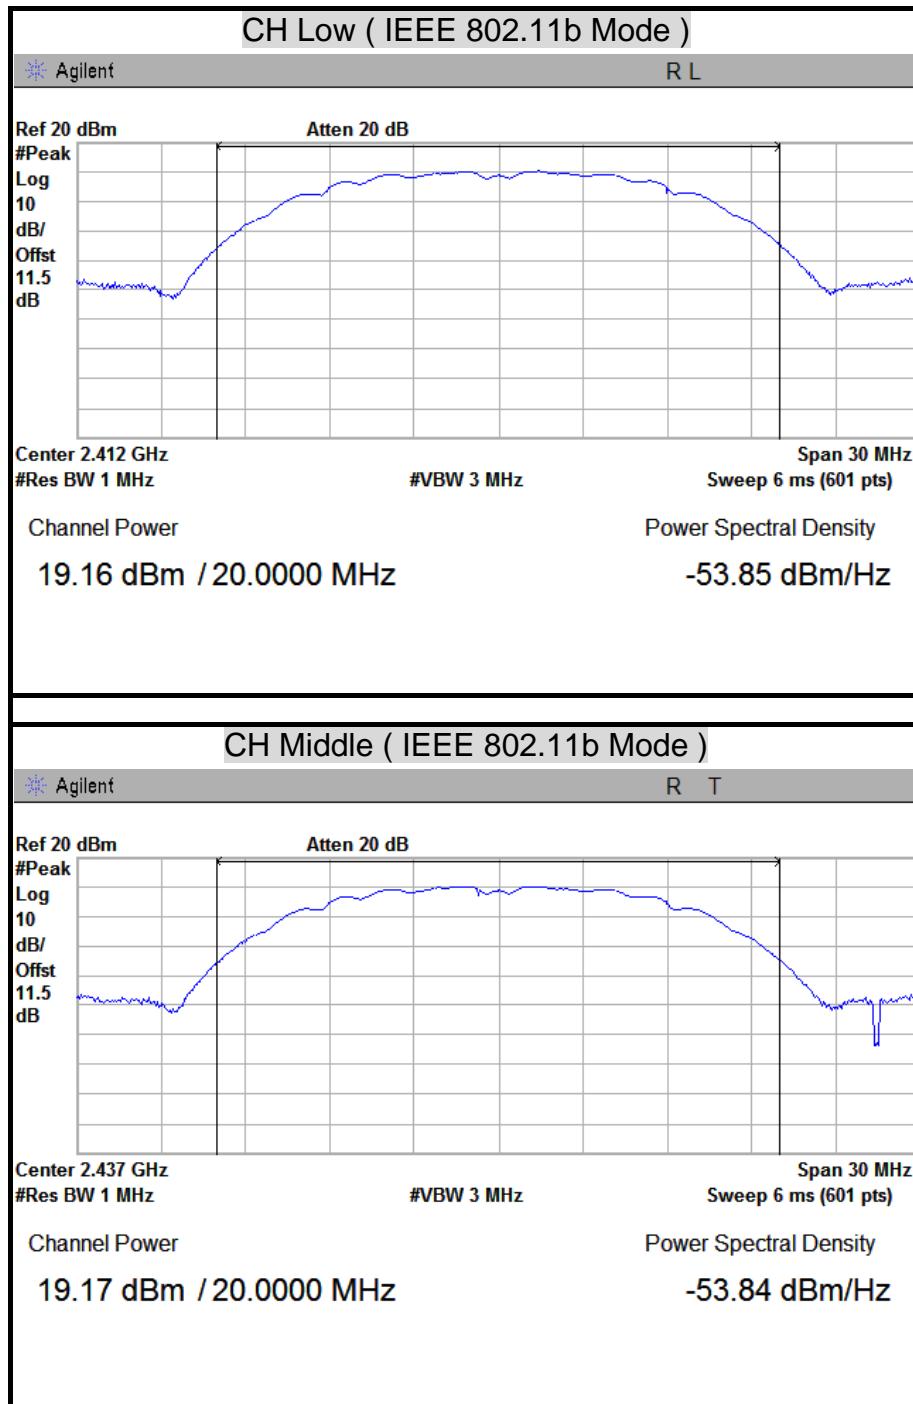**MAXIMUM PEAK OUTPUT POWER**

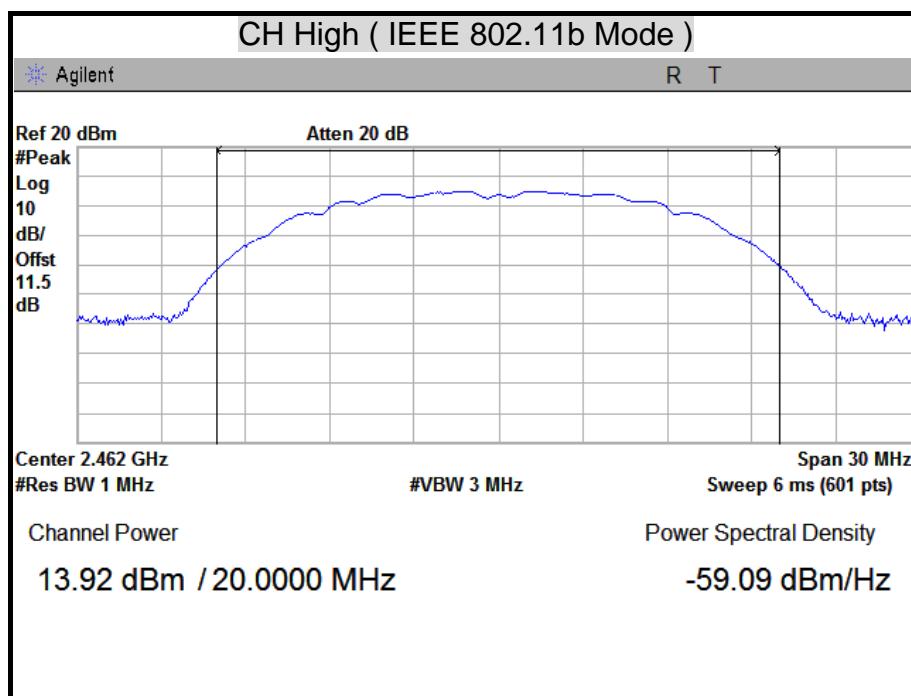

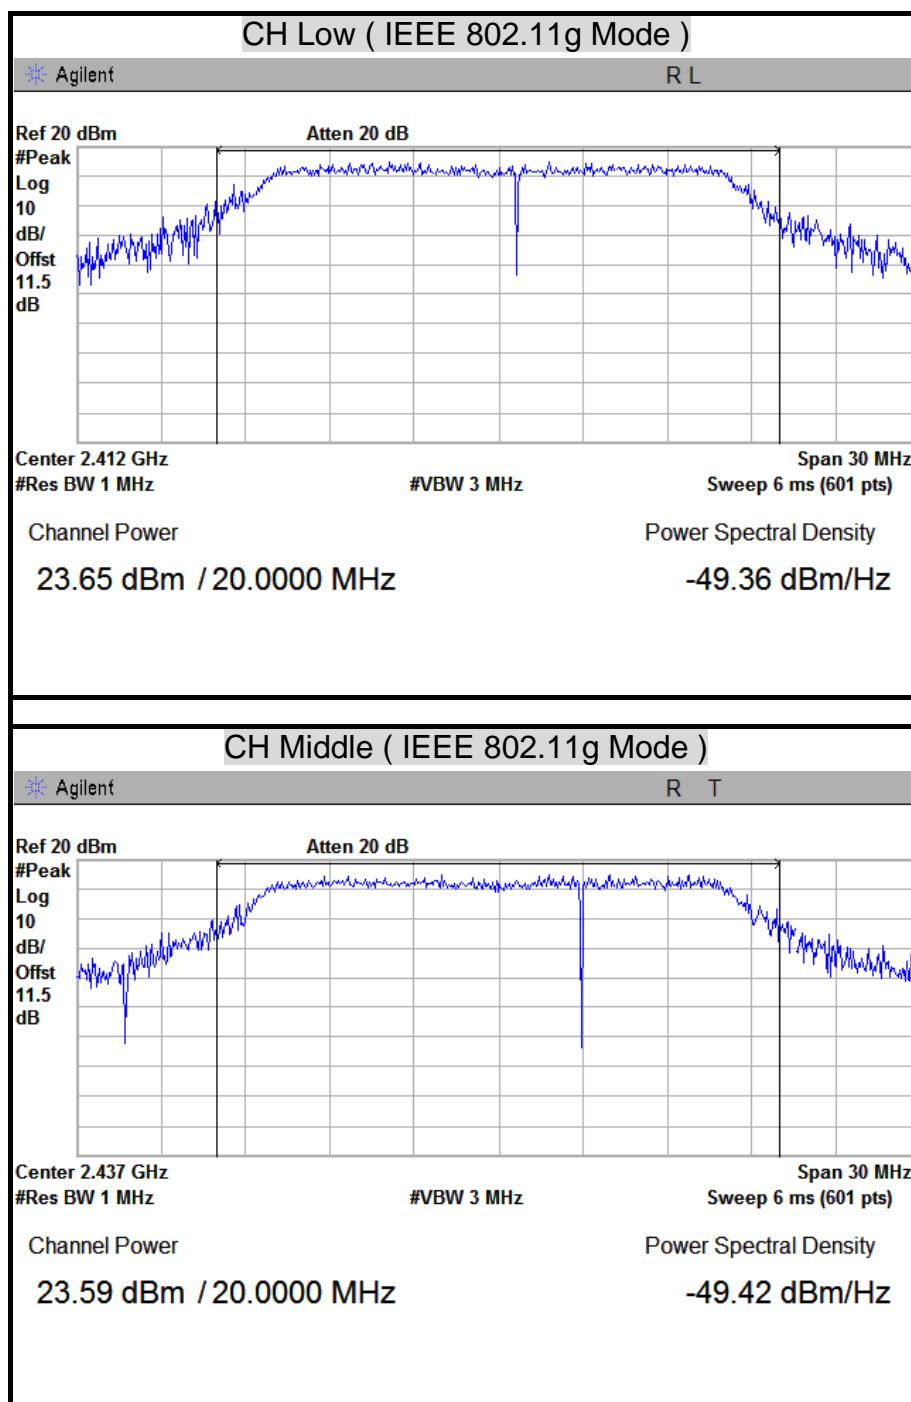

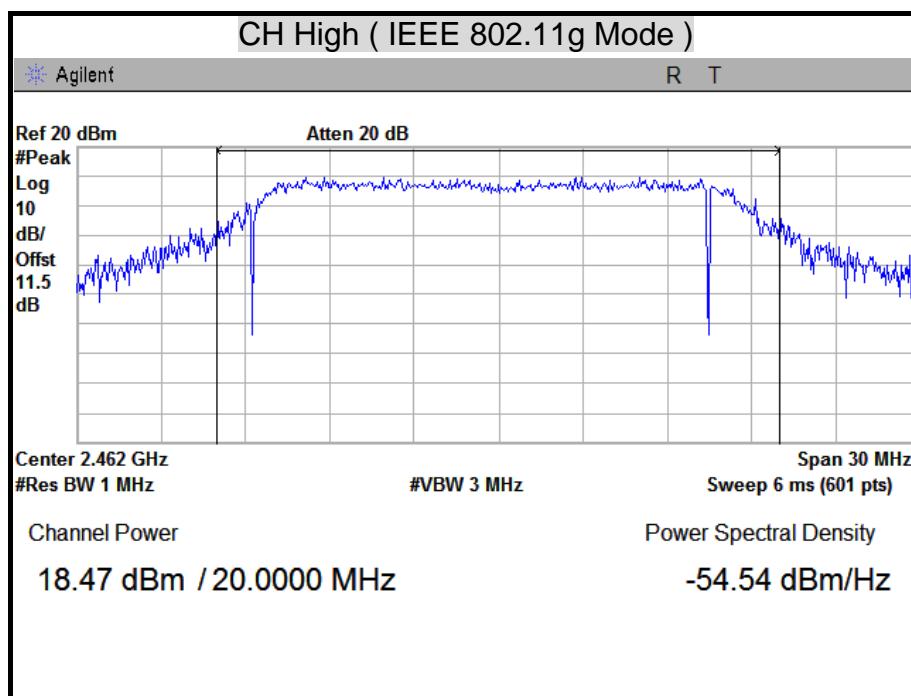



8.2 MAXIMUM PEAK OUTPUT POWER (BLUETOOTH)

LIMITS


§15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Peak Power Meter	Anritsu	ML2487A	6K00001783	04/18/2012
Wide Bandwidth Sensor	Anritsu	MA2491A	030982	04/18/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

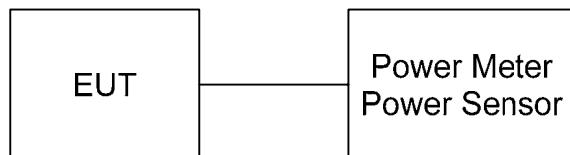

TEST PROCEDURE

The RF power output was measured with a power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, a power meter was used to record the shape of the transmit signal.

**TEST RESULTS**

Modulation Type: GFSK ,CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Result
		(dBm)	(W)	(dBm)	(W)	
Low	2402	2.03	0.0016	20.97	0.125	PASS
Middle	2441	1.84	0.0015	20.97	0.125	PASS
High	2480	1.25	0.0013	20.97	0.125	PASS

Remark: The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was
Entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK ,CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Result
		(dBm)	(W)	(dBm)	(W)	
Low	2402	4.23	0.0026	20.97	0.125	PASS
Middle	2441	4.05	0.0025	20.97	0.125	PASS
High	2480	3.97	0.0025	20.97	0.125	PASS

Remark: The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was
Entered as an offset in the power meter to allow for direct reading of power.



8.3 RADIATED EMISSION

LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

- ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
- ² Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber_A

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012
EMI Receiver	ROHDE & SCHWARZ	ESCI	100221	04/24/2012
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-249	10/03/2012
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/05/2012
Horn Antenna	COM-POWER	AH-840	03077	12/06/2012
Pre-Amplifier	Agilent	8449B	3008A01471	07/24/2012
Pre-Amplifier	HP	8447F	2944A03748	09/18/2012
LOOP Antenna	EMCO	6502	8905-2356	06/10/2012
Band Reject Notch Filter	Micro-Tronics	BRM05702-01	009	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

9kHz ~ 30MHz

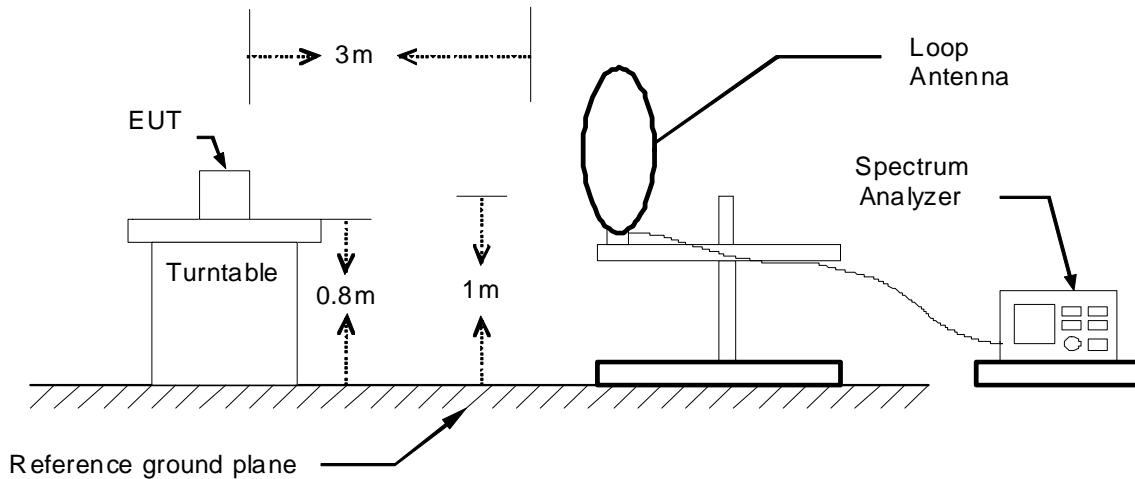


30MHz ~ 1GHz

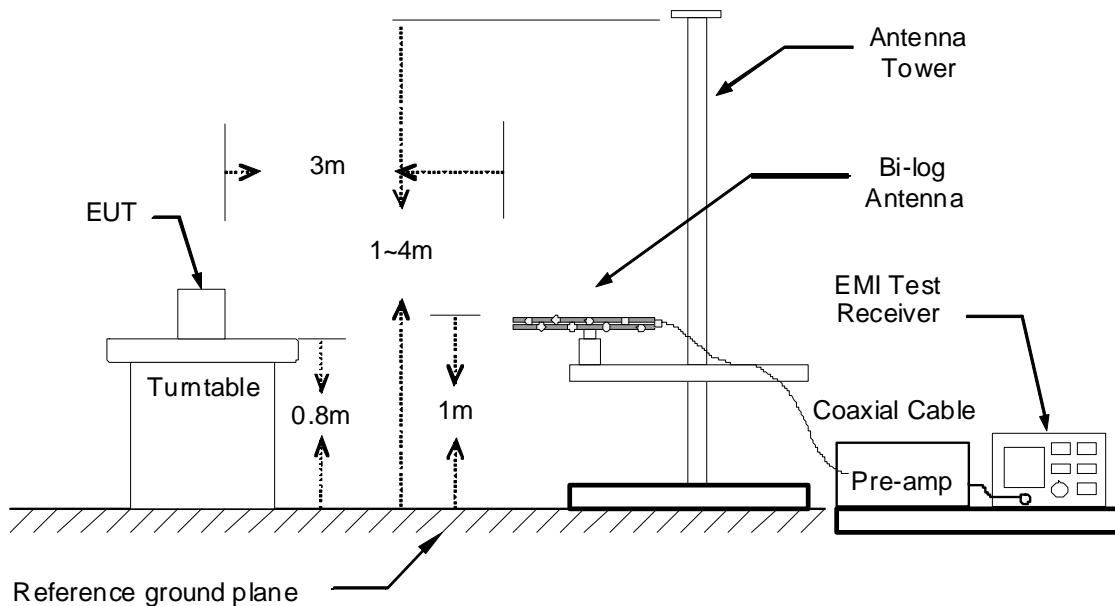



The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

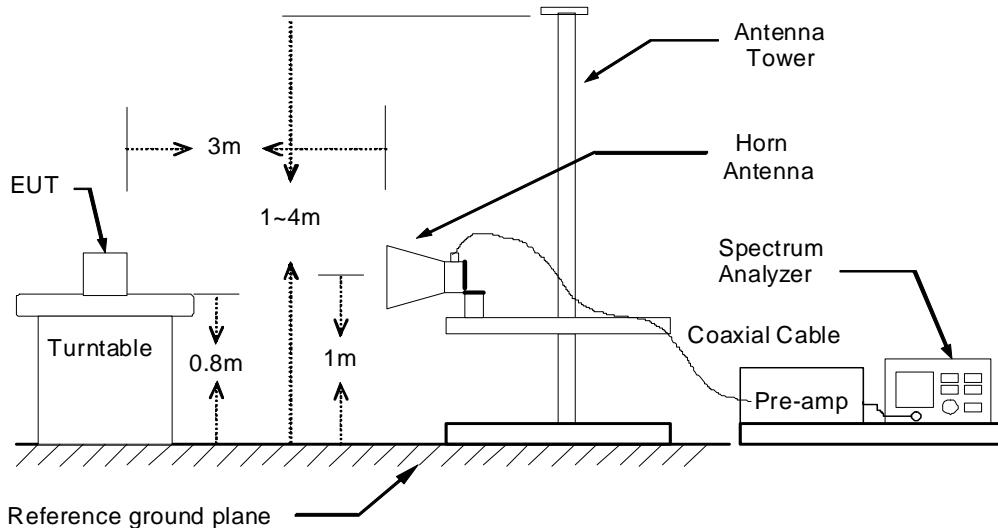

TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark :

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*



TEST RESULTS

Below 1 GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	IEEE 802.11b TX / CH Middle (worst case)	Temp. & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
103.72	39.07	-14.27	24.79	43.50	-18.71	Peak
223.03	43.37	-12.12	31.24	46.00	-14.76	Peak
278.32	42.84	-9.37	33.47	46.00	-12.53	Peak
335.55	38.16	-7.80	30.36	46.00	-15.64	Peak
598.42	32.27	-1.41	30.86	46.00	-15.14	Peak
800.18	29.68	2.00	31.69	46.00	-14.31	Peak

966 Chamber_A at 3Meter / Vertical						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
34.85	42.06	-10.35	31.71	40.00	-8.29	Peak
167.74	37.08	-9.55	27.52	43.50	-15.98	Peak
278.32	37.89	-9.37	28.52	46.00	-17.48	Peak
443.22	34.88	-4.98	29.90	46.00	-16.10	Peak
665.35	31.07	-0.62	30.45	46.00	-15.55	Peak
797.27	33.33	1.95	35.27	46.00	-10.73	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - PreAmp.Gain (dB)
4. Result (dB μ V/m) = Reading (dB μ V) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dB μ V/m) - Quasi-peak limit (dB μ V/m).



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / GFSK TX / CH Middle (worst case)	Temp. & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
99.84	39.02	-14.68	24.34	43.50	-19.16	Peak
166.77	41.51	-9.47	32.04	43.50	-11.46	Peak
224.00	43.79	-12.05	31.74	46.00	-14.26	Peak
280.26	43.04	-9.30	33.74	46.00	-12.26	Peak
334.58	38.80	-7.83	30.97	46.00	-15.03	Peak
436.43	32.48	-5.14	27.34	46.00	-18.66	Peak
800.18	29.72	2.00	31.72	46.00	-14.28	Peak

966 Chamber_A at 3Meter / Vertical						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
35.82	42.64	-10.47	32.17	40.00	-7.83	Peak
102.75	40.58	-14.38	26.21	43.50	-17.29	Peak
166.77	38.09	-9.47	28.62	43.50	-14.88	Peak
278.32	37.52	-9.37	28.15	46.00	-17.85	Peak
437.40	34.00	-5.12	28.89	46.00	-17.11	Peak
598.42	30.18	-1.41	28.77	46.00	-17.23	Peak
653.71	31.35	-0.88	30.46	46.00	-15.54	Peak
800.18	31.66	2.00	33.67	46.00	-12.33	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - PreAmp.Gain (dB)
4. Result (dB μ V/m) = Reading (dB μ V) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dB μ V/m) - Quasi-peak limit (dB μ V/m).



TX Above 1 GHz

Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/18
Test Mode	IEEE 802.11b TX / CH Low	TEMP & Humidity	21°C, 52%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1674.00	54.05	---	-4.36	49.69	---	74.00	54.00	-4.31	Peak
2112.00	53.70	---	-2.65	51.05	---	74.00	54.00	-2.95	Peak
3120.00	42.90	---	0.72	43.61	---	74.00	54.00	-10.39	Peak
3825.00	42.26	---	2.28	44.53	---	74.00	54.00	-9.47	Peak
4905.00	41.27	---	5.80	47.07	---	74.00	54.00	-6.93	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1832.00	54.90	---	-3.75	51.15	---	74.00	54.00	-2.85	Peak
2146.00	53.25	---	-2.51	50.74	---	74.00	54.00	-3.26	Peak
3450.00	43.79	---	1.12	44.91	---	74.00	54.00	-9.09	Peak
4470.00	41.84	---	4.40	46.24	---	74.00	54.00	-7.76	Peak
5835.00	41.47	---	7.61	49.08	---	74.00	54.00	-4.92	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/18
Test Mode	IEEE 802.11b TX / CH Middle	TEMP & Humidity	21°C, 52%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1434.00	53.80	---	-5.43	48.37	---	74.00	54.00	-5.63	Peak
2052.00	54.12	---	-2.89	51.23	---	74.00	54.00	-2.77	Peak
3135.00	43.69	---	0.73	44.42	---	74.00	54.00	-9.58	Peak
3495.00	43.97	---	1.17	45.14	---	74.00	54.00	-8.86	Peak
4710.00	42.51	---	5.18	47.68	---	74.00	54.00	-6.32	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1320.00	54.25	---	-6.10	48.15	---	74.00	54.00	-5.85	Peak
2000.00	55.52	---	-3.10	52.42	---	74.00	54.00	-1.58	Peak
3240.00	43.39	---	0.86	44.26	---	74.00	54.00	-9.74	Peak
4275.00	41.55	---	3.77	45.32	---	74.00	54.00	-8.68	Peak
5235.00	42.79	---	6.50	49.30	---	74.00	54.00	-4.70	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/18
Test Mode	IEEE 802.11b TX / CH High	TEMP & Humidity	21°C, 52%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1416.00	54.54	---	-5.53	49.00	---	74.00	54.00	-5.00	Peak
1778.00	54.29	---	-3.96	50.33	---	74.00	54.00	-3.67	Peak
3390.00	43.07	---	1.05	44.11	---	74.00	54.00	-9.89	Peak
4365.00	42.06	---	4.06	46.12	---	74.00	54.00	-7.88	Peak
4950.00	42.06	---	5.95	48.01	---	74.00	54.00	-5.99	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1426.00	53.92	---	-5.48	48.45	---	74.00	54.00	-5.55	Peak
1838.00	54.18	---	-3.73	50.46	---	74.00	54.00	-3.54	Peak
3330.00	43.45	---	0.97	44.42	---	74.00	54.00	-9.58	Peak
4185.00	41.67	---	3.47	45.14	---	74.00	54.00	-8.86	Peak
4950.00	41.81	---	5.95	47.76	---	74.00	54.00	-6.24	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/18
Test Mode	IEEE 802.11g TX / CH Low	TEMP & Humidity	21°C, 52%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1034.00	54.74	---	-7.78	46.96	---	74.00	54.00	-7.04	Peak
1260.00	54.57	---	-6.45	48.12	---	74.00	54.00	-5.88	Peak
3255.00	42.41	---	0.88	43.29	---	74.00	54.00	-10.71	Peak
4095.00	41.33	---	3.18	44.51	---	74.00	54.00	-9.49	Peak
4770.00	41.38	---	5.37	46.75	---	74.00	54.00	-7.25	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1392.00	54.20	---	-5.68	48.53	---	74.00	54.00	-5.47	Peak
1994.00	54.57	---	-3.12	51.45	---	74.00	54.00	-2.55	Peak
3330.00	44.84	---	0.97	45.82	---	74.00	54.00	-8.18	Peak
4260.00	41.32	---	3.72	45.04	---	74.00	54.00	-8.96	Peak
4995.00	43.60	---	6.09	49.69	---	74.00	54.00	-4.31	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/18
Test Mode	IEEE 802.11g TX / CH Middle	TEMP & Humidity	21°C, 52%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1118.00	55.36	---	-7.29	48.07	---	74.00	54.00	-5.93	Peak
1490.00	53.88	---	-5.10	48.78	---	74.00	54.00	-5.22	Peak
3255.00	43.06	---	0.88	43.94	---	74.00	54.00	-10.06	Peak
3750.00	42.20	---	2.02	44.22	---	74.00	54.00	-9.78	Peak
4995.00	40.98	---	6.09	47.07	---	74.00	54.00	-6.93	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1230.00	54.86	---	-6.63	48.23	---	74.00	54.00	-5.77	Peak
1748.00	54.53	---	-4.08	50.46	---	74.00	54.00	-3.54	Peak
3330.00	44.13	---	0.97	45.10	---	74.00	54.00	-8.90	Peak
4125.00	41.26	---	3.28	44.53	---	74.00	54.00	-9.47	Peak
4665.00	42.37	---	5.03	47.40	---	74.00	54.00	-6.60	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/18
Test Mode	IEEE 802.11g TX / CH High	TEMP & Humidity	21°C, 52%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1382.00	54.45	---	-5.73	48.71	---	74.00	54.00	-5.29	Peak
1656.00	53.53	---	-4.43	49.09	---	74.00	54.00	-4.91	Peak
3660.00	43.61	---	1.72	45.33	---	74.00	54.00	-8.67	Peak
4860.00	41.35	---	5.66	47.01	---	74.00	54.00	-6.99	Peak
5265.00	41.86	---	6.56	48.42	---	74.00	54.00	-5.58	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1504.00	53.91	---	-5.02	48.89	---	74.00	54.00	-5.11	Peak
1870.00	55.22	---	-3.60	51.61	---	74.00	54.00	-2.39	Peak
3330.00	43.87	---	0.97	44.84	---	74.00	54.00	-9.16	Peak
4170.00	42.34	---	3.42	45.76	---	74.00	54.00	-8.24	Peak
4650.00	42.63	---	4.98	47.61	---	74.00	54.00	-6.39	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / GFSK TX / CH Low	TEMP & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal

Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	48.48	---	-6.83	41.65	---	74.00	54.00	-12.35	Peak
1624.00	43.07	---	-4.56	38.51	---	74.00	54.00	-15.49	Peak
1960.00	43.41	---	-3.26	40.15	---	74.00	54.00	-13.85	Peak
3165.00	42.30	---	0.77	43.07	---	74.00	54.00	-10.93	Peak
5040.00	41.55	---	6.18	47.73	---	74.00	54.00	-6.27	Peak
5970.00	42.09	---	7.88	49.97	---	74.00	54.00	-4.03	Peak

966 Chamber_A at 3Meter / Vertical

Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	48.87	---	-6.82	42.05	---	74.00	54.00	-11.95	Peak
1598.00	48.20	---	-4.66	43.54	---	74.00	54.00	-10.46	Peak
1834.00	45.34	---	-3.74	41.60	---	74.00	54.00	-12.40	Peak
2606.00	44.63	---	-0.74	43.89	---	74.00	54.00	-10.11	Peak
3945.00	41.52	---	2.68	44.20	---	74.00	54.00	-9.80	Peak
4980.00	41.05	---	6.05	47.10	---	74.00	54.00	-6.90	Peak
6480.00	41.24	---	9.70	50.94	---	74.00	54.00	-3.06	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / GFSK TX / CH Middle	TEMP & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	48.14	---	-6.82	41.32	---	74.00	54.00	-12.68	Peak
1618.00	43.89	---	-4.58	39.31	---	74.00	54.00	-14.69	Peak
1940.00	43.24	---	-3.33	39.91	---	74.00	54.00	-14.09	Peak
3240.00	42.71	---	0.86	43.57	---	74.00	54.00	-10.43	Peak
4155.00	42.32	---	3.38	45.69	---	74.00	54.00	-8.31	Peak
5895.00	41.84	---	7.73	49.57	---	74.00	54.00	-4.43	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	49.82	---	-6.82	43.00	---	74.00	54.00	-11.00	Peak
1598.00	49.82	---	-4.66	45.16	---	74.00	54.00	-8.84	Peak
1794.00	45.37	---	-3.90	41.47	---	74.00	54.00	-12.53	Peak
2602.00	44.69	---	-0.75	43.94	---	74.00	54.00	-10.06	Peak
3105.00	43.29	---	0.70	43.99	---	74.00	54.00	-10.01	Peak
3930.00	42.72	---	2.63	45.36	---	74.00	54.00	-8.64	Peak
6030.00	41.21	---	8.05	49.26	---	74.00	54.00	-4.74	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / GFSK TX / CH High	TEMP & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	47.17	---	-6.82	40.35	---	74.00	54.00	-13.65	Peak
1492.00	44.27	---	-5.09	39.18	---	74.00	54.00	-14.82	Peak
1984.00	42.44	---	-3.16	39.28	---	74.00	54.00	-14.72	Peak
3255.00	43.29	---	0.88	44.18	---	74.00	54.00	-9.82	Peak
4710.00	42.28	---	5.18	47.46	---	74.00	54.00	-6.54	Peak
6105.00	40.01	---	8.32	48.33	---	74.00	54.00	-5.67	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	50.15	---	-6.82	43.34	---	74.00	54.00	-10.66	Peak
1598.00	51.79	---	-4.66	47.13	---	74.00	54.00	-6.87	Peak
2320.00	46.01	---	-1.81	44.20	---	74.00	54.00	-9.80	Peak
2596.00	44.24	---	-0.77	43.47	---	74.00	54.00	-10.53	Peak
3225.00	42.15	---	0.84	43.00	---	74.00	54.00	-11.00	Peak
4815.00	41.54	---	5.51	47.06	---	74.00	54.00	-6.94	Peak
6195.00	41.27	---	8.65	49.92	---	74.00	54.00	-4.08	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / 8-DPSK TX / CH Low	TEMP & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal

Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	48.41	---	-6.83	41.58	---	74.00	54.00	-12.42	Peak
1596.00	44.82	---	-4.67	40.15	---	74.00	54.00	-13.85	Peak
1996.00	44.02	---	-3.12	40.90	---	74.00	54.00	-13.10	Peak
3165.00	43.31	---	0.77	44.08	---	74.00	54.00	-9.92	Peak
4710.00	42.53	---	5.18	47.70	---	74.00	54.00	-6.30	Peak
6060.00	41.21	---	8.16	49.37	---	74.00	54.00	-4.63	Peak

966 Chamber_A at 3Meter / Vertical

Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	49.77	---	-6.82	42.96	---	74.00	54.00	-11.04	Peak
1598.00	49.92	---	-4.66	45.26	---	74.00	54.00	-8.74	Peak
1794.00	44.67	---	-3.90	40.77	---	74.00	54.00	-13.23	Peak
2598.00	44.06	---	-0.76	43.29	---	74.00	54.00	-10.71	Peak
4110.00	41.96	---	3.23	45.19	---	74.00	54.00	-8.81	Peak
5040.00	41.90	---	6.18	48.07	---	74.00	54.00	-5.93	Peak
5820.00	40.73	---	7.58	48.31	---	74.00	54.00	-5.69	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / 8-DPSK TX / CH Middle	TEMP & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1202.00	47.53	---	-6.79	40.74	---	74.00	54.00	-13.26	Peak
1594.00	44.14	---	-4.68	39.46	---	74.00	54.00	-14.54	Peak
2122.00	43.31	---	-2.61	40.70	---	74.00	54.00	-13.30	Peak
3390.00	42.26	---	1.05	43.30	---	74.00	54.00	-10.70	Peak
4995.00	42.25	---	6.09	48.34	---	74.00	54.00	-5.66	Peak
5895.00	40.55	---	7.73	48.28	---	74.00	54.00	-5.72	Peak
966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	48.86	---	-6.82	42.05	---	74.00	54.00	-11.95	Peak
1600.00	47.90	---	-4.65	43.24	---	74.00	54.00	-10.76	Peak
1798.00	45.14	---	-3.88	41.26	---	74.00	54.00	-12.74	Peak
2560.00	43.90	---	-0.89	43.01	---	74.00	54.00	-10.99	Peak
3210.00	42.76	---	0.83	43.58	---	74.00	54.00	-10.42	Peak
4365.00	40.77	---	4.06	44.83	---	74.00	54.00	-9.17	Peak
5820.00	41.32	---	7.58	48.90	---	74.00	54.00	-5.10	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Remark AVG = Result(AV) - Limit(AV)



Product Name	802.11g / Draft 802.11n WLAN + Bluetooth PCI-E minicard	Test By	Rueyyan Lin
Test Model	BCM94313HMGB	Test Date	2012/02/22
Test Mode	Bluetooth / 8-DPSK TX / CH High	TEMP & Humidity	24°C, 58%

966 Chamber_A at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	48.76	---	-6.83	41.94	---	74.00	54.00	-12.06	Peak
1662.00	43.75	---	-4.41	39.34	---	74.00	54.00	-14.66	Peak
2214.00	43.47	---	-2.24	41.23	---	74.00	54.00	-12.77	Peak
3270.00	43.21	---	0.90	44.11	---	74.00	54.00	-9.89	Peak
4515.00	41.30	---	4.55	45.85	---	74.00	54.00	-8.15	Peak
5760.00	40.65	---	7.46	48.12	---	74.00	54.00	-5.88	Peak

966 Chamber_A at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	50.53	---	-6.82	43.71	---	74.00	54.00	-10.29	Peak
1598.00	49.57	---	-4.66	44.91	---	74.00	54.00	-9.09	Peak
1796.00	44.33	---	-3.89	40.43	---	74.00	54.00	-13.57	Peak
2606.00	45.22	---	-0.74	44.48	---	74.00	54.00	-9.52	Peak
3765.00	42.38	---	2.08	44.45	---	74.00	54.00	-9.55	Peak
4965.00	40.82	---	6.00	46.82	---	74.00	54.00	-7.18	Peak
5820.00	40.92	---	7.58	48.50	---	74.00	54.00	-5.50	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Restricted Band Edges

Detector Mode : Peak

Polarity : Horizontal

WiFi / CH Low (IEEE 802.11b Mode)

Agilent

R T

Mkr3 2.390 0 GHz
55.93 dB μ VRef 127 dB μ V

#Atten 20 dB

Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.425 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 0 GHz	100.13 dB μ V
2	(1)	Freq	2.400 0 GHz	62.64 dB μ V
3	(1)	Freq	2.390 0 GHz	55.93 dB μ V



Detector Mode : Average

Polarity : Horizontal

WiFi / CH Low (IEEE 802.11b Mode)

Agilent

R T

Mkr3 2.390 0 GHz
43.84 dB μ VRef 127 dB μ V

#Atten 20 dB

Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.425 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.967 s (1001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 0 GHz	96.22 dB μ V
2	(1)	Freq	2.400 0 GHz	53.81 dB μ V
3	(1)	Freq	2.390 0 GHz	43.84 dB μ V






Detector Mode : Peak



Polarity : Vertical

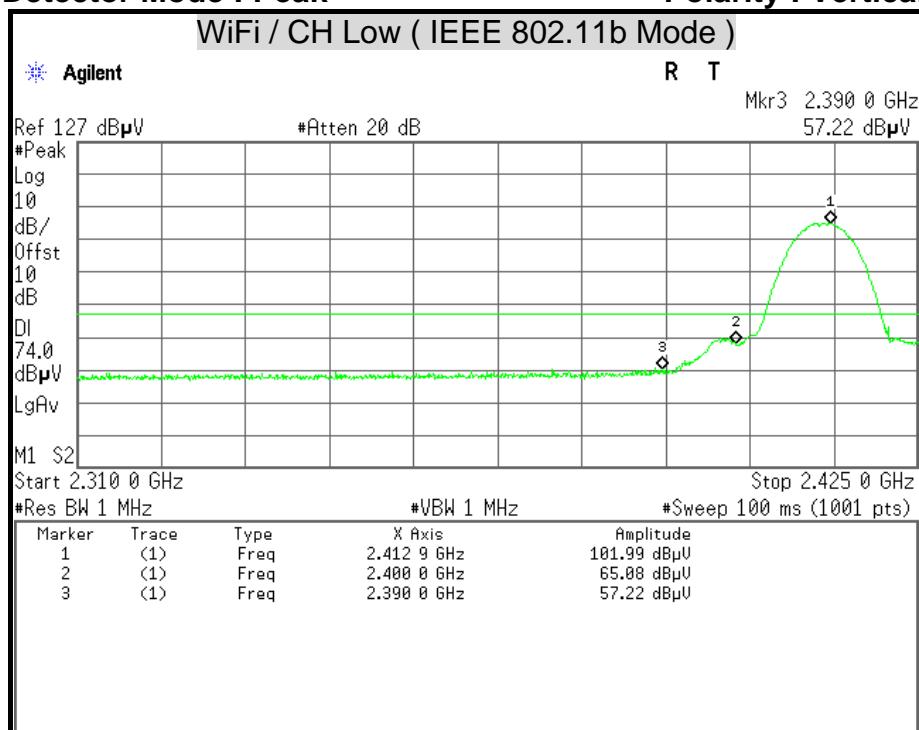

Detector Mode : Average

Polarity : Vertical

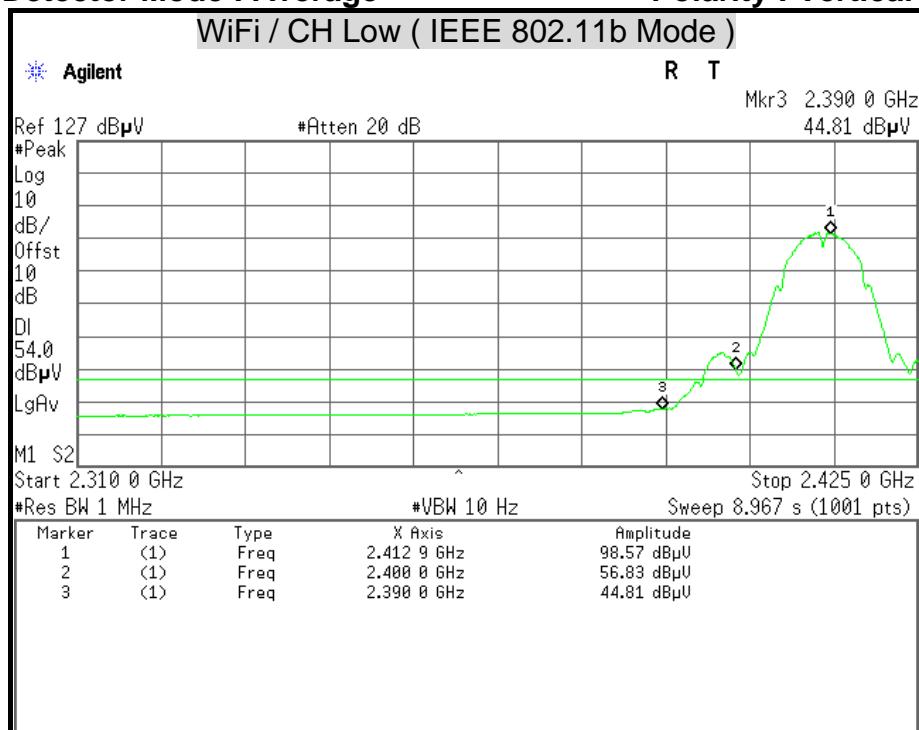


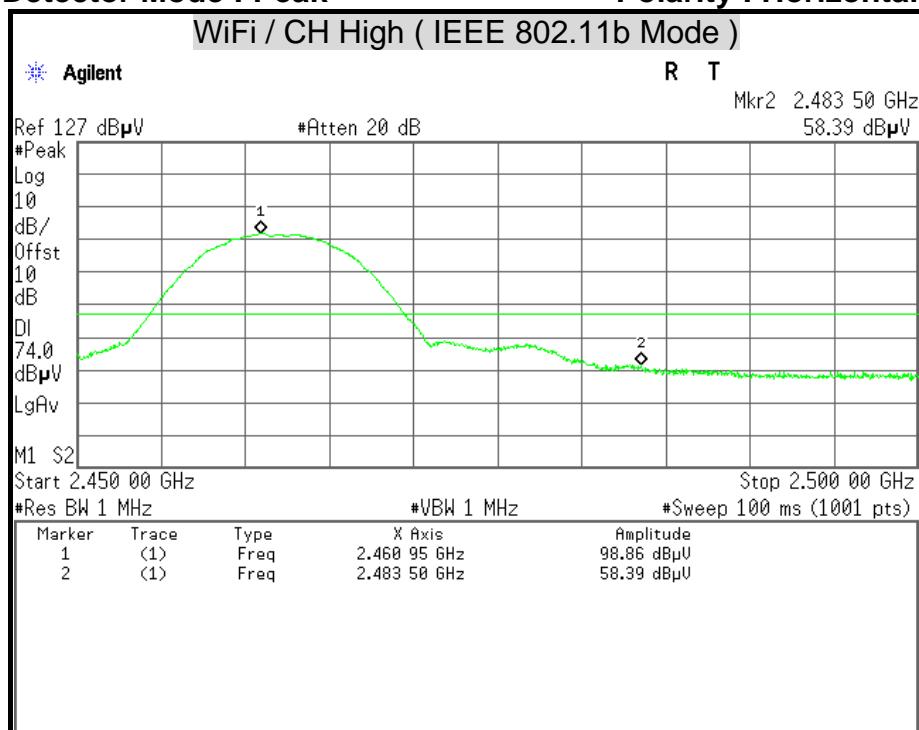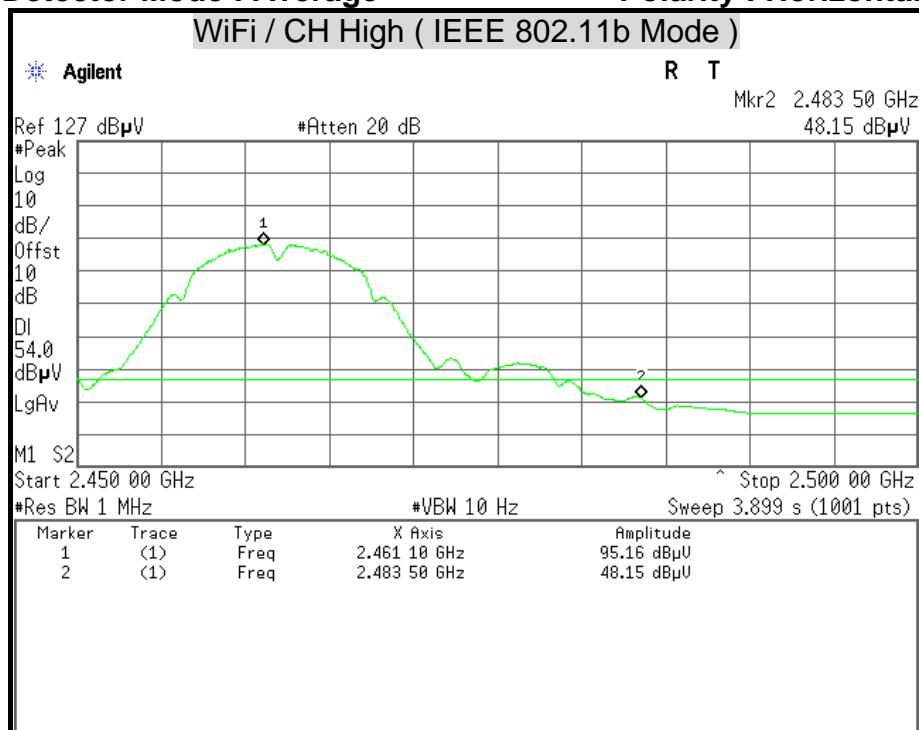**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**




Detector Mode : Peak

Polarity : Vertical

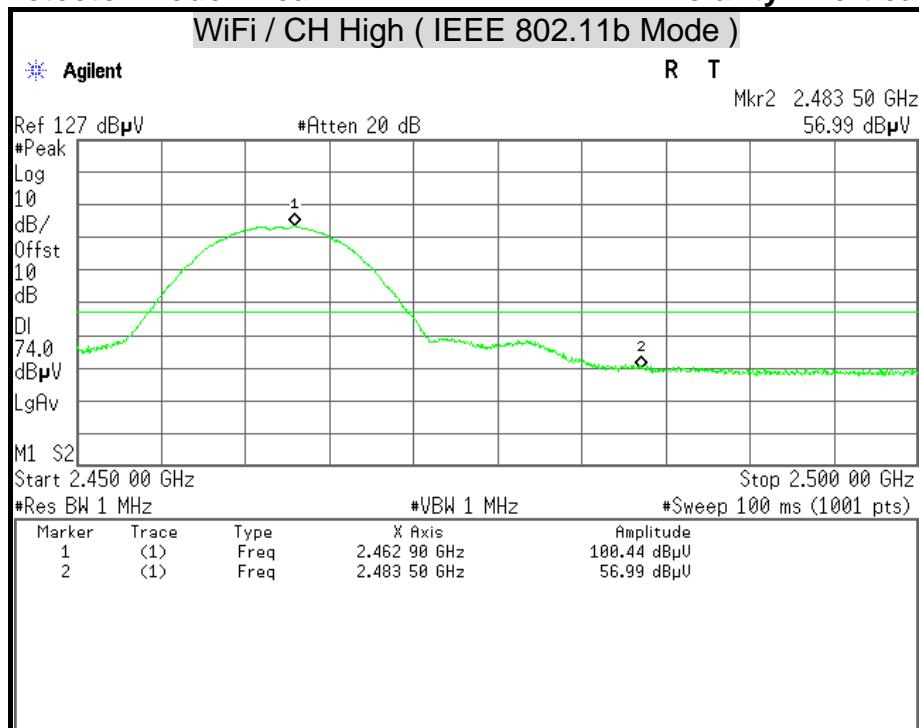

Detector Mode : Average


Polarity : Vertical

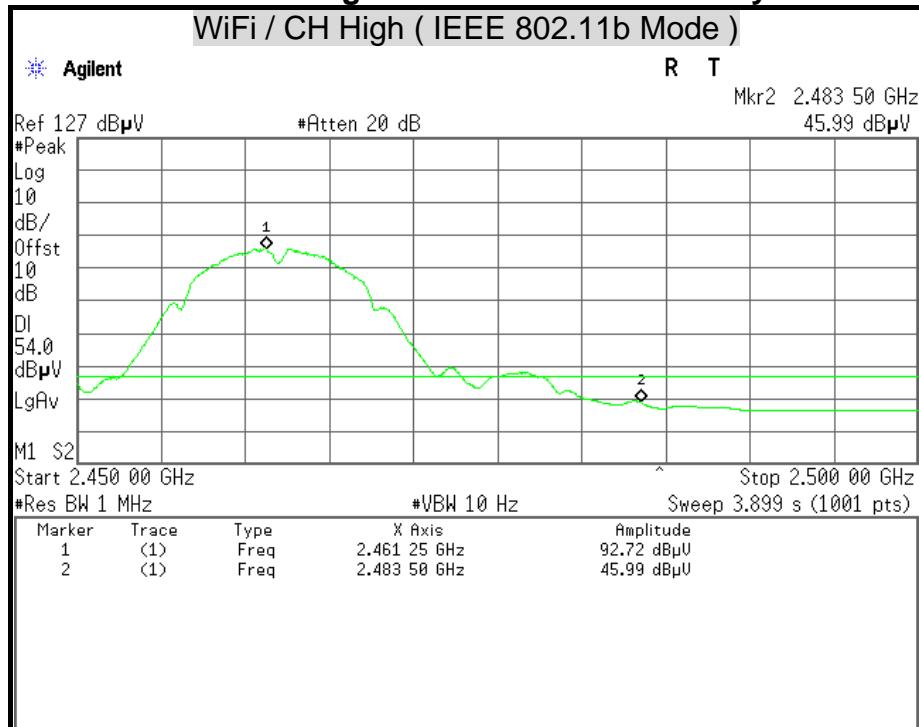




Detector Mode : Peak

Polarity : Horizontal

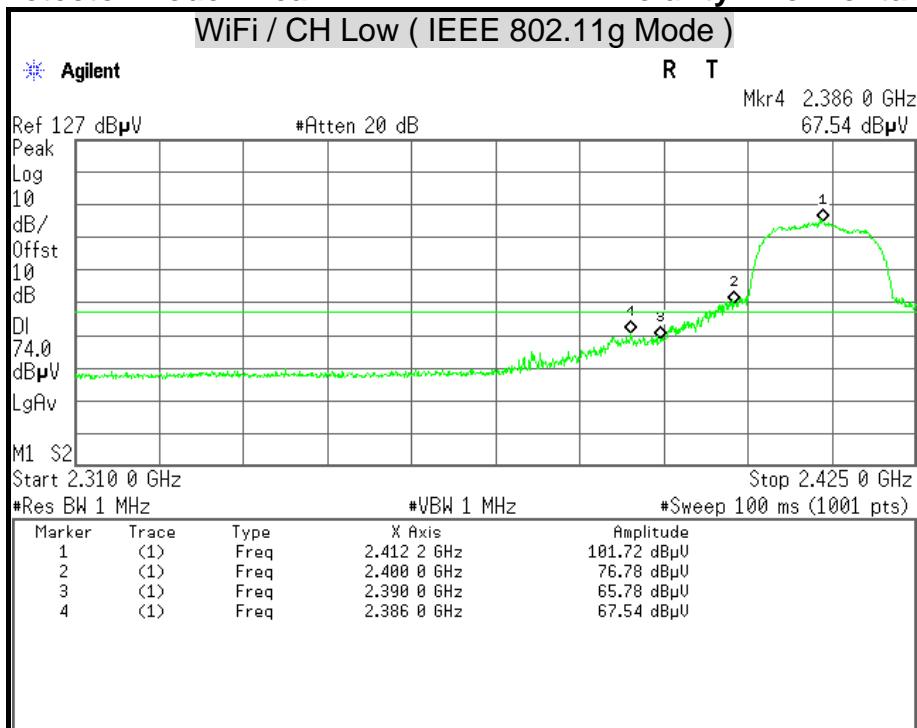

Detector Mode : Average


Polarity : Horizontal

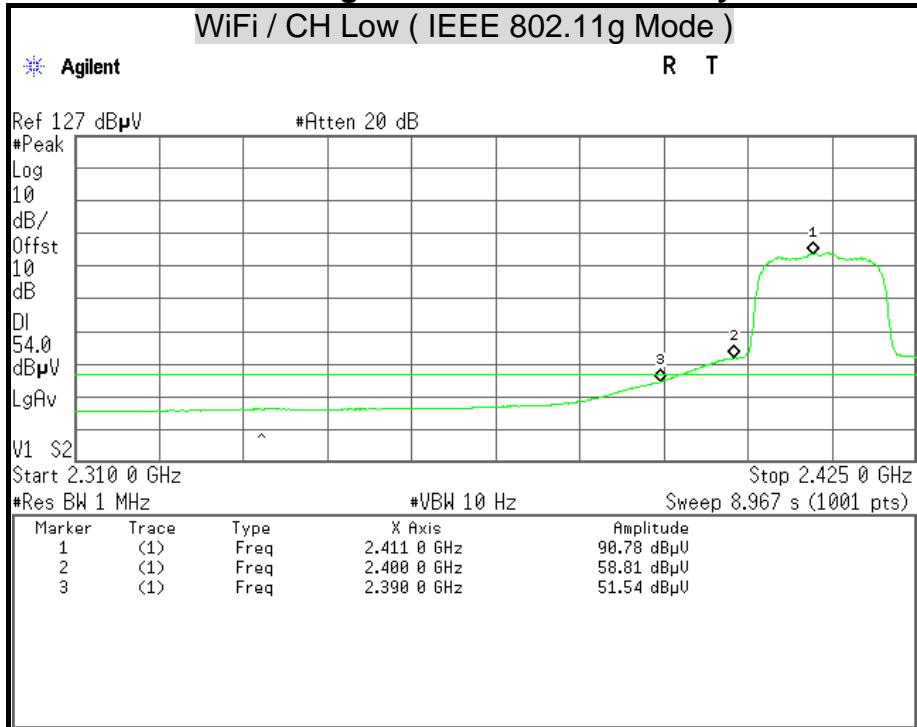




Detector Mode : Peak

Polarity : Vertical

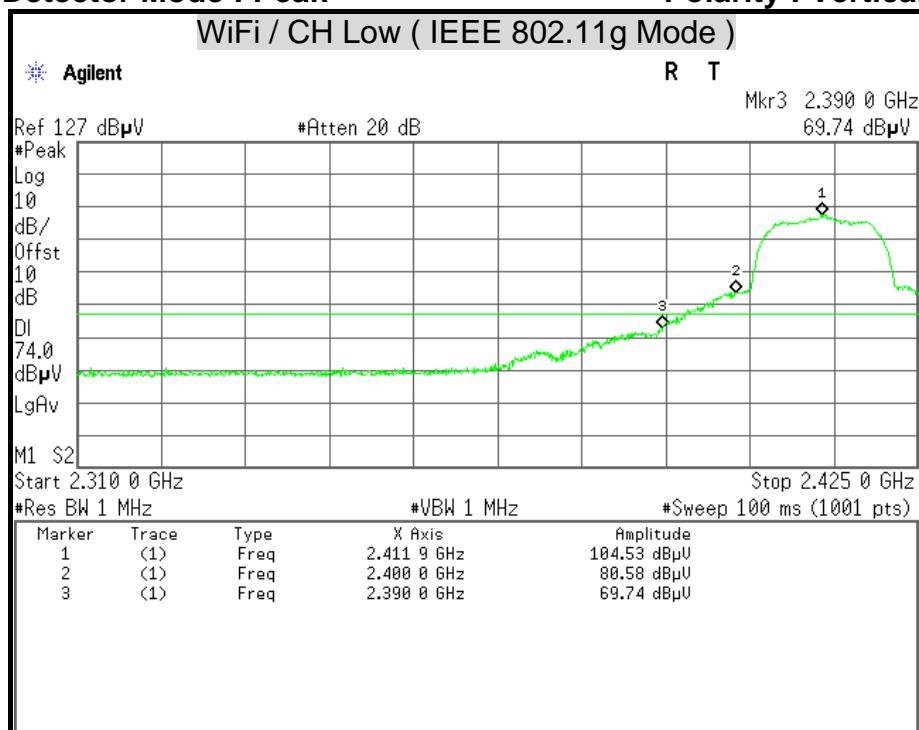

Detector Mode : Average


Polarity : Vertical

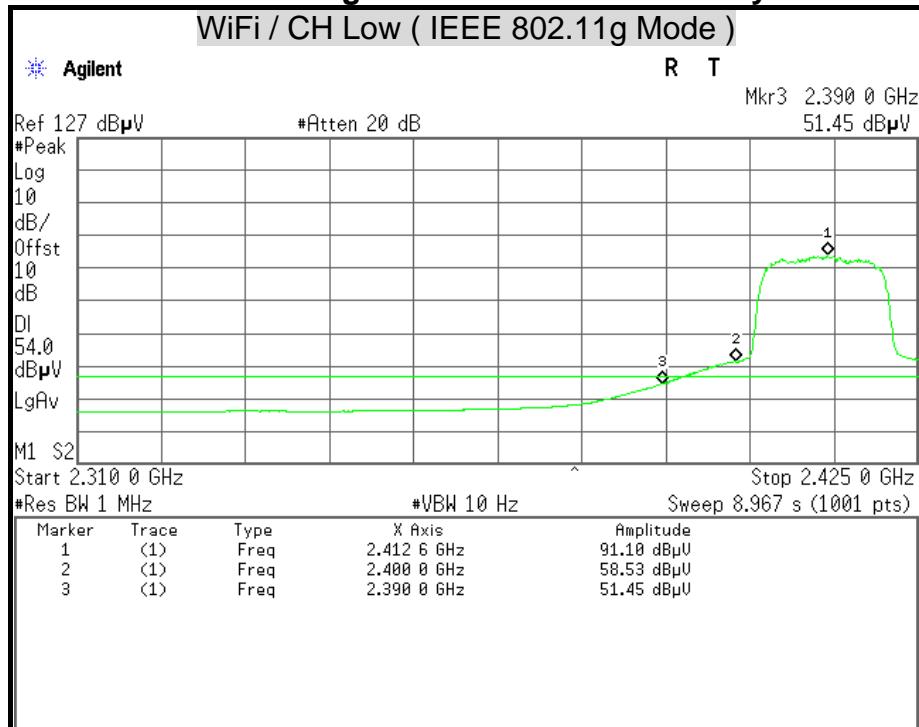




Detector Mode : Peak



Polarity : Horizontal

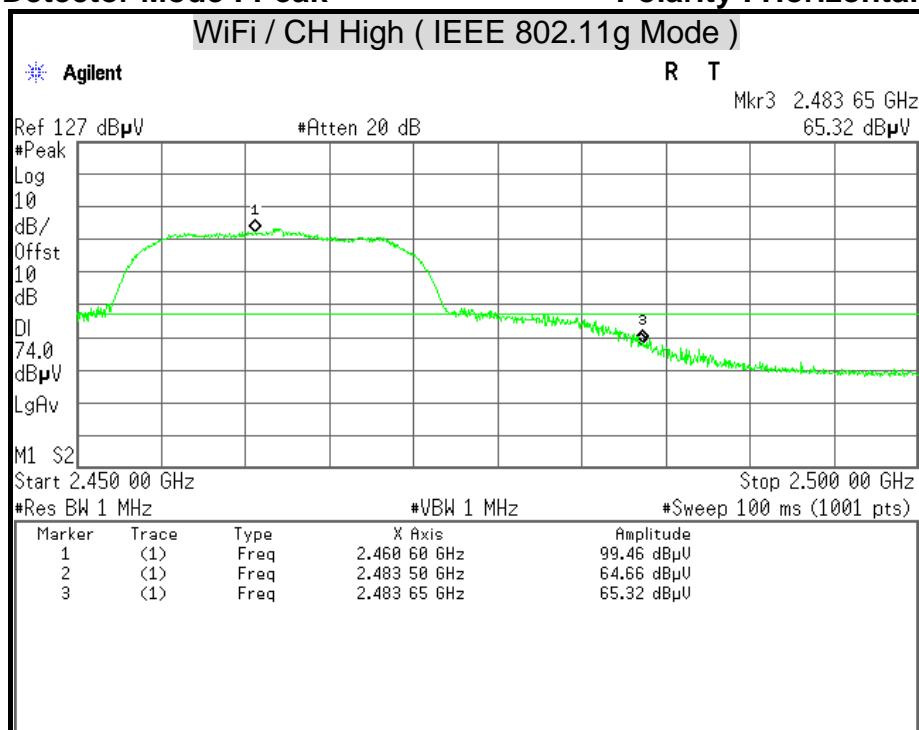

Detector Mode : Average

Polarity : Horizontal

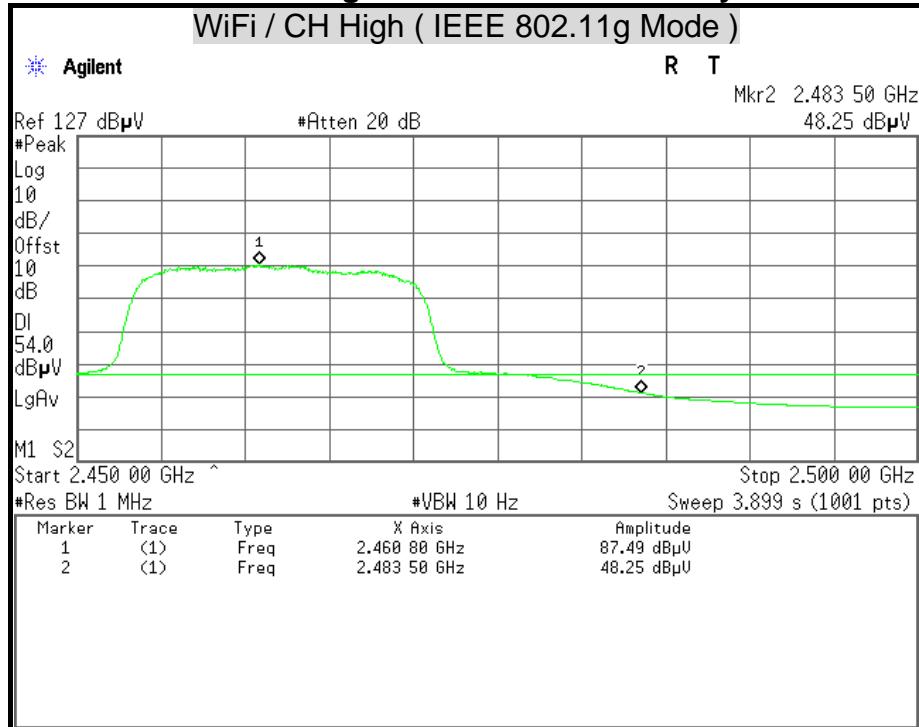


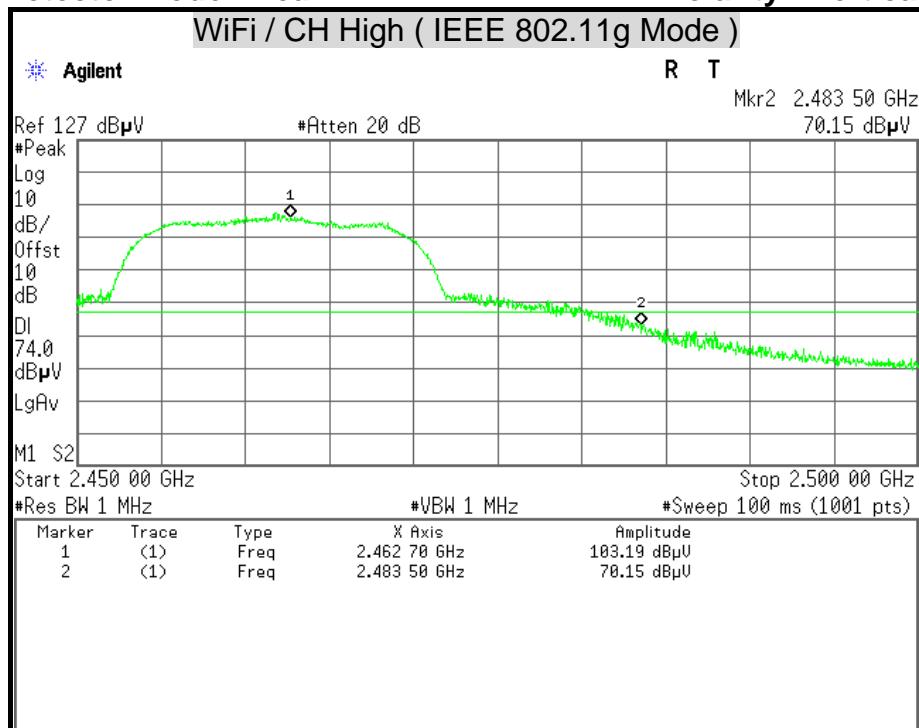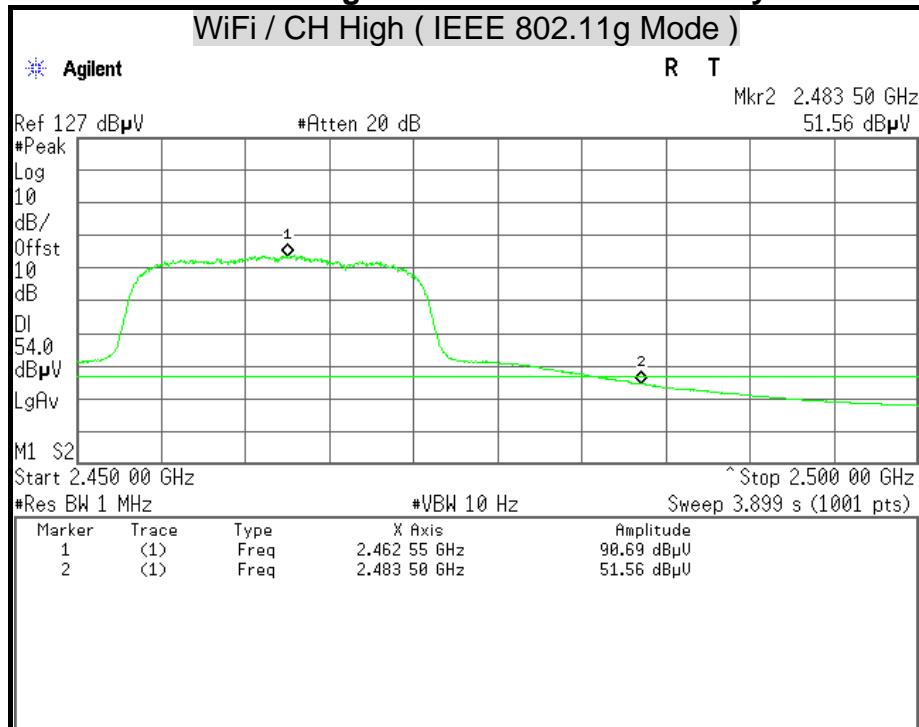**Detector Mode : Peak****Polarity : Vertical****Detector Mode : Average****Polarity : Vertical**




Detector Mode : Peak

Polarity : Horizontal

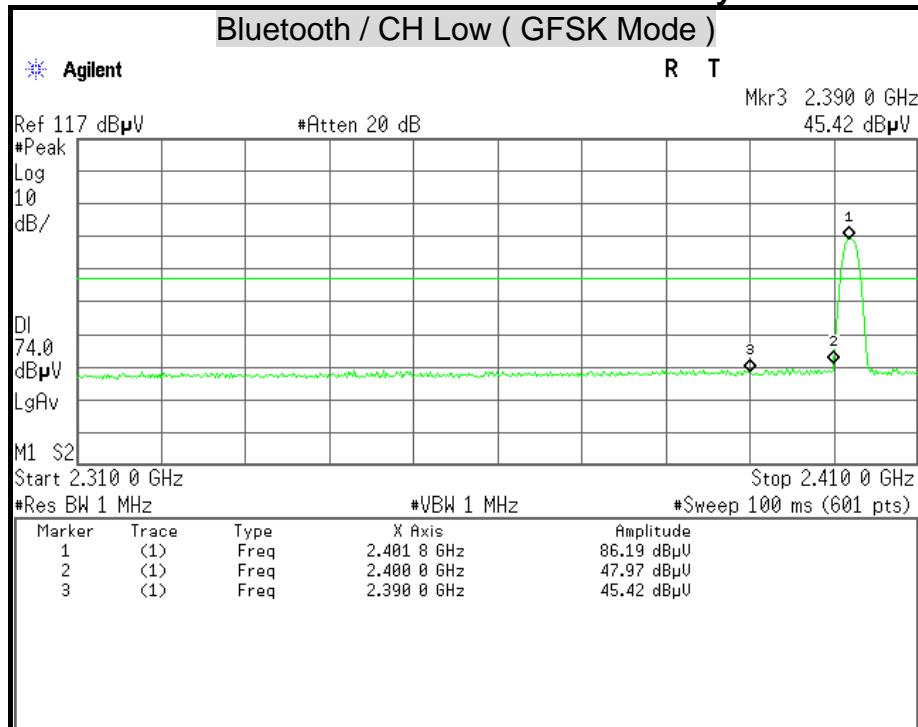

Detector Mode : Average


Polarity : Horizontal

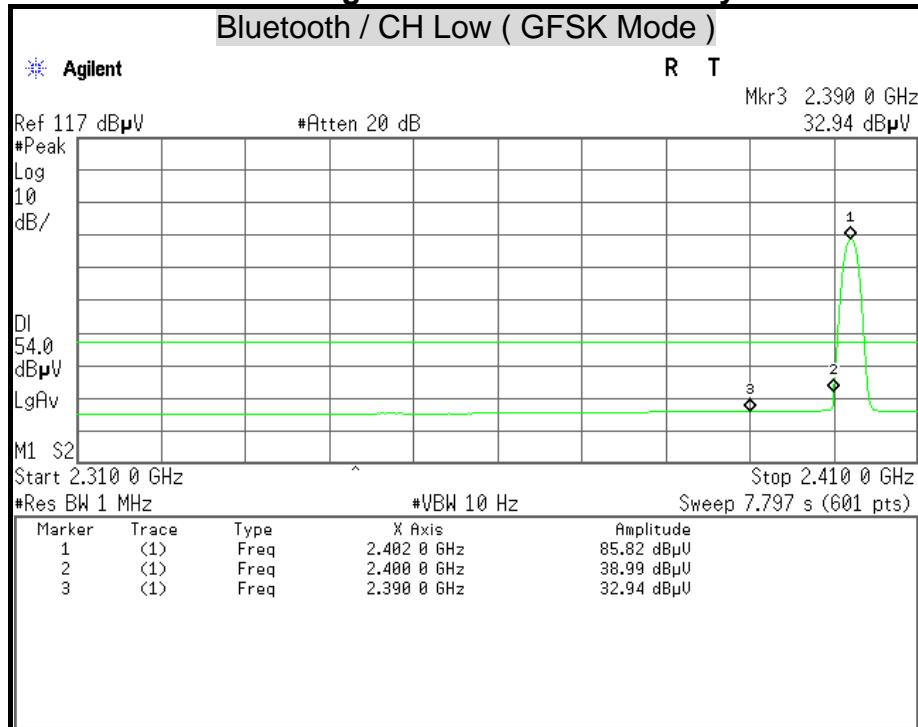




Detector Mode : Peak



Polarity : Vertical


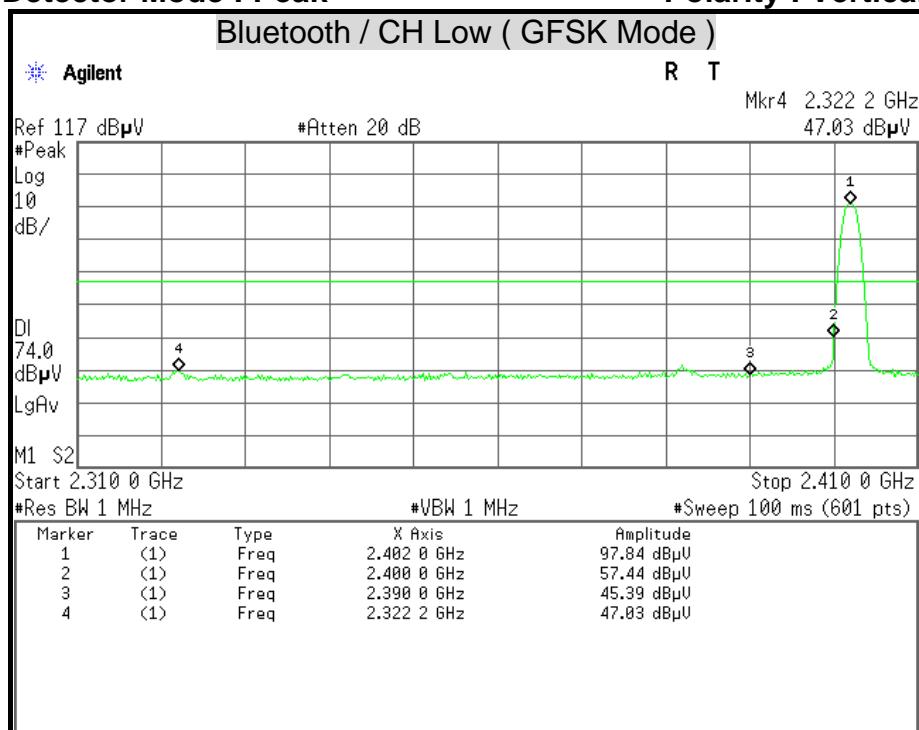


Detector Mode : Average

Polarity : Vertical

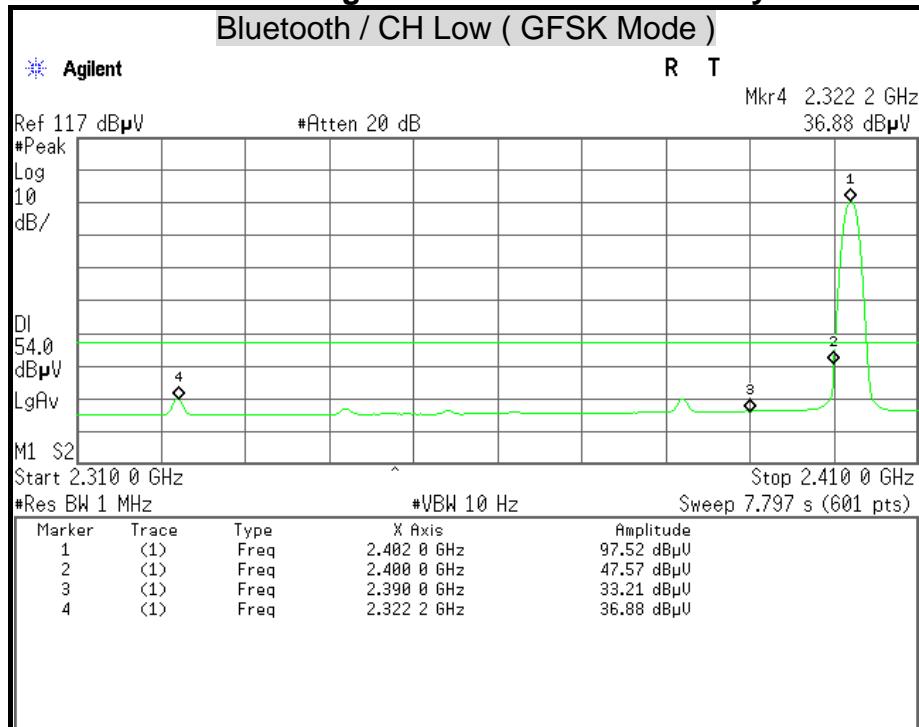

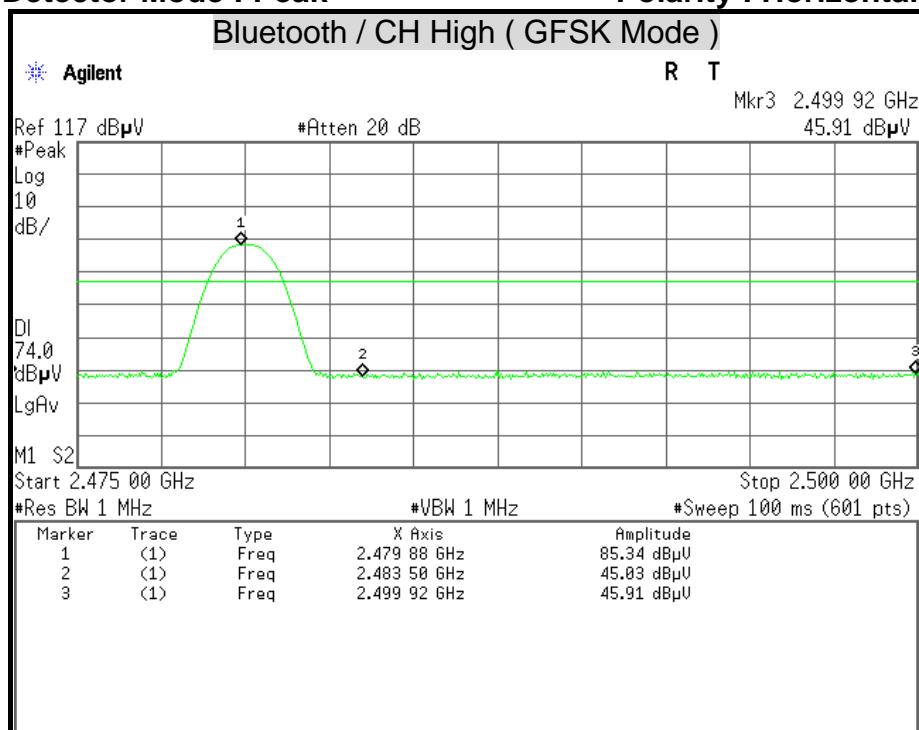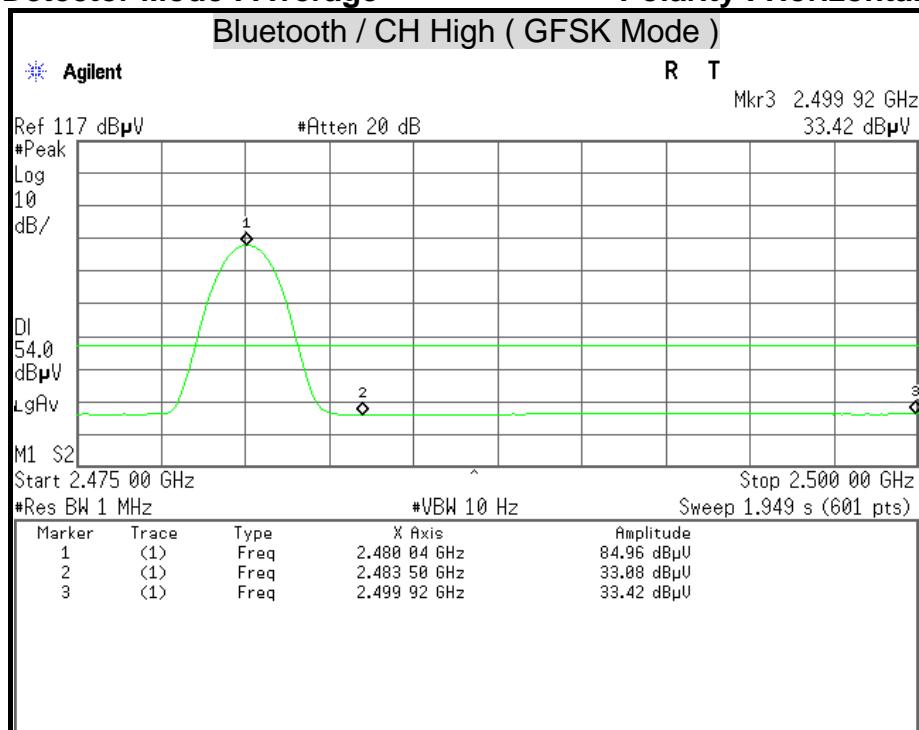
**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**

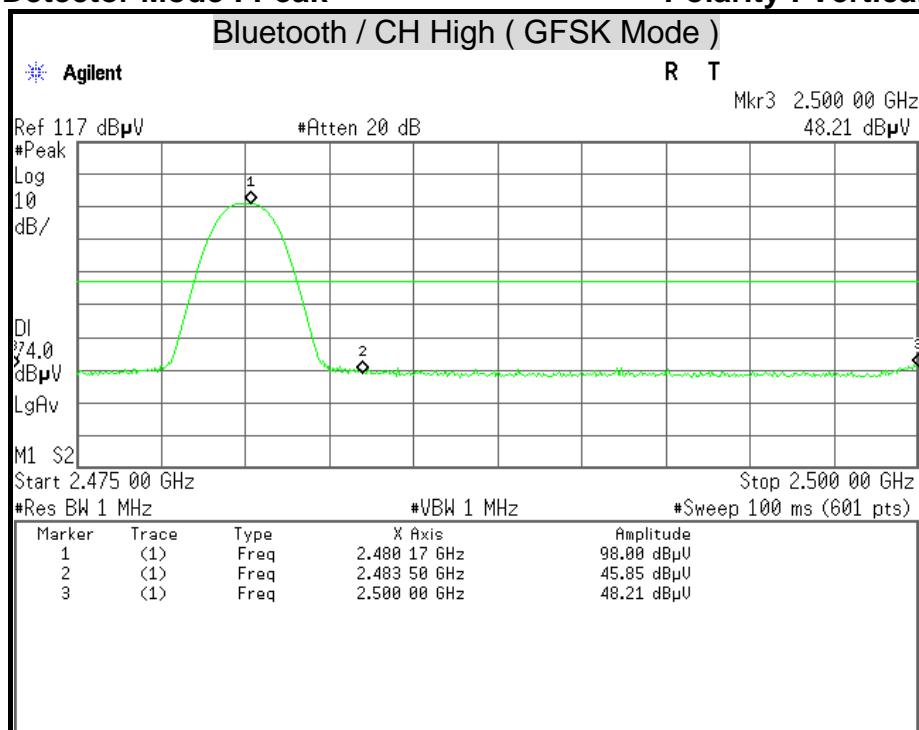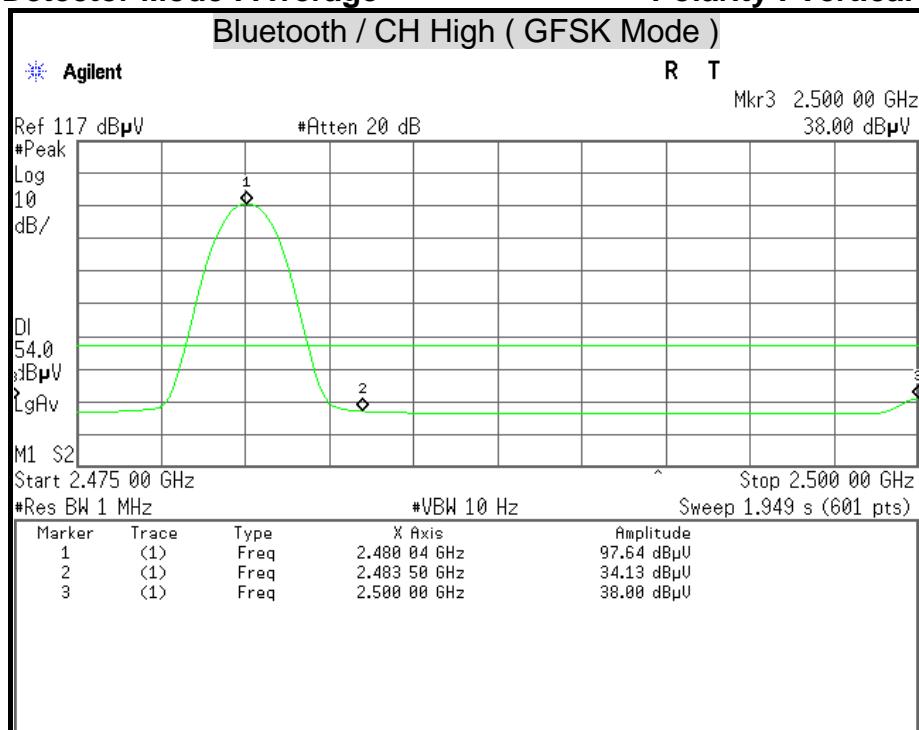**Detector Mode : Peak****Polarity : Vertical****Detector Mode : Average****Polarity : Vertical**




Detector Mode : Peak

Polarity : Horizontal

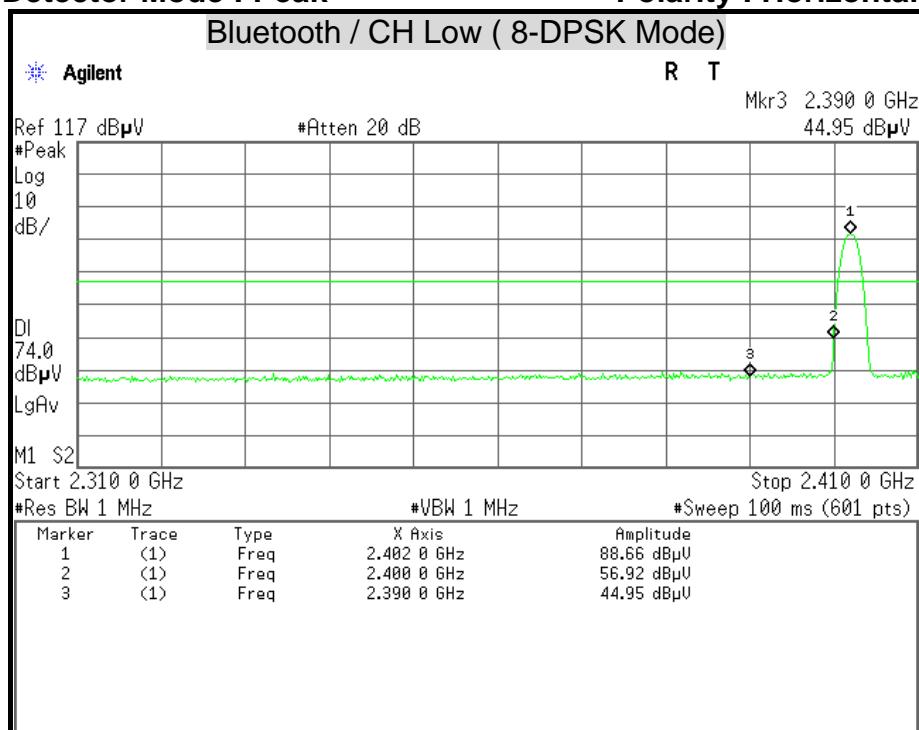

Detector Mode : Average


Polarity : Horizontal

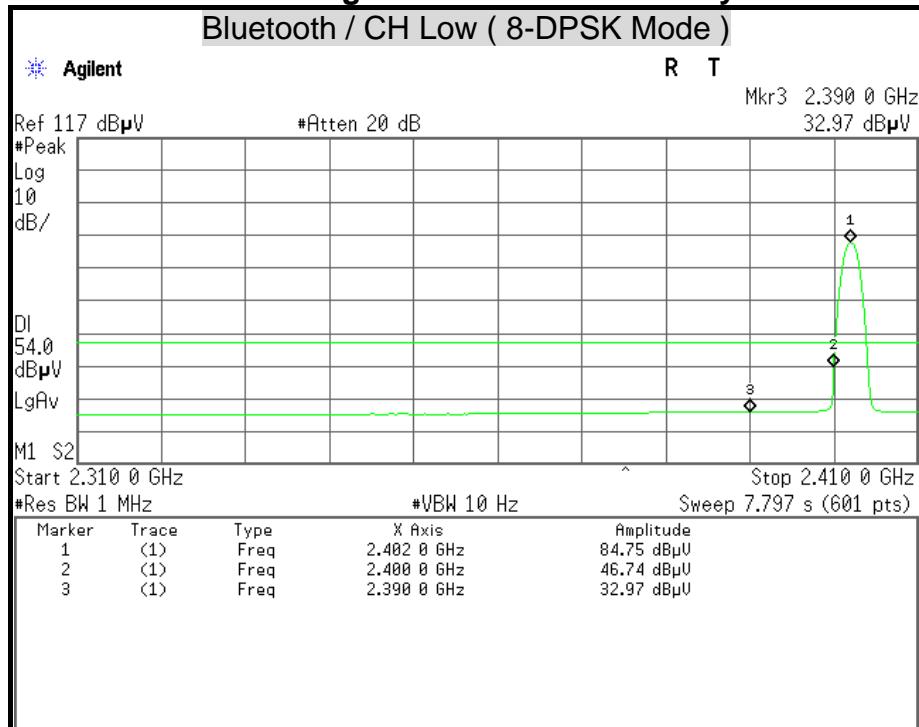




Detector Mode : Peak



Polarity : Vertical

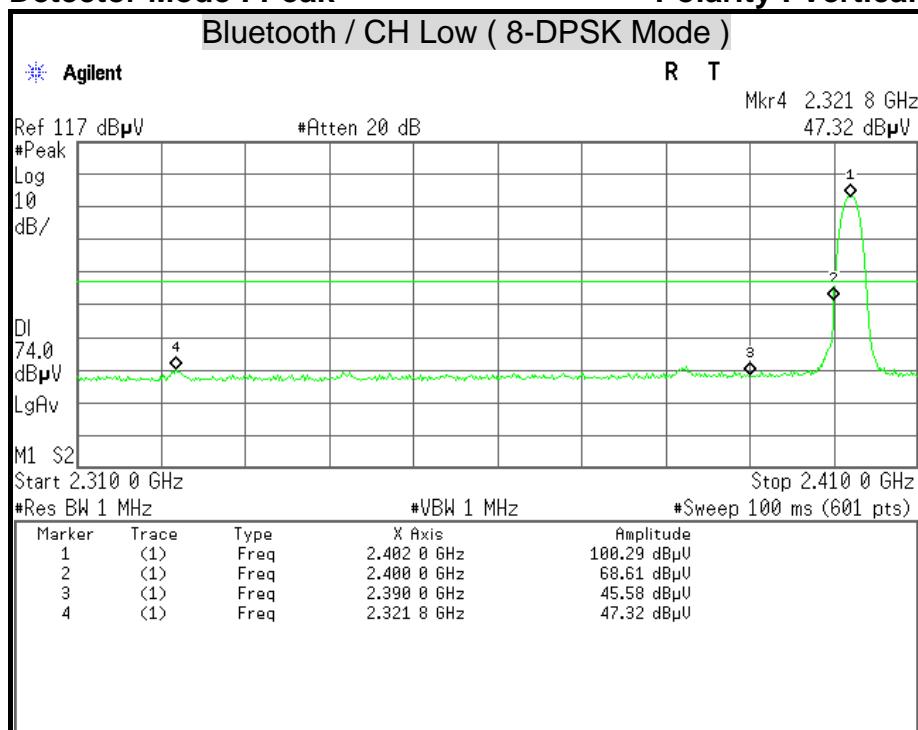

Detector Mode : Average

Polarity : Vertical

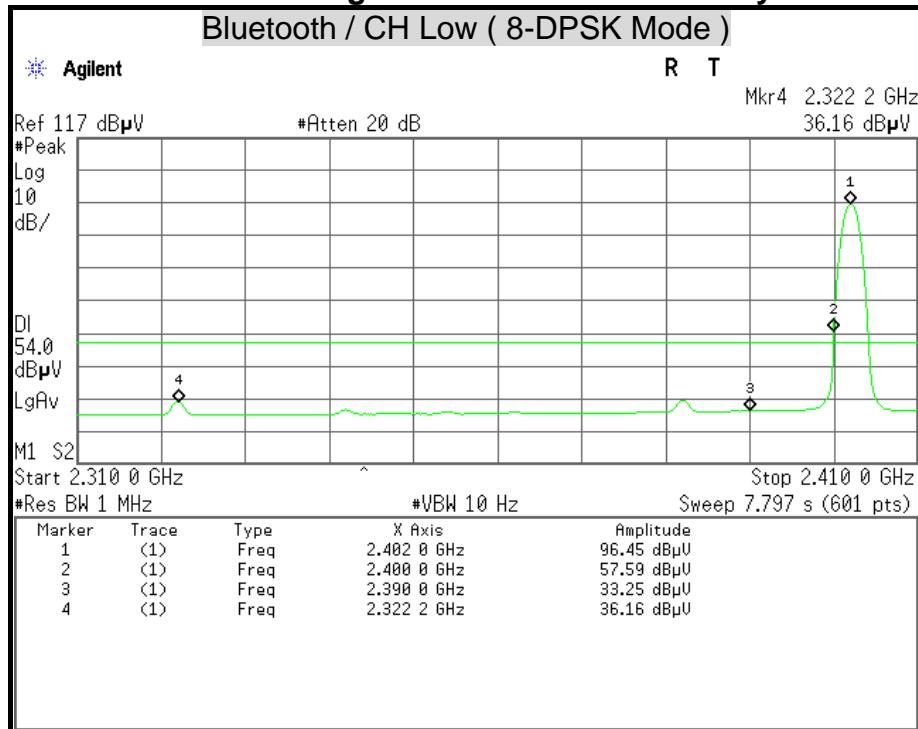


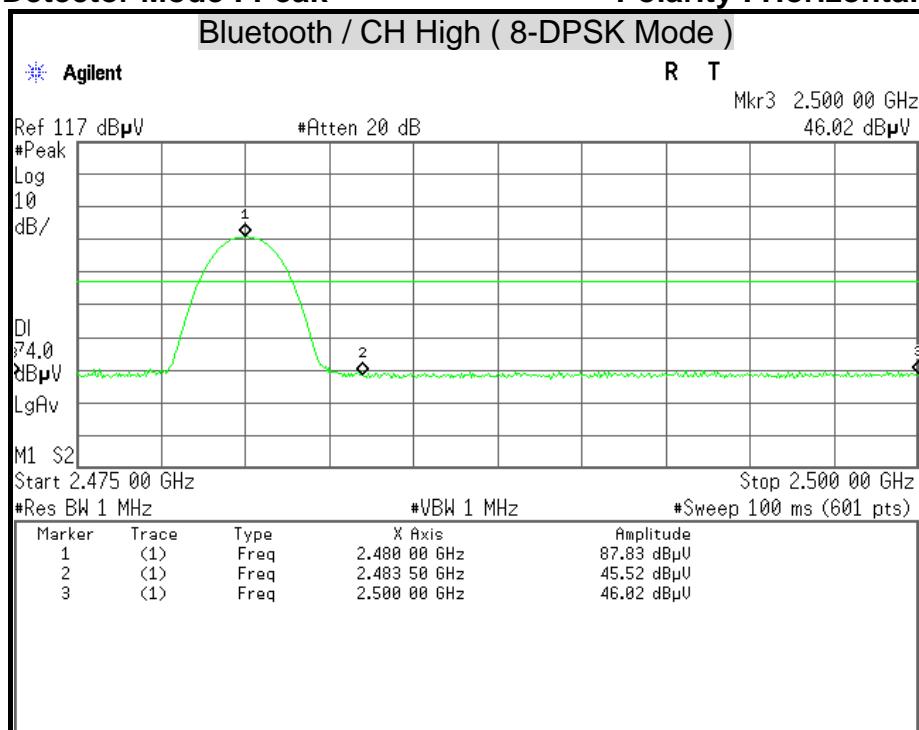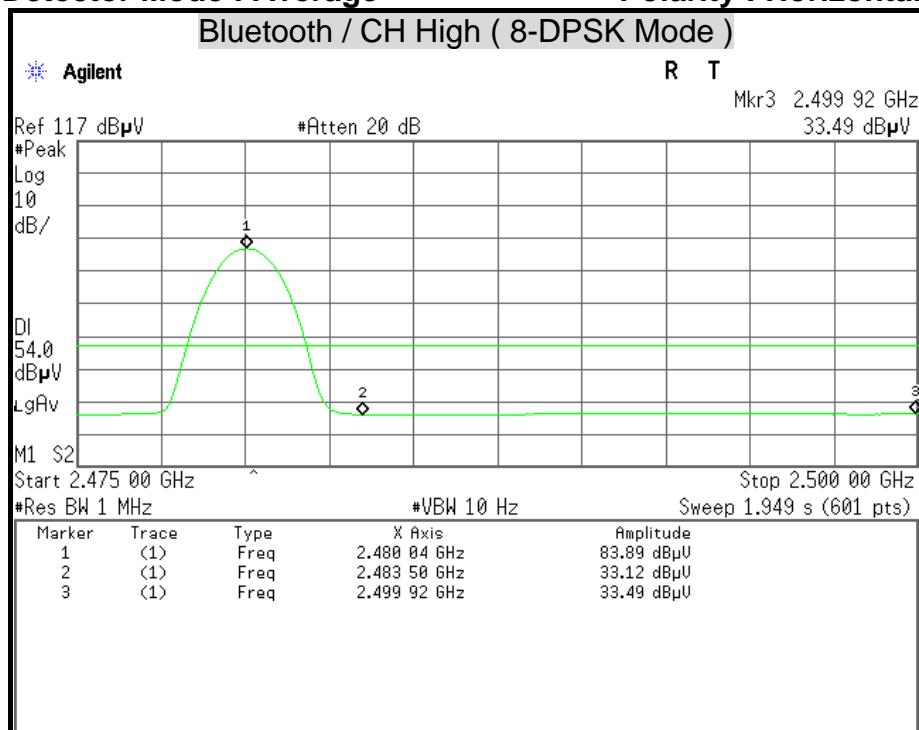**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**



Detector Mode : Peak

Polarity : Vertical

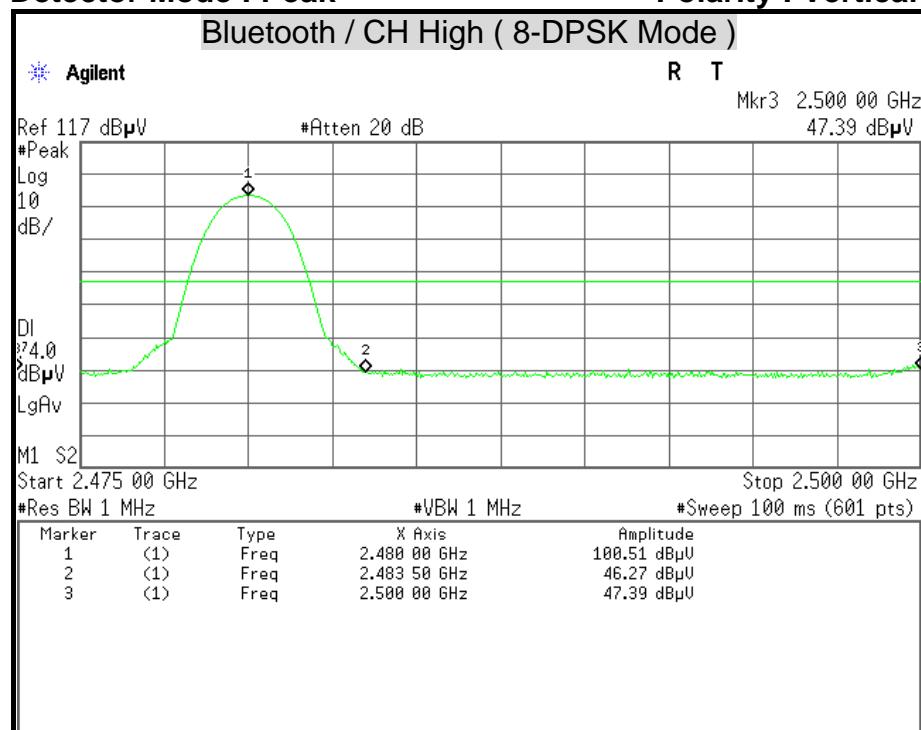

Detector Mode : Average

Polarity : Vertical

