


This is the test jig / adaptor board.

BCM94319SDB



For WLAN testing the device can be power via USB or 5V DC power supply, either one is fine, and the true connector is the SDIO interface. For BT& BLE, USB is required for connection and power(without SDIO connection).

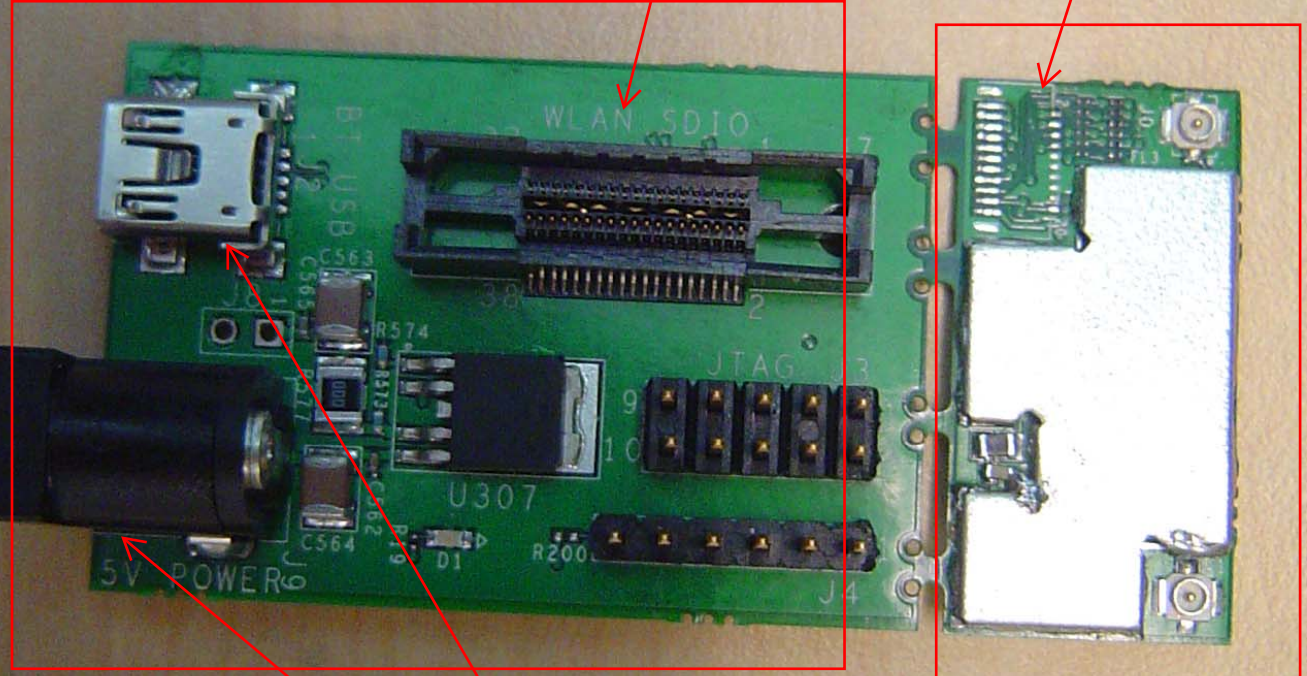

SDIO connection to host PC.

