

*EMC Test Report*

*Application for Grant of Equipment Authorization*

*Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8  
FCC Part 15 Subpart C*

*Model: BCM943142HM*

IC CERTIFICATION #: 4324A-BRCM1063  
FCC ID: QDS-BRCM1063

APPLICANT: Broadcom Corporation  
190 Mathilda Ave  
Sunnyvale, CA 94086

TEST SITE(S): Elliott Laboratories  
41039 Boyce Road.  
Fremont, CA. 94538-2435


IC SITE REGISTRATION #: 2845B-4

REPORT DATE: October 31, 2011

FINAL TEST DATES: October 25 and 26, 2011


TOTAL NUMBER OF PAGES: 56

PROGRAM MGR /  
TECHNICAL REVIEWER:

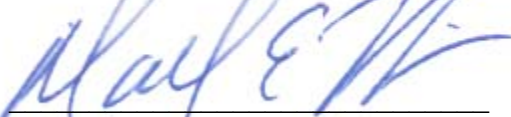

Mark E Hill  
Staff Engineer

QUALITY ASSURANCE DELEGATE /  
FINAL REPORT PREPARER:

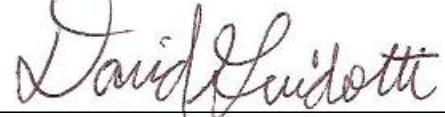

David Guidotti  
Senior Technical Writer



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

**REVISION HISTORY**

Rev#	Date	Comments	Modified By
-	10-31-2011	First release	

**TABLE OF CONTENTS**

<b>REVISION HISTORY .....</b>	<b>2</b>
<b>TABLE OF CONTENTS .....</b>	<b>3</b>
<b>SCOPE.....</b>	<b>4</b>
<b>OBJECTIVE .....</b>	<b>4</b>
<b>STATEMENT OF COMPLIANCE.....</b>	<b>5</b>
<b>DEVIATIONS FROM THE STANDARDS.....</b>	<b>5</b>
<b>TEST RESULTS SUMMARY .....</b>	<b>6</b>
FREQUENCY HOPPING SPREAD SPECTRUM (2400 – 2483.5 MHZ, LESS THAN 75 CHANNELS) .....	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	6
MEASUREMENT UNCERTAINTIES.....	7
<b>EQUIPMENT UNDER TEST (EUT) DETAILS.....</b>	<b>8</b>
GENERAL.....	8
OTHER EUT DETAILS.....	8
ANTENNA SYSTEM .....	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT .....	8
EUT INTERFACE PORTS .....	9
EUT OPERATION .....	9
<b>TEST SITE.....</b>	<b>10</b>
GENERAL INFORMATION.....	10
CONDUCTED EMISSIONS CONSIDERATIONS .....	10
RADIATED EMISSIONS CONSIDERATIONS .....	10
<b>MEASUREMENT INSTRUMENTATION .....</b>	<b>11</b>
RECEIVER SYSTEM .....	11
INSTRUMENT CONTROL COMPUTER .....	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
FILTERS/ATTENUATORS .....	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
<b>TEST PROCEDURES .....</b>	<b>13</b>
EUT AND CABLE PLACEMENT .....	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS.....	13
RADIATED EMISSIONS.....	14
CONDUCTED EMISSIONS FROM ANTENNA PORT .....	16
BANDWIDTH MEASUREMENTS .....	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS .....	17
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN .....	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS .....	18
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS .....	18
OUTPUT POWER LIMITS – FHSS SYSTEMS .....	19
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	20
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	21
<b>APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....</b>	<b>22</b>
<b>APPENDIX B TEST DATA .....</b>	<b>23</b>
<b>END OF REPORT .....</b>	<b>56</b>

## SCOPE

An electromagnetic emissions test has been performed on the Broadcom Corporation model BCM943142HM, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3  
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"  
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003  
FHSS test procedure DA 00-0705A1, March 2000

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

## OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

### **STATEMENT OF COMPLIANCE**

The tested sample of Broadcom Corporation model BCM943142HM complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3  
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"  
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Broadcom Corporation model BCM943142HM and therefore apply only to the tested sample. The sample was selected and prepared by Anne Liang of Broadcom Corporation.

### **DEVIATIONS FROM THE STANDARDS**

No deviations were made from the published requirements listed in the scope of this report.

**TEST RESULTS SUMMARY****FREQUENCY HOPPING SPREAD SPECTRUM (2400 – 2483.5 MHz, less than 75 channels)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247 (a) (1)	RSS 210 A8.1 (1)	20dB Bandwidth	Basic Rate: 1045 kHz EDR: 1335 kHz	Channel spacing > 2/3rds 20dB BW	Complies
		Channel Separation	1.010 MHz		Complies
15.247 (a) (1) (ii)	RSS 210 A8.1 (4)	Number of Channels	Device complies with the Bluetooth 2 specifications with a minimum of 20 hopping channels	15 or more	Complies
15.247 (a) (1) (ii)	RSS 210 A8.1 (4)	Channel Dwell Time (average time of occupancy)		<0.4 second within a period of 0.4 x number of channels	Complies
15.247 (a) (1)	RSS 210 A8.1 (1)	Channel Utilization	The system uses the Bluetooth algorithm and, therefore, meets all requirements for channel utilization.	All channels shall, on average, be used equally	Complies
15.247 (b) (3)	RSS 210 A8.4 (2)	Output Power	Basic Rate: -1.2dBm EDR: 0.4dBm EIRP = 3 mW <sup>Note 1</sup>	0.125 Watts (EIRP < ???)	Complies
15.247(c)	RSS 210 A8.5	Spurious Emissions – 30MHz – 25GHz	All spurious emissions < -20dBc	< -20dBc	Complies
15.247(c) / 15.209	RSS 210 A8.5 Table 2, 3	Radiated Spurious Emissions 30MHz – 25GHz	53.2dBμV/m @ 4804.0MHz (-0.8dB)	15.207 in restricted bands, all others < -20dBc	Complies
15.247 (a) (1)	RSS 210 A8.1(2)	Receiver bandwidth	Refer to operational description	Shall match the channel bandwidth	Complies

Note 1: EIRP calculated using antenna gain of 3.9 dBi

**GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS**

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	The EUT has u.FL connectors	Unique or integral antenna required	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	50.3dBμV @ 1.295MHz (-5.7dB)	Refer to page 17	Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	38.3dBμV/m @ 1884.4MHz (-15.7dB)	Refer to page 18	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in Exhibit 11, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	Refer to user's manual	Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	Refer to user's manual	Statement for products with detachable antenna	Complies
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	Basic Rate: 913 kHz EDR: 1223 kHz	Information only	N/A

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB $\mu$ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB $\mu$ V	0.15 to 30 MHz	± 2.4 dB

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Broadcom Corporation model BCM943142HM is a 802.11bgn WLAN + Bluetooth PCI-E Mini Card. The EUT would be installed within a table top host product during normal operation, therefore, the EUT was treated as table-top equipment. The electrical rating of the EUT is powered from 3.3V from the host system.

The sample was received on September 27, 2011 and tested on October 25 and 26, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Broadcom	BCM943142HM	802.11bgn WLAN + Bluetooth PCI-E Mini Card	561	QDS-BRCM1063

**OTHER EUT DETAILS**

The Bluetooth is rev 4.0, supporting the basic, EDR and LE modes. The results for the basic and EDR modes are reported here. The results for the LE mode modes are reported in Elliott report R85111.

**ANTENNA SYSTEM**

The EUT antenna is a 3.9dBi WLAN antenna.

The antenna connects to the EUT via a non-standard u.FL antenna connector, thereby meeting the requirements of FCC 15.203.

**ENCLOSURE**

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

**MODIFICATIONS**

No modifications were made to the EUT during the time the product was at Elliott.

**SUPPORT EQUIPMENT**

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Lenovo	G560	Laptop Computer	CBU4495773	-
Lenovo	ADP-65Y	AC/DC Adapter	11S42T4458Z1 ZF4K96V9S9	-

No remote support equipment was used during testing.



**EUT INTERFACE PORTS**

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
Laptop - DC Power In	AC/DC Adapter	Multiconductor	Unshielded	1.5
AC/DC Adapter	AC Mains	3Wire	Unshielded	1.5

**EUT OPERATION**

During testing, the EUT was configured to continuously transmit at the noted channel at the maximum output power.

**TEST SITE****GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 4	211948	2845B-4	41039 Boyce Road Fremont, CA 94538-2435

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

**CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

**RADIATED EMISSIONS CONSIDERATIONS**

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

## **MEASUREMENT INSTRUMENTATION**

### **RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

### **INSTRUMENT CONTROL COMPUTER**

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

### **LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

### *FILTERS/ATTENUATORS*

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

### *ANTENNAS*

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

### *ANTENNA MAST AND EQUIPMENT TURNTABLE*

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

### *INSTRUMENT CALIBRATION*

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.


## TEST PROCEDURES

### EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

### CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

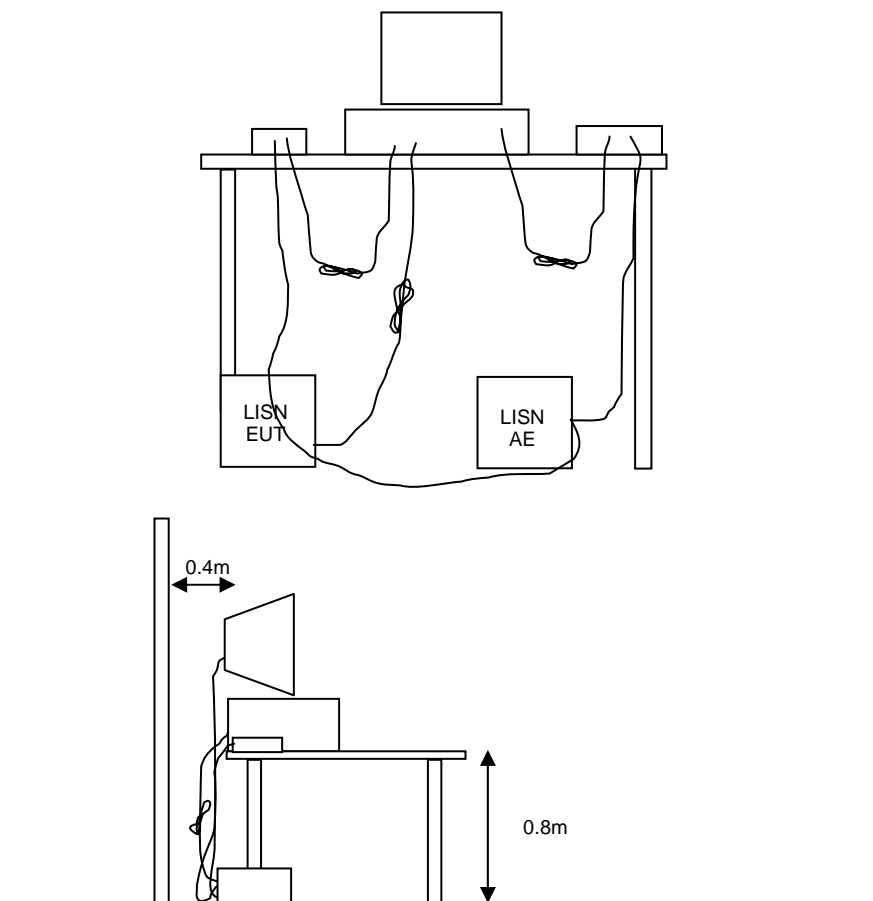

**Figure 1 Typical Conducted Emissions Test Configuration**


**RADIATED EMISSIONS**

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

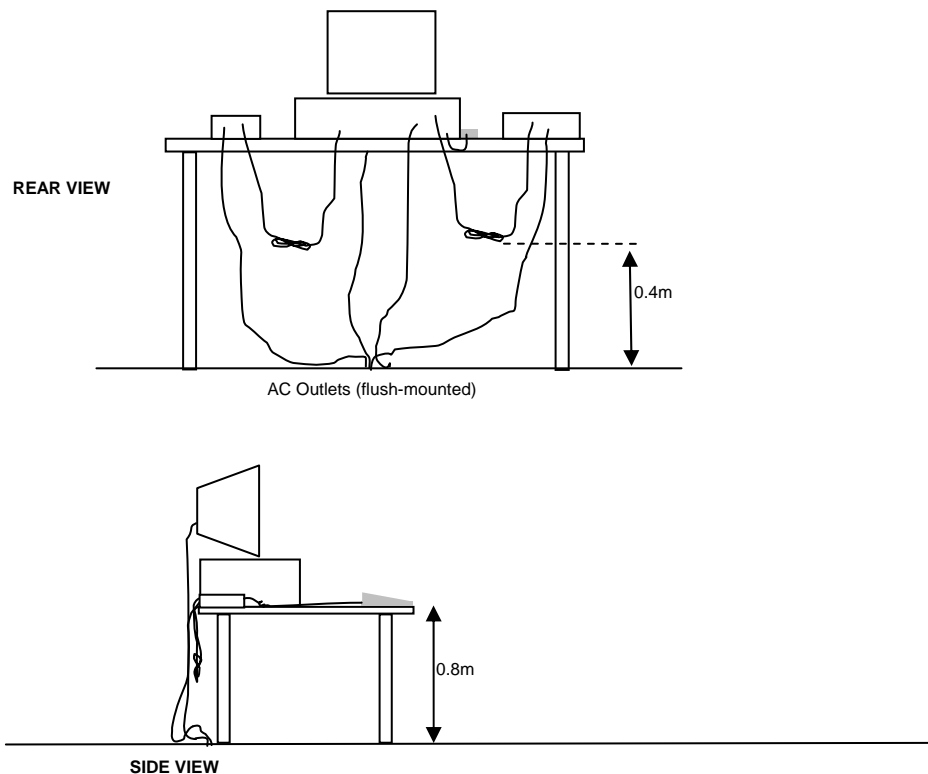


Typical Test Configuration for Radiated Field Strength Measurements

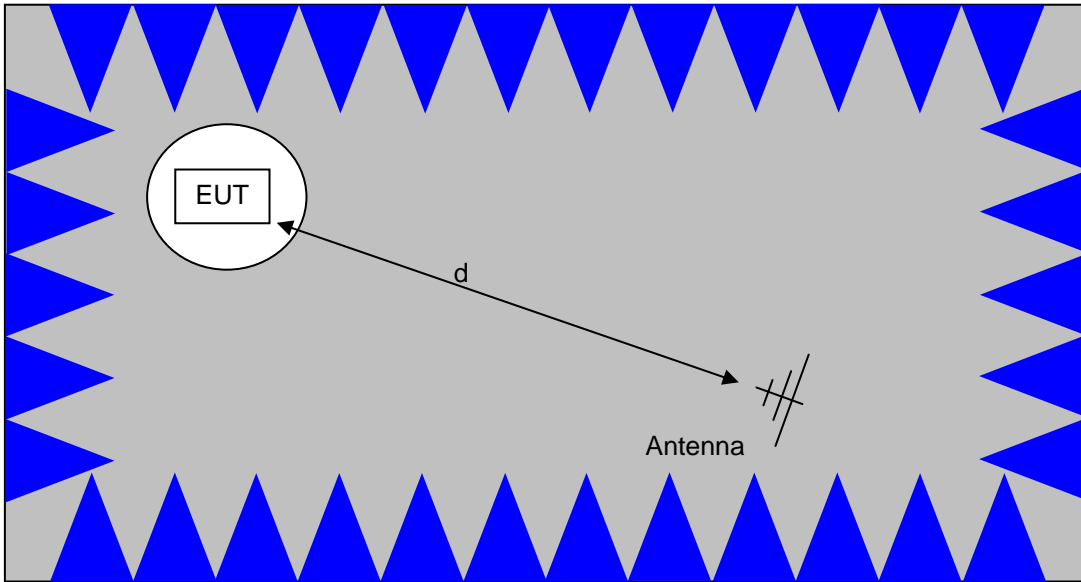

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

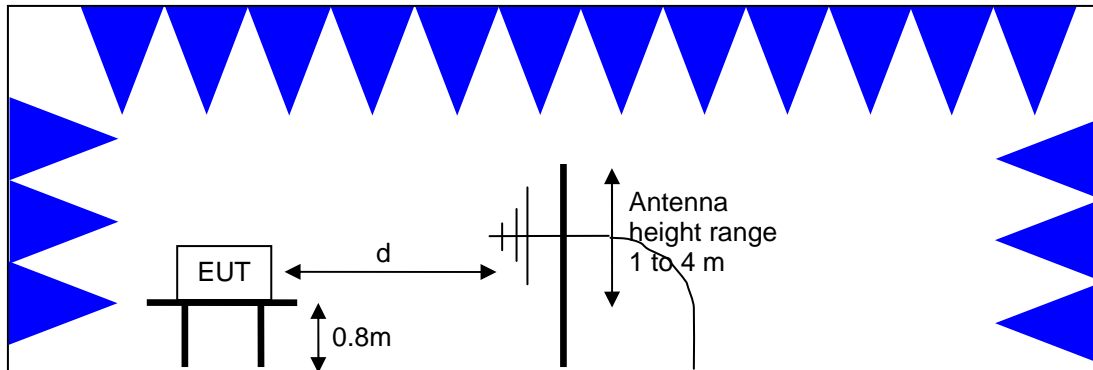

Test Configuration for Radiated Field Strength Measurements  
Semi-Anechoic Chamber, Plan and Side Views

**CONDUCTED EMISSIONS FROM ANTENNA PORT**

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

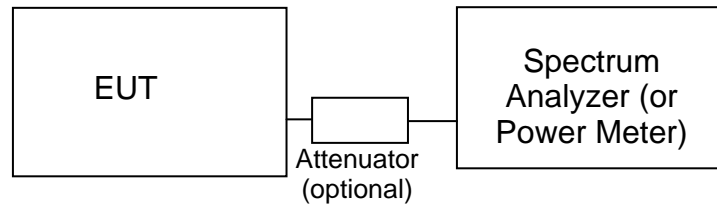**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

**BANDWIDTH MEASUREMENTS**

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.



**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

**CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN**

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

**GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands<sup>1</sup> (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F <sub>KHz</sub> @ 300m	67.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 300m
0.490-1.705	24000/F <sub>KHz</sub> @ 30m	87.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

**RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

<sup>1</sup> The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

**OUTPUT POWER LIMITS – FHSS SYSTEMS**

The table below shows the limits for output power based on the number of channels available for the hopping system.

Operating Frequency (MHz)	Number of Channels	Output Power
902 – 928	≥ 50	1 Watt (30 dBm)
902 – 928	25 to 49	0.25 Watts (24 dBm)
2400 – 2483.5	≥ 75	1 Watt (30 dBm)
2400 – 2483.5	< 75	0.125 Watts (21 dBm)
5725 – 5850	75	1 Watt (30 dBm)

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

**TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS**

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

**SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION**

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

**Appendix A Test Equipment Calibration Data****Conducted Emissions - AC Power Ports, 15-Oct-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	812	1/18/2012
EMCO	LISN, 10 kHz-100 MHz, 25A	3825/2	1292	3/1/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	11/2/2011

**Radiated Emissions, 1000 - 26,500 MHz, 26-Oct-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
Hewlett Packard	Head (Inc flex cable, 1143, 2198) Red	84125C	1145	2/17/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/15/2012
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	9/21/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	8/3/2012
A.H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	2/9/2012

**Radio Antenna Port (Power and Spurious Emissions), 26-Oct-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
Rohde & Schwarz	Power Sensor 100 uW - 2 Watts use with 20dB attenuator sn:100059 only	NRV-Z32	1423	9/1/2012
Rohde & Schwarz	Power Meter, Dual Channel	NRVD	1539	9/9/2012

## *Appendix B Test Data*

T84936 Pages 24 - 55



## EMC Test Data

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Emissions Standard(s):	FCC 15.247, 15.E, RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

# EMC Test Data

For The

## Broadcom

Model

BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)

Date of Last Test: 10/28/2011



Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
		Account Manager:	Sheareen Washington
Contact:	Anne Liang		
Standard:	FCC 15.247, 15.E, RSS-210	Class:	-

### Conducted Emissions

*(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)*

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 10/14/2011	Config. Used: 2
Test Engineer: Rafael Varelas	Config Change: Added Mouse and Remote Hub
Test Location: Fremont Chamber #4	EUT Voltage: 120V/60Hz

#### General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment where routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

<b>Ambient Conditions:</b>	Temperature:	21.2 °C
	Rel. Humidity:	41 %

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class B	Pass	50.3dB $\mu$ V @ 1.295MHz (-5.7dB)

#### Modifications Made During Testing



No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Broadcom	Job Number: J84866
Model: BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number: T84936
Contact: Anne Liang	Account Manager: Sheareen Washington
Standard: FCC 15.247, 15.E, RSS-210	Class: -

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

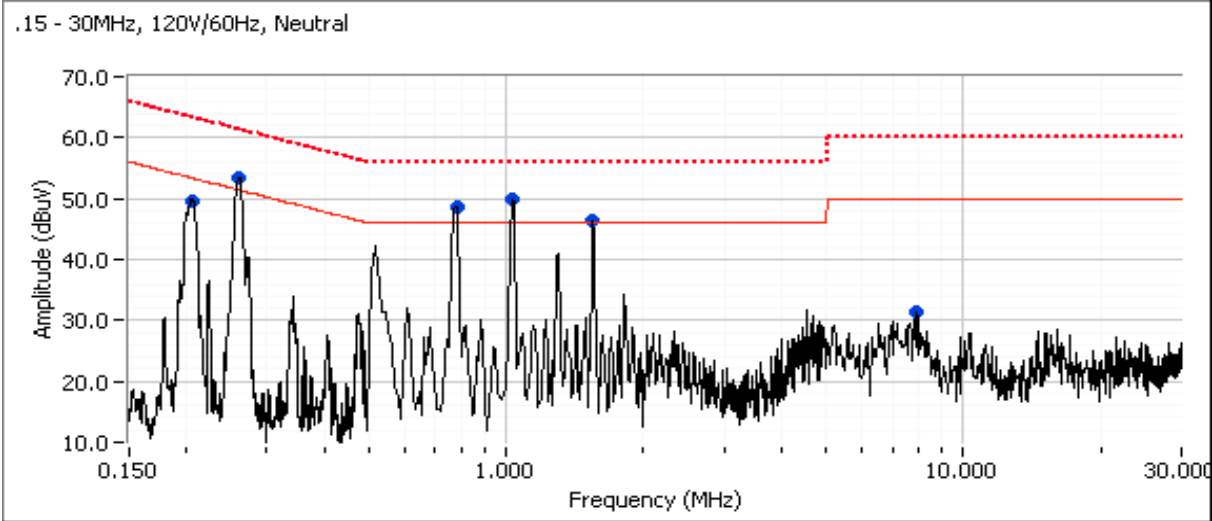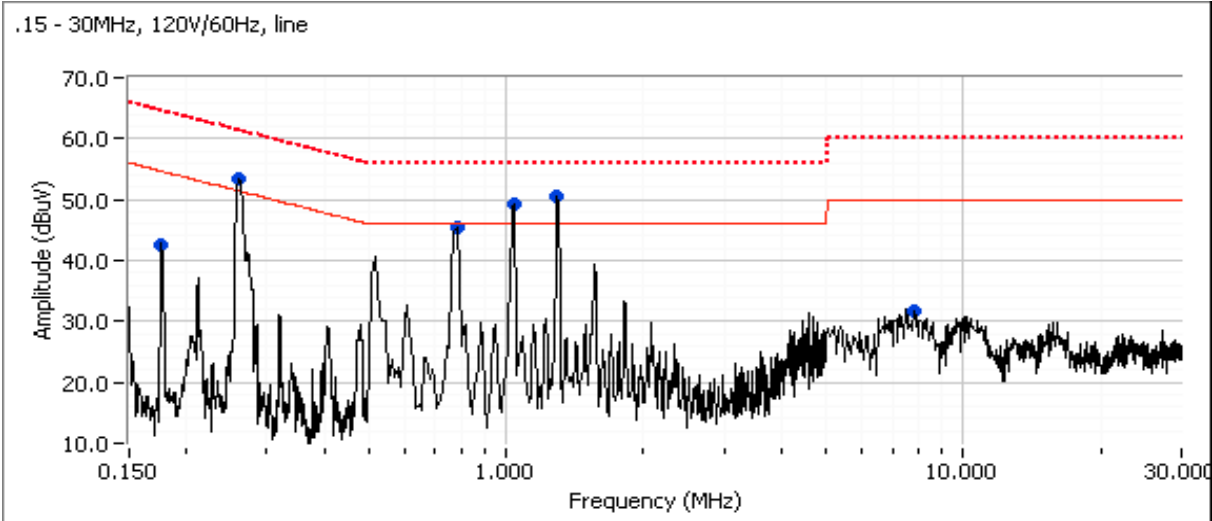

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	-

**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.175	42.6	Line 1	54.7	-12.1	Peak	
0.259	53.3	Line 1	51.4	1.9	Peak	
0.778	45.4	Line 1	46.0	-0.6	Peak	
1.038	49.3	Line 1	46.0	3.3	Peak	
1.295	50.4	Line 1	46.0	4.4	Peak	
7.858	31.6	Line 1	50.0	-18.4	Peak	
0.205	49.7	Neutral	53.3	-3.6	Peak	
0.259	53.3	Neutral	51.4	1.9	Peak	
0.776	48.6	Neutral	46.0	2.6	Peak	
1.034	49.8	Neutral	46.0	3.8	Peak	
1.551	46.4	Neutral	46.0	0.4	Peak	
7.933	31.5	Neutral	50.0	-18.5	Peak	

**Final quasi-peak and average readings**

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
1.295	50.3	Line 1	56.0	-5.7	QP	QP (1.00s)
0.777	39.8	Line 1	46.0	-6.2	AVG	AVG (0.10s)
0.776	39.7	Neutral	46.0	-6.3	AVG	AVG (0.10s)
1.034	49.5	Neutral	56.0	-6.5	QP	QP (1.00s)
1.038	48.5	Line 1	56.0	-7.5	QP	QP (1.00s)
1.295	38.4	Line 1	46.0	-7.6	AVG	AVG (0.10s)
0.777	48.1	Line 1	56.0	-7.9	QP	QP (1.00s)
0.259	53.2	Line 1	61.5	-8.3	QP	QP (1.00s)
0.776	47.7	Neutral	56.0	-8.3	QP	QP (1.00s)
0.259	53.0	Neutral	61.5	-8.5	QP	QP (1.00s)
1.034	36.3	Neutral	46.0	-9.7	AVG	AVG (0.10s)
1.038	35.3	Line 1	46.0	-10.7	AVG	AVG (0.10s)
0.259	40.6	Neutral	51.5	-10.9	AVG	AVG (0.10s)
0.259	40.5	Line 1	51.5	-11.0	AVG	AVG (0.10s)
1.551	35.0	Neutral	46.0	-11.0	AVG	AVG (0.10s)
1.551	41.9	Neutral	56.0	-14.1	QP	QP (1.00s)
0.205	47.6	Neutral	63.4	-15.8	QP	QP (1.00s)
0.205	33.7	Neutral	53.4	-19.7	AVG	AVG (0.10s)

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

## FCC 15.247 FHSS - Power, Bandwidth and Conducted Spurious Emissions (Bluetooth Operation - Basic/EDR)

### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

### General Test Configuration

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators used.

Unless stated otherwise the EUT was operating such that it constantly hopped on either the low, center or high channels.

### Ambient Conditions:

Temperature: 18-23 °C  
 Rel. Humidity: 30-40 %

### Summary of Results

MAC: 00150096B40F DRTU Tool Version 1.5.3-0320 Driver version 15.0.0.51

Run #	Test Performed	Limit	Pass / Fail	Result / Margin
1	Output Power	15.247(b)	Pass	Basic Rate: -1.2dBm EDR: 0.4dBm
2	20dB Bandwidth	15.247(a)	Pass	Basic Rate: 1045 kHz EDR: 1335 kHz
2	99% bandwidth	15.247(a)	-	Basic Rate: 913 kHz EDR: 1223 kHz
3	Channel Spacing	15.247(a)	Pass	1.010 MHz
3	Channel Occupancy	15.247(a)	Pass	Device complies with the Bluetooth 2 specifications with a minimum of 20 hopping channels
3	Number of Channels	15.247(a)	Pass	
5	Conducted Spurious	15.247(a)	Pass	All emissions more than 20dB below the highest in-band signal level.

### Modifications Made During Testing:

No modifications were made to the EUT during testing

### Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
		Account Manager:	Sheareen Washington
Contact:	Anne Liang		
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

## Run #1: Output Power

Date of Test: 10/26/2011  
Test Engineer: Jack Liu & John Caizzi

Test Location: FT4

For frequency hopping systems in the 2400-2483.5 MHz band employing less than 75 channels the maximum allowed output power is **0.125 watts**.

Maximum antenna gain: 3.9 dBi

Mode	Channel	Frequency (MHz)	Res BW <sup>1</sup>	Output Power (dBm)	Output Power (W)	EIRP (W)
Basic Rate (GFSK)	Low	2402	N/A	-1.5	0.0007	0.0017
	Mid	2441	N/A	-1.2	0.0008	0.0019
	High	2480	N/A	-1.8	0.0007	0.0016
EDR (8PSK)	Low	2402	N/A	0.1	0.0010	0.0025
	Mid	2441	N/A	0.4	0.0011	0.0027
	High	2480	N/A	-0.1	0.0010	0.0024

Note 1: Output power measured using a peak power meter, spurious limit is -20dBc.

## Run #2: Bandwidth

Date of Test: 10/26/2011  
Test Engineer: Jack Liu & John Caizzi


Test Location: FT4

Mode	Channel	Frequency (MHz)	Resolution Bandwidth	20dB Bandwidth (kHz)	Resolution Bandwidth	99% Bandwidth (kHz)
Basic Rate (GFSK)	Low	2402	30 kHz	1045	30 kHz	908
	Mid	2441	30 kHz	1045	30 kHz	913
	High	2480	30 kHz	1045	30 kHz	908
EDR (8PSK)	Low	2402	30 kHz	1335	30 kHz	1223
	Mid	2441	30 kHz	1320	30 kHz	1218
	High	2480	30 kHz	1335	30 kHz	1223

Note 1: 20dB bandwidth measured using RB = 30kHz, VB = 100kHz (VB > RB)

Note 2: 99% bandwidth measured using RB = 30kHz, VB = 100kHz VB >= 3RB)

Client: Broadcom	Job Number: J84866
Model: BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number: T84936
Contact: Anne Liang	Account Manager: Sheereen Washington
Standard: FCC 15.247, 15.E, RSS-210	Class: N/A

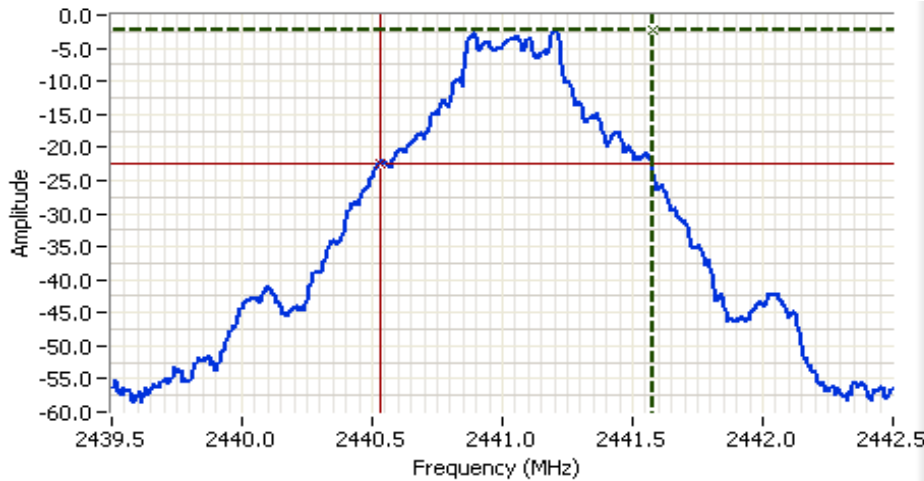


**Analyzer Settings**  
 HP8564E,EMICF: 2441.000 MHz  
 SPAN: 3.000 MHz  
 RB: 30.0 kHz  
 VB: 100 kHz  
 Detector: POS  
 Attn: 10 DB  
 RL Offset: 11.0 DB  
 Sweep Time: 50.0ms  
 Ref Lvl: 0.0 DBM

**Comments**  
 20dB BW: 1.045 MHz

Cursor 1 2441.5750 -2.33  Delta Freq. 1.045

Cursor 2 2440.5300 -22.33  Delta Amplitude 20.00

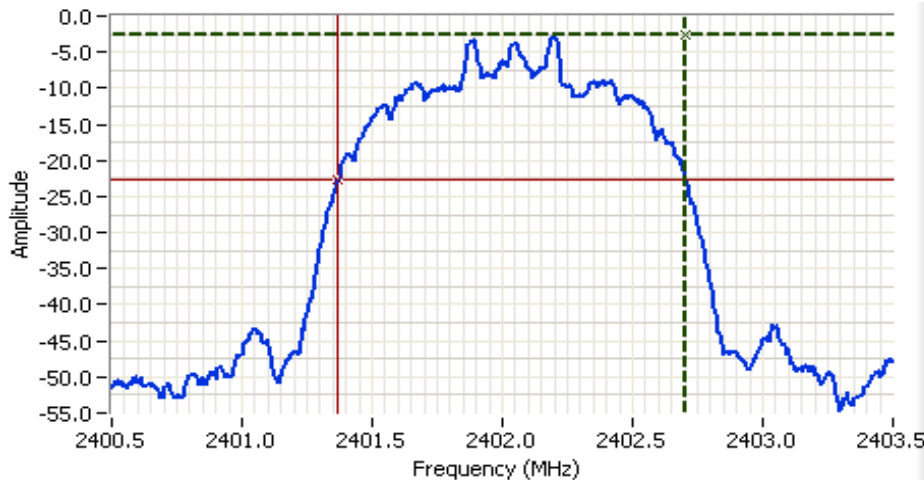

**Analyzer Settings**  
 HP8564E,EMICF: 2402.000 MHz  
 SPAN: 3.000 MHz  
 RB: 30.0 kHz  
 VB: 100 kHz  
 Detector: POS  
 Attn: 10 DB  
 RL Offset: 11.0 DB  
 Sweep Time: 50.0ms  
 Ref Lvl: 0.0 DBM

**Comments**  
 20dB BW: 1.335 MHz  
 EDR

Cursor 1 2402.7050 -2.67  Delta Freq. 1.335

Cursor 2 2401.3700 -22.67  Delta Amplitude 20.00



Client: Broadcom	Job Number: J84866
Model: BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number: T84936
Contact: Anne Liang	Account Manager: Sheareen Washington
Standard: FCC 15.247, 15.E, RSS-210	Class: N/A

### Run #3: Channel Spacing

#### Basic Mode

Channel Spacing: 1010 kHz


20dB Bandwidth: 1045 kHz

The channel spacing was measured in Basic rate mode with hopping enabled - see plot below showing channel spacing:

The channel spacing shall be greater than 2/3 times the widest 20dB bandwidth, as the output power is <0.125W.

Number of channels: 79 Max                      20 Min (AFH enabled)

The number of channels was measured in Basic rate mode with hopping enabled with both the maximum (all) channels enabled and with the minimum number of channels enabled. The system shall employ a minimum of 15 hopping channels.

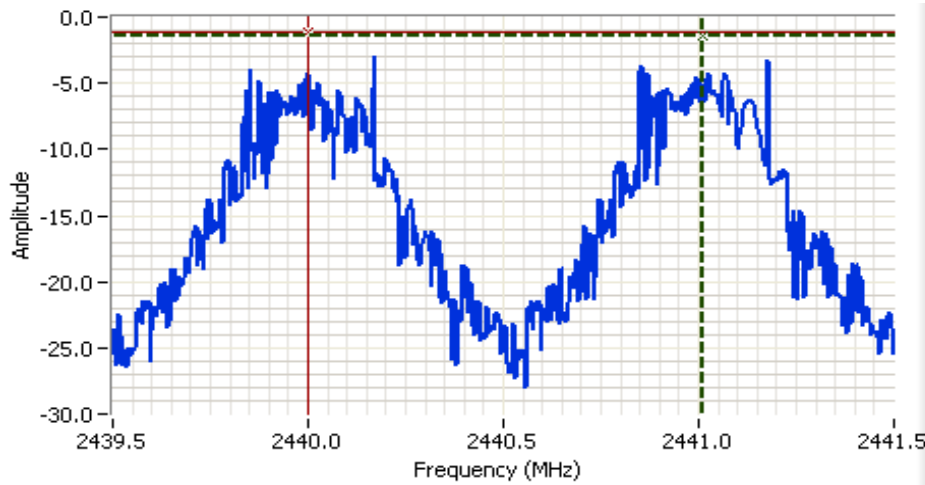

**Analyzer Settings**

HP8564E,EMICF: 2440.500 MHz

SPAN: 2.000 MHz

RB: 30.0 kHz

VB: 30.0 kHz

Detector: POS

Attn: 10 DB

RL Offset: 11.0 DB

Sweep Time: 50.0ms

Ref Lvl: 10.0 DBM

---

**Comments**

Basic

Cursor 1	2441.0104	-1.46	
Cursor 2	2440.0000	-1.20	

Delta Freq. 1.010

Delta Amplitude 0.26



Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheereen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**EDR Mode**


Channel Spacing: 1010 kHz

20dB Bandwidth: 1335.0 kHz

The channel spacing was measured in Basic rate mode with hopping enabled - see plot below showing channel spacing:  
The channel spacing shall be greater than 2/3 Times the widest 20dB bandwidth as the output power is <0.125W.

Number of channels: 79 Max                      20 Min (AFH enabled)


The number of channels was measured in Basic rate mode with hopping enabled with both the maximum (all) channels enabled and with the minimum number of channels enabled. The system shall employ a minimum of 15 hopping channels.

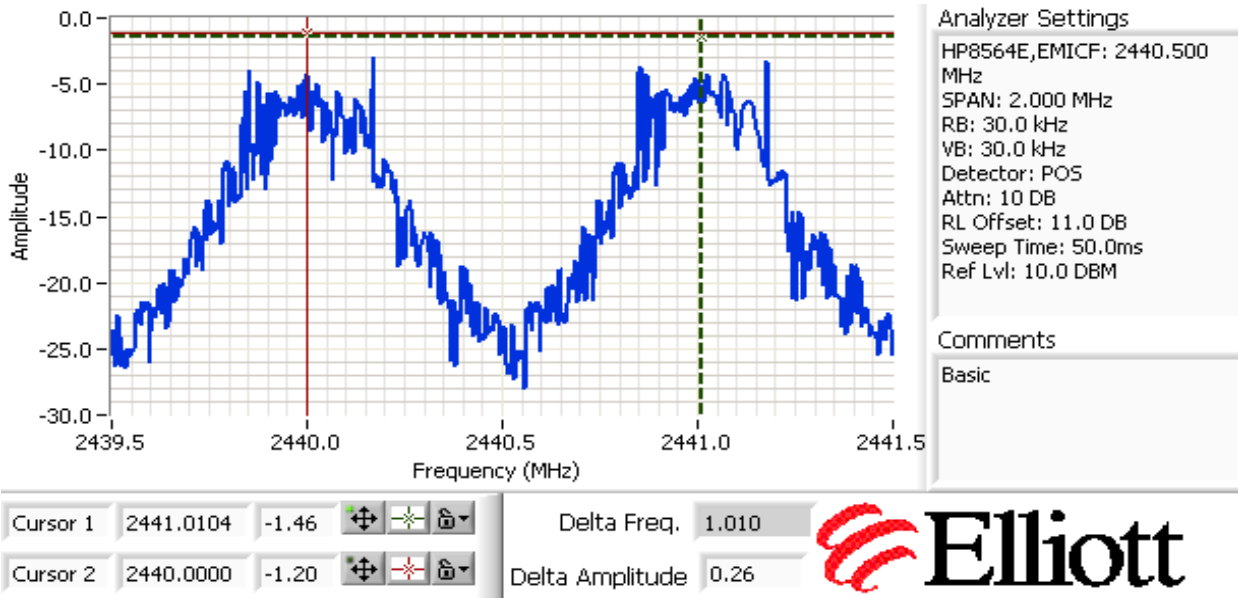

Basic mode and EDR mode have same CH spacing.




Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

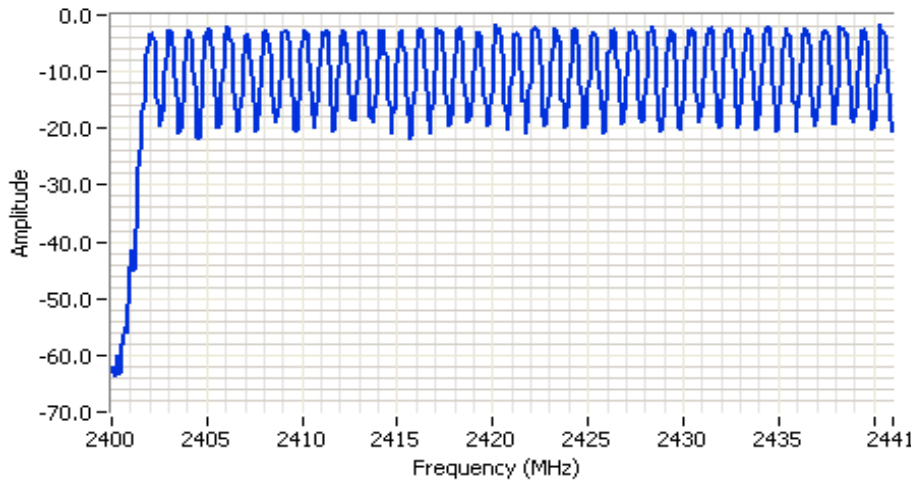


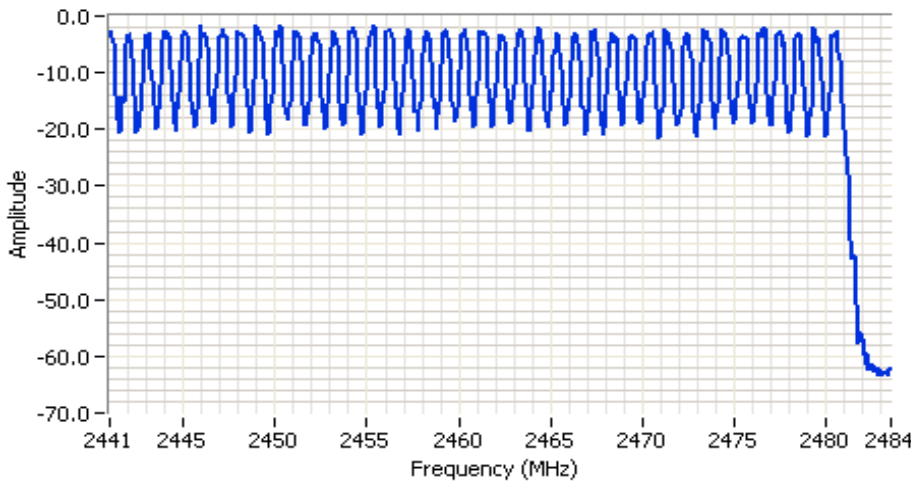
**Analyzer Settings**  
 HP8564E,EMICF: 2420.500 MHz  
 SPAN: 41.000 MHz  
 RB: 100 kHz  
 VB: 100 kHz  
 Detector: POS  
 Attn: 10 DB  
 RL Offset: 11.0 DB  
 Sweep Time: 50.0ms  
 Ref Lvl: 10.0 DBM

**Comments**

2400~2441MHz  
 39 ch

Cursor 1 0.0000 10.00 


0.0000 0.00 




**Analyzer Settings**  
 HP8564E,EMICF: 2462.250 MHz  
 SPAN: 42.500 MHz  
 RB: 100 kHz  
 VB: 100 kHz  
 Detector: POS  
 Attn: 10 DB  
 RL Offset: 11.0 DB  
 Sweep Time: 50.0ms  
 Ref Lvl: 10.0 DBM

**Comments**

2441~2483.5MHz  
 40 ch

Cursor 1 0.0000 10.00 

0.0000 0.00 



The hopping rate is 1600 hops per second although any new channel may be used for a single hop slot, 3 hop slots or 5 hop slots. The dwell time per channel is, therefore either 0.625ms (single slot), 1.875ms (three slot) or 3.125ms (five slot). The average time of occupancy will not exceed 0.4s in any time interval of 0.4s multiplied by the number of channels being used.

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

### Run #4: Antenna Conducted Spurious Emissions, 30 - 26500 MHz.

Date of Test: 10/26/2011


Test Location: FT4

Test Engineer: Jack Liu & John Caizzi

Refer to plots below. Scans made using RBW=VB=100 KHz with the limit line set at 20dB below the highest in-band signal level with the **hopping feature disabled**. Additional plots with hopping enabled at the band edges.


#### Low channel -Basic Rate

Broadband plot

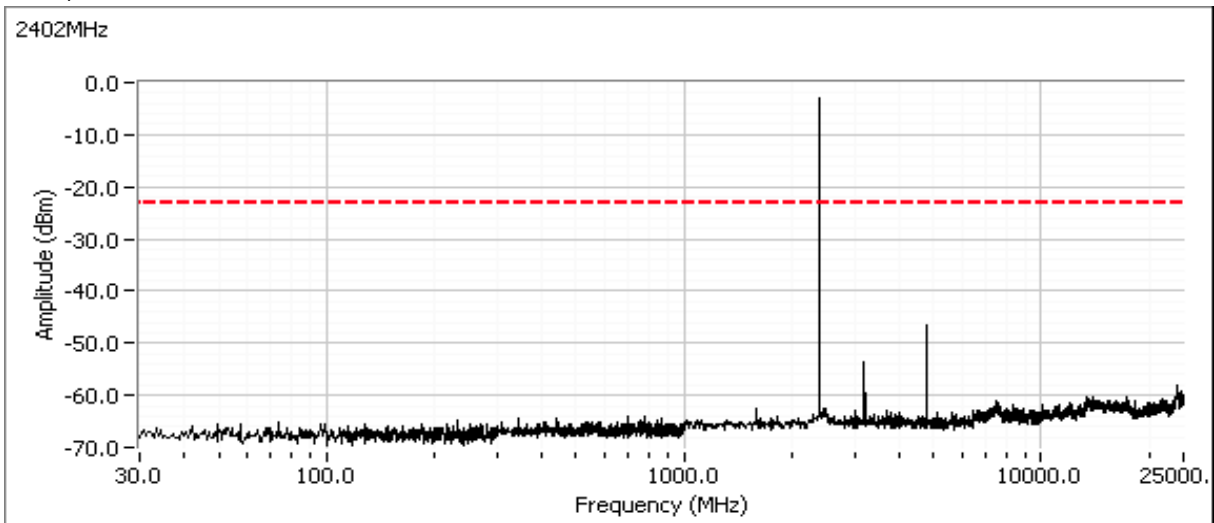


Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

Plot showing -20dBc at the lower band edge

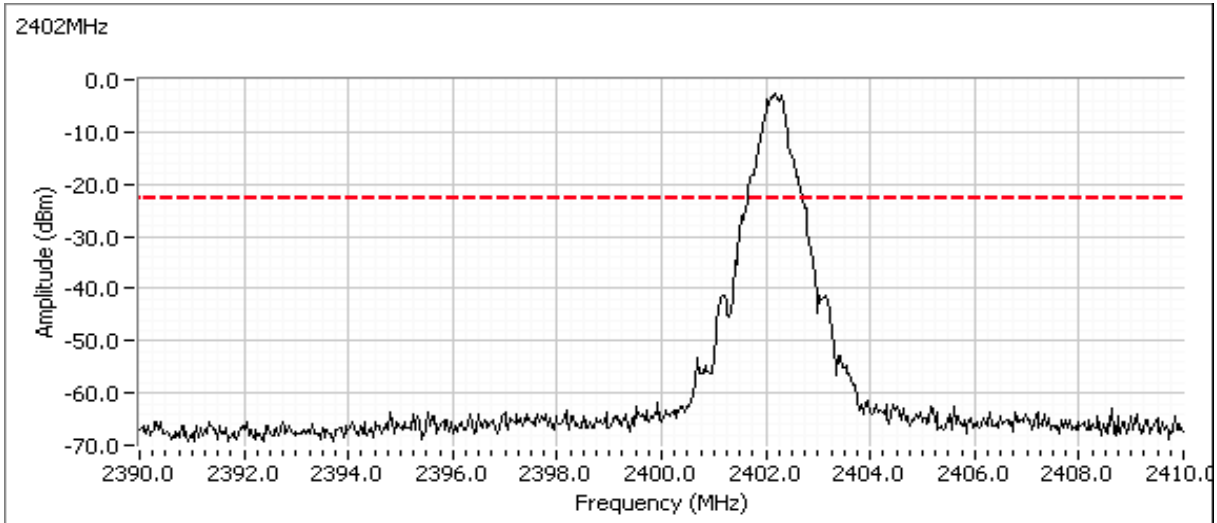

Center channel - Basic Rate


Broadband plot

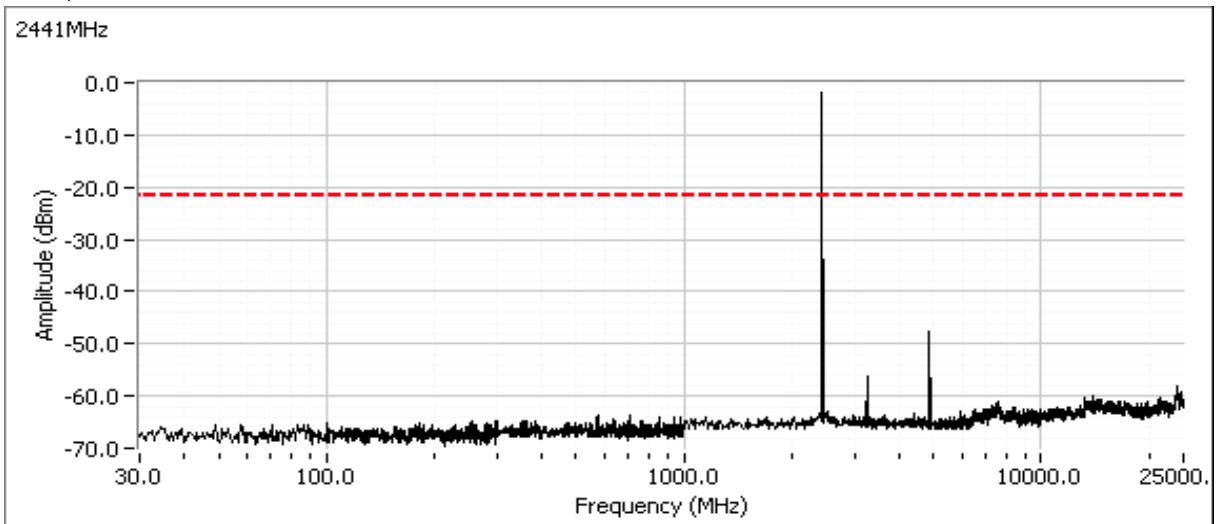


Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

## High channel - Basic Rate

### Broadband plot

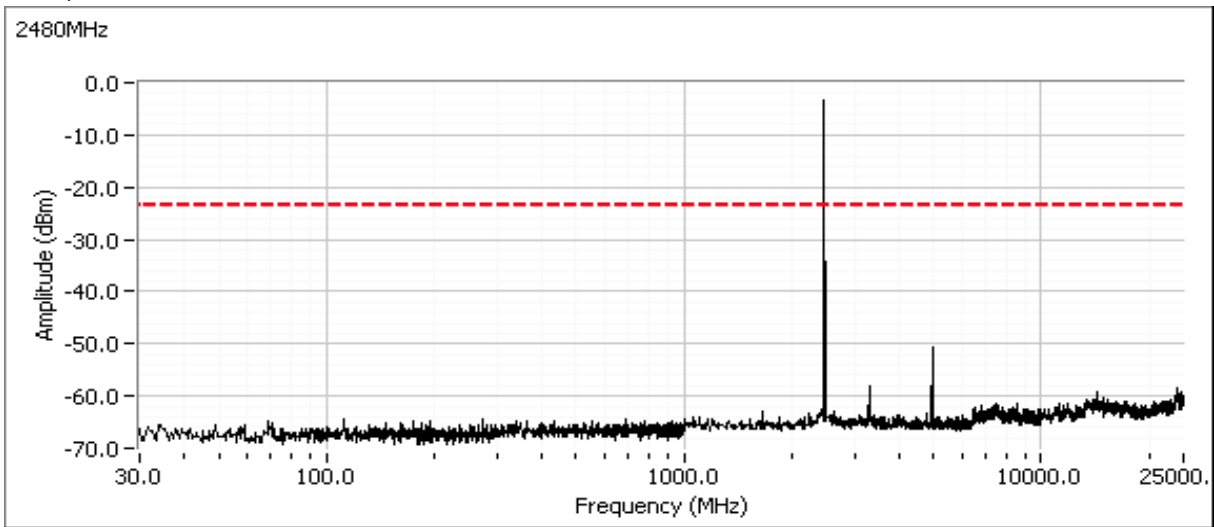


### Plot showing -20dBc at the upper band edge

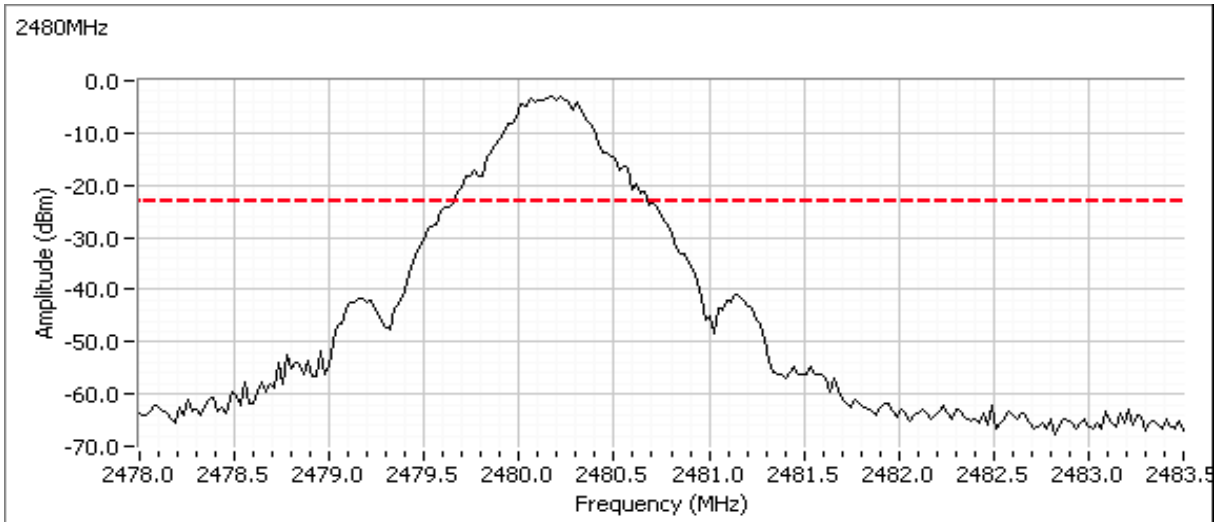


Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

Refer to plots below. Scans made using RBW=VB=100 KHz with the limit line set at 20dB below the highest in-band signal level with the **hopping feature enabled** to show compliance with the -20dBc requirement at the allocated band edge. The spectrum analyzer is left in max hold mode until the trace stabilizes.

Low channel, hopping enabled - Basic Rate

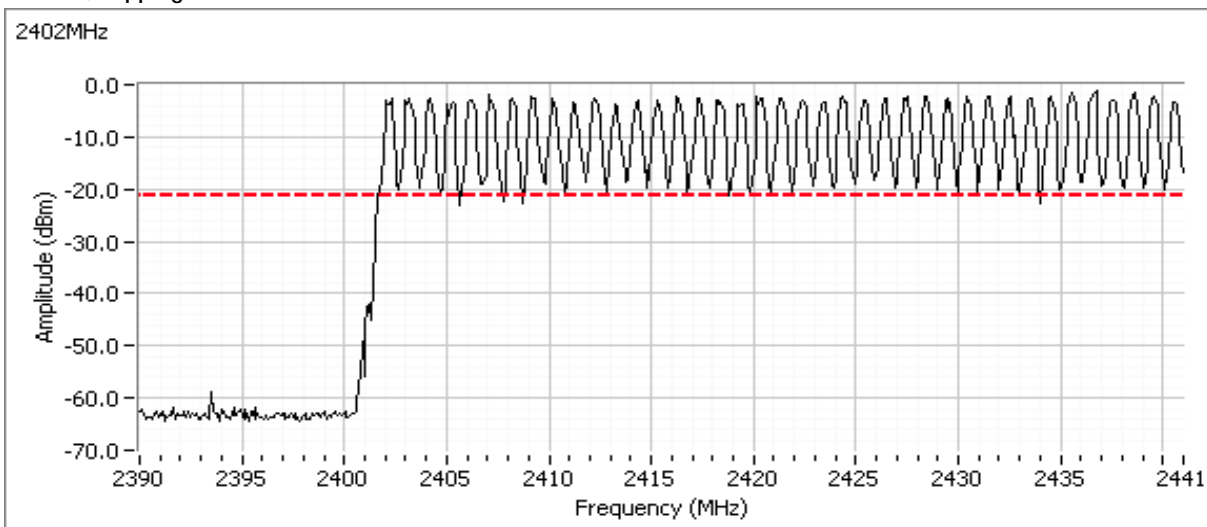


High channel, hopping enabled - Basic Rate

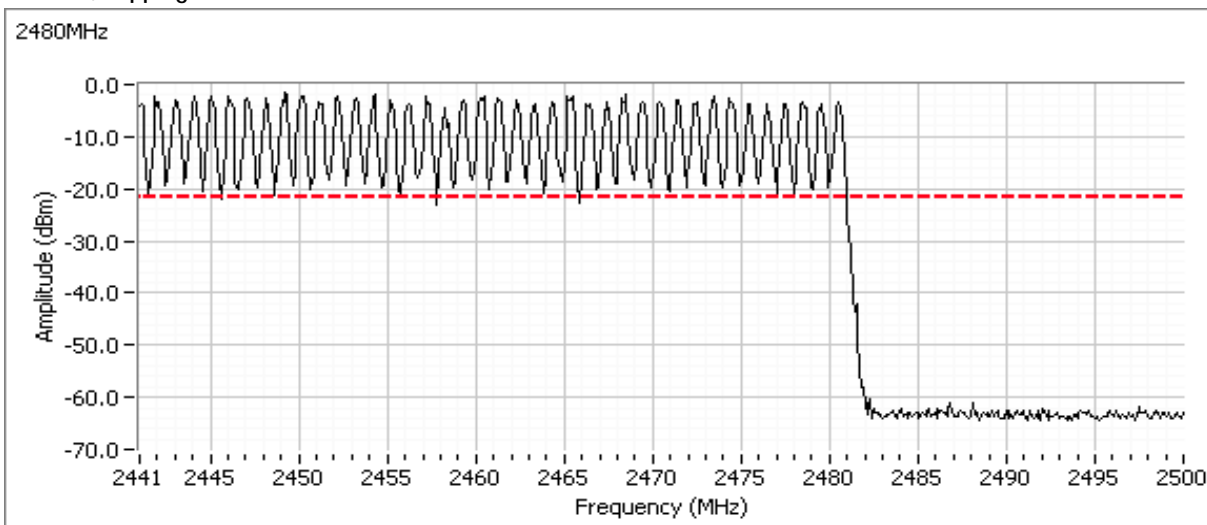


Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

## Low channel -EDR (3Mb/s)

### Broadband plot

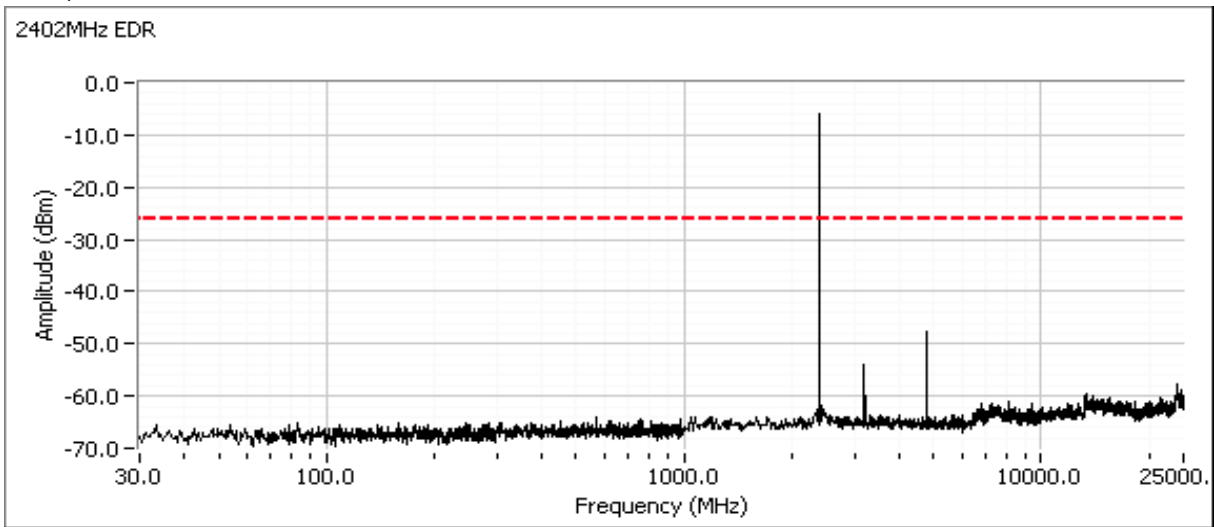


### Plot showing -20dBc at the lower band edge

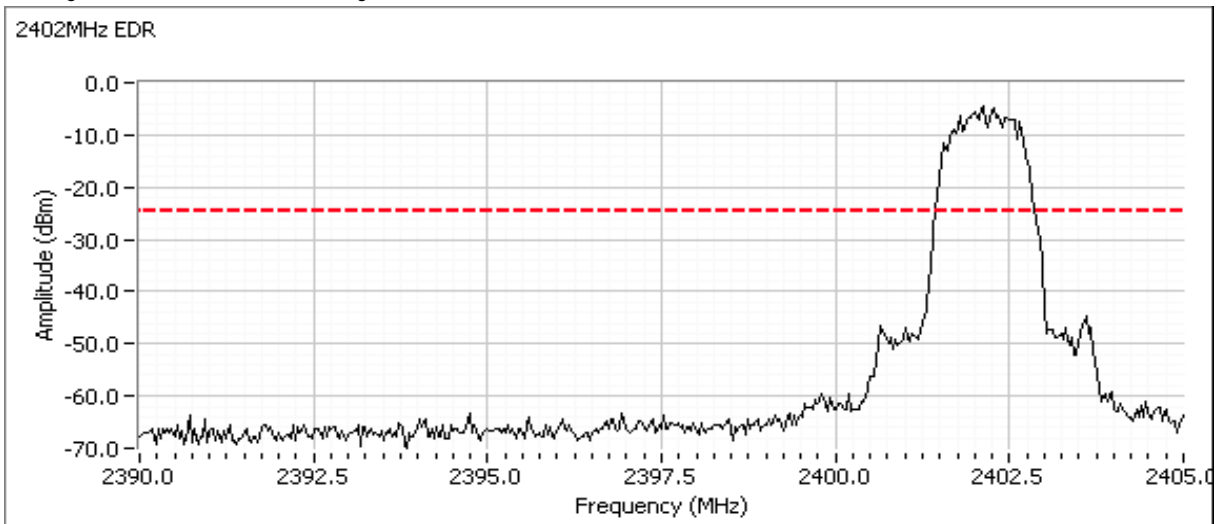

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A


### Center channel - EDR (3Mb/s)

Broadband plot

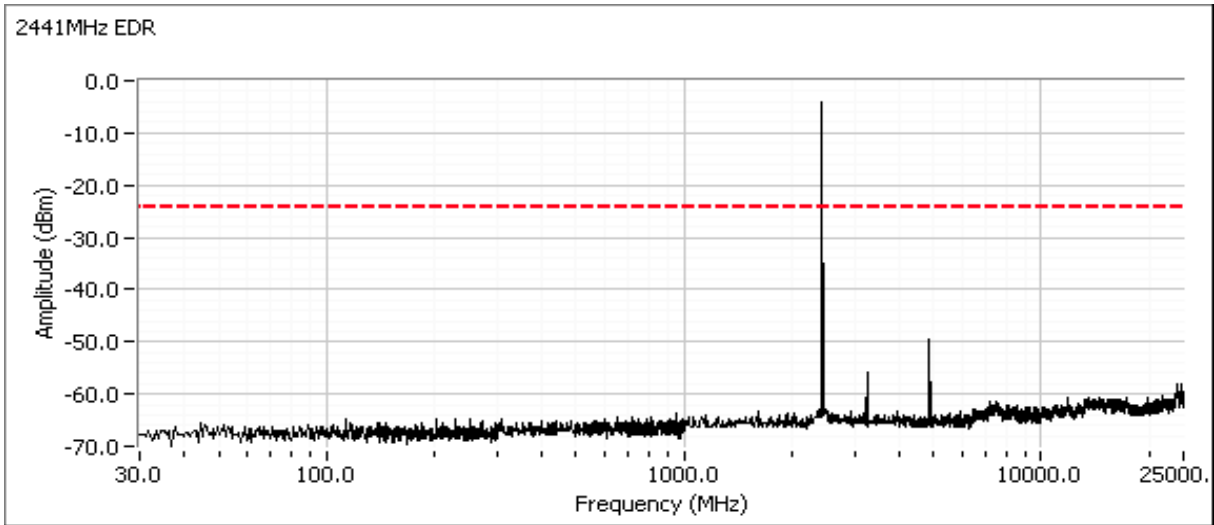

### High channel - EDR (3Mb/s)

Broadband plot

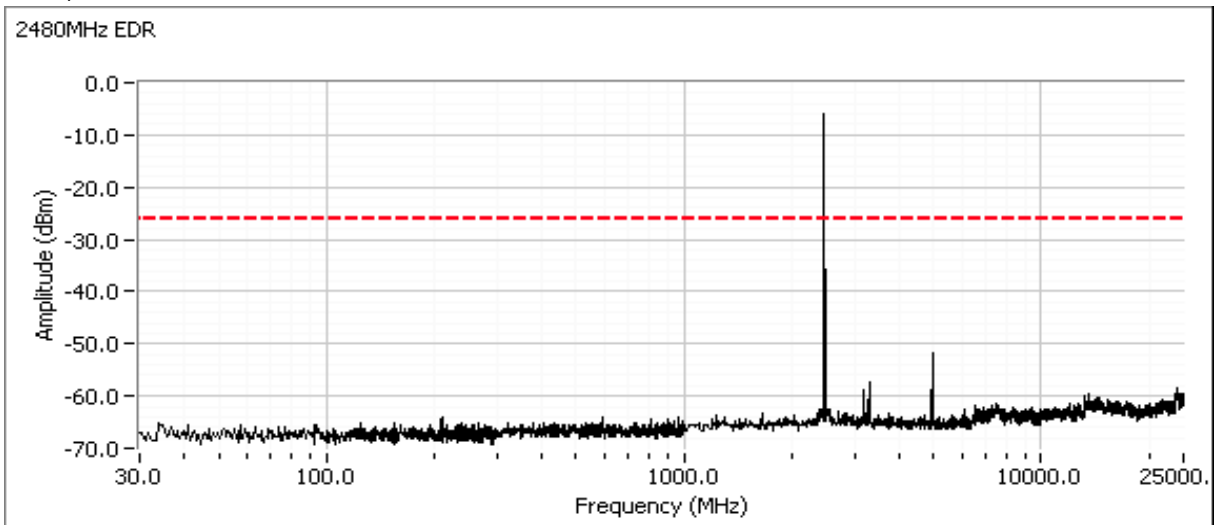


Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

Plot showing -20dBc at the upper band edge



Refer to plots below. Scans made using RBW=VB=100 KHz with the limit line set at 20dB below the highest in-band signal level with the **hopping feature enabled** to show compliance with the -20dBc requirement at the allocated band edge. The spectrum analyzer is left in max hold mode until the trace stabilizes.


Low channel, hopping enabled - EDR (3Mb/s)

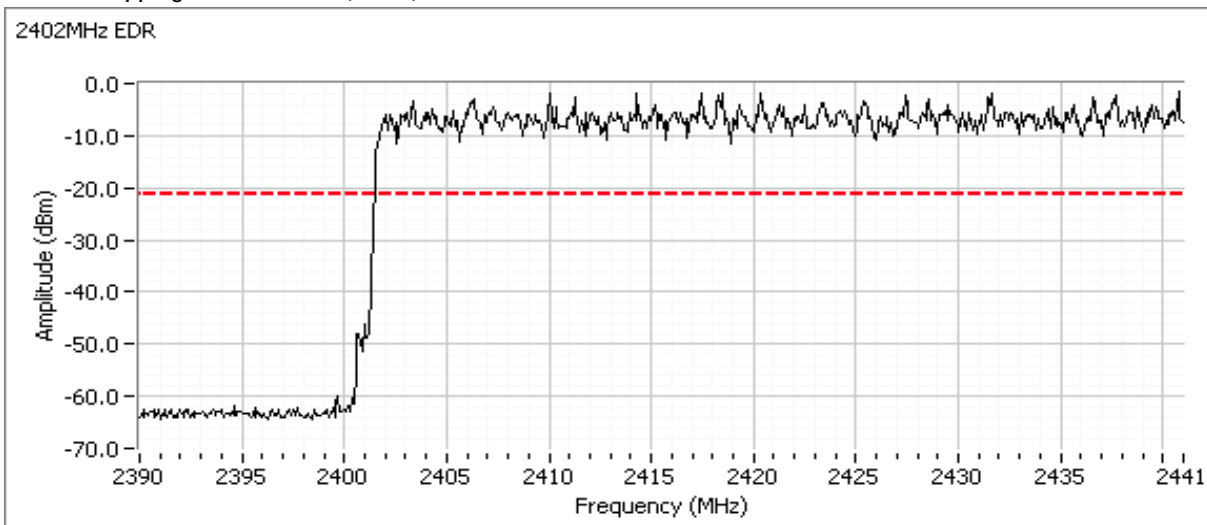



Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

### High channel, hopping enabled - EDR (3Mb/s)

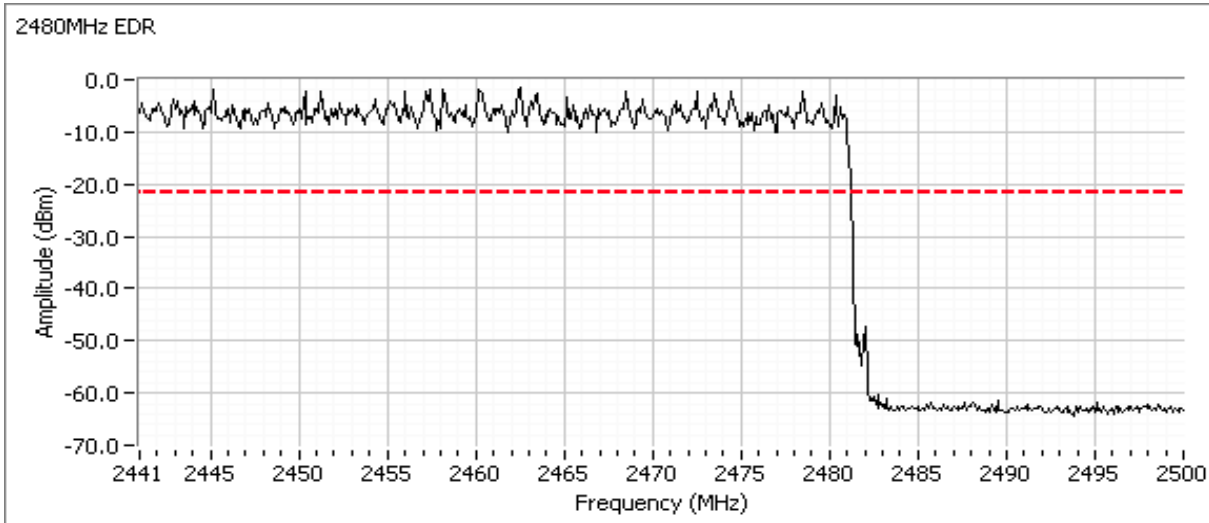

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
		Account Manager:	Sheareen Washington
Contact:	Anne Liang		
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

## RSS 210 and FCC 15.247 Radiated Spurious Emissions (Bluetooth - Basic/EDR Operation)

### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

### General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

### Ambient Conditions:

Temperature: 20.4 °C  
 Rel. Humidity: 37 %

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

### Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Bluetooth uses a frequency hopping algorithm that means that the device, during normal operation, is only on a specific channel for a short period of time. The average correction factor is calculated as follows:

A maximum length packet has a duration of 5 time slots.

The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

With a minimum of 20 hopping channels a channel will not be used more than 4 times in any 100ms period.

The maximum dwell time in a 100m period is  $4 \times 3.125\text{ms} = 12.5\text{ms}$ .

The average correction factor is, therefore,  $20\log(12.5/100) = -18\text{dB}$

As this is a hopping radio the correction factor can be applied to the average value of the signal provided the average value was measured with the device continuously transmitting. DA 00-0705 permits the use of the average correction on the **measured average** value for frequency hopping radios.

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
Run #1	BT - Basic (GFSK) Chain A	2402MHz	-	-	Restricted Band Edge at 2390 MHz	15.209	47.4dB $\mu$ V/m @ 2389.2MHz (-6.6dB)
		2480MHz	-	-	Restricted Band Edge at 2483.5 MHz	15.209	48.1dB $\mu$ V/m @ 2483.5MHz (-5.9dB)
Run #2	BT - EDR (8PSK) Chain A	2402MHz	-	-	Restricted Band Edge at 2390 MHz	15.209	47.3dB $\mu$ V/m @ 2387.9MHz (-6.7dB)
		2480MHz	-	-	Restricted Band Edge at 2483.5 MHz	15.209	48.4dB $\mu$ V/m @ 2483.5MHz (-5.6dB)
Run #3	BT - Basic (GFSK) Chain A	2402MHz	-	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	40.7dB $\mu$ V/m @ 4804.1MHz (-13.3dB)
		2441MHz	-	-			36.5dB $\mu$ V/m @ 4882.1MHz (-17.5dB)
		2480MHz	-	-			36.3dB $\mu$ V/m @ 4960.1MHz (-17.7dB)
Run #4	BT - EDR (8PSK) Chain A	2402MHz	-	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	43.3dB $\mu$ V/m @ 4804.1MHz (-10.7dB)
		2441MHz	-	-			40.9dB $\mu$ V/m @ 4882.0MHz (-13.1dB)
		2480MHz	-	-			39.8dB $\mu$ V/m @ 4960.0MHz (-14.2dB)
Run #5	BT - RX Mode Chain A	2441MHz	-	-	Radiated Emissions, 1 - 8 GHz	RSS-GEN	38.3dB $\mu$ V/m @ 1884.4MHz (-15.7dB)

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Modifications Made During Testing**

No modifications were made to the EUT during testing

**Deviations From The Standard**

No deviations were made from the requirements of the standard.

**Run #1, Band Edge Field Strength - BT - Basic (GFSK), Chain A**

Date of Test: 10/25/2011

Test Location: FT Chamber #4

Test Engineer: Rafael Varelas

Config Change: none

**Run #1a, EUT on Channel 2402MHz - BT - Basic (GFSK), Chain A**

	Power Settings		
	Target (dBm)	Measured (dBm)	Software Setting
Chain A	0.0	6.3	0.0

**Fundamental Signal Field Strength**


Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2402.080	95.8	H	-	-	AVG	311	1.0	RB 1 MHz;VB 10 Hz;Pk
2402.250	96.5	H	-	-	PK	311	1.0	RB 1 MHz;VB 3 MHz;Pk
2402.200	95.9	H	-	-	PK	311	1.0	RB 100 kHz;VB 100 kHz;Pk
2402.100	94.2	V	-	-	AVG	92	2.0	RB 1 MHz;VB 10 Hz;Pk
2401.990	94.7	V	-	-	PK	92	2.0	RB 1 MHz;VB 3 MHz;Pk

**2390 MHz Band Edge Signal Field Strength**

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2389.180	47.4	V	54.0	-6.6	AVG	284	1.0	RB 1 MHz;VB 10 Hz;Pk
2387.140	58.4	V	74.0	-15.6	PK	284	1.0	RB 1 MHz;VB 3 MHz;Pk
2387.070	47.2	H	54.0	-6.8	AVG	193	1.0	RB 1 MHz;VB 10 Hz;Pk
2387.040	58.5	H	74.0	-15.5	PK	193	1.0	RB 1 MHz;VB 3 MHz;Pk

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

RB 1 MHz; VB 10 Hz Avg (Black Trace); RB=VB=1MHz (Blue Trace) V

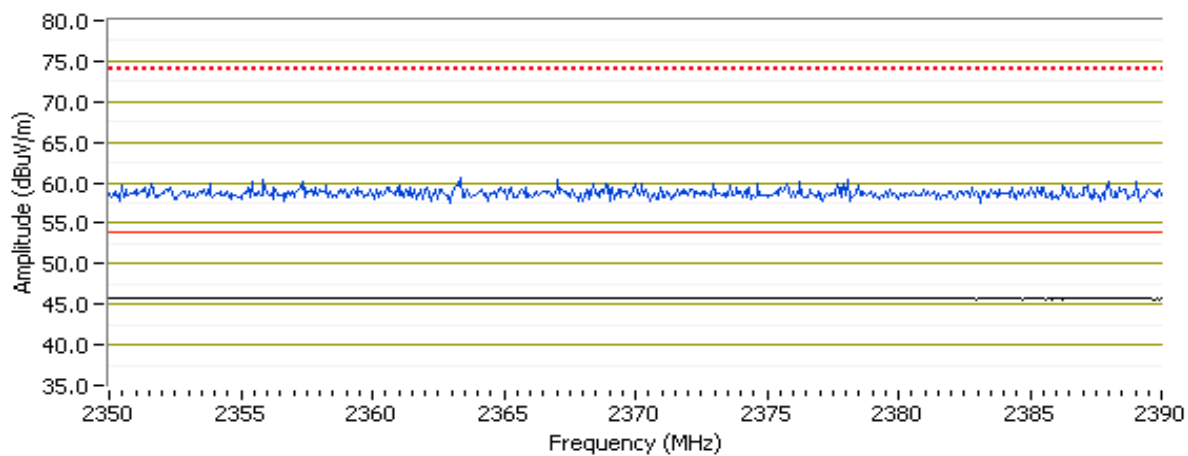

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Run #1b, EUT on Channel 2480MHz - BT - Basic (GFSK), Chain A**


	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	0.3	0.0

**Fundamental Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2480.040	94.4	H	-	-	AVG	49	1.0	RB 1 MHz;VB 10 Hz;Pk
2479.900	95.0	H	-	-	PK	49	1.0	RB 1 MHz;VB 3 MHz;Pk
2480.030	94.5	H	-	-	PK	49	1.0	RB 100 kHz;VB 100 kHz;Pk
2480.050	87.1	V	-	-	AVG	150	1.1	RB 1 MHz;VB 10 Hz;Pk
2479.920	87.8	V	-	-	PK	150	1.1	RB 1 MHz;VB 3 MHz;Pk

**2483.5 MHz Band Edge Signal Radiated Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	48.1	H	54.0	-5.9	AVG	19	1.0	RB 1 MHz;VB 10 Hz;Pk
2486.100	59.4	H	74.0	-14.6	PK	19	1.0	RB 1 MHz;VB 3 MHz;Pk
2485.380	47.8	V	54.0	-6.2	AVG	230	1.8	RB 1 MHz;VB 10 Hz;Pk
2486.020	59.6	V	74.0	-14.4	PK	230	1.8	RB 1 MHz;VB 3 MHz;Pk

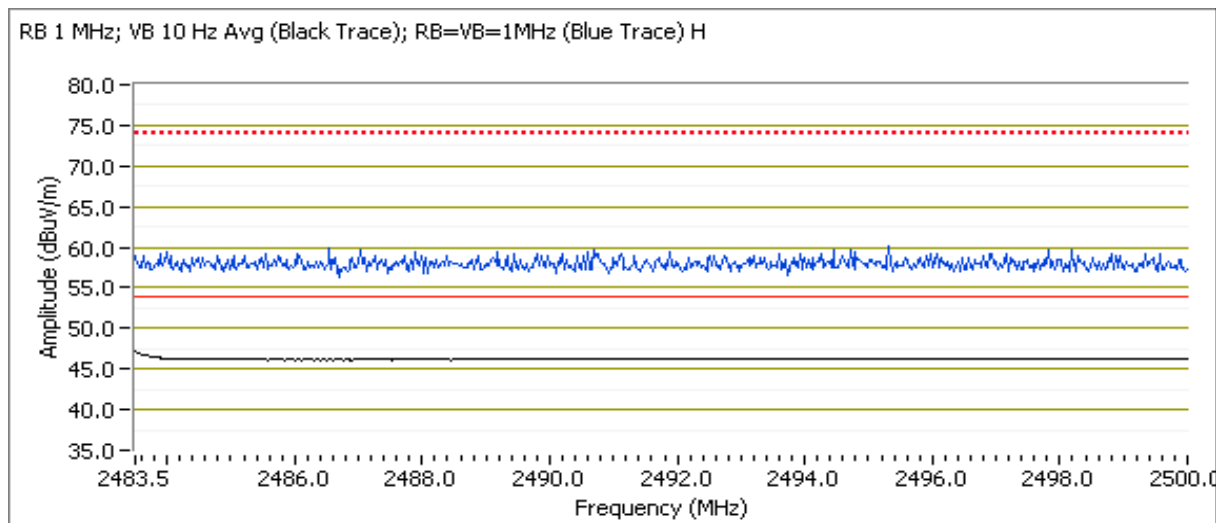

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Run # 2, Band Edge Field Strength - BT - EDR (8PSK), Chain A**

Date of Test: 10/25/2011

Test Location: FT Chamber #4

Test Engineer: Rafael Varelas

Config Change: none

**Run # 2a, EUT on Channel 2402MHz - BT - EDR (8PSK), Chain A**

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	7.2	0.0


**Fundamental Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2402.080	97.2	H	-	-	AVG	51	1.0	RB 1 MHz;VB 10 Hz;Pk
2402.060	100.4	H	-	-	PK	51	1.0	RB 1 MHz;VB 3 MHz;Pk
2402.190	97.8	H	-	-	PK	51	1.0	RB 100 kHz;VB 100 kHz;Pk
2402.030	93.1	V	-	-	AVG	92	1.0	RB 1 MHz;VB 10 Hz;Pk
2402.030	96.4	V	-	-	PK	92	1.0	RB 1 MHz;VB 3 MHz;Pk

**2390 MHz Band Edge Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2387.930	47.3	H	54.0	-6.7	AVG	71	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.470	58.8	H	74.0	-15.2	PK	71	1.0	RB 1 MHz;VB 3 MHz;Pk
2389.120	47.2	V	54.0	-6.8	AVG	285	1.0	RB 1 MHz;VB 10 Hz;Pk
2387.280	58.6	V	74.0	-15.4	PK	285	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); RB=VB=1MHz (Blue Trace) H

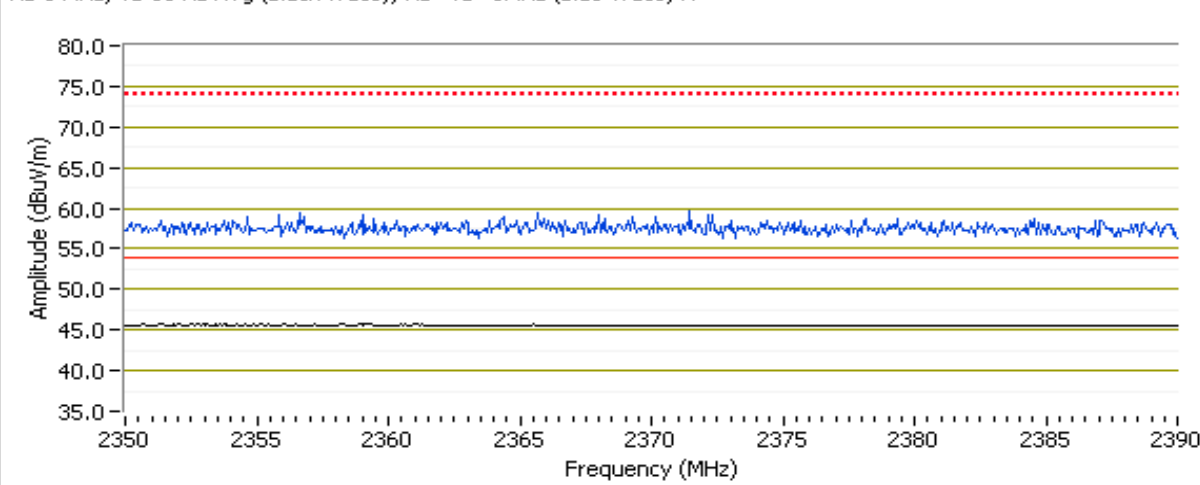

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

Run # 2b, EUT on Channel 2480MHz - BT - EDR (8PSK), Chain A

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	0.4	0.0


**Fundamental Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2480.000	93.4	H	-	-	AVG	49	1.0	RB 1 MHz;VB 10 Hz;Pk
2480.040	96.6	H	-	-	PK	49	1.0	RB 1 MHz;VB 3 MHz;Pk
2479.930	93.9	H	-	-	PK	49	1.0	RB 100 kHz;VB 100 kHz;Pk
2480.000	86.7	V	-	-	AVG	151	1.1	RB 1 MHz;VB 10 Hz;Pk
2480.080	90.0	V	-	-	PK	151	1.1	RB 1 MHz;VB 3 MHz;Pk

**2483.5 MHz Band Edge Signal Radiated Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.500	48.4	H	54.0	-5.6	AVG	16	1.0	RB 1 MHz;VB 10 Hz;Pk
2484.780	59.7	H	74.0	-14.3	PK	16	1.0	RB 1 MHz;VB 3 MHz;Pk
2483.530	47.7	V	54.0	-6.3	AVG	0	1.0	RB 1 MHz;VB 10 Hz;Pk
2486.050	59.4	V	74.0	-14.6	PK	0	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); RB=VB=1MHz (Blue Trace) H

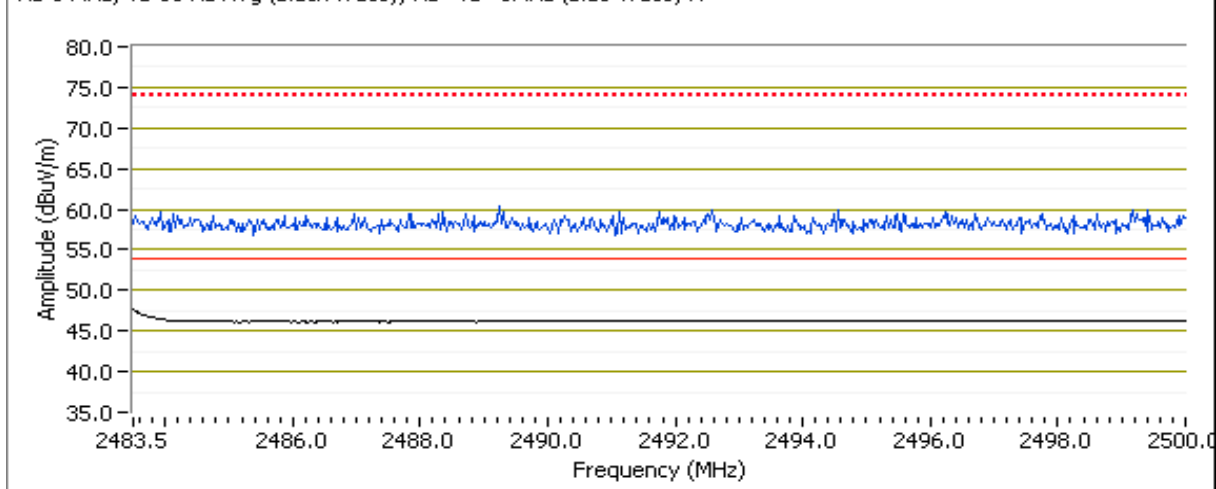



Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Run # 3, Radiated Spurious Emissions, 1-26GHz, BT - Basic (GFSK), Chain A**  
 Date of Test: 10/25/2011      Test Location: FT Chamber #4  
 Test Engineer: Rafael Varelas      Config Change: none

**Run # 3a, EUT on Channel 2402MHz - BT - Basic (GFSK), Chain A**


	Target (dBm)	Power Settings	
		Measured (dBm)	Software Setting
Chain A	0.0	6.3	0.0

**Spurious Radiated Emissions:**

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4804.070	40.7	V	54.0	-13.3	AVG	271	1.0	Note 2
4803.840	58.7	V	74.0	-15.3	PK	271	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 2: Average measurement corrected using the -18dB correction factor for hopping.

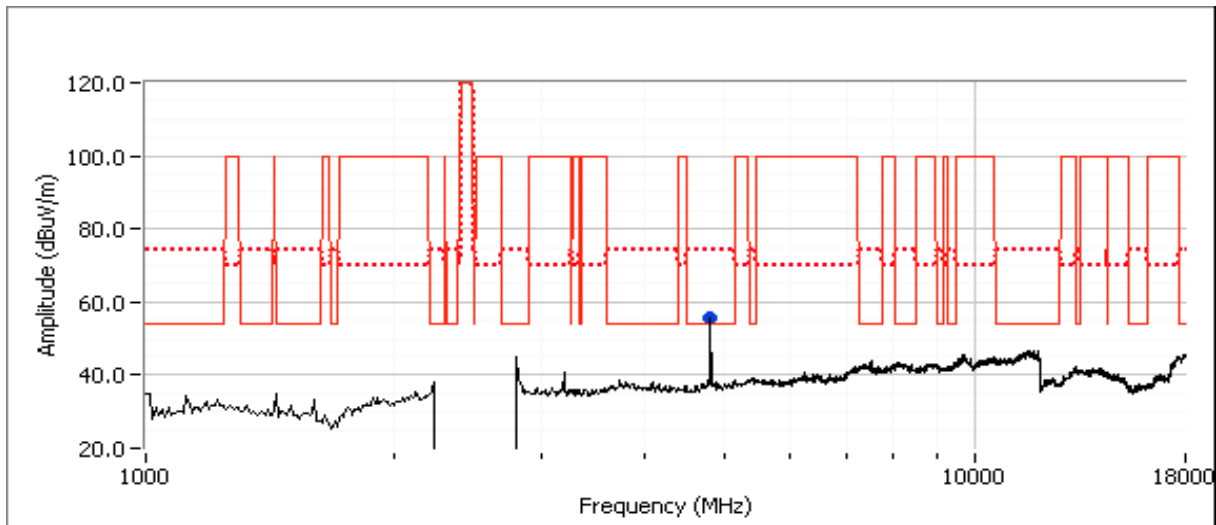

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A


**Run # 3b: , EUT on Channel 2441MHz - BT - Basic (GFSK), Chain A**

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	0.5	0.0

**Spurious Radiated Emissions:**

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4882.080	36.5	H	54.0	-17.5	AVG	299	1.0	Note 3
4881.770	54.5	H	74.0	-19.5	PK	299	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Average measurement corrected using the -18dB correction factor for hopping.

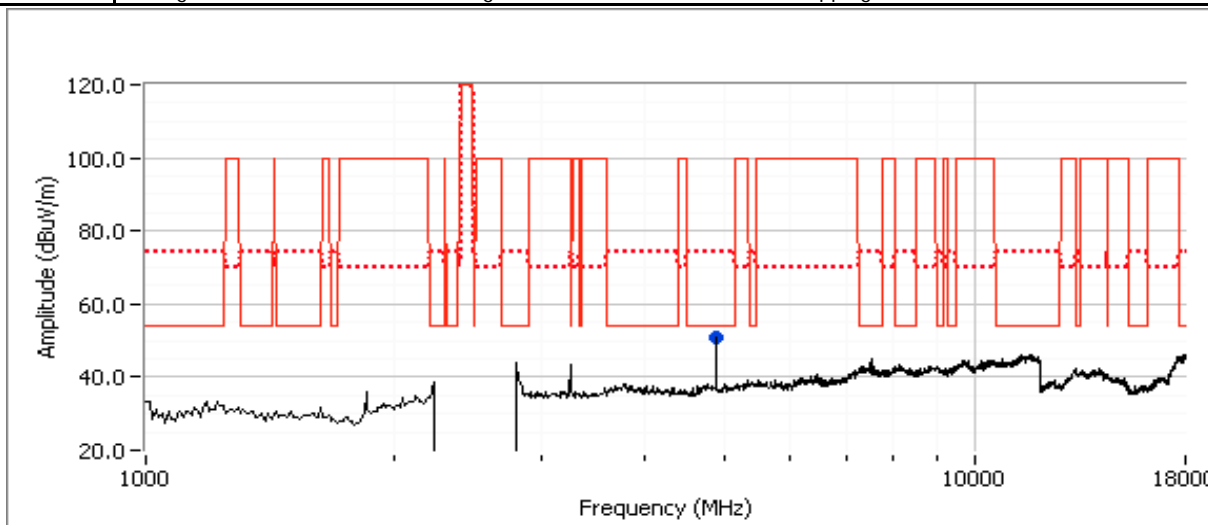

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Run # 3c: , EUT on Channel 2480MHz - BT - Basic (GFSK), Chain A**


	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	0.3	0.0

**Spurious Radiated Emissions:**

Frequency	Level	Pol	15.209/15.247	Detector	Azimuth	Height	Comments	
MHz	dB $\mu$ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
4960.080	36.3	V	54.0	-17.7	AVG	290	1.3	Note 2
4959.770	54.3	V	74.0	-19.7	PK	290	1.3	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 2: Average measurement corrected using the -18dB correction factor for hopping.

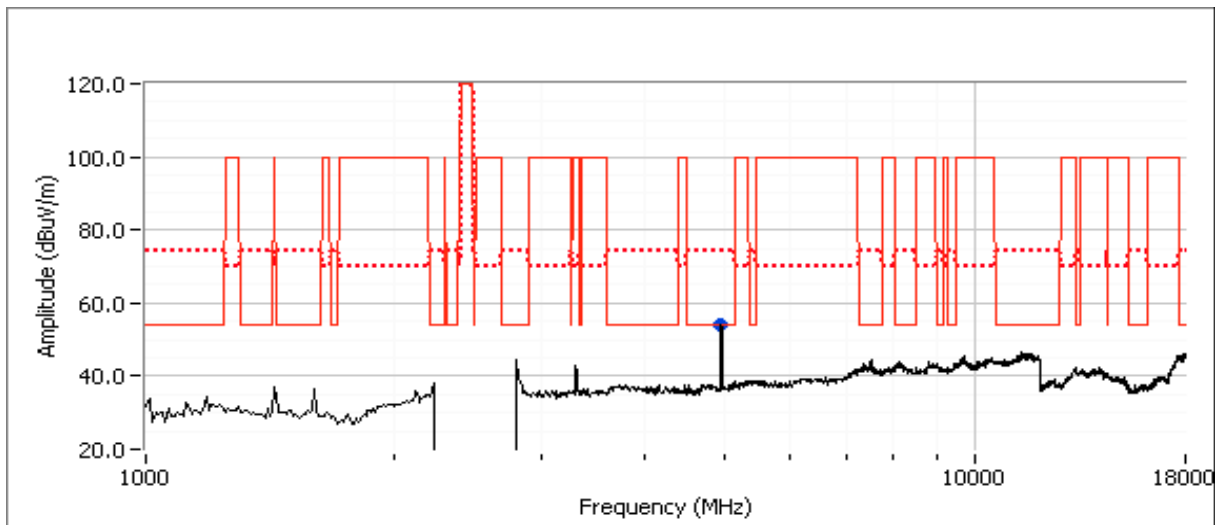

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Run # 4, Radiated Spurious Emissions, 1-26GHz, BT - EDR (8PSK), Chain A**

Date of Test: 10/25/2011

Test Location: FT Chamber #4

Test Engineer: Rafael Varelas

Config Change: none

**Run # 4a, EUT on Channel 2402MHz - BT - EDR (8PSK), Chain A**


	Target (dBm)	Power Settings	
		Measured (dBm)	Software Setting
Chain A	0.0	7.2	0.0

**Spurious Radiated Emissions:**

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4804.050	43.3	V	54.0	-10.7	AVG	270	1.1	Note 2
4804.020	61.3	V	74.0	-12.7	PK	270	1.1	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 2: Average measurement corrected using the -18dB correction factor for hopping.

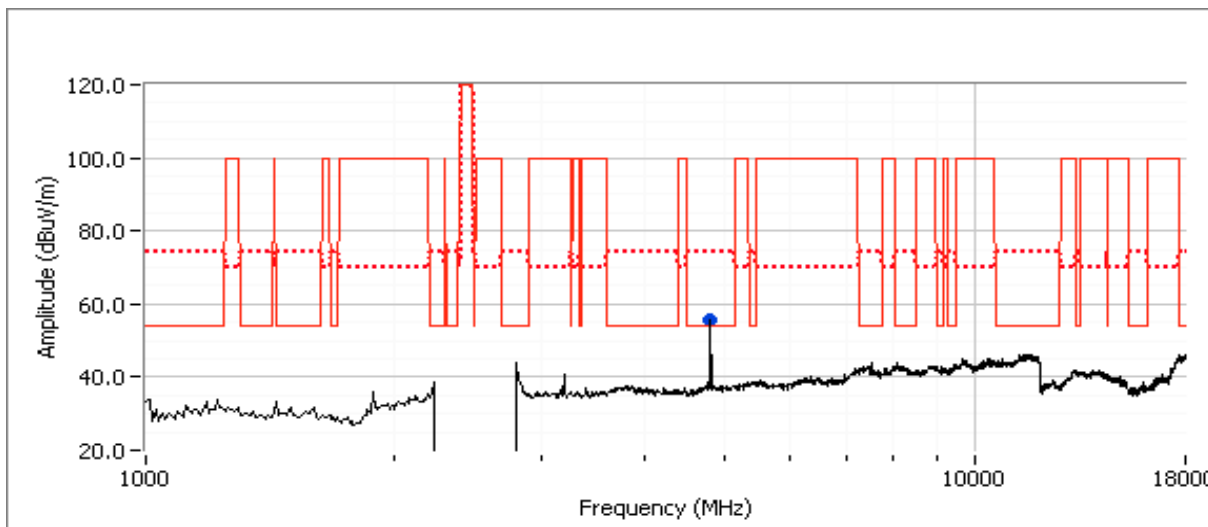

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A


**Run # 4b: , EUT on Channel 2441MHz - BT - EDR (8PSK), Chain A**

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	0.7	0.0

**Spurious Radiated Emissions:**

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4882.040	40.9	V	54.0	-13.1	AVG	269	1.1	Note 3
4882.180	58.9	V	74.0	-15.1	PK	269	1.1	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Average measurement corrected using the -18dB correction factor for hopping.

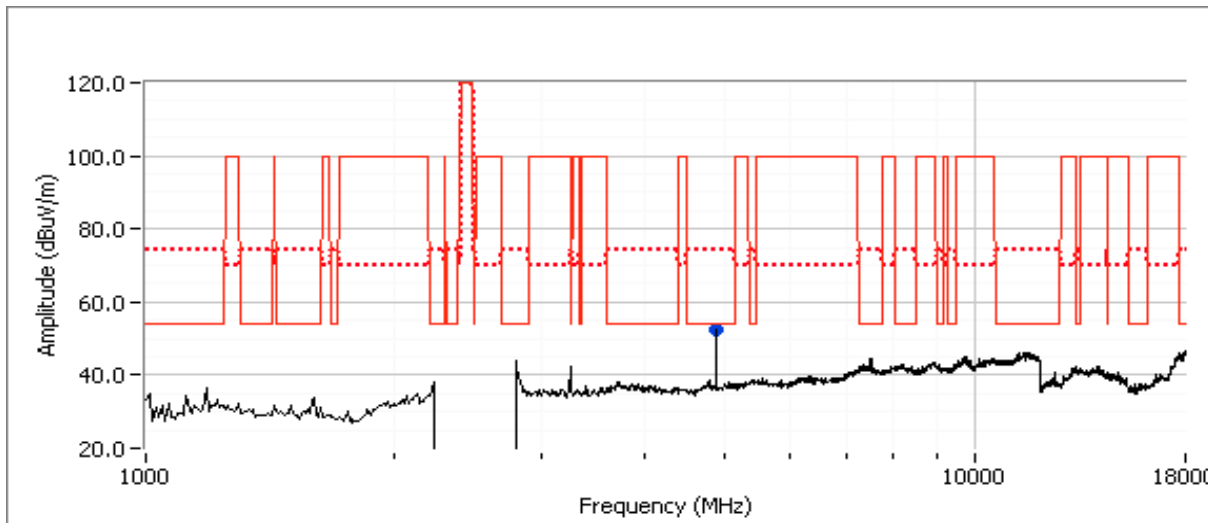

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A


**Run # 4c: , EUT on Channel 2480MHz - BT - EDR (8PSK), Chain A**

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain A	0.0	0.4	0.0

**Spurious Radiated Emissions:**

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4960.040	39.8	V	54.0	-14.2	AVG	287	1.1	RB 1 MHz;VB 10 Hz;Pk
4959.920	57.8	V	74.0	-16.2	PK	287	1.1	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

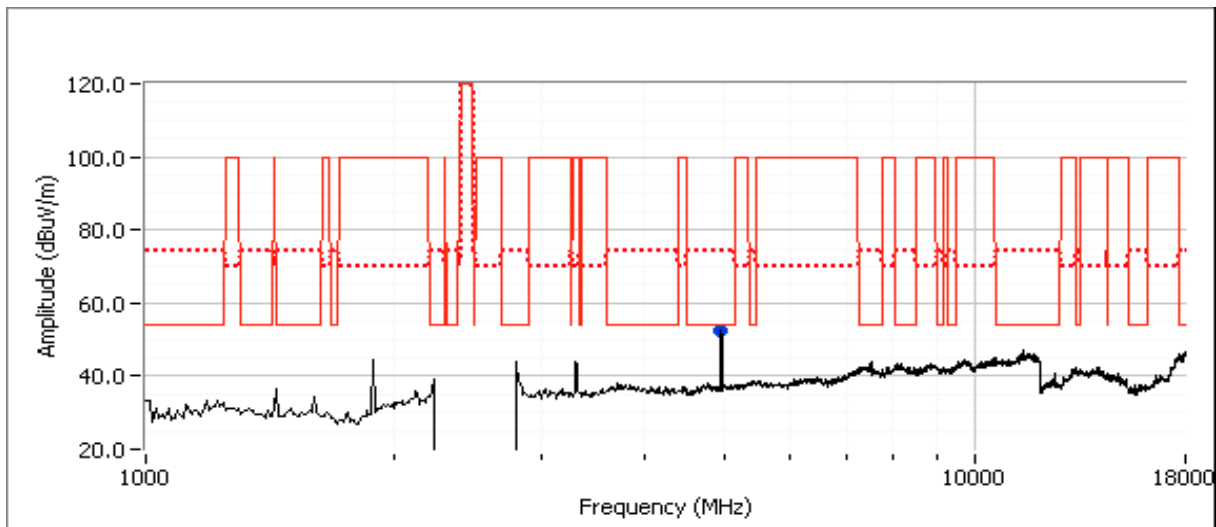

Client:	Broadcom	Job Number:	J84866
Model:	BCM943142HM 802.11bgn (20 and 40MHz SISO only + BT 4.0)	T-Log Number:	T84936
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247, 15.E, RSS-210	Class:	N/A

**Run # 5, Radiated Spurious Emissions, 1-8GHz, BT - RX Mode, Chain A**

Date of Test: 10/25/2011

Test Location: FT Chamber #4


Test Engineer: Rafael Varelas

Config Change: none

**Run # 5a, EUT on Channel 2441MHz - BT - RX Mode, Chain A**

**Spurious Radiated Emissions:**

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	RSS-GEN		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1884.360	38.3	H	54.0	-15.7	AVG	74	1.5	RB 1 MHz;VB 10 Hz;Pk
1882.970	40.3	H	74.0	-33.7	PK	74	1.5	RB 1 MHz;VB 3 MHz;Pk
2500.190	37.6	H	54.0	-16.4	AVG	174	1.0	RB 1 MHz;VB 10 Hz;Pk
2500.720	43.4	H	74.0	-30.6	PK	174	1.0	RB 1 MHz;VB 3 MHz;Pk

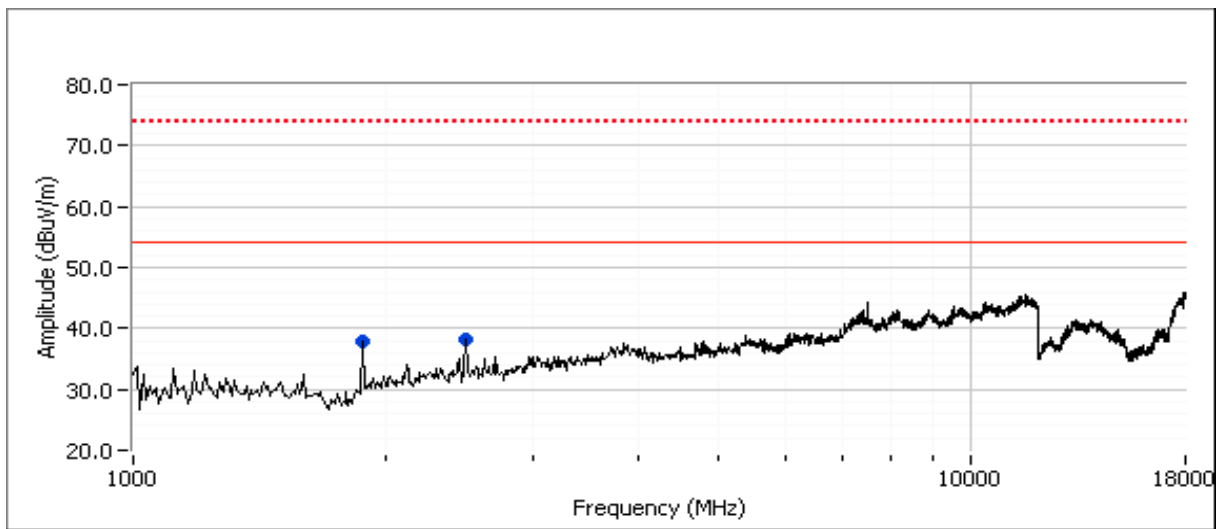

*End of Report*

This page is intentionally blank and marks the last page of this test report.