



Test Certificate

A sample of the following product received on March 20, 2011 and tested on April 26, 2012 complied with the requirements of,

- Subpart B of Part 15 of FCC Rules for Class B digital devices
- Industry Canada Interference Causing Equipment Standard ICES-003 Issue 4, dated February 2004 (Class B)

given the measurement uncertainties detailed in Elliott report R87267.

Broadcom Corporation
Model BCM94330UARTSDB (802.11bgn WLAN + BT combo Card
(2.4GHz, SISO only)

Mark E Hill
Staff Engineer

Broadcom Corporation

Printed Name



Elliott Laboratories is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

EMC Test Report

*Information Technology Equipment
Class B Digital Device*

*FCC Part 15
Industry Canada ICES-003 Issue 4*

*Model: BCM94330UARTSDB (802.11bgn WLAN + BT combo Card
(2.4GHz, SISO only)*

COMPANY: Broadcom Corporation
190 Mathilda Ave.
Sunnyvale, CA 94086

TEST SITE(S): Elliott Laboratories
41039 Boyce Road
Fremont, CA. 94538-2435

REPORT DATE: May 8, 2012

FINAL TEST DATES: April 26, 2012


TOTAL NUMBER OF PAGES: 31

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

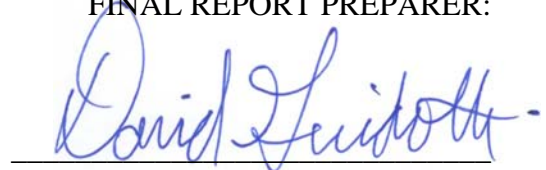

David Guidotti
Senior Technical Writer



Elliott Laboratories is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	05-08-2012	First release	

TABLE OF CONTENTS

REVISION HISTORY	3
TABLE OF CONTENTS	4
SCOPE.....	5
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS	6
CONDUCTED EMISSIONS (MAINS PORT)	6
RADIATED EMISSIONS	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
OTHER EUT DETAILS.....	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	10
EUT OPERATION	10
EMISSIONS TESTING	11
RADIATED AND CONDUCTED EMISSIONS.....	11
RADIATED EMISSIONS CONSIDERATIONS	11
CONDUCTED EMISSIONS CONSIDERATIONS	11
EMISSIONS MEASUREMENT INSTRUMENTATION.....	12
RECEIVER SYSTEM	12
INSTRUMENT CONTROL COMPUTER	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS	12
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	13
INSTRUMENT CALIBRATION.....	13
EMISSIONS TEST PROCEDURES	14
EUT AND CABLE PLACEMENT	14
CONDUCTED EMISSIONS (MAINS)	14
CONDUCTED EMISSIONS (TELECOMMUNICATION PORTS)	14
RADIATED EMISSIONS (SEMI-ANECHOIC TEST ENVIRONMENT)	15
Preliminary Scan.....	15
Final Maximization.....	15
SAMPLE CALCULATIONS	16
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	16
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	16
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	17
APPENDIX B TEST DATA	18
APPENDIX C PRODUCT LABELING REQUIREMENTS.....	28
APPENDIX D USER MANUAL REGULATORY STATEMENTS.....	29
APPENDIX E BASIC AND REFERENCE STANDARDS.....	30
SUBPART B OF PART 15 OF FCC RULES FOR DIGITAL DEVICES.....	30
END OF REPORT	31

SCOPE

Governments and standards organizations around the world have published requirements regarding the electromagnetic compatibility (EMC) of electronic equipment. Testing has been performed on the Broadcom Corporation model BCM94330UARTSDB (802.11bgn WLAN + BT combo Card (2.4GHz, SISO only), pursuant to the following standards.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2011 as Amended
ICES-003, Issue 4	Digital apparatus	2004

All measurements and evaluations have been in accordance with these specifications, test procedures, and measurement guidelines as outlined in Elliott Laboratories test procedures, and in accordance with the standards referenced therein (refer to Appendix E).

OBJECTIVE

The objective of Broadcom Corporation is to verify compliance with FCC requirements for digital devices and Canada's requirements for digital devices;

STATEMENT OF COMPLIANCE

The tested sample of Broadcom Corporation model BCM94330UARTSDB (802.11bgn WLAN + BT combo Card (2.4GHz, SISO only) complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class B	2011 as amended
ICES-003, Issue 4	Class B	2004

As specified in Section 15.101 of FCC Part 15, unintentional radiators shall be authorized prior to the initiation of marketing. Based on the description of the EUT, the following criteria per Section 15.101 of FCC Part 15 were applied to the EUT:

Type of device	Equipment authorization required
Other Class B digital devices & peripherals	Verification

The test results recorded herein are based on a single type test of the Broadcom Corporation model BCM94330UARTSDB (802.11bgn WLAN + BT combo Card (2.4GHz, SISO only) and therefore apply only to the tested sample(s). The sample was selected and prepared by Anne Liang of Broadcom Corporation.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS

The following emissions tests were performed on the Broadcom Corporation model BCM94330UARTSDB (802.11bgn WLAN + BT combo Card (2.4GHz, SISO only). The measurements were extracted from the data recorded during testing and represent the highest amplitude emissions relative to the specification limits. The complete test data is provided in the appendices of this report.

CONDUCTED EMISSIONS (MAINS PORT)

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement	Margin	Status
0.15-30 MHz, 120 V, 60 Hz	FCC § 15.107(a) (Class B)	0.15-0.5 MHz: 66-56 dB μ V QP 56-46 dB μ V Av 0.5-5.0 MHz: 56 dB μ V QP 46 dB μ V Av 5.0-30.0 MHz: 60 dB μ V QP 50 dB μ V Av	45.8dB μ V @ 0.291MHz	-4.7dB	Complied

RADIATED EMISSIONS

Frequency Range	Standard/Section	Requirement	Measurement	Margin	Status
30-1000 MHz Note 1	FCC §15.109(g) Class B	30-230 MHz, 30 dB μ V/m 230-1000 MHz, 37 dB μ V/m (10 m limit)	32.8dB μ V/m @ 480.03MHz	-4.2dB	Complied
Note 1 Testing above 1 GHz against FCC 15.109(a) requirements was not required because the highest frequency generated in the EUT was declared to be less than 108 MHz					

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of $k=2$, which gives a level of confidence of approximately 95%. The levels were found to be below levels of U_{cispr} and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dBuV or dBuA	150 kHz – 30 MHz	± 2.2 dB
Radiated Electric Field	dBuV/m	30-1000 MHz	± 3.6 dB
		1000-40,000 MHz	± 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Broadcom Corporation model BCM94330UARTSDB (802.11bgn WLAN + BT combo Card (2.4GHz, SISO only) is an 802.11bgn (20MHz SISO only) + Bluetooth 4.0 radio module. Since the EUT would be placed on a table top during operation, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is powered from 3.3V from the host system.

The sample was received on March 20, 2011 and tested on April 26, 2012. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Broadcom	BCM94330UA RTSDB	802.11bgn WLAN + BT 4.0, 20MHz SISO only module	81	4324A- BRCM1065

OTHER EUT DETAILS

For radiated emissions, the EUT was installed into a host system.

ENCLOSURE

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for testing (AC conducted emissions):

Company	Model	Description	Serial Number	FCC ID
Dell	E6400	Laptop	-	-
Broadcom	BCM9433EVB	Test Board	-	-
Broadcom	-	Support Board	-	-
-	-	PCMCIA card	-	-
HP	5650	Printer	C64904	-

The following equipment was used as remote support equipment for testing (AC conducted emissions):

Company	Model	Description	Serial Number	FCC ID
Cisco	SD2005	Switch	DNI145303V1	-

The following equipment was used as local support equipment for testing (radiated emissions):

Company	Model	Description	Serial Number	FCC ID
Dell	DCNE	Desktop	F1XFMD1	-
Dell	E198FPF	Monitor	CN-0CN078-72872-7BF-4KGL	-
SIIG	-	Keyboard	AXP1930X2074	-
Logitech	U0026	Mouse	LZ102HU	-
HP	5650	Printer	C64904	-

The following equipment was used as remote support equipment for testing (radiated emissions):

Company	Model	Description	Serial Number	FCC ID
Cisco	SD2005	Switch	DNI145303V1	-

EUT INTERFACE PORTS

The I/O cabling configuration during testing (AC conducted emissions) was as follows:

Port		Description	Cable(s)	
From	To		Shielded/Unshielded	Length(m)
Main	Main Antenna	-	-	-
AUX	Aux Antenna	-	-	-
EUT board	Test Board	-	-	-
Test Board	Support Board	-	-	-
Support Board	PCMCIA card	-	-	-
PCMCIA card	Laptop	-	-	-
AC Power	AC Mains	2Wire	Unshielded	1.5
Host – Ethernet	Remote Switch	CAT5	Unshielded	10

The I/O cabling configuration during testing (radiated emissions) was as follows:

Port		Description	Cable(s)	
From	To		Shielded/Unshielded	Length(m)
Host – VGA	Monitor	Multiconductor	Shielded	1.5
Host – USB	Printer	Multiconductor	Shielded	1.5
Host – Ethernet	Remote Switch	CAT5	Unshielded	10
Host – USB	Keyboard	Multiconductor	Shielded	1.5
Host – USB	Mouse	Multiconductor	Shielded	1.5

EUT OPERATION

During emissions testing the EUT was configured for normal WIFI operation.

EMISSIONS TESTING**RADIATED AND CONDUCTED EMISSIONS**

Final test measurements were taken at the Elliott Laboratories Anechoic Chambers listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and Industry Canada.

Site	Registration Numbers			Location
	VCCI	FCC	Canada	
Chamber 5	R-1685 G-56 C-1797 T-1641	211948	IC 2845B-5	41039 Boyce Road Fremont, CA 94538-2435

RADIATED EMISSIONS CONSIDERATIONS

Radiated emissions measurements were made with the EUT powered from a supply voltage within the expected tolerances of each nominal operating voltage/frequency for each geographical regions covered by the scope of the standards referenced in this report.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions tests are performed in conformance with ANSI C63.4, and Subpart B of Part 15 of FCC Rules for Digital Devices.

Mains port measurements are made with the EUT connected to the public power network through nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

Telecommunication port measurements are made with the unshielded network cable connected through an impedance stabilization network (ISN) appropriate to the type of cable employed. Where no suitable ISN is available measurements are made using a capacitive voltage probe (CVP) and a current probe. If shielded cables are specified for the port under test the measurement is made of the noise voltage on the shield of the cable via a 100 ohm resistor.

EMISSIONS MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

Measurements are converted to the field strength at an antenna or voltage developed at the LISN (or ISN) measurement port, which is then compared directly with the appropriate specification limit under software control of the test receivers and spectrum analyzers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted emission measurements utilize a fifty micro-Henry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250-uH CISPR adapter. This network provides for calibrated radio-frequency noise measurements by the design of the internal low-pass and high-pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high-amplitude transient events.

ANTENNAS

A bilog antenna or combination of biconical and log periodic antennas are used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas may be used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, horn antennas are used. The antenna calibration factors are included in site factors that are programmed into the test receivers or data collection software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4 and CISPR 22 specify that the test height above ground for table-mounted devices shall be 80 centimeters. Floor-mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12-mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. An appendix of this report contains the list of test equipment used and calibration information.

EMISSIONS TEST PROCEDURES

EUT AND CABLE PLACEMENT

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4 and CISPR 22, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS (MAINS)

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

CONDUCTED EMISSIONS (TELECOMMUNICATION PORTS)

Conducted emissions voltages are measured at a point 80 cm from the EUT. If conducted emission currents are measured, the current probe is located 70 cm from the EUT. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

RADIATED EMISSIONS (SEMI-ANECHOIC TEST ENVIRONMENT)

Radiated emissions measurements in a semi-anechoic environment are performed in two phases (preliminary scan and final maximization).

Preliminary Scan

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulations specified on page 1. One or more of these are performed with the antenna polarized vertically and one or more of these are performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other methods used during the preliminary scan for EUT emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final Maximization

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

For measurements above 1 GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3 dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

When Testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5 m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5 m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5 m and below.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

- R_r = Receiver Reading in dBuV
- S = Specification Limit in dBuV
- M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

- F_d = Distance Factor in dB
- D_m = Measurement Distance in meters
- D_s = Specification Distance in meters

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

- R_r = Receiver Reading in dBuV/m
- F_d = Distance Factor in dB
- R_c = Corrected Reading in dBuV/m
- L_s = Specification Limit in dBuV/m
- M = Margin in dB Relative to Spec

Appendix A Test Equipment Calibration Data**Conducted Emissions - AC Power Ports, 26-Apr-12**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1594	5/17/2012
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2- 09	2000	10/18/2012
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2- 09	2001	2/15/2013
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESIB40 (1088.7490.40)	2493	12/9/2012

Radiated Emissions, 30 - 1,000 MHz, 26-Apr-12

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	5/28/2012
Com-Power Corp.	Preamplifier, 30-1000 MHz	PA-103A	2359	2/14/2013
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESIB40 (1088.7490.40)	2493	12/9/2012

Appendix B Test Data

T86945 Pages 19 - 27



EMC Test Data

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Emissions Standard(s):	EN 300 328 / FCC	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Broadcom Corporation

Model

BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)

Date of Last Test: 5/7/2012

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
		Account Manager:	Sheareen Jacobs
Contact:	Anne Liang (Sachin Sawalapurkar)		
Standard:	EN 300 328 / FCC	Class:	-

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 4/26/2012	Config. Used: 1
Test Engineer: Mehran Birgani	Config Change: Laptop was used for testing (see below)
Test Location: Fremont Chamber #5	Host Unit Voltage Refer to each run

General Test Configuration

The host system was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:

Temperature:	15-18 °C
Rel. Humidity:	35-40 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 230V/50Hz	Class B	Pass	46.3 dBµV @ 0.310 MHz (-3.7 dB)
2	CE, AC Power, 120V/60Hz	Class B	Pass	45.8 dBµV @ 0.291 MHz (-4.7 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing



Deviations From The Standard

No deviations were made from the requirements of the standard.

Laptop: Dell	Model: Latitude E6400	Service Tag: 9XLB3M1
--------------	-----------------------	----------------------

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Standard:	EN 300 328 / FCC	Class:	-

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

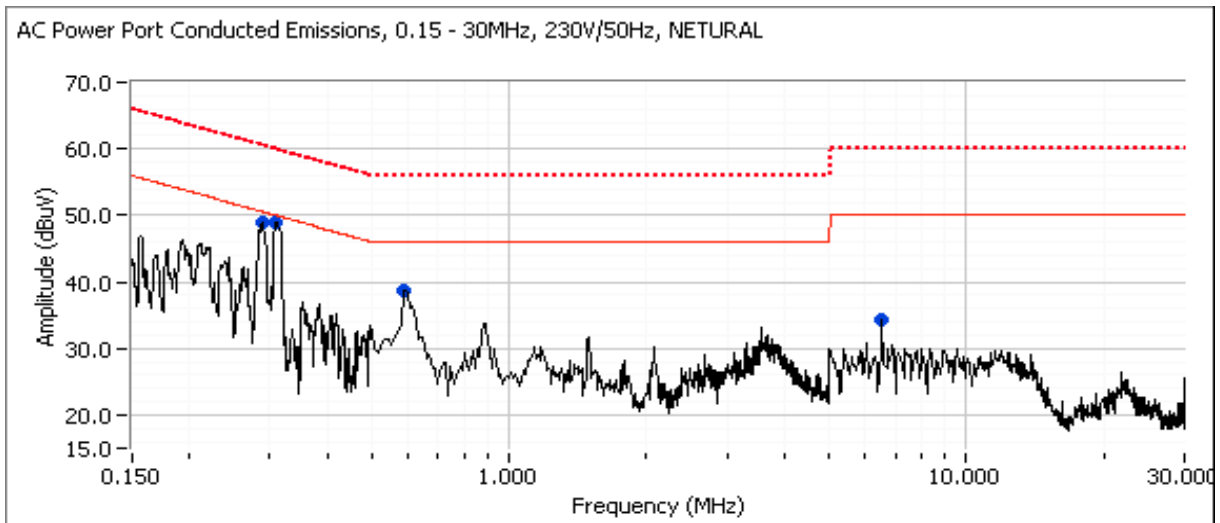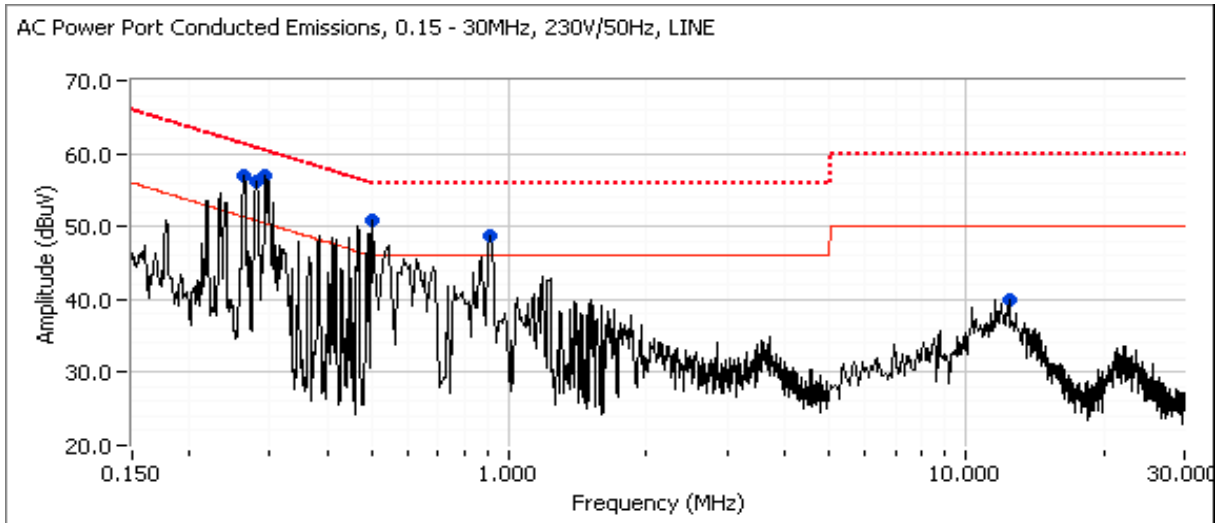

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Standard:	EN 300 328 / FCC	Class:	-

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)



Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.294	56.9	Line	50.4	6.5	Peak	
0.264	57.0	Line	51.3	5.7	Peak	
0.281	56.2	Line	50.8	5.4	Peak	
0.500	50.8	Line	46.0	4.8	Peak	
0.906	48.8	Line	46.0	2.8	Peak	
0.310	48.9	Neutral	50.0	-1.1	Peak	
0.289	49.0	Neutral	50.6	-1.6	Peak	
0.590	38.7	Neutral	46.0	-7.3	Peak	
12.415	39.9	Line	50.0	-10.1	Peak	
6.553	34.4	Neutral	50.0	-15.6	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.310	46.3	Neutral	50.0	-3.7	AVG	AVG (0.10s)
0.294	45.5	Line	50.4	-4.9	AVG	AVG (0.10s)
0.294	53.4	Line	60.4	-7.0	QP	QP (1.00s)
0.289	42.3	Neutral	50.6	-8.3	AVG	AVG (0.10s)
0.280	51.6	Line	60.8	-9.2	QP	QP (1.00s)
0.264	51.8	Line	61.3	-9.5	QP	QP (1.00s)
0.264	41.0	Line	51.3	-10.3	AVG	AVG (0.10s)
0.310	48.1	Neutral	60.0	-11.9	QP	QP (1.00s)
0.590	33.7	Neutral	46.0	-12.3	AVG	AVG (0.10s)
0.500	42.5	Line	56.0	-13.5	QP	QP (1.00s)
0.289	46.4	Neutral	60.6	-14.2	QP	QP (1.00s)
0.280	34.3	Line	50.8	-16.5	AVG	AVG (0.10s)
0.500	29.2	Line	46.0	-16.8	AVG	AVG (0.10s)
0.906	28.2	Line	46.0	-17.8	AVG	AVG (0.10s)
0.590	37.6	Neutral	56.0	-18.4	QP	QP (1.00s)
0.906	37.4	Line	56.0	-18.6	QP	QP (1.00s)
12.415	21.4	Line	50.0	-28.6	AVG	AVG (0.10s)
12.415	31.0	Line	60.0	-29.0	QP	QP (1.00s)
6.553	16.9	Neutral	50.0	-33.1	AVG	AVG (0.10s)
6.553	24.0	Neutral	60.0	-36.0	QP	QP (1.00s)

Client: Broadcom Corporation	Job Number: J86739
Model: BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number: T86945
	Account Manager: Sheareen Jacobs
Contact: Anne Liang (Sachin Sawalapurkar)	
Standard: EN 300 328 / FCC	Class: -

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

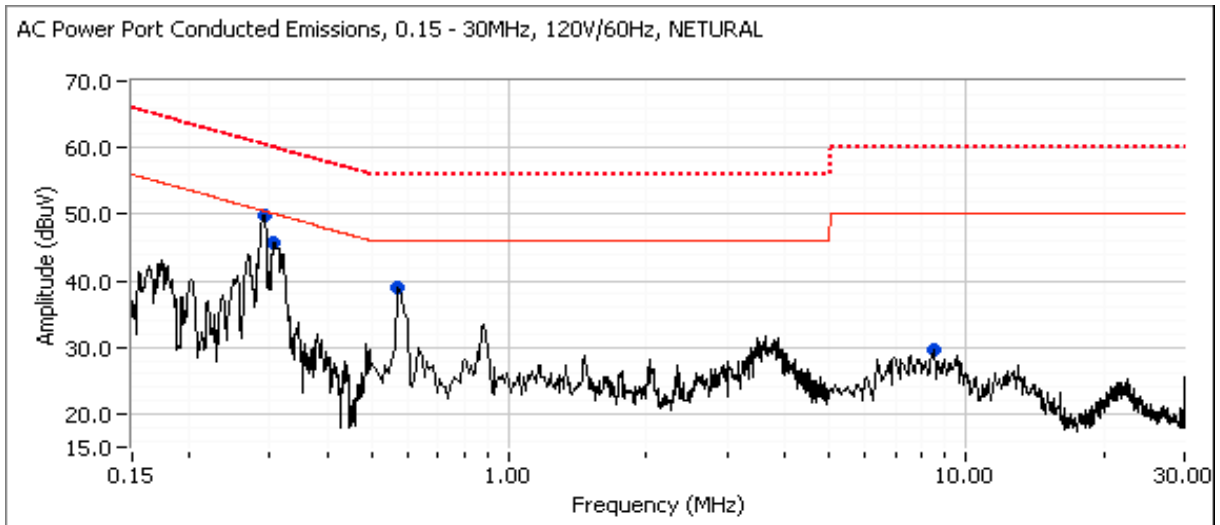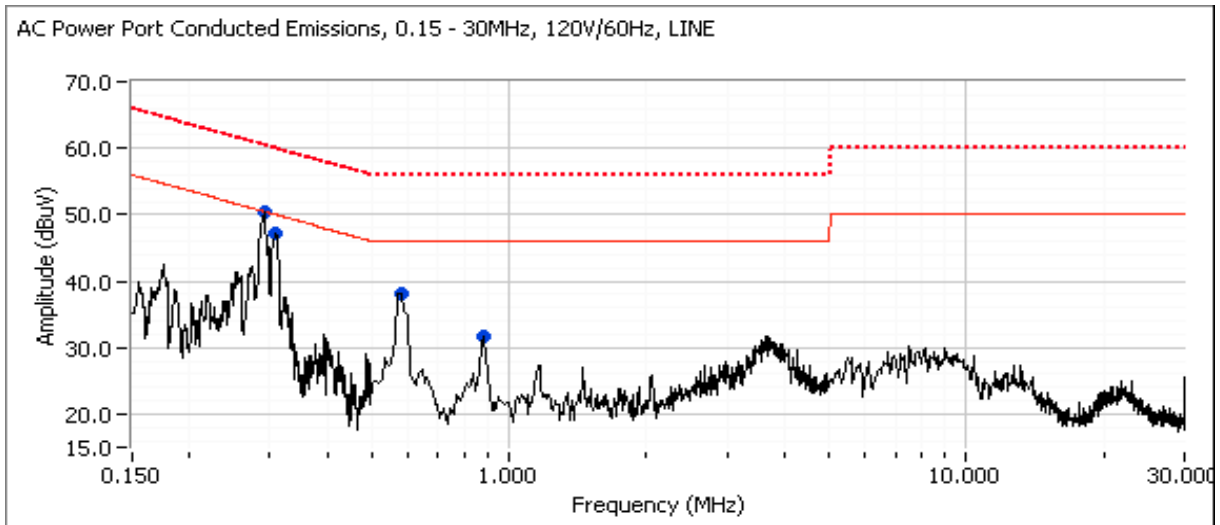

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Standard:	EN 300 328 / FCC	Class:	-

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.292	50.3	Line	50.5	-0.2	Peak	
0.291	49.7	Neutral	50.5	-0.8	Peak	
0.309	47.2	Line	50.0	-2.8	Peak	
0.306	45.7	Neutral	50.1	-4.4	Peak	
0.572	39.1	Neutral	46.0	-6.9	Peak	
0.581	38.2	Line	46.0	-7.8	Peak	
0.879	31.8	Line	46.0	-14.2	Peak	
8.457	29.5	Neutral	50.0	-20.5	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.291	45.8	Neutral	50.5	-4.7	AVG	AVG (0.10s)
0.292	44.0	Line	50.5	-6.5	AVG	AVG (0.10s)
0.306	43.3	Neutral	50.1	-6.8	AVG	AVG (0.10s)
0.309	41.4	Line	50.0	-8.6	AVG	AVG (0.10s)
0.291	49.0	Neutral	60.5	-11.5	QP	QP (1.00s)
0.292	48.0	Line	60.5	-12.5	QP	QP (1.00s)
0.572	32.4	Neutral	46.0	-13.6	AVG	AVG (0.10s)
0.306	45.4	Neutral	60.1	-14.7	QP	QP (1.00s)
0.309	45.2	Line	60.0	-14.8	QP	QP (1.00s)
0.581	30.4	Line	46.0	-15.6	AVG	AVG (0.10s)
0.572	36.8	Neutral	56.0	-19.2	QP	QP (1.00s)
0.879	26.7	Line	46.0	-19.3	AVG	AVG (0.10s)
0.581	36.1	Line	56.0	-19.9	QP	QP (1.00s)
0.879	30.4	Line	56.0	-25.6	QP	QP (1.00s)
8.457	18.9	Neutral	50.0	-31.1	AVG	AVG (0.10s)
8.457	24.5	Neutral	60.0	-35.5	QP	QP (1.00s)

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Standard:	EN 300 328 / FCC	Class:	-

Radiated Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 4/26/2012
 Test Engineer: Mehran Birgani
 Test Location: FT Chamber #5

Config. Used: 1
 Config Change: -
 Host Unit Voltage 230V/50Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 17-20 °C
 Rel. Humidity: 30-35 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	Radiated Emissions 30 - 1000 MHz, Maximized	Class B	Pass	32.8 dBµV/m @ 480.03 MHz (-4.2 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing


Deviations From The Standard

No deviations were made from the requirements of the standard.

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	5	10	-6.0

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Standard:	EN 300 328 / FCC	Class:	-

Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

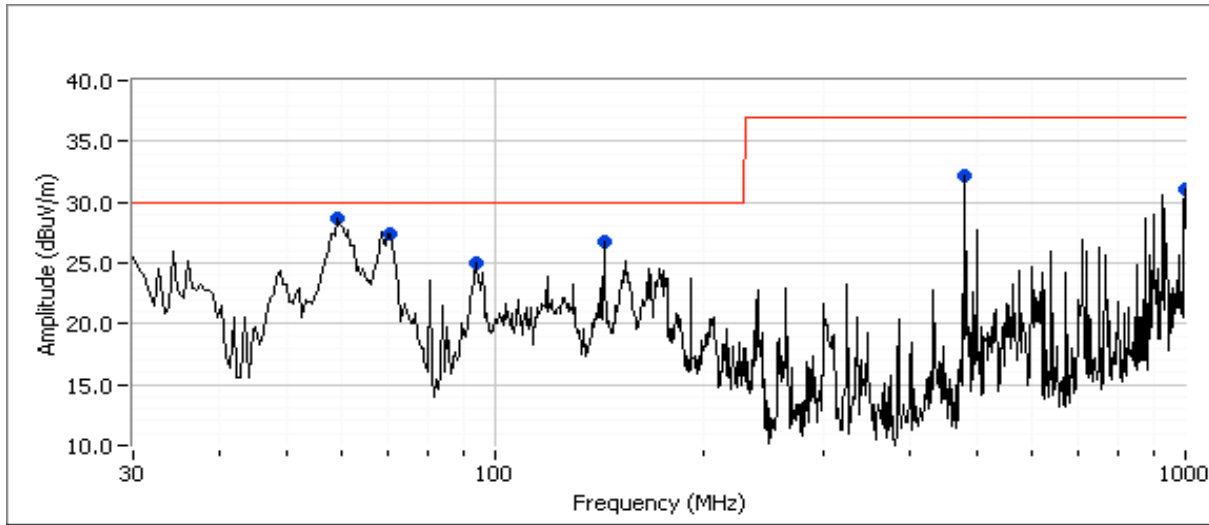

Preliminary peak readings captured during pre-scan

Frequency MHz	Level dBµV/m	Pol V/H	Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
59.634	28.6	V	30.0	-1.4	Peak	346	1.0	
70.399	27.4	V	30.0	-2.6	Peak	107	2.5	
145.070	26.8	H	30.0	-3.2	Peak	83	3.5	
480.030	32.2	V	37.0	-4.8	Peak	314	3.5	
95.394	25.0	H	30.0	-5.0	Peak	78	4.0	
999.689	31.0	V	37.0	-6.0	Peak	349	1.0	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency MHz	Level dBµV/m	Pol V/H	Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
480.030	31.8	V	37.0	-5.2	QP	335	1.7	QP (1.00s)
59.634	24.3	V	30.0	-5.7	QP	360	1.0	QP (1.00s)
70.399	22.2	V	30.0	-7.8	QP	296	1.0	QP (1.00s)
95.394	20.3	H	30.0	-9.7	QP	80	4.0	QP (1.00s)
999.689	25.9	V	37.0	-11.1	QP	360	1.0	QP (1.00s)
145.070	12.9	H	30.0	-17.1	QP	86	3.2	QP (1.00s)

Client:	Broadcom Corporation	Job Number:	J86739
Model:	BCM94330UARTSDB (802.11bgn WLAN + BT 4.0, 20MHz SISO only)	T-Log Number:	T86945
Contact:	Anne Liang (Sachin Sawalapurkar)	Account Manager:	Sheareen Jacobs
Standard:	EN 300 328 / FCC	Class:	-

Run #2: Maximized Readings From Run #1

Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency	Level	Pol	Class B		Detector	Azimuth	Height	Comments
			Limit	Margin				
MHz	dB μ V/m	V/H			Pk/QP/Avg	degrees	meters	
480.030	32.8	V	37.0	-4.2	QP	339	1.4	QP (1.00s)
59.634	24.3	V	30.0	-5.7	QP	360	1.0	QP (1.00s)
70.399	22.2	V	30.0	-7.8	QP	296	1.0	QP (1.00s)
95.394	20.3	H	30.0	-9.7	QP	80	4.0	QP (1.00s)
999.689	25.9	V	37.0	-11.1	QP	360	1.0	QP (1.00s)
145.070	12.9	H	30.0	-17.1	QP	86	3.2	QP (1.00s)

Appendix C Product Labeling Requirements

The following information has been provided to clarify notification, equipment labeling requirements and information that must be included in the operator's manual. These requirements may be found in the standards/regulations listed in the scope of this report.

Label Location

The required label(s) must be in a *conspicuous location* on the product, which is defined as any location readily visible to the user of the device without the use of tools.

Label Attachment

The label(s) must be *permanently attached* to the product, which is defined as attached such that it can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

Industry Canada

For ICES-003 (digital apparatus), the product must be labeled with a notice indicating compliance e.g.

This Class B digital apparatus complies with Canadian ICES-003
Cet appareil numérique de la classe B est conforme à la norme NMB-003
du Canada

If there is limited space on the product then the text may be placed in the manual.

Appendix D User Manual Regulatory Statements

Where special accessories, such as shielded cables, are required in order to meet the emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

A requirement by FCC regulations, and recommended for all regulatory markets, is a cautionary statement to the end user that changes or modifications to the device not expressly approved by you, the manufacturer, could void their right to operate the equipment.

United States Class B Manual Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: Additional information about corrective measures may also be provided to the user at the company's option.

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine and stapled manual would not meet this condition.

Appendix E Basic and Reference Standards

Subpart B of Part 15 of FCC Rules for digital devices.

FCC Part 15 Subpart B references the use of ANSI C63.4–2003: “*Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz*” for the purposes of evaluating the radiated and conducted emissions from digital devices.

End of Report

This page is intentionally blank and marks the last page of this test report.