

System Check_Body_2450MHz_120904

DUT: D2450V2-SN:736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_120904 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 52.3$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.4, 7.4, 7.4); Calibrated: 2011/11/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 14.1 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.3 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 12.1 mW/g; SAR(10 g) = 5.44 mW/g

Maximum value of SAR (measured) = 13.7 mW/g

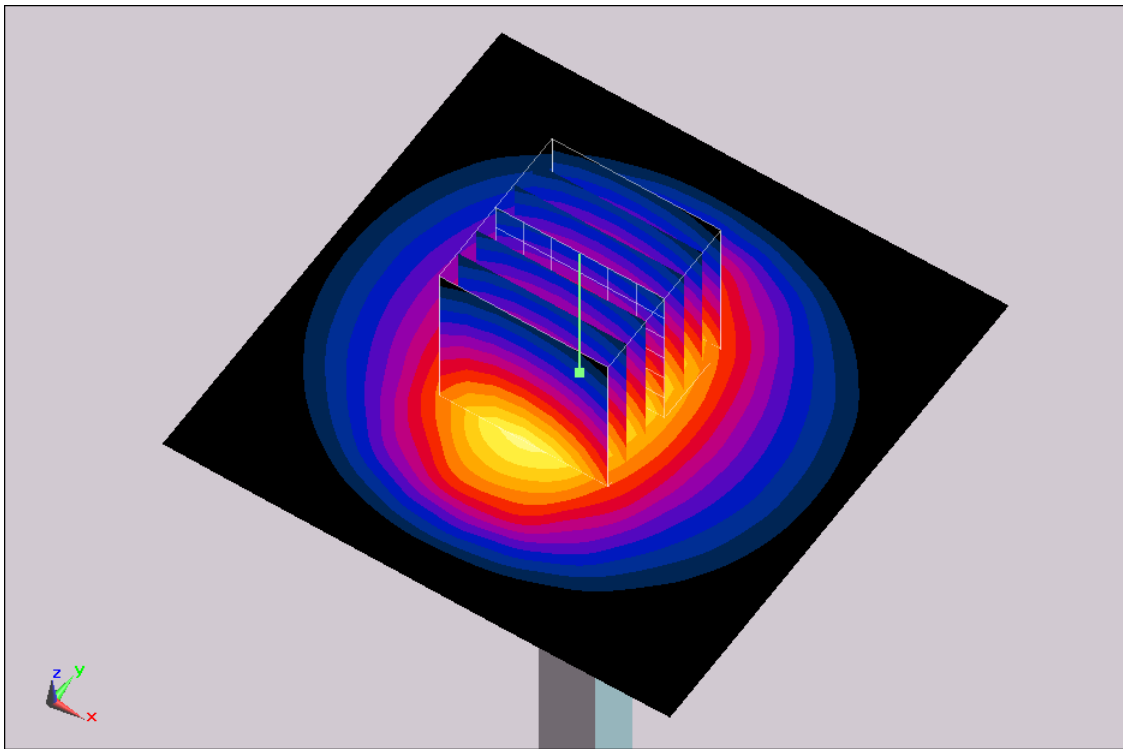

0 dB = 13.7mW/g

System Check_Body_5200MHz_120906

DUT: D5GHzV2-SN:1006

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL_5G_120906 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/11/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 120; Postprocessing SW: SEMCAD, V1.8 Build 186

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 27.8 mW/g


Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 71.5 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 42.2 W/kg

SAR(1 g) = 17 mW/g; SAR(10 g) = 5.72 mW/g

Maximum value of SAR (measured) = 25.6 mW/g

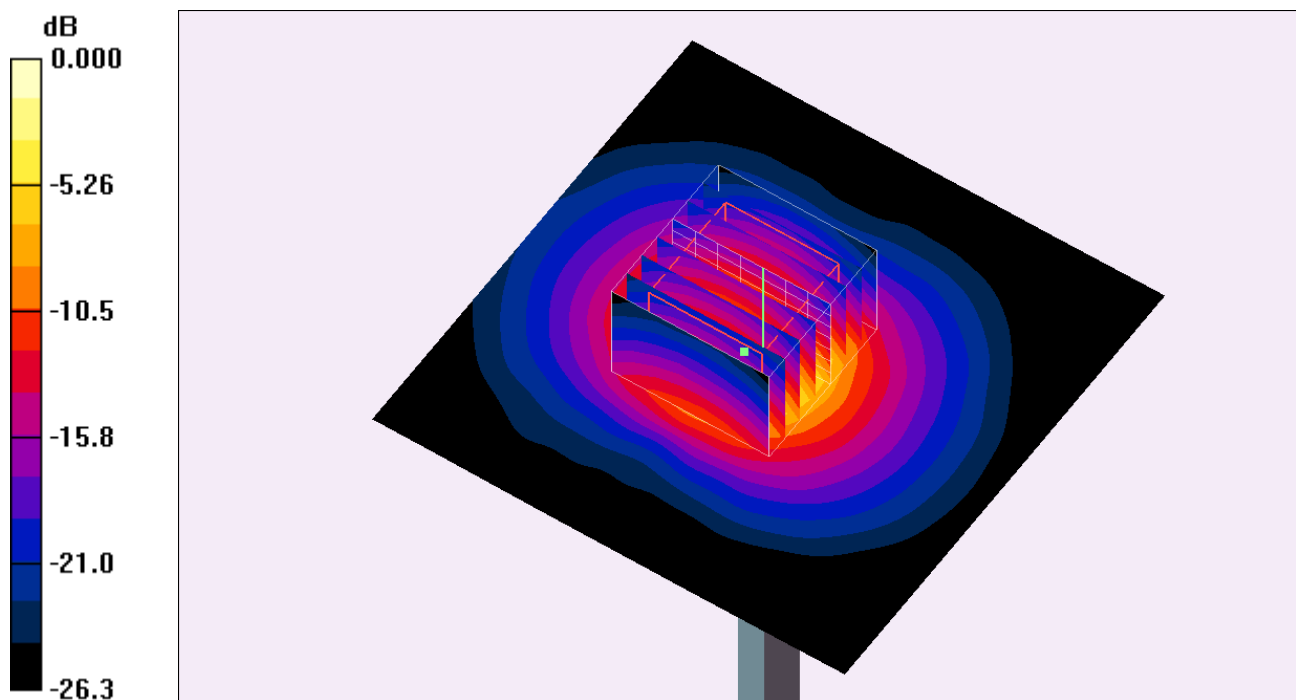

0 dB = 25.6mW/g

System Check_Body_5500MHz_120906

DUT: D5GHzV2-SN:1006

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL_5G_120906 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.72$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.9, 3.9, 3.9); Calibrated: 2011/11/16
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 29 mW/g



Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 78 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 54.6 W/kg

SAR(1 g) = 18.2 mW/g; SAR(10 g) = 4.37 mW/g

Maximum value of SAR (measured) = 26 mW/g

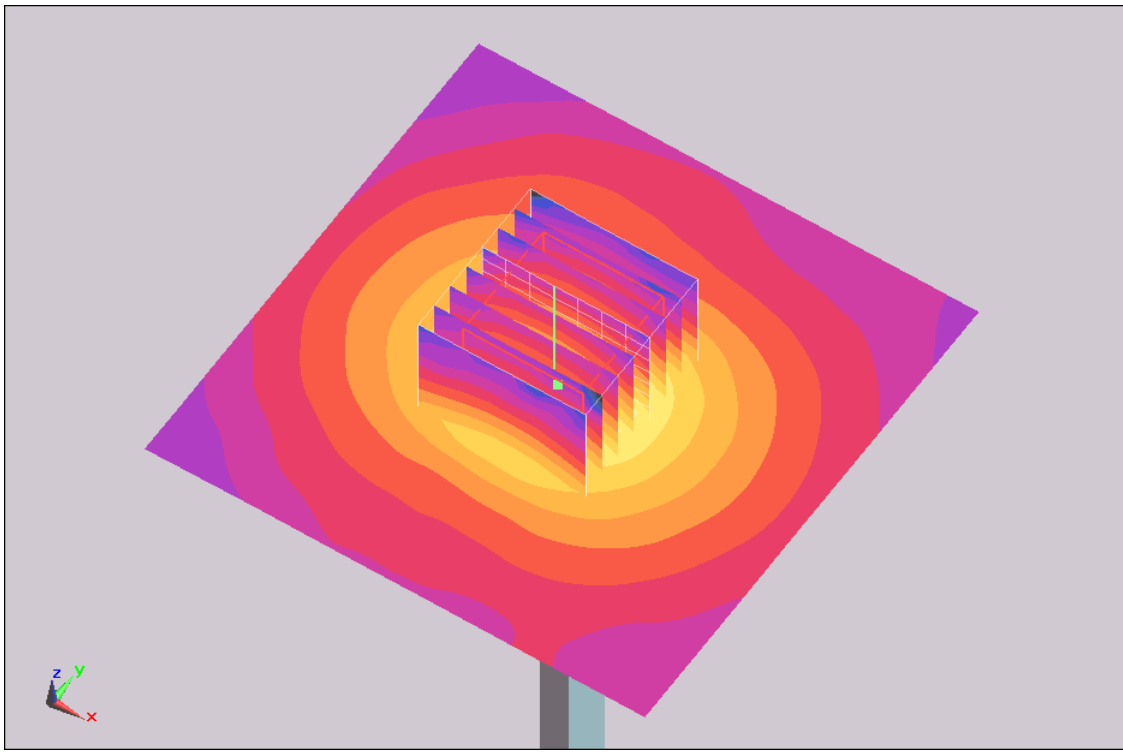

0 dB = 26mW/g

System Check_Body_5500MHz_120908

DUT: D5GHzV2-SN:1006

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL_5G_120908 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.506$ mho/m; $\epsilon_r = 47.018$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.81, 3.81, 3.81); Calibrated: 2012/6/21;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 33.5 W/kg

Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm
Reference Value = 81.606 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 72.558 mW/g
SAR(1 g) = 19.4 mW/g; SAR(10 g) = 5.4 mW/g
Maximum value of SAR (measured) = 33.1 W/kg

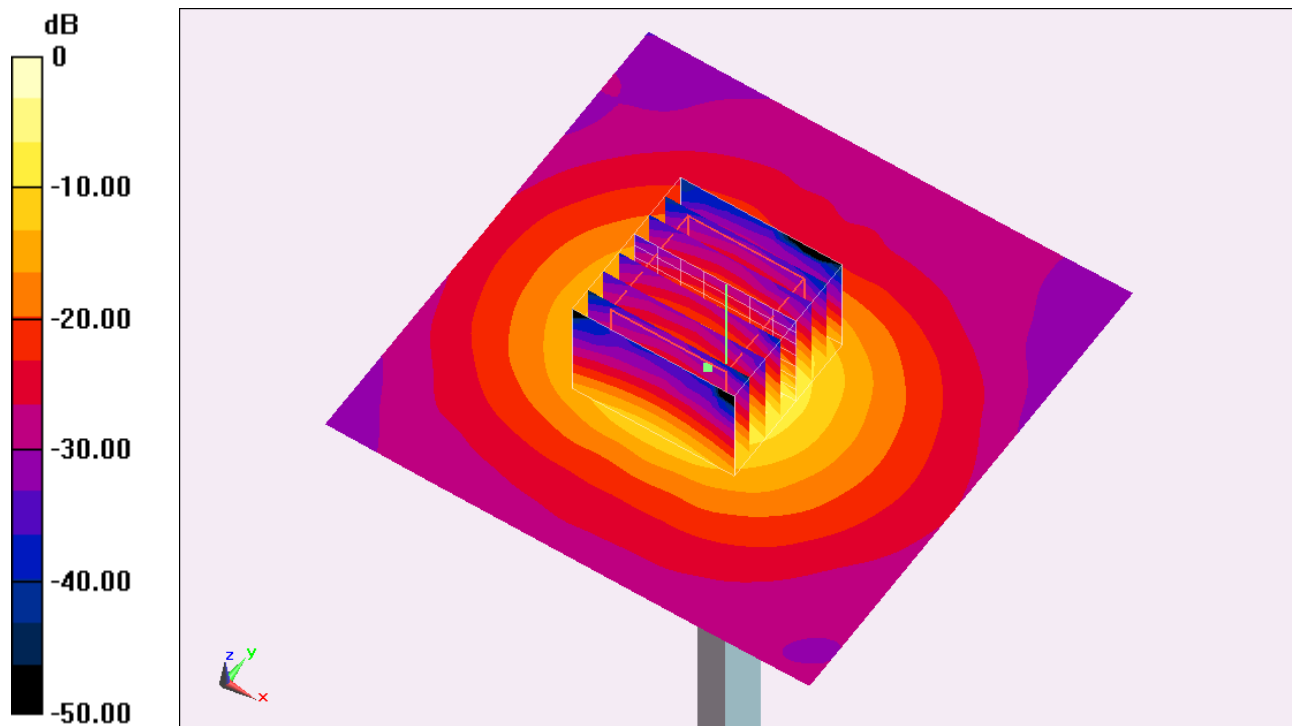

0 dB = 33.1 W/kg = 30.40 dB W/kg

System Check_Body_5800MHz_120908

DUT: D5GHzV2-SN:1006

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL_5G_120908 Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.981 \text{ mho/m}$; $\epsilon_r = 46.515$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.89, 3.89, 3.89); Calibrated: 2012/6/21;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10 mm, dy=10 mm
 Maximum value of SAR (interpolated) = 32.3 W/kg

Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm
 Reference Value = 79.023 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 72.182 mW/g
SAR(1 g) = 18.5 mW/g; SAR(10 g) = 5.15 mW/g
 Maximum value of SAR (measured) = 31.8 W/kg

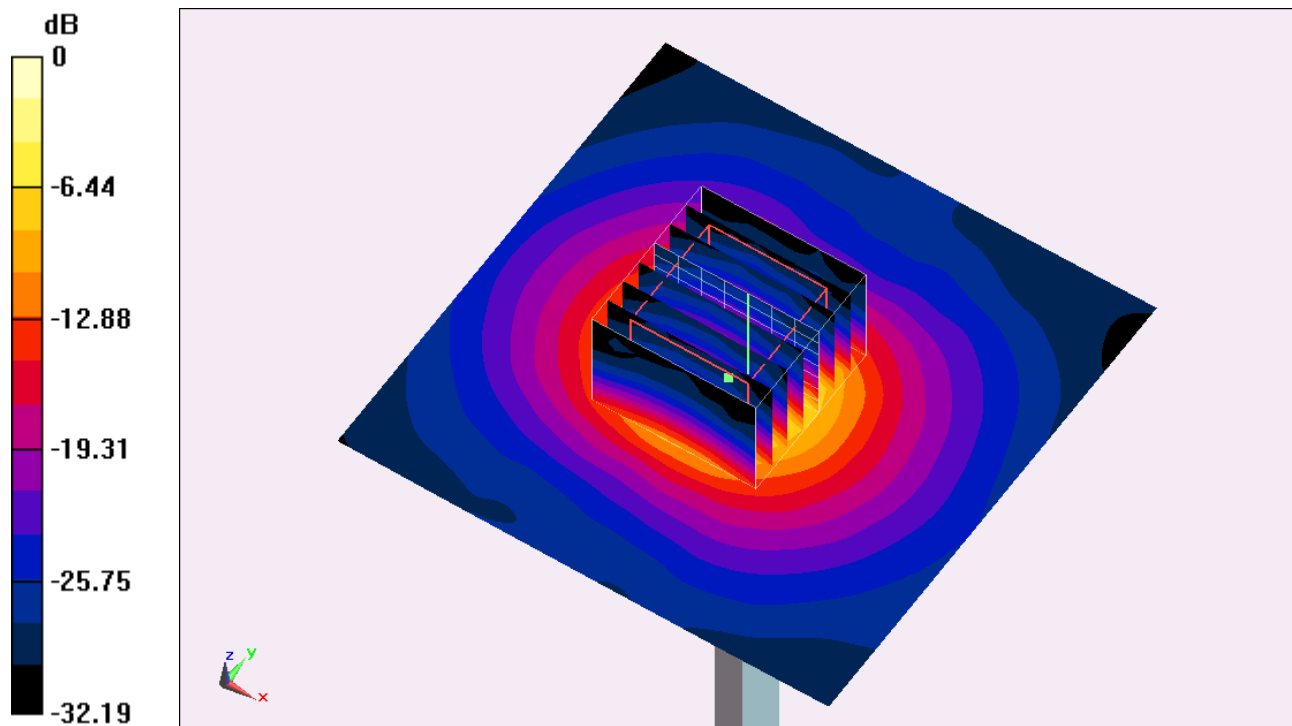

0 dB = 31.8 W/kg = 30.05 dB W/kg