


FCC SAR Test Report

APPLICANT : Broadcom Corporation
EQUIPMENT : 802.11 a/b/g/n/ac WLAN+ Bluetooth PCI-E Mini Card
BRAND NAME : Broadcom Corporation
MODEL NAME : BCM94352Z
FCC ID : QDS-BRCM1076
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P20T, Regulatory Type: P20T003) during test.

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

- 1. Statement of Compliance 4
- 2. Administration Data 5
- 3. Guidance Standard 5
- 4. Equipment Under Test (EUT) 6
 - 4.1 General Information 6
 - 4.2 Maximum Tune-up Limit..... 7
- 5. RF Exposure Limits..... 9
 - 5.1 Uncontrolled Environment..... 9
 - 5.2 Controlled Environment..... 9
- 6. Specific Absorption Rate (SAR).....10
 - 6.1 Introduction10
 - 6.2 SAR Definition.....10
- 7. System Description and Setup11
- 8. Measurement Procedures12
 - 8.1 Spatial Peak SAR Evaluation.....12
 - 8.2 Power Reference Measurement.....13
 - 8.3 Area Scan13
 - 8.4 Zoom Scan.....14
 - 8.5 Volume Scan Procedures.....14
 - 8.6 Power Drift Monitoring.....14
- 9. Test Equipment List15
- 10. System Verification16
 - 10.1 Tissue Verification16
 - 10.2 System Performance Check Results.....17
- 11. RF Exposure Positions17
 - 11.1 SAR Testing for Tablet17
- 12. Conducted RF Output Power (Unit: dBm).....18
- 13. Bluetooth Exclusions Applied28
- 14. Antenna Location29
- 15. SAR Test Results32
 - 15.1 Body SAR32
 - 15.2 Repeated SAR Measurement36
- 16. Simultaneous Transmission Analysis.....37
 - 16.1 Body Exposure Conditions.....38
 - 16.2 SPLSR Evaluation and Analysis.....39
- 17. Uncertainty Assessment40
- 18. References.....43
- Appendix A. Plots of System Performance Check
- Appendix B. Plots of High SAR Measurement
- Appendix C. DASY Calibration Certificate
- Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Broadcom Corporation, 802.11 a/b/g/n/ac WLAN+ Bluetooth PCI-E Mini Card, BCM94352Z**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
DTS	2.4GHz WLAN	0.55	1.24
	5.8GHz WLAN	1.17	
NII	5.2GHz WLAN	0.99	1.47
	5.3GHz WLAN	1.09	
	5.5GHz WLAN	1.19	
Date of Testing:		2015/03/19 ~ 2015/03/27	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Broadcom Corporation
Address	190 Mathilda Place, Sunnyvale, CA 94086

Manufacturer	
Company Name	Broadcom Corporation
Address	190 Mathilda Place, Sunnyvale, CA 94086

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01



4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	802.11 a/b/g/n/ac WLAN+ Bluetooth PCI-E Mini Card
Brand Name	Broadcom Corporation
Model Name	BCM94352Z
FCC ID	QDS-BRCM1076
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 • Bluetooth v3.0+EDR • Bluetooth v4.0-LE
EUT Stage	Identical Prototype
Remark:	
1. This host, the display screen can be rotated 360 degree and lay down on the back surface become a Tablet computer, RF Exposure evaluation was performed on the two configuration of Tablet mode and NB mode.	
2. Select highest gain WNC antenna as the main testing, Acon antenna will verify worse case found in WNC antenna.	

Host Information & Antenna Information							
Host Name	Portable Computer						
Brand Name	DELL						
Model Name	P20T						
Regulatory Type	P20T003						
WNC Main	Ant. Type	PIFA		WNC Aux	Ant. Type	PIFA	
	Model No.	81EAAX15.G01			Model No.	81EAAX15.G01	
	Peak Gain (dBi)				Peak Gain (dBi)		
	2400~2483.5MHz	NB: 1.95 dBi Tablet: -0.17 dBi			2400~2483.5MHz	NB: -0.39 dBi Tablet: 2.77 dBi	
	5150~5250MHz	NB: -0.21 dBi Tablet: -0.44 dBi			5150~5250MHz	NB: -1.57 dBi Tablet: -2.00 dBi	
	5250~5350MHz	NB: -0.17 dBi Tablet: -0.75 dBi			5250~5350MHz	NB: -2.37 dBi Tablet: -1.87 dBi	
	5470~5725MHz	NB: -0.06 dBi Tablet: 0.61 dBi			5470~5725MHz	NB: -2.81 dBi Tablet: -1.55 dBi	
	5725~5850MHz	NB: 0.55 dBi Tablet: -2.72 dBi			5725~5850MHz	NB: -2.81 dBi Tablet: -1.59 dBi	
Acon Main	Ant. Type	PIFA		Acon Aux	Ant. Type	PIFA	
	Model No.	APP6P-701144			Model No.	APP6P-701144	
	Peak Gain (dBi)				Peak Gain (dBi)		
	2400~2483.5MHz	NB: 1.25 dBi Tablet: 0.17 dBi			2400~2483.5MHz	NB: 1.16 dBi Tablet: -0.34 dBi	
	5150~5250MHz	NB: -1.24 dBi Tablet: -0.92 dBi			5150~5250MHz	NB: -3.49 dBi Tablet: -4.52 dBi	
	5250~5350MHz	NB: -1.14 dBi Tablet: -0.92 dBi			5250~5350MHz	NB: -1.86 dBi Tablet: -3.19 dBi	
	5470~5725MHz	NB: -0.46 dBi Tablet: -1.88 dBi			5470~5725MHz	NB: -1.98 dBi Tablet: -1.88 dBi	
	5725~5850MHz	NB: -0.49 dBi Tablet: -0.77 dBi			5725~5850MHz	NB: -1.98 dBi Tablet: -3.38 dBi	



4.2 Maximum Tune-up Limit

Mode		Average Power (dBm)
Bluetooth v3.0	1Mbps	1.5
	2Mbps	1.5
	3Mbps	1.5
Bluetooth v4.0		1.5

Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)											
		WLAN Antenna A				WLAN Antenna B				WLAN Antenna A+B			
		11b	11g	HT20	HT40	11b	11g	HT20	HT40	11b	11g	HT20	HT40
2.4GHz Band	2412	16	16	16		16	16	16		19	19	19	
	2422				13.5				13.5				13
	2437	16	16	16	16	16	16	16	16	19	19	19	19
	2452				12				12				14
	2462	16	16	16		16	16	16		19	19	19	

Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)																	
		Antenna A						Antenna B						Antenna A+B					
		11a	HT20	HT40	VHT20	VHT40	VHT80	11a	HT20	HT40	VHT20	VHT40	VHT80	11a	HT20	HT40	VHT20	VHT40	VHT80
5.2GHz Band	5180	14	14		14			14	14		14				15.5		15.5		
	5190			14		14				14		14				16.5		16.5	
	5200	14	14		14			14	14		14				15.5		15.5		
	5210												14						16.5
	5220	14	14		14			14	14		14				15.5		15.5		
	5230			14		14				14		14				16.5		16.5	
	5240	14	14		14			14	14		14				15.5		15.5		
5.3GHz Band	5260	14	14		14			14	14		14				17		17		
	5270			14		14				14		14				17		17	
	5280	14	14		14			14	14		14				17		17		
	5290												14						15.5
	5300	14	14		14			14	14		14				17		17		
	5310			14		14				14		14				17		17	
5320	14	14		14			14	14		14				17		17			



Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)																	
		Antenna A						Antenna B						Antenna A+B					
		11a	HT20	HT40	VHT20	VHT40	VHT80	11a	HT20	HT40	VHT20	VHT40	VHT80	11a	HT20	HT40	VHT20	VHT40	VHT80
5.5GHz Band	5500	16	16		16			16	16		16				19		19		
	5510			15		15				15		15				17		17	
	5520	16	16		16			16	16		16				19		19		
	5530						15						15						16.5
	5540	16	16		16			16	16		16				19		19		
	5550			16		16				16		16				19		19	
	5560	16	16		16			16	16		16				19		19		
	5580	16	16		16			16	16		16				19		19		
	5660	16	16		16			16	16		16				19		19		
	5670			16		16				16		16				19		19	
	5680	16	16		16			16	16		16				19		19		
	5690						16						16						19
	5700	16	16		16			16	16		16				18.5		18.5		
	5710			16		16				16		16				19		19	
5720	16	16		16			16	16		16				19		19			
5.8GHz Band	5745	18	18		18			18	18		18				21		21		
	5755			18		18				18		18				17		17	
	5765	18	18		18			18	18		18				21		21		
	5775						17.5						17.5						16.5
	5785	18	18		18			18	18		18				21		21		
	5795			18		18				18		18				21		21	
	5805	18	18		18			18	18		18				21		21		
	5825	18	18		18			18	18		18				21		21		



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

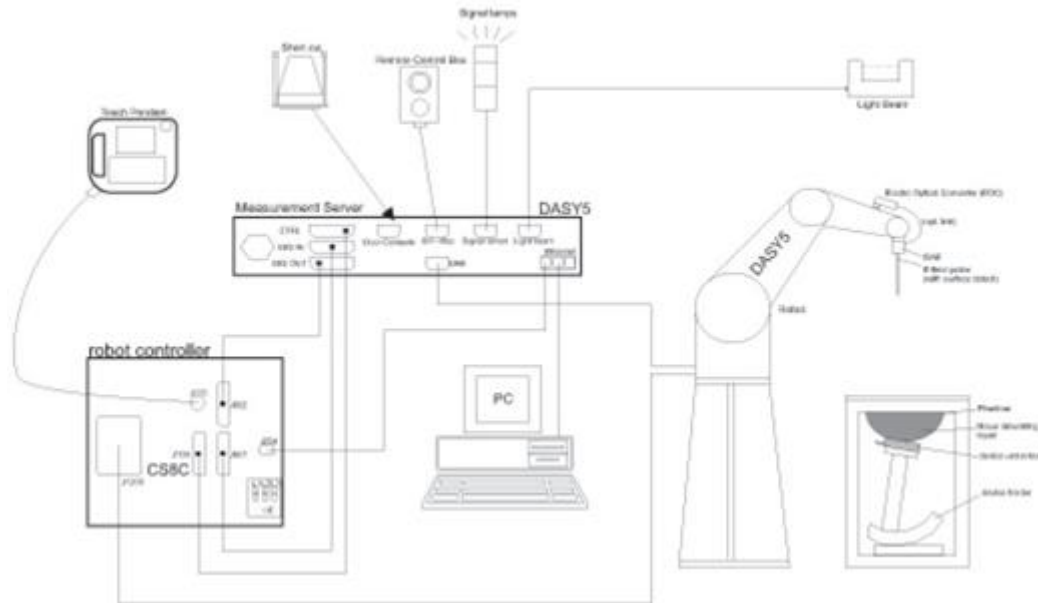

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 19, 2014	Nov. 18, 2015
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Data Acquisition Electronics	DAE3	577	Oct. 06, 2014	Oct. 05, 2015
SPEAG	Data Acquisition Electronics	DAE4	1279	Jul. 23, 2014	Jul. 22, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 19, 2014	May. 18, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 22, 2014	May. 21, 2015
Wisewind	Thermometer	HTC-1	TM281	Oct. 21, 2014	Oct. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
WonDer	Thermometer	WD-5015	TM225	Oct. 21, 2014	Oct. 20, 2015
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMU200A	102502	Jul. 07, 2014	Jul. 06, 2015
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
Agilent	ENA Network Analyzer	E5071C	MY46101588	May. 31, 2014	May. 30, 2015
Anritsu	Power Meter	ML2495A	1036004	Aug. 09, 2014	Aug. 08, 2015
Anritsu	Power Sensor	MA2411B	1027253	Aug. 11, 2014	Aug. 10, 2015
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 10, 2014	Jul. 09, 2015
Agilent	Dual Directional Coupler	778D	50422	Note1	
Woken	Attenuator 1	WK0602-XX	N/A	Note1	
PE	Attenuator 2	PE7005-10	N/A	Note1	
PE	Attenuator 3	PE7005- 3	N/A	Note1	
AR	Power Amplifier	5S1G4M2	0328767	Note1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	MSL	22.3	2.015	51.798	1.95	52.70	3.33	-1.71	±5	2015/3/19
2450	MSL	22.3	2.026	52.958	1.95	52.70	3.90	0.49	±5	2015/3/27
5200	MSL	22.4	5.456	48.276	5.30	49.00	2.94	-1.48	±5	2015/3/20
5200	MSL	22.4	5.364	48.341	5.30	49.00	1.21	-1.34	±5	2015/3/23
5300	MSL	22.4	5.595	48.102	5.42	48.90	3.23	-1.63	±5	2015/3/20
5300	MSL	22.2	5.505	47.853	5.42	48.90	1.57	-2.14	±5	2015/3/24
5600	MSL	22.4	5.990	47.570	5.77	48.50	3.81	-1.92	±5	2015/3/20
5600	MSL	22.2	5.886	47.150	5.77	48.50	2.01	-2.78	±5	2015/3/24
5800	MSL	22.3	6.063	46.872	6.00	48.20	1.05	-2.76	±5	2015/3/21
5800	MSL	22.3	6.273	46.897	6.00	48.20	4.55	-2.70	±5	2015/3/26
5800	MSL	22.3	6.260	46.953	6.00	48.20	4.33	-2.59	±5	2015/3/27

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/3/19	2450	MSL	250	D2450V2-924	EX3DV4 - SN3931	DAE3 Sn577	12.10	51.40	48.40	-5.84
2015/3/27	2450	MSL	250	D2450V2-924	EX3DV4 - SN3954	DAE3 Sn577	12.50	51.40	50.00	-2.72
2015/3/20	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.28	77.50	82.80	6.84
2015/3/23	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3954	DAE4 Sn1279	7.84	77.50	78.40	1.16
2015/3/20	5300	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.59	80.00	85.90	7.38
2015/3/24	5300	MSL	100	D5GHzV2-1006	EX3DV4 - SN3954	DAE4 Sn1279	8.52	80.00	85.20	6.50
2015/3/20	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.62	85.20	86.20	1.17
2015/3/24	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3954	DAE4 Sn1279	8.71	85.20	87.10	2.23
2015/3/21	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.19	78.40	81.90	4.46
2015/3/26	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3954	DAE3 Sn577	7.96	78.40	79.60	1.53
2015/3/27	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3954	DAE3 Sn577	7.92	78.40	79.20	1.02

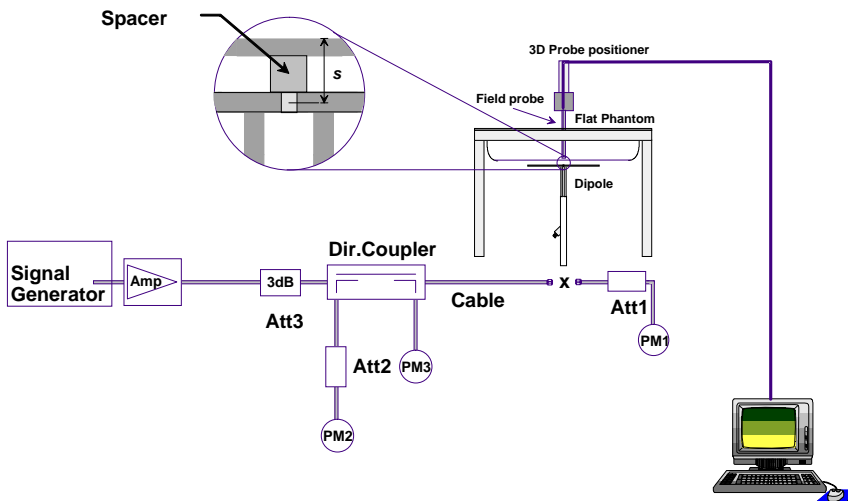


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



12. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

- For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
- For IEEE802.11a/b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11a/b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11a/b mode.
- For IEEE802.11n/ac, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11a/b/g (as applicable) provided bandwidth and test position are the same.
- For IEEE802.11n/ac with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
- Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

<2.4GHz WLAN>

<Main Antenna A>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	15.67	15.61	15.74	15.72
CH 6	2437	15.90			
CH 11	2462	15.55			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	15.53	15.47	15.36	15.41	15.57	15.52	15.35	15.52
CH 6	2437	15.59							
CH 11	2462	15.56							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	15.63	15.76	15.51	15.65	15.52	15.76	15.66	15.77
CH 6	2437	15.78							
CH 11	2462	15.72							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	13.31	15.49	15.46	15.44	15.65	15.51	15.66	15.59
CH 6	2437	15.75							
CH 9	2452	11.71							



<Aux. Antenna B>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	15.69	15.80	15.76	15.59
CH 6	2437	15.85			
CH 11	2462	15.67			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	15.60	15.55	15.59	15.50	15.54	15.49	15.46	15.68
CH 6	2437	15.70							
CH 11	2462	15.65							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	15.62	15.57	15.45	15.55	15.48	15.61	15.62	15.55
CH 6	2437	15.73							
CH 11	2462	15.55							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	13.12	15.40	15.43	15.61	15.58	15.45	15.41	15.41
CH 6	2437	15.65							
CH 9	2452	11.64							



<MIMO Antenna A+B>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	18.59	18.80	18.80	18.76
CH 6	2437	18.85			
CH 11	2462	18.72			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	18.88	18.65	18.77	18.61	18.82	18.66	18.81	18.61
CH 6	2437	18.92							
CH 11	2462	18.80							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	17.61	18.37	18.35	18.63	18.63	18.42	18.58	18.57
CH 6	2437	18.66							
CH 11	2462	17.02							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	12.77	18.64	18.76	18.75	18.74	18.79	18.76	18.56
CH 6	2437	18.82							
CH 9	2452	13.84							



<5GHz WLAN>

<Main Antenna A>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	13.79	13.67	13.60	13.50	13.56	13.55	13.76	13.60
CH 40	5200	13.78							
CH 44	5220	13.76							
CH 48	5240	13.52							
CH 52	5260	13.85	13.77	13.78	13.65	13.76	13.82	13.79	13.84
CH 56	5280	13.80							
CH 60	5300	13.87							
CH 64	5320	13.73							
CH 100	5500	15.94							
CH 104	5520	15.93	15.92	15.67	15.74	15.76	15.86	15.76	15.68
CH 108	5540	15.81							
CH 112	5560	15.79							
CH 116	5580	15.96							
CH 132	5660	15.81							
CH 136	5680	15.91							
CH 140	5700	15.87							
CH 144	5720	15.75							
CH 149	5745	17.84	17.75	17.83	17.93	17.74	17.97	17.96	17.85
CH 153	5765	17.87							
CH 157	5785	18.00							
CH 161	5805	17.92							
CH 165	5825	17.91							

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	13.83	13.72	13.66	13.73	13.57	13.58	13.57	13.77
CH 40	5200	13.81							
CH 44	5220	13.69							
CH 48	5240	13.53							
CH 52	5260	13.60	13.74	13.70	13.82	13.61	13.70	13.58	13.63
CH 56	5280	13.75							
CH 60	5300	13.89							
CH 64	5320	13.73							
CH 100	5500	15.89							
CH 104	5520	15.77	15.68	15.65	15.72	15.58	15.86	15.78	15.83
CH 108	5540	15.71							
CH 112	5560	15.81							
CH 116	5580	15.72							
CH 132	5660	15.71							
CH 136	5680	15.70							
CH 140	5700	15.61							
CH 144	5720	15.65							
CH 149	5745	17.58	17.61	17.61	17.57	17.36	17.57	17.49	17.38
CH 153	5765	17.50							
CH 157	5785	17.62							
CH 161	5805	17.59							
CH 165	5825	17.63							



WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 38	5190	13.80	13.64	13.52	13.53	13.61	13.62	13.71	13.51
CH 46	5230	13.70							
CH 54	5270	13.65							
CH 62	5310	13.82	13.74	13.64	13.56	13.69	13.63	13.64	13.52
CH 102	5510	14.84							
CH 110	5550	15.83							
CH 134	5670	15.92							
CH 142	5710	15.90	15.81	15.74	15.72	15.88	15.72	15.83	15.85
CH 151	5755	17.69							
CH 159	5795	17.82							
			17.59	17.67	17.58	17.63	17.75	17.53	17.70

WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0								
CH 36	5180	13.90	13.84	13.64	13.79	13.87	13.87	13.88	13.87	13.83
CH 40	5200	13.81								
CH 44	5220	13.85								
CH 48	5240	13.83								
CH 52	5260	13.96	13.65	13.67	13.77	13.76	13.81	13.72	13.72	13.85
CH 56	5280	13.84								
CH 60	5300	13.82								
CH 64	5320	13.89								
CH 100	5500	15.98								
CH 104	5520	15.92	15.86	15.67	15.76	15.96	15.80	15.88	15.88	15.82
CH 108	5540	15.89								
CH 112	5560	15.87								
CH 116	5580	15.90								
CH 132	5660	15.78								
CH 136	5680	15.73								
CH 140	5700	15.85								
CH 144	5720	15.87								
CH 149	5745	17.69	17.66	17.63	17.76	17.89	17.82	17.59	17.72	17.61
CH 153	5765	17.77								
CH 157	5785	17.90								
CH 161	5805	17.69								
CH 165	5825	17.74								

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 38	5190	13.79	13.70	13.64	13.50	13.49	13.55	13.78	13.59	13.70	13.52
CH 46	5230	13.75									
CH 54	5270	13.81	13.86	13.74	13.68	13.78	13.85	13.88	13.92	13.72	13.89
CH 62	5310	13.93									
CH 102	5510	14.97									
CH 110	5550	15.86	15.66	15.84	15.73	15.61	15.75	15.80	15.64	15.58	15.67
CH 134	5670	15.77									
CH 142	5710	15.75									
CH 151	5755	17.65									
CH 159	5795	17.90	17.62	17.59	17.85	17.68	17.66	17.83	17.74	17.82	17.87



WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 42	5210	13.82	13.73	13.57	13.72	13.81	13.79	13.60	13.51	13.51	13.71
CH 58	5290	13.83	13.73	13.60	13.70	13.64	13.58	13.56	13.80	13.76	13.82
CH 106	5530	14.87	15.83	15.67	15.68	15.76	15.71	15.65	15.72	15.55	15.70
CH 138	5690	15.86									
CH 155	5775	17.11	16.99	16.85	16.98	17.05	17.01	17.09	17.00	17.03	16.97

<Aux. Antenna B>

WLAN 5GHz 802.11a Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
		6Mbps								
CH 36	5180	13.90	13.67	13.76	13.89	13.69	13.60	13.65	13.69	
CH 40	5200	13.82								
CH 44	5220	13.74								
CH 48	5240	13.80								
CH 52	5260	13.77	13.66	13.66	13.79	13.67	13.62	13.72	13.60	
CH 56	5280	13.81								
CH 60	5300	13.84								
CH 64	5320	13.85								
CH 100	5500	15.74								
CH 104	5520	15.69								
CH 108	5540	15.71	15.57	15.58	15.64	15.67	15.69	15.71	15.68	
CH 112	5560	15.87								
CH 116	5580	15.80								
CH 132	5660	15.69								
CH 136	5680	15.71								
CH 140	5700	15.77								
CH 144	5720	15.74								
CH 149	5745	17.88								
CH 153	5765	17.91	17.76	17.68	17.73	17.89	17.81	17.93	17.98	
CH 157	5785	17.99								
CH 161	5805	17.92								
CH 165	5825	17.87								



WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	13.77	13.54	13.53	13.47	13.55	13.51	13.61	13.72
CH 40	5200	13.71							
CH 44	5220	13.76							
CH 48	5240	13.74							
CH 52	5260	13.76	13.89	13.87	13.81	13.82	13.90	13.74	13.86
CH 56	5280	13.81							
CH 60	5300	13.91							
CH 64	5320	13.78							
CH 100	5500	15.98	15.76	15.67	15.71	15.87	15.86	15.80	15.91
CH 104	5520	15.71							
CH 108	5540	15.66							
CH 112	5560	15.81							
CH 116	5580	15.79							
CH 132	5660	15.66							
CH 136	5680	15.59							
CH 140	5700	15.72							
CH 144	5720	15.92							
CH 149	5745	17.86	17.81	17.79	17.64	17.79	17.63	17.82	17.79
CH 153	5765	17.83							
CH 157	5785	17.88							
CH 161	5805	17.91							
CH 165	5825	17.91							

WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	13.78	13.68	13.76	13.58	13.77	13.54	13.68	13.69
CH 46	5230	13.83							
CH 54	5270	13.66	13.55	13.72	13.56	13.63	13.63	13.51	13.68
CH 62	5310	13.80							
CH 102	5510	14.85	15.70	15.92	15.92	15.77	15.93	15.77	15.87
CH 110	5550	15.94							
CH 134	5670	15.81							
CH 142	5710	15.91							
CH 151	5755	17.66	17.55	17.45	17.68	17.67	17.44	17.62	17.57
CH 159	5795	17.75							



WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 36	5180	13.92	13.68	13.72	13.66	13.63	13.69	13.74	13.81	13.79
CH 40	5200	13.81								
CH 44	5220	13.79								
CH 48	5240	13.90								
CH 52	5260	13.71	13.73	13.97	13.87	13.83	13.76	13.82	13.96	13.68
CH 56	5280	13.87								
CH 60	5300	13.98								
CH 64	5320	13.90								
CH 100	5500	15.72	15.71	15.86	15.92	15.76	15.89	15.71	15.78	15.80
CH 104	5520	15.72								
CH 108	5540	15.58								
CH 112	5560	15.66								
CH 116	5580	15.58								
CH 132	5660	15.92								
CH 136	5680	15.97								
CH 140	5700	15.89								
CH 144	5720	15.89								
CH 149	5745	17.85	17.78	17.92	17.67	17.80	17.91	17.80	17.69	17.92
CH 153	5765	17.79								
CH 157	5785	17.94								
CH 161	5805	17.88								
CH 165	5825	17.89								

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 38	5190	13.80	13.79	13.67	13.64	13.59	13.75	13.70	13.65	13.70	13.53
CH 46	5230	13.84									
CH 54	5270	13.78	13.78	13.62	13.81	13.68	13.88	13.88	13.59	13.79	13.67
CH 62	5310	13.89									
CH 102	5510	14.89	15.85	15.69	15.58	15.70	15.87	15.78	15.82	15.70	15.79
CH 110	5550	15.88									
CH 134	5670	15.87									
CH 142	5710	15.89									
CH 151	5755	17.92	17.69	17.70	17.65	17.94	17.78	17.92	17.70	17.67	17.82
CH 159	5795	17.96									

WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 42	5210	13.95	13.77	13.71	13.86	13.93	13.73	13.73	13.65	13.70	13.66
CH 58	5290	13.87	13.74	13.66	13.56	13.67	13.66	13.78	13.82	13.76	13.84
CH 106	5530	14.96	15.68	15.56	15.59	15.76	15.84	15.67	15.59	15.76	15.57
CH 138	5690	15.86									
CH 155	5775	17.30	17.27	17.06	17.09	17.08	17.25	17.01	17.06	17.13	17.15



<MIMO Antenna A+B>

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	15.41	15.27	15.33	15.38	15.32	15.39	15.21	15.35
CH 40	5200	15.48							
CH 44	5220	15.40							
CH 48	5240	15.38							
CH 52	5260	16.88	16.68	16.89	16.78	16.83	16.92	16.70	16.76
CH 56	5280	16.92							
CH 60	5300	16.99							
CH 64	5320	16.91							
CH 100	5500	18.99	18.74	18.71	18.88	18.79	18.69	18.84	18.87
CH 104	5520	18.91							
CH 108	5540	18.86							
CH 112	5560	18.71							
CH 116	5580	18.51							
CH 132	5660	18.81							
CH 136	5680	18.71							
CH 140	5700	18.49							
CH 144	5720	18.87	20.76	20.80	20.74	20.58	20.58	20.74	20.56
CH 149	5745	20.69							
CH 153	5765	20.71							
CH 157	5785	20.70							
CH 161	5805	20.79							
CH 165	5825	20.81							

WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	16.49	16.40	16.47	16.20	16.44	16.26	16.30	16.23
CH 46	5230	16.48							
CH 54	5270	16.93							
CH 62	5310	16.98	16.79	16.72	16.93	16.96	16.94	16.78	16.87
CH 102	5510	16.96							
CH 110	5550	18.82							
CH 134	5670	18.61							
CH 142	5710	18.98	18.67	18.84	18.96	18.67	18.94	18.69	18.75
CH 151	5755	16.98							
CH 159	5795	20.63							
			20.35	20.55	20.38	20.49	20.34	20.32	20.47



WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0								
CH 36	5180	15.40	15.42	15.19	15.34	15.29	15.38	15.29	15.33	15.28
CH 40	5200	15.45								
CH 44	5220	15.27								
CH 48	5240	15.28								
CH 52	5260	16.64	16.73	16.89	16.63	16.79	16.72	16.82	16.70	16.89
CH 56	5280	16.83								
CH 60	5300	16.94								
CH 64	5320	16.93								
CH 100	5500	18.92	18.76	18.97	18.74	18.95	18.78	18.90	18.86	18.68
CH 104	5520	18.88								
CH 108	5540	18.76								
CH 112	5560	18.62								
CH 116	5580	18.88								
CH 132	5660	18.88								
CH 136	5680	18.83								
CH 140	5700	18.49								
CH 144	5720	18.98								
CH 149	5745	20.91	20.85	20.79	20.70	20.89	20.63	20.74	20.66	20.75
CH 153	5765	20.75								
CH 157	5785	20.84								
CH 161	5805	20.81								
CH 165	5825	20.79								

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 38	5190	16.40	16.20	16.22	16.23	16.22	16.34	16.29	16.47	16.42	16.37
CH 46	5230	16.48									
CH 54	5270	16.90	16.73	16.71	16.60	16.88	16.69	16.79	16.79	16.59	16.71
CH 62	5310	16.62									
CH 102	5510	16.88	18.68	18.78	18.71	18.77	18.52	18.64	18.62	18.54	18.65
CH 110	5550	18.70									
CH 134	5670	18.66									
CH 142	5710	18.81									
CH 151	5755	16.74	20.58	20.68	20.56	20.56	20.59	20.65	20.48	20.58	20.52
CH 159	5795	20.72									

WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 42	5210	16.43	16.20	16.40	16.16	16.19	16.18	16.33	16.17	16.36	16.39
CH 58	5290	15.41	15.10	15.29	15.26	15.23	15.17	15.38	15.22	15.13	15.14
CH 106	5530	16.26	18.86	18.68	18.92	18.68	18.74	18.69	18.90	18.87	18.78
CH 138	5690	18.97									
CH 155	5775	16.34	16.17	16.18	16.05	16.26	16.08	16.07	16.26	16.07	16.18



13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth, v3.0+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	1.5	1.5

Note:

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$


- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
1.5	< 5	2.48	0.31

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.31 which is ≤ 3, SAR testing is not required.

14. Antenna Location

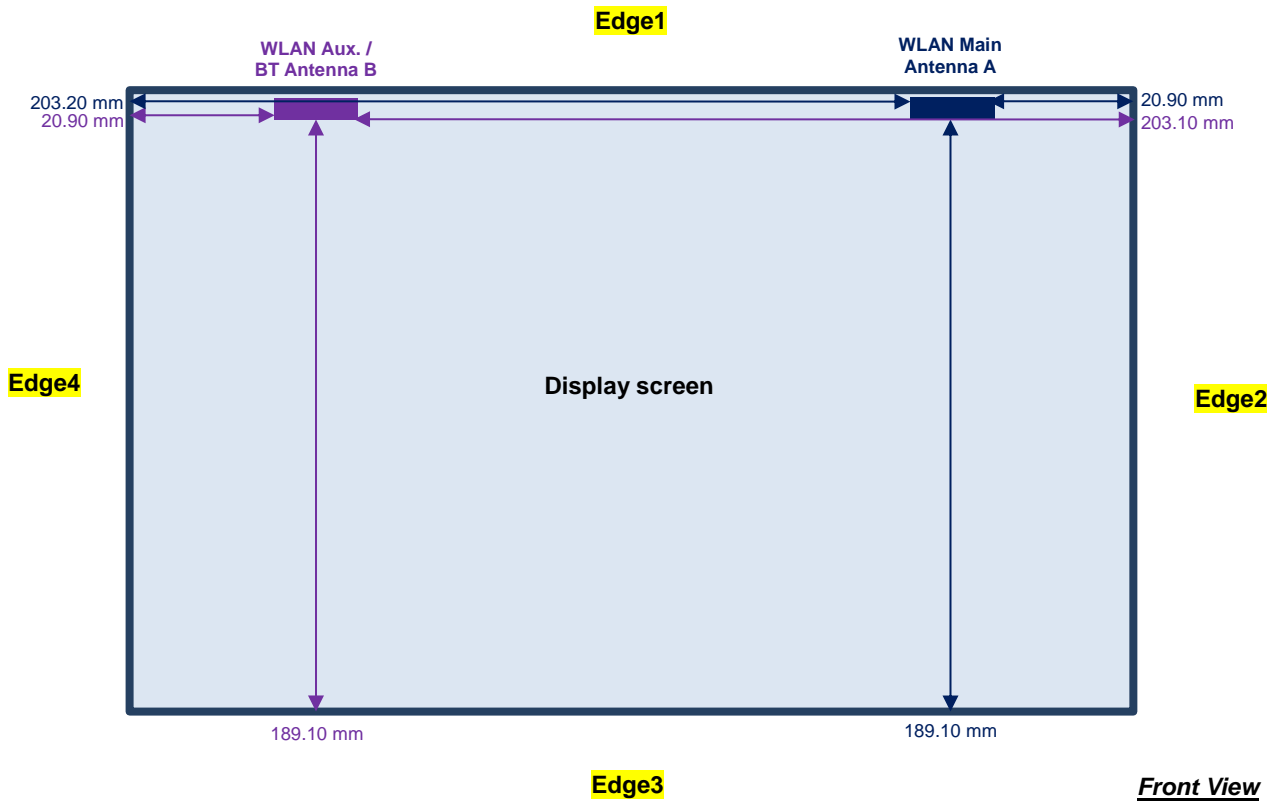

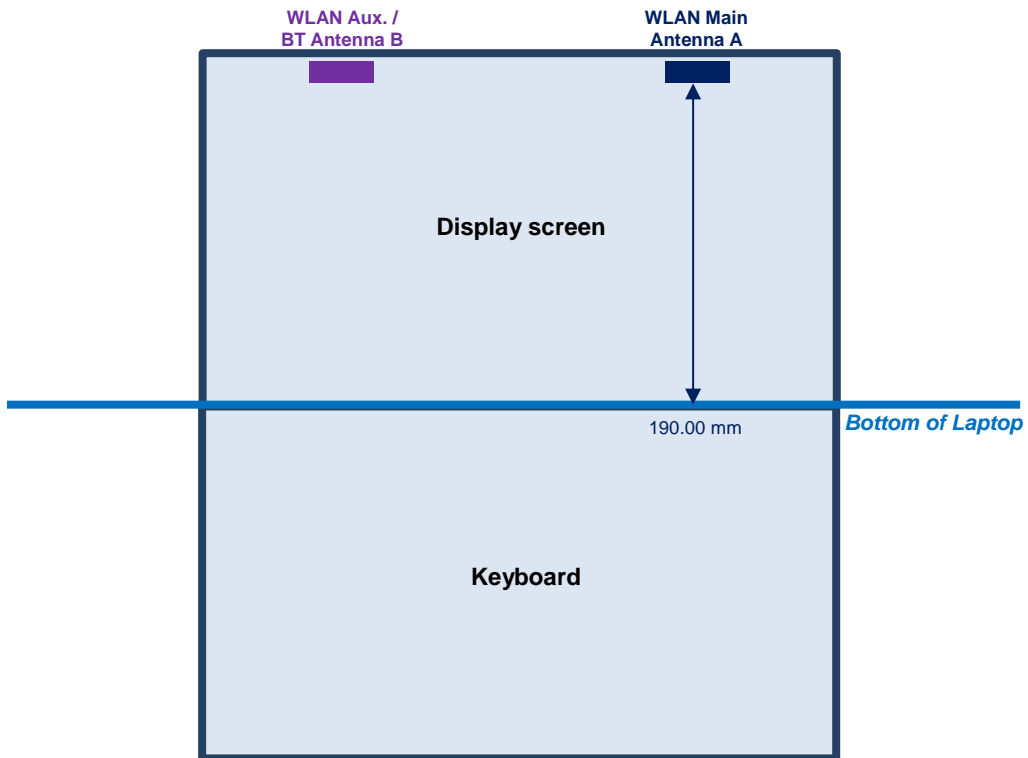



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	802.11b Ant A	802.11b Ant B	802.11a Ant A	802.11a Ant B
	Calculated Frequency	2462MHz	2462MHz	5825MHz	5825MHz
	Maximum power (dBm)	16.0	16.0	18.0	18.0
	Maximum rated power(mW)	40.0	40.0	63.0	63.0
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	12.6	12.6	30.4	30.4
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	12.6	12.6	30.4	30.4
	Testing required?	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	20.9	203.1	20.9	203.1
	exclusion threshold	3.0	1627.0	7.3	1593.0
	Testing required?	No	No	Yes	No
Edge 3	Separation distance(mm)	189.1	189.1	189.1	189.1
	exclusion threshold	1487.0	1487.0	1453.0	1453.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	203.2	20.9	203.2	20.9
	exclusion threshold	1628.0	3.0	1594.0	7.3
	Testing required?	No	No	No	Yes
Bottom of Laptop	Separation distance(mm)	190.0	190.0	190.0	190.0
	exclusion threshold	1496.0	1496.0	1462.0	1462.0
	Testing required?	No	No	No	No



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Main	B_BSW with WNC	6	2437	15.90	16.00	1.024	94.95	1.053	0.08	0.180	0.194
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Main	B_BSW with WNC	6	2437	15.90	16.00	1.024	94.95	1.053	0.16	0.392	0.423
01	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	6	2437	15.75	16.00	1.058	90.48	1.105	0.18	0.473	0.553
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	3	2422	13.31	13.50	1.044	90.48	1.105	-0.14	0.187	0.216
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	9	2452	11.71	12.00	1.068	90.48	1.105	-0.14	0.187	0.221
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	MLK_BSW with Acon	6	2437	15.75	16.00	1.058	90.48	1.105	-0.15	0.331	0.387
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	MLK_BSW with WNC	6	2437	15.75	16.00	1.058	90.48	1.105	-0.16	0.413	0.483
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Aux	B_BSW with WNC	6	2437	15.85	16.00	1.036	94.95	1.053	0.16	0.038	0.041
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Aux	B_BSW with WNC	6	2437	15.85	16.00	1.036	94.95	1.053	0.11	0.081	0.088
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	6	2437	15.65	16.00	1.084	90.38	1.106	0.14	0.084	0.101
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	6	2437	15.65	16.00	1.084	90.38	1.106	-0.04	0.046	0.055
	WLAN2.4GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with WNC	6	2437	15.65	16.00	1.084	90.38	1.106	-0.16	0.130	0.156



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	36	5180	13.79	14.00	1.051	94.95	1.053	-0.14	0.244	0.270
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	36	5180	13.79	14.00	1.051	94.95	1.053	0.15	0.729	0.807
02	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	44	5220	13.76	14.00	1.058	94.95	1.053	-0.14	0.884	0.985
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	38	5190	13.80	14.00	1.046	91.35	1.095	0.07	0.768	0.880
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	46	5230	13.70	14.00	1.071	91.35	1.095	0.05	0.799	0.937
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Main	B_BSW with WNC	42	5210	13.82	14.00	1.042	93.50	1.070	-0.07	0.796	0.887
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	44	5220	13.76	14.00	1.058	94.95	1.053	-0.08	0.759	0.846
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	36	5180	13.79	14.00	1.051	94.95	1.053	-0.16	0.632	0.699
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	44	5220	13.76	14.00	1.058	94.95	1.053	-0.04	0.838	0.934
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	36	5180	13.79	14.00	1.051	94.95	1.053	-0.14	0.811	0.897
	WLAN5GHz	802.11a 6Mbps	Edge 2	0mm	Main	B_BSW with WNC	36	5180	13.79	14.00	1.051	94.95	1.053	-0.19	0.099	0.110
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Aux	B_BSW with WNC	36	5180	13.90	14.00	1.024	94.95	1.053	-0.17	0.127	0.137
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	B_BSW with WNC	36	5180	13.90	14.00	1.024	94.95	1.053	-0.05	0.324	0.350
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	46	5230	13.83	14.00	1.039	90.48	1.105	-0.19	0.304	0.349
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	42	5210	13.95	14.00	1.011	94.31	1.060	0	0.269	0.288
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	MLK_BSW with Acon	36	5180	13.90	14.00	1.024	94.95	1.053	0.07	0.185	0.200
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	MLK_BSW with WNC	36	5180	13.90	14.00	1.024	94.95	1.053	-0.06	0.171	0.184
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Aux	B_BSW with WNC	36	5180	13.90	14.00	1.024	94.95	1.053	-0.04	0.038	0.041
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	60	5300	13.87	14.00	1.032	94.95	1.053	-0.11	0.279	0.303
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	60	5300	13.87	14.00	1.032	94.95	1.053	0.19	0.869	0.944
03	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	52	5260	13.85	14.00	1.036	94.95	1.053	-0.14	1.000	1.091
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	62	5310	13.82	14.00	1.042	91.35	1.095	-0.07	0.665	0.759
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Main	B_BSW with WNC	58	5290	13.83	14.00	1.039	93.50	1.070	-0.12	0.910	1.012
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	52	5260	13.85	14.00	1.036	94.95	1.053	0.19	0.790	0.862
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	60	5300	13.87	14.00	1.032	94.95	1.053	-0.18	0.672	0.730
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	52	5260	13.85	14.00	1.036	94.95	1.053	-0.12	0.840	0.917
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	60	5300	13.87	14.00	1.032	94.95	1.053	-0.19	0.681	0.740
	WLAN5GHz	802.11a 6Mbps	Edge 2	0mm	Main	B_BSW with WNC	60	5300	13.87	14.00	1.032	94.95	1.053	-0.18	0.092	0.100
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Aux	B_BSW with WNC	64	5320	13.85	14.00	1.036	94.95	1.053	-0.13	0.082	0.089
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	B_BSW with WNC	64	5320	13.85	14.00	1.036	94.95	1.053	-0.07	0.190	0.207
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	62	5310	13.80	14.00	1.047	90.48	1.105	-0.11	0.185	0.214
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	58	5290	13.87	14.00	1.029	94.31	1.060	-0.15	0.198	0.216
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	58	5290	13.87	14.00	1.029	94.31	1.060	-0.1	0.165	0.180
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	MLK_BSW with WNC	58	5290	13.87	14.00	1.029	94.31	1.060	0.05	0.347	0.379
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Aux	B_BSW with WNC	64	5320	13.85	14.00	1.036	94.95	1.053	-0.16	0.027	0.029



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	116	5580	15.96	16.00	1.010	94.95	1.053	-0.16	0.457	0.486
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	100	5500	15.94	16.00	1.015	94.95	1.053	-0.18	0.383	0.409
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	136	5680	15.91	16.00	1.021	94.95	1.053	-0.16	0.468	0.503
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	116	5580	15.96	16.00	1.010	94.95	1.053	0.04	0.877	0.933
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	100	5500	15.94	16.00	1.015	94.95	1.053	-0.13	0.964	1.030
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	136	5680	15.91	16.00	1.021	94.95	1.053	-0.16	0.638	0.686
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	134	5670	15.92	16.00	1.018	91.35	1.095	-0.17	0.623	0.694
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	102	5510	14.84	15.00	1.037	91.35	1.095	0.13	0.712	0.808
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	110	5550	15.83	16.00	1.039	91.35	1.095	-0.15	0.867	0.987
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	142	5710	15.90	16.00	1.024	91.35	1.095	-0.1	0.527	0.591
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Main	B_BSW with WNC	138	5690	15.86	16.00	1.032	93.50	1.070	-0.18	0.721	0.796
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Main	B_BSW with WNC	106	5530	14.87	15.00	1.030	93.50	1.070	-0.17	0.722	0.796
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	100	5500	15.94	16.00	1.015	94.95	1.053	-0.17	0.688	0.735
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	116	5580	15.96	16.00	1.010	94.95	1.053	-0.1	0.871	0.927
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with Acon	136	5680	15.91	16.00	1.021	94.95	1.053	0.04	0.568	0.611
04	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	100	5500	15.94	16.00	1.015	94.95	1.053	0	1.110	1.186
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	116	5580	15.96	16.00	1.010	94.95	1.053	-0.17	0.885	0.942
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	136	5680	15.91	16.00	1.021	94.95	1.053	-0.17	0.694	0.746
	WLAN5GHz	802.11a 6Mbps	Edge 2	0mm	Main	B_BSW with WNC	116	5580	15.96	16.00	1.010	94.95	1.053	-0.14	0.059	0.063
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Aux	B_BSW with WNC	112	5320	15.87	16.00	1.030	94.95	1.053	-0.18	0.172	0.187
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	B_BSW with WNC	112	5560	15.87	16.00	1.030	94.95	1.053	0.13	0.316	0.343
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	110	5550	15.94	16.00	1.013	90.48	1.105	-0.1	0.353	0.395
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	138	5690	15.86	16.00	1.033	94.31	1.060	0	0.379	0.415
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	106	5530	14.96	15.00	1.008	94.31	1.060	0.06	0.346	0.370
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	138	5690	15.86	16.00	1.033	94.31	1.060	0.17	0.601	0.658
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	106	5530	14.96	15.00	1.008	94.31	1.060	0.09	0.352	0.376
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	MLK_BSW with WNC	138	5690	15.86	16.00	1.033	94.31	1.060	0.16	0.607	0.665
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	MLK_BSW with WNC	106	5530	14.96	15.00	1.008	94.31	1.060	0.11	0.482	0.515
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Aux	B_BSW with WNC	112	5560	15.87	16.00	1.030	94.95	1.053	-0.11	0.044	0.048



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	157	5785	18.00	18.00	1.000	94.95	1.053	-0.15	0.720	0.758
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	153	5765	17.87	18.00	1.030	94.95	1.053	-0.18	0.732	0.794
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Main	B_BSW with WNC	161	5805	17.92	18.00	1.019	94.95	1.053	-0.12	0.801	0.859
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	157	5785	18.00	18.00	1.000	94.95	1.053	-0.15	0.790	0.832
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	153	5765	17.87	18.00	1.030	94.95	1.053	0.19	0.898	0.974
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	161	5805	17.92	18.00	1.019	94.95	1.053	-0.11	1.070	1.148
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	159	5795	17.82	18.00	1.042	91.35	1.095	-0.11	0.860	0.981
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	151	5755	17.69	18.00	1.073	91.35	1.095	-0.01	0.756	0.888
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	B_BSW with WNC	157	5785	17.90	18.00	1.024	98.47	1.016	-0.15	0.951	0.989
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	B_BSW with WNC	153	5765	17.77	18.00	1.054	98.47	1.016	-0.11	0.914	0.979
05	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	B_BSW with WNC	165	5825	17.74	18.00	1.062	98.47	1.016	-0.19	1.080	1.166
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	159	5795	17.90	18.00	1.022	96.94	1.032	-0.12	0.927	0.978
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Main	B_BSW with WNC	151	5755	17.65	18.00	1.083	96.94	1.032	-0.06	0.822	0.918
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Main	B_BSW with WNC	155	5775	17.11	17.50	1.093	93.50	1.070	-0.14	0.694	0.812
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	MLK_BSW with Acon	165	5825	17.74	18.00	1.062	98.47	1.016	0.02	1.070	1.155
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	MLK_BSW with Acon	157	5785	17.90	18.00	1.024	98.47	1.016	0.13	1.000	1.040
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	MLK_BSW with Acon	153	5765	17.77	18.00	1.054	98.47	1.016	-0.15	0.912	0.977
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	MLK_BSW with WNC	165	5825	17.74	18.00	1.062	98.47	1.016	-0.19	0.788	0.851
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	MLK_BSW with WNC	157	5785	17.90	18.00	1.024	98.47	1.016	-0.06	0.799	0.831
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Main	MLK_BSW with WNC	153	5765	17.77	18.00	1.054	98.47	1.016	-0.09	0.746	0.799
	WLAN5GHz	802.11a 6Mbps	Edge 2	0mm	Main	B_BSW with WNC	157	5785	18.00	18.00	1.000	94.95	1.053	-0.14	0.075	0.079
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Aux	B_BSW with WNC	157	5785	17.99	18.00	1.002	94.95	1.053	-0.13	0.363	0.383
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	B_BSW with WNC	157	5785	17.99	18.00	1.002	94.95	1.053	0.12	0.570	0.602
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	B_BSW with WNC	153	5765	17.91	18.00	1.021	94.95	1.053	-0.08	0.561	0.603
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Aux	B_BSW with WNC	161	5805	17.92	18.00	1.019	94.95	1.053	-0.11	0.680	0.729
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	159	5795	17.75	18.00	1.058	90.48	1.105	-0.09	0.625	0.731
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	151	5755	17.66	18.00	1.080	90.48	1.105	-0.03	0.495	0.591
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	157	5785	17.94	18.00	1.015	98.47	1.016	-0.15	0.704	0.726
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	149	5745	17.85	18.00	1.036	98.47	1.016	-0.02	0.521	0.548
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	165	5825	17.89	18.00	1.026	98.47	1.016	-0.01	0.706	0.736
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	159	5795	17.96	18.00	1.008	96.97	1.031	-0.08	0.961	0.999
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	151	5755	17.92	18.00	1.017	96.97	1.031	0.02	0.806	0.845
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Aux	B_BSW with WNC	155	5775	17.30	17.50	1.046	94.31	1.060	0.04	0.535	0.593
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	159	5795	17.96	18.00	1.008	96.97	1.031	-0.01	1.110	1.154
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	151	5755	17.92	18.00	1.017	96.97	1.031	-0.02	0.958	1.005
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with WNC	159	5795	17.96	18.00	1.008	96.97	1.031	0.03	1.090	1.133
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with WNC	151	5755	17.92	18.00	1.017	96.97	1.031	-0.12	1.050	1.101
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Aux	B_BSW with WNC	157	5785	17.99	18.00	1.002	94.95	1.053	-0.1	0.039	0.041



15.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	44	5220	13.76	14.00	1.058	94.95	1.053	-0.14	0.884	-	0.985
2nd	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	44	5220	13.76	14.00	1.058	94.95	1.053	0.09	0.881	1.01	0.982
1st	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	52	5260	13.85	14.00	1.036	94.95	1.053	-0.14	1.000	-	1.091
2nd	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	B_BSW with WNC	52	5260	13.85	14.00	1.036	94.95	1.053	-0.18	0.974	1.03	1.063
1st	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	100	5500	15.94	16.00	1.015	94.95	1.053	0	1.110	-	1.186
2nd	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Main	MLK_BSW with WNC	100	5500	15.94	16.00	1.015	94.95	1.053	-0.15	1.030	1.08	1.101
1st	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	159	5795	17.96	18.00	1.008	96.97	1.031	-0.01	1.110	-	1.154
2nd	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Aux	MLK_BSW with Acon	159	5795	17.96	18.00	1.008	96.97	1.031	-0.06	1.090	1.02	1.133

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Support
1.	WLAN Main Antenna + Bluetooth	Yes
2.	WLAN Main Antenna + WLAN Aux. Antenna	Yes

General Note:

1. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
2. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 16.2.
6. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.
 - iv) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	All Positions
1.50 dBm	Estimated SAR (W/kg)	0.042 W/kg



16.1 Body Exposure Conditions


Band	Exposure Position	1	2	3	1+2 Summed SAR (W/kg)	1+3 Summed SAR (W/kg)	SPLSR	Case No
		WLAN Main SAR (W/kg)	WLAN Aux SAR (W/kg)	Bluetooth Aux Estimated SAR (W/kg)				
2.4GHz WLAN	Bottom Face at 0cm	0.194	0.041	0.042	0.24	0.24		
	Edge1 at 0cm	0.553	0.156	0.042	0.71	0.60		
5.2GHz WLAN	Bottom Face at 0cm	0.270	0.137	0.042	0.41	0.31		
	Edge1 at 0cm	0.985	0.350	0.042	1.34	1.03		
	Edge2 at 0cm	0.110		0.042	0.11	0.15		
	Edge4 at 0cm		0.041	0.042	0.04	0.04		
5.3GHz WLAN	Bottom Face at 0cm	0.303	0.089	0.042	0.39	0.35		
	Edge1 at 0cm	1.091	0.379	0.042	1.47	1.13		
	Edge2 at 0cm	0.100		0.042	0.10	0.14		
	Edge4 at 0cm		0.029	0.042	0.03	0.04		
5.5GHz WLAN	Bottom Face at 0cm	0.503	0.187	0.042	0.69	0.55		
	Edge1 at 0cm	1.186	0.665	0.042	1.85	1.23	0.02	Case 1
	Edge2 at 0cm	0.063		0.042	0.06	0.11		
	Edge4 at 0cm		0.048	0.042	0.05	0.04		
5.8GHz WLAN	Bottom Face at 0cm	0.859	0.383	0.042	1.24	0.90		
	Edge1 at 0cm	1.166	1.154	0.042	2.32	1.21	0.02	Case 2
	Edge2 at 0cm	0.079		0.042	0.08	0.12		
	Edge4 at 0cm		0.041	0.042	0.04	0.04		

16.2 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	5.8GHz Main				X	Y	Z				
	5.8GHz Main	Edge 1	1.186	0	-0.002	0.118	-0.182	208.1	1.85	0.01	Not required
	5.8GHz Aux		0.665	0	0.004	-0.09	-0.181				

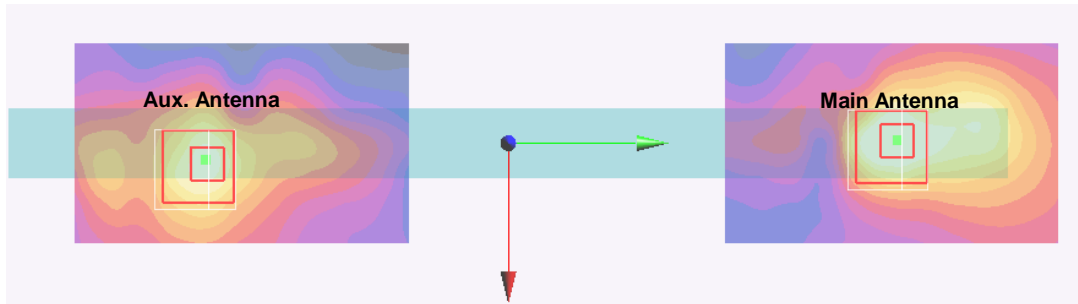

Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	5.5GHz Main				X	Y	Z				
	5.5GHz Main	Edge 1	1.166	0	-0.000963	0.12	-0.177	213.0	2.32	0.02	Not required
	5.5GHz Aux		1.154	0	-0.00297	-0.093	-0.177				

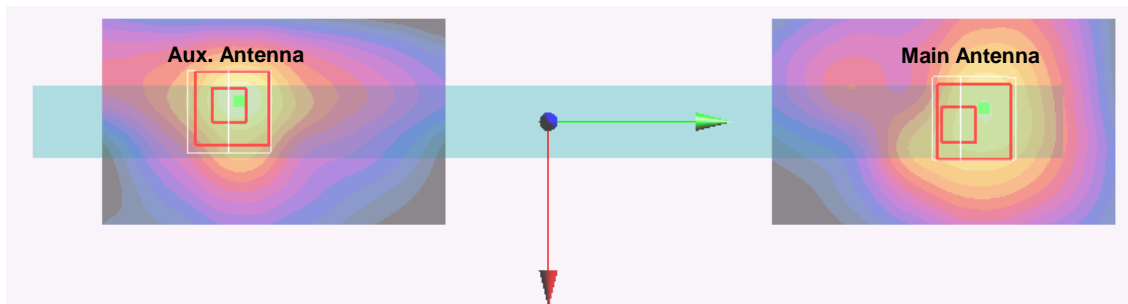

Test Engineer : Ken Li, Angelo Chang, San Lin, Nick Yu, Bevis Chang, Frank Wu, Galen Zhang,
Jerry Hu, Tommy Chen, Steven Chang

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [8] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [9] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.