

APPENDIX A. SAR System Verification Data

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

Date/Time: 05/02/2015

Test Laboratory: Cerpess Lab

SystemPerformanceCheck-D2450 Body

DUT: Dipole 2450 MHz D2450V2; Type: SA AAD 245 BB

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.71$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Meas. Ambient Temp (celsius) -22°C; Input power-250mW

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.63, 7.63, 7.63); Calibrated: 2014/5/23;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2014/5/19
- Phantom: ELI v5.0; Type: QDOVA002AA
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/SystemPerformanceCheck-D2450 Body/Area Scan (5x7x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 11.9 W/kg

Configuration/SystemPerformanceCheck-D2450 Body/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 78.21 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.53 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.94 W/kg

Maximum value of SAR (measured) = 14.8 W/kg



0 dB = 14.8 W/kg = 11.70 dBW/kg

APPENDIX B. SAR measurement Data

The SAR plots are shown as follows.

Date/Time: 05/02/2015

Test Laboratory: Cerpass Lab

DUT: lenovo flex 3-1120; Type: 43142Y-ACON Ant

Procedure Name: 802.11b 2437MHz Mid Tablet-Edge 1 Main Antenna

Communication System Band: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Tissue Temp(celsius)- 21 °C

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.63, 7.63, 7.63); Calibrated: 2014/5/23;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1379; Calibrated: 2014/5/19
- Phantom: ELI v5.0; Type: QDOVA002AA
- Measurement SW: DASYS2, Version 52.8 (8);

Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Main Antenna/Area Scan

(7x14x1): Measurement grid: dx=12mm, dy=12mm, Maximum value of SAR (measured) = 0.426 W/kg


Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Main Antenna/Zoom Scan

(7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.977 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.165 W/kg Maximum value of SAR (measured) = 0.498 W/kg

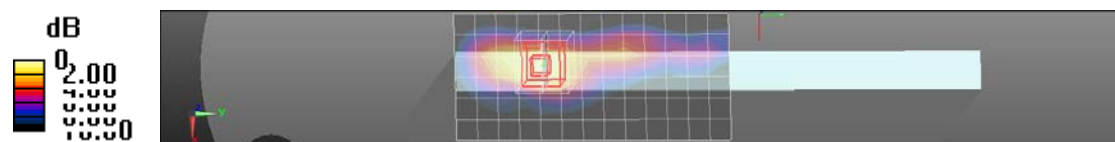

0 dB = 0.498 W/kg = -3.03 dBW/kg

Date/Time: 05/02/2015

Test Laboratory: Cerpass Lab

DUT: lenovo flex 3-1120; Type: 43142Y-ACON Ant

Procedure Name: 802.11b 2437MHz Mid Tablet-Edge 1 Aux Antenna

Communication System Band: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Tissue Temp(celsius)- 21 °C

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.63, 7.63, 7.63); Calibrated: 2014/5/23;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1379; Calibrated: 2014/5/19
- Phantom: ELI v5.0; Type: QDOVA002AA
- Measurement SW: DASYS2, Version 52.8 (8);

Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Aux Antenna/Area Scan

(7x14x1): Measurement grid: dx=12mm, dy=12mm, Maximum value of SAR (measured) = 0.560 W/kg

Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Aux Antenna/Zoom Scan

(7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.830 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.198 W/kg Maximum value of SAR (measured) = 0.574 W/kg



0 dB = 0.574 W/kg = -2.41 dBW/kg

Date/Time: 05/02/2015

Test Laboratory: Cerpass Lab

DUT: lenovo flex 3-1120; Type: 43142Y-Jiabang Ant

Procedure Name: 802.11b 2437MHz Mid Tablet-Edge 1 Main Antenna

Communication System Band: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Tissue Temp(celsius)- 21 °C

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.63, 7.63, 7.63); Calibrated: 2014/5/23;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1379; Calibrated: 2014/5/19
- Phantom: ELI v5.0; Type: QDOVA002AA
- Measurement SW: DASYS2, Version 52.8 (8);

Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Main Antenna/Area Scan

(7x14x1): Measurement grid: dx=12mm, dy=12mm, Maximum value of SAR (measured) = 0.382 W/kg


Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Main Antenna/Zoom Scan

(7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.418 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.143 W/kg Maximum value of SAR (measured) = 0.425 W/kg

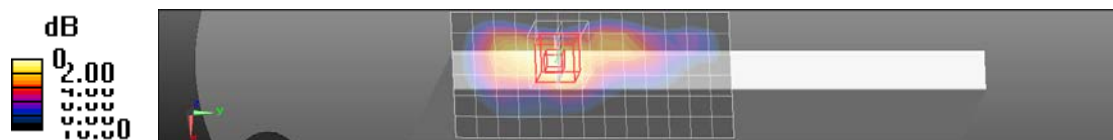

0 dB = 0.425 W/kg = -3.72 dBW/kg

Date/Time: 05/02/2015

Test Laboratory: Cerpess Lab

DUT: lenovo flex 3-1120; Type: 43142Y-Jiabang Ant

Procedure Name: 802.11b 2437MHz Mid Tablet-Edge 1 Aux Antenna

Communication System Band: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Tissue Temp(celsius)- 21 °C

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.63, 7.63, 7.63); Calibrated: 2014/5/23;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1379; Calibrated: 2014/5/19
- Phantom: ELI v5.0; Type: QDOVA002AA
- Measurement SW: DASYS2, Version 52.8 (8);

Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Aux Antenna/Area Scan

(7x14x1): Measurement grid: dx=12mm, dy=12mm, Maximum value of SAR (measured) = 0.515 W/kg

Configuration/802.11b 2437MHz Mid Tablet-Edge 1 Aux Antenna/Zoom Scan

(7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.386 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.189 W/kg Maximum value of SAR (measured) = 0.537 W/kg



0 dB = 0.537 W/kg = -2.70 dBW/kg

APPENDIX C. Calibration Data for Probe, Dipole and DAE

Please refer to attached files.

APPENDIX D. Photographs of EUT and Setup

Please refer to attached files.