




Data: 63

File: D:\客戶\Broadcom\BCM94356Z.EM6 (68)

Date: 2015-05-14 Time: 21:21:03

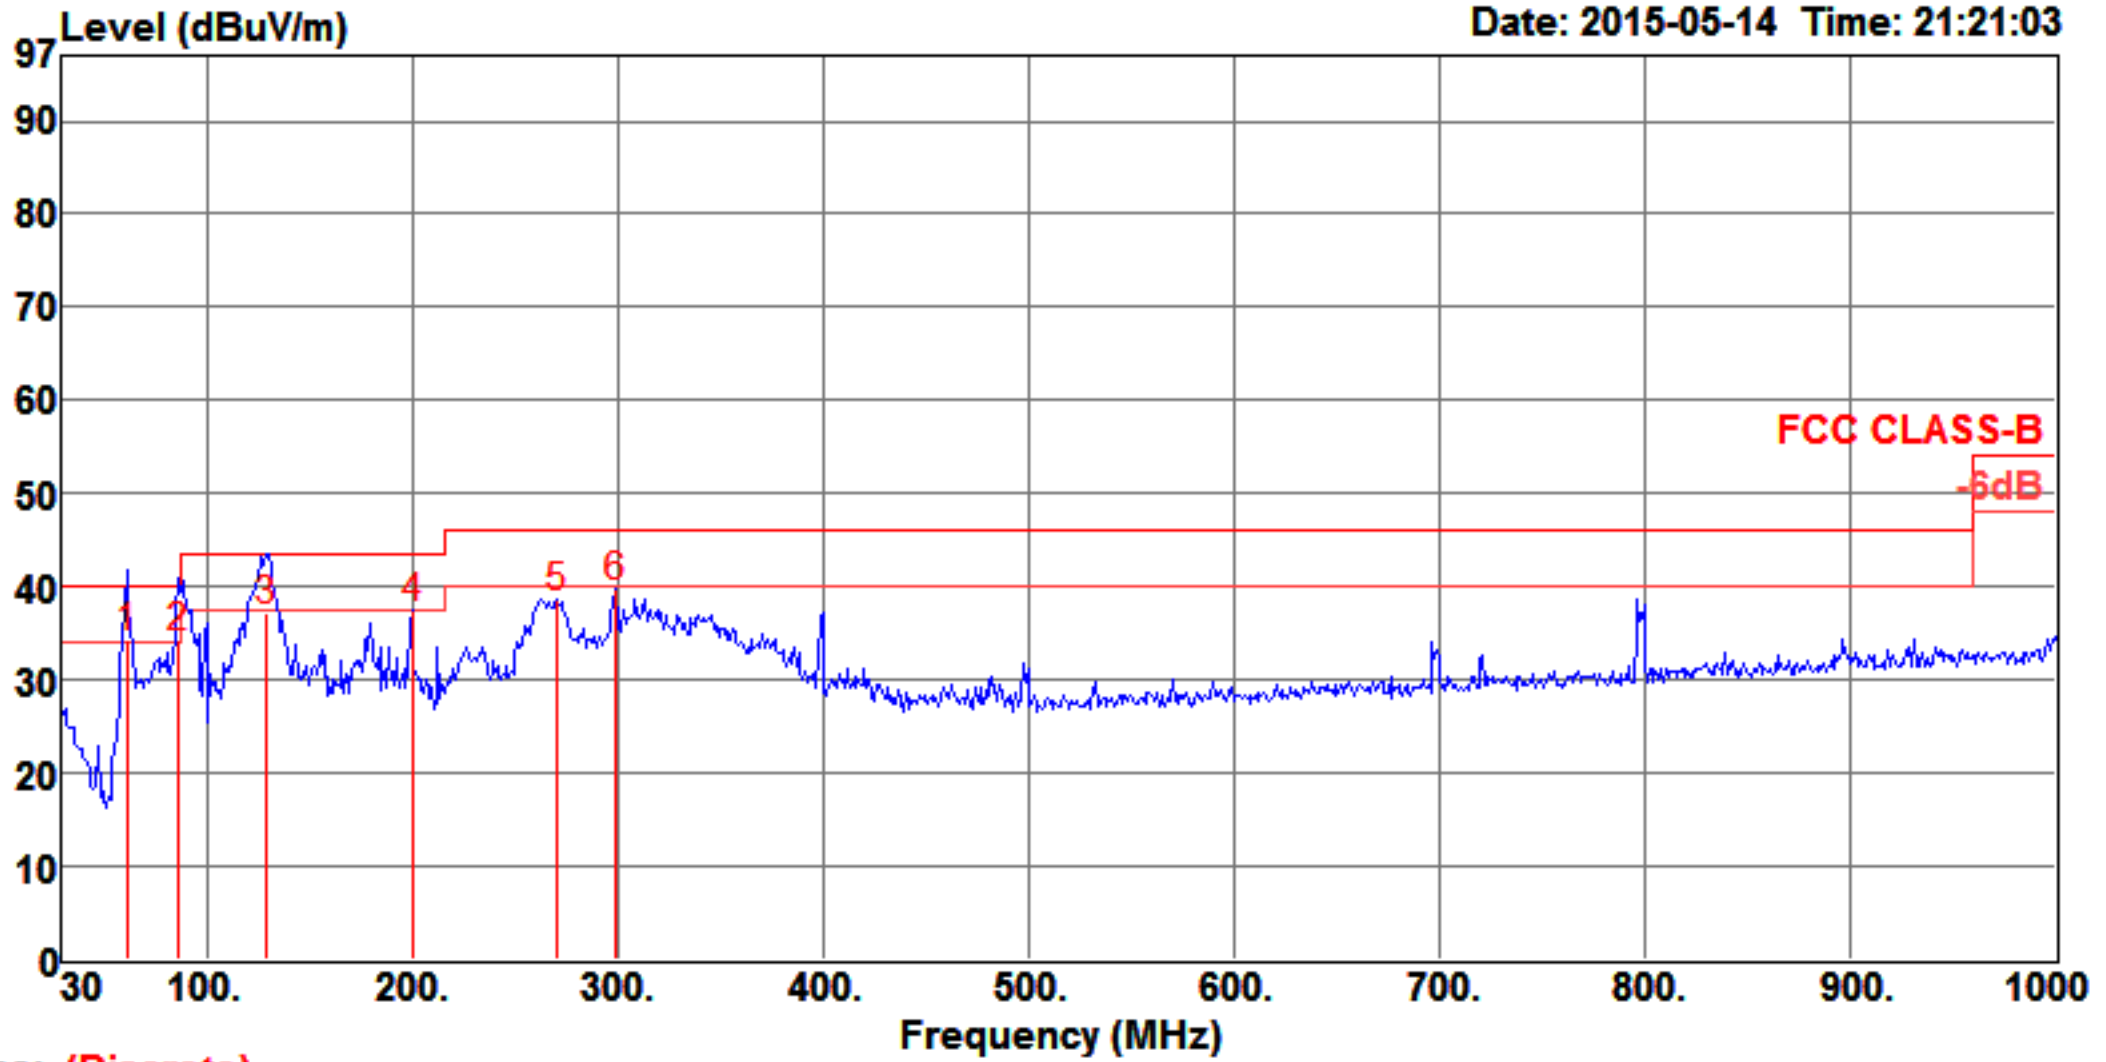

Trace: (Discrete)

Site : chamber
 Condition: FCC CLASS-B 3m CBL 6112D 20141106 HORIZONTAL
 : RBW:100.000KHz VBW:300.000KHz SWT:0.500sec
 : S-5
 Eut : BCM94356Z
 Mode : Normal
 Power : AC 120V/60Hz
 Memo 6-1 : WIFI(5G)+BT
 : EUT平躺


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	61.04	34.43	40.00	-5.57	59.34	0.79	32.50	6.80	HORIZONTAL	214	400	QP
2	86.26	34.39	40.00	-5.61	57.28	0.93	32.44	8.62	HORIZONTAL	196	200	QP
3	128.94	37.12	43.50	-6.38	55.79	1.15	32.43	12.61	HORIZONTAL	242	400	QP
4	199.75	37.36	43.50	-6.14	57.98	1.39	32.29	10.28	HORIZONTAL	172	150	Peak
5	270.56	38.71	46.00	-7.29	55.83	1.63	32.44	13.69	HORIZONTAL	92	125	Peak
6	298.69	39.86	46.00	-6.14	56.58	1.71	32.30	13.87	HORIZONTAL	334	125	Peak



Data: 64

File: D:\客戶\Broadcom\BCM94356Z.EM6 (68)

Date: 2015-05-14 Time: 21:46:26

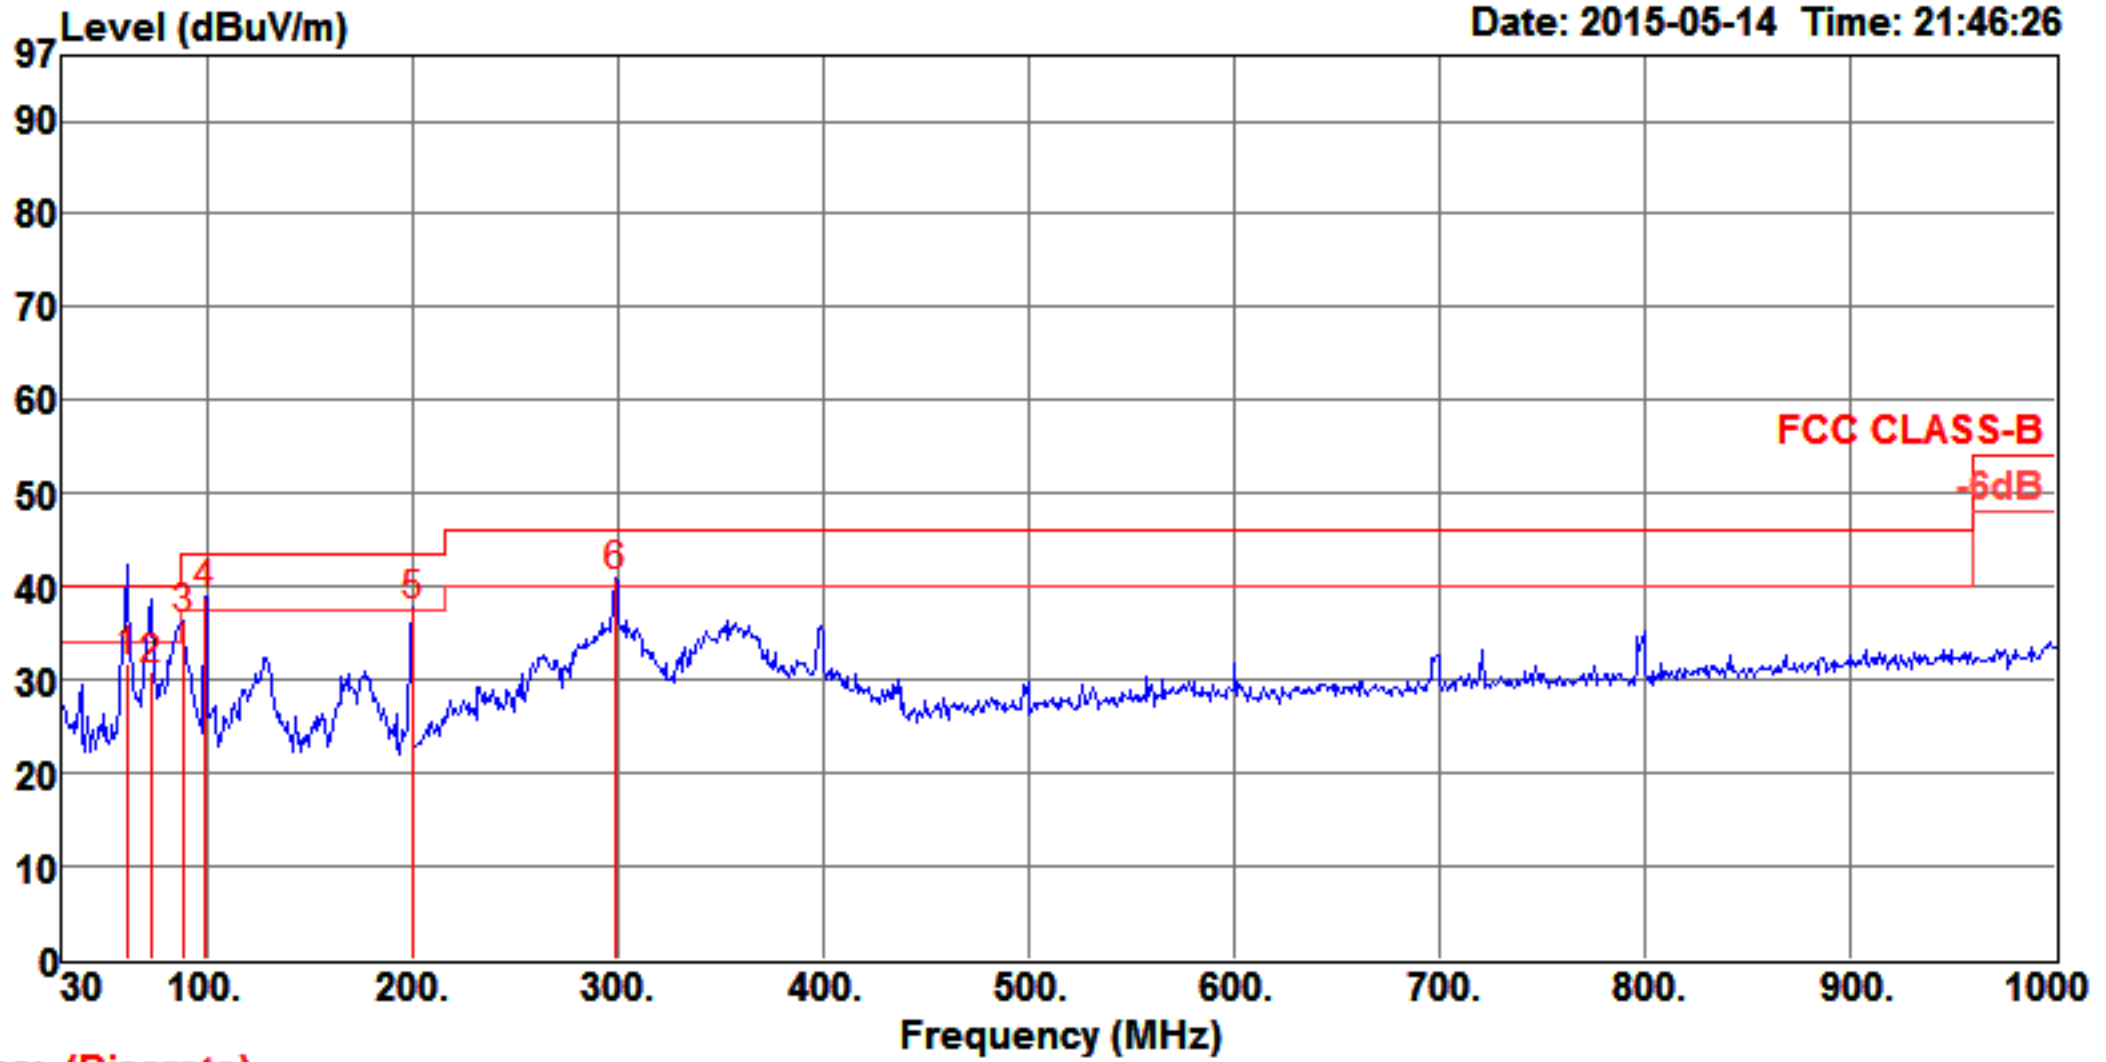

Trace: (Discrete)

Site : chamber
 Condition: FCC CLASS-B 3m CBL 6112D 20141106 VERTICAL
 : RBW:100.000KHz VBW:300.000KHz SWT:0.500sec
 : S-5
 Eut : BCM94356Z
 Mode : Normal
 Power : AC 120V/60Hz
 Memo 6-1 : WIFI(5G)+BT
 : EUT平躺

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	61.04	31.80	40.00	-8.20	56.71	0.79	32.50	6.80	VERTICAL	271	300	QP
2	72.68	30.90	40.00	-9.10	55.46	0.86	32.44	7.02	VERTICAL	30	200	QP
3	88.20	36.48	43.50	-7.02	59.09	0.94	32.43	8.88	VERTICAL	341	200	Peak
4	98.87	39.03	43.50	-4.47	59.59	0.98	32.45	10.91	VERTICAL	244	300	Peak
5	199.75	37.69	43.50	-5.81	58.29	1.39	32.29	10.30	VERTICAL	115	100	Peak
6	298.69	40.81	46.00	-5.19	57.52	1.71	32.30	13.88	VERTICAL	202	200	Peak