




Data: 61

File: D:\客戶\Broadcom\BCM94356Z.EM6 (68)

Date: 2015-05-14 Time: 21:42:48

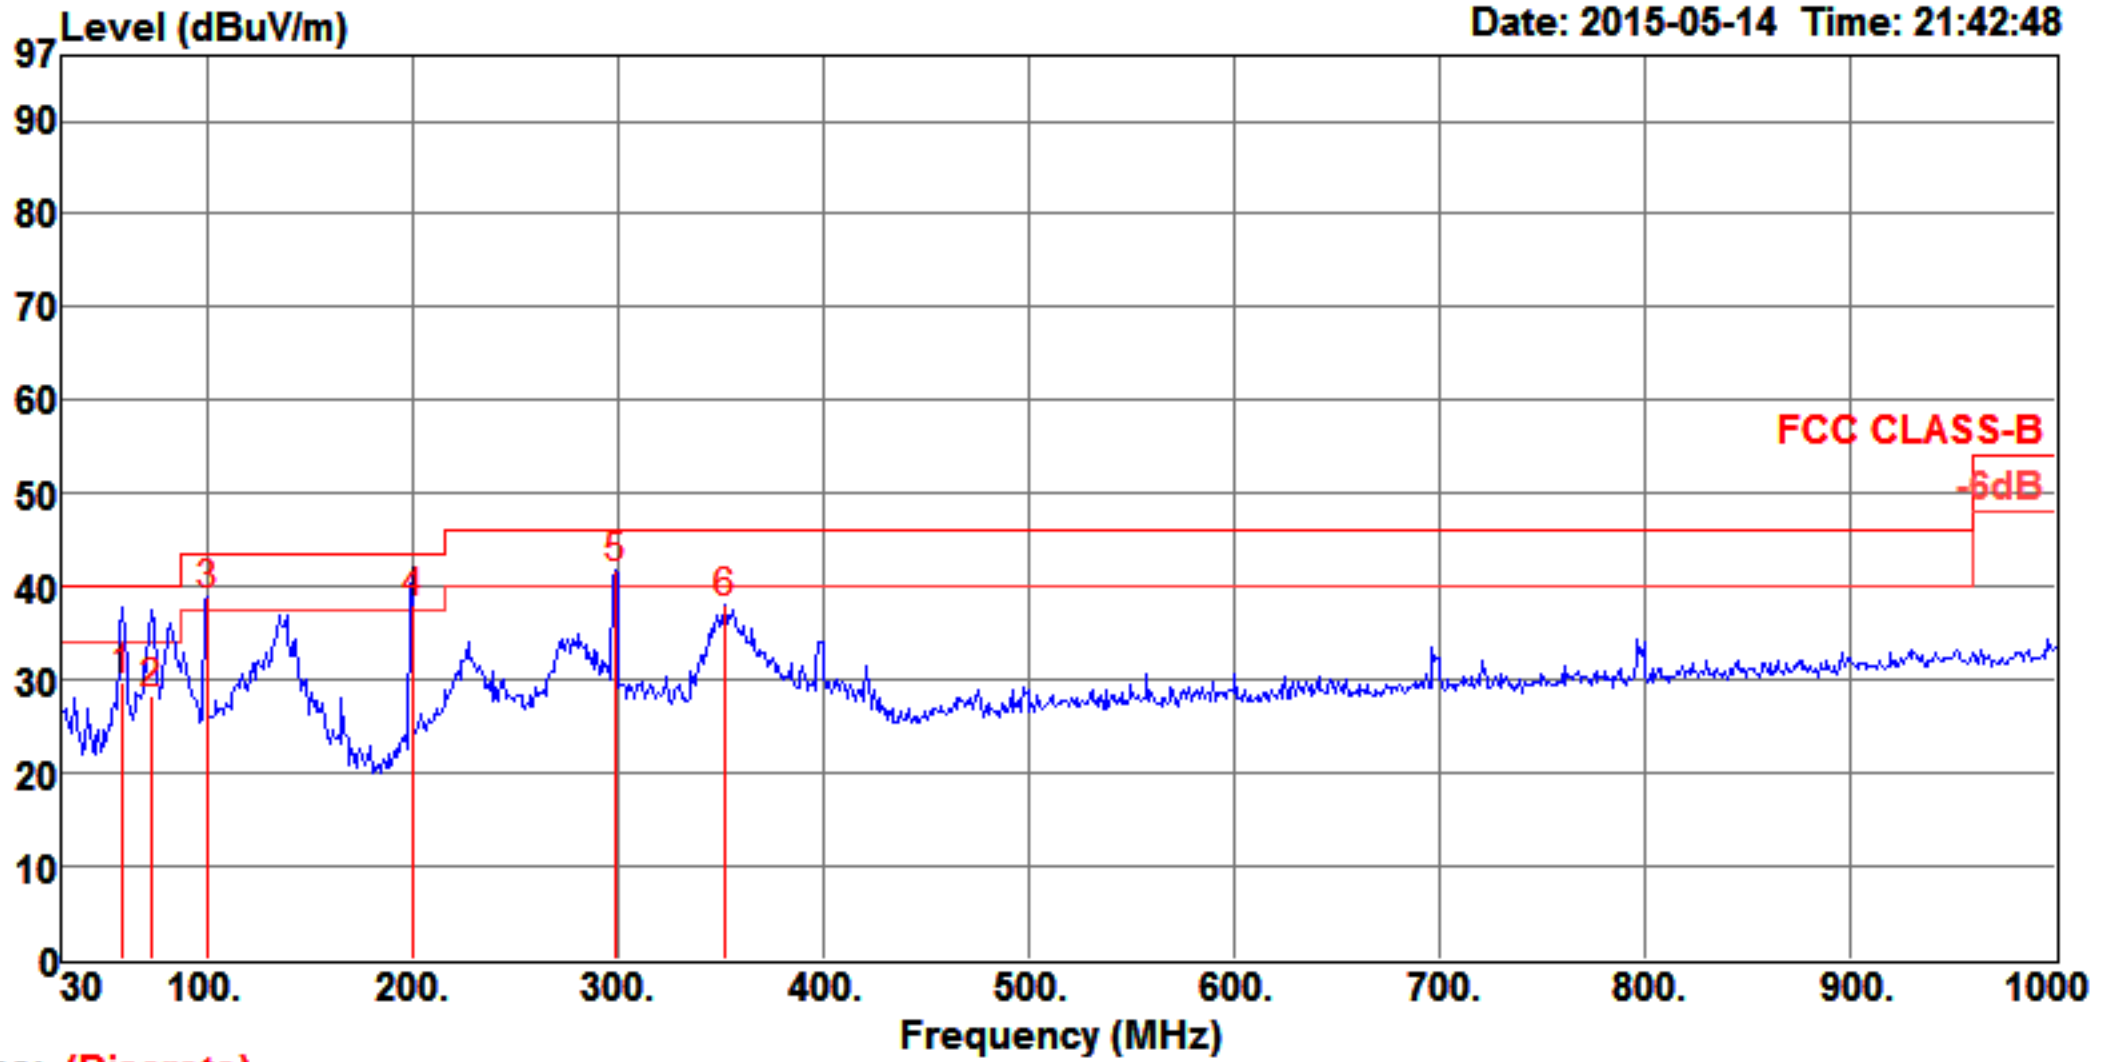

Trace: (Discrete)

Site : chamber
Condition: FCC CLASS-B 3m CBL 6112D 20141106 VERTICAL
: RBW:100.000KHz VBW:300.000KHz SWT:0.500sec
: S-5
Eut : BCM94356Z
Mode : Normal
Power : AC 120V/60Hz
Memo 6-1 : WIFI(2.4G)+BT
: EUT平躺


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	59.10	29.91	40.00	-10.09	54.61	0.78	32.50	7.02	VERTICAL	124	400	QP
2	73.65	28.40	40.00	-11.60	52.85	0.87	32.41	7.09	VERTICAL	116	100	QP
3	99.84	38.80	43.50	-4.70	59.19	0.98	32.47	11.10	VERTICAL	92	300	Peak
4	199.75	38.05	43.50	-5.45	58.65	1.39	32.29	10.30	VERTICAL	69	200	Peak
5	298.69	41.88	46.00	-4.12	58.59	1.71	32.30	13.88	VERTICAL	192	150	Peak
6	352.04	38.06	46.00	-7.94	53.20	1.87	32.36	15.35	VERTICAL	4	200	Peak



Data: 62

File: D:\客戶\Broadcom\BCM94356Z.EM6 (68)

Date: 2015-05-14 Time: 22:49:57

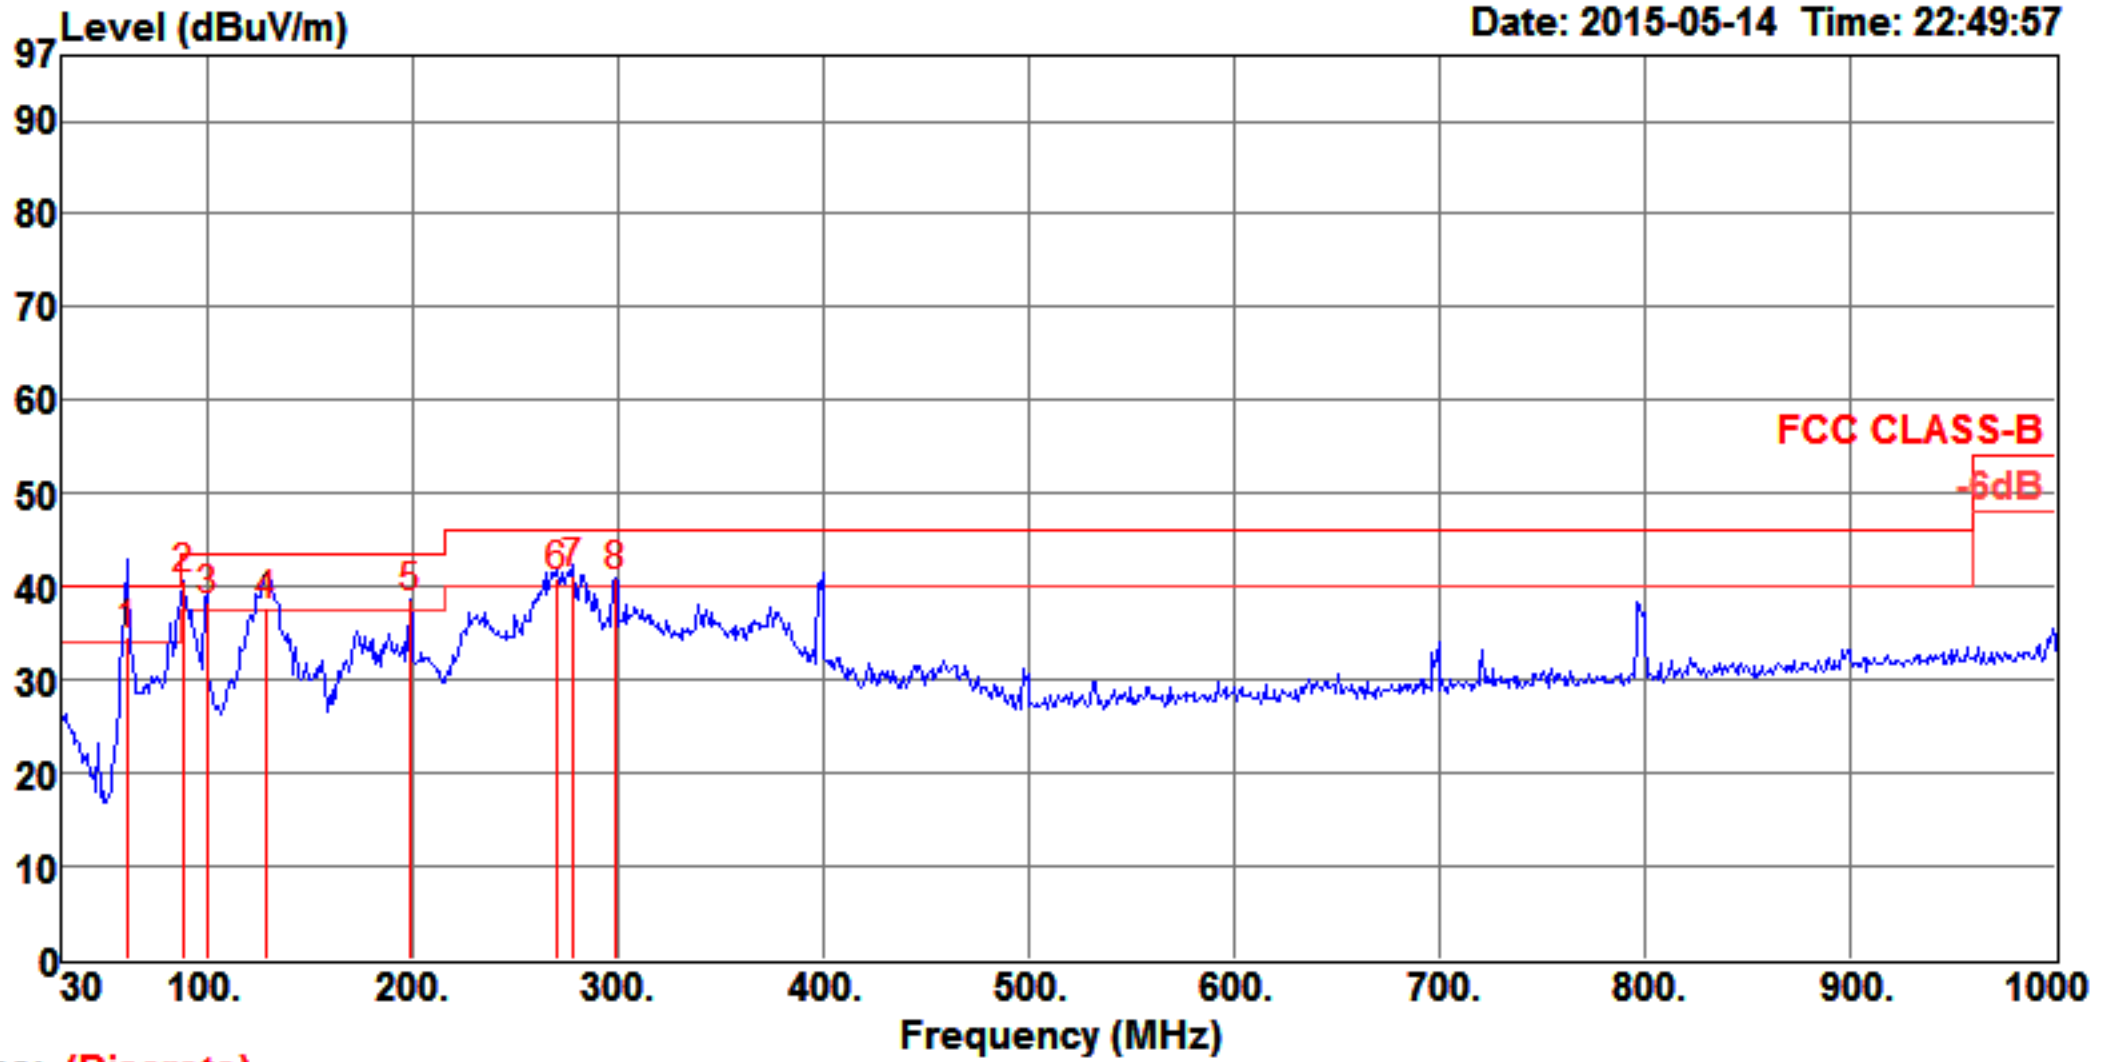

Trace: (Discrete)

Site : chamber
 Condition: FCC CLASS-B 3m CBL 6112D 20141106 HORIZONTAL
 : RBW:100.000KHz VBW:300.000KHz SWT:0.500sec
 : S-5
 Eut : BCM94356Z
 Mode : Normal
 Power : AC 120V/60Hz
 Memo 6-1 : WIFI(2.4G)+BT
 : EUT平躺

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	61.04	34.69	40.00	-5.31	59.60	0.79	32.50	6.80	HORIZONTAL	46	300	QP
2	88.20	40.50	43.50	-3.00	63.06	0.94	32.43	8.93	HORIZONTAL	195	400	Peak
3	99.84	38.31	43.50	-5.19	58.73	0.98	32.47	11.07	HORIZONTAL	202	400	Peak
4	128.94	37.67	43.50	-5.83	56.34	1.15	32.43	12.61	HORIZONTAL	237	150	QP
5	198.78	38.50	43.50	-5.00	59.20	1.39	32.29	10.20	HORIZONTAL	178	150	Peak
6	270.56	40.80	46.00	-5.20	57.92	1.63	32.44	13.69	HORIZONTAL	137	125	Peak
7	278.32	41.22	46.00	-4.78	58.44	1.65	32.40	13.53	HORIZONTAL	276	125	Peak
8	298.69	40.97	46.00	-5.03	57.69	1.71	32.30	13.87	HORIZONTAL	336	125	Peak