


**AUTHORIZED BANDEDGE (CHANNEL 11)**

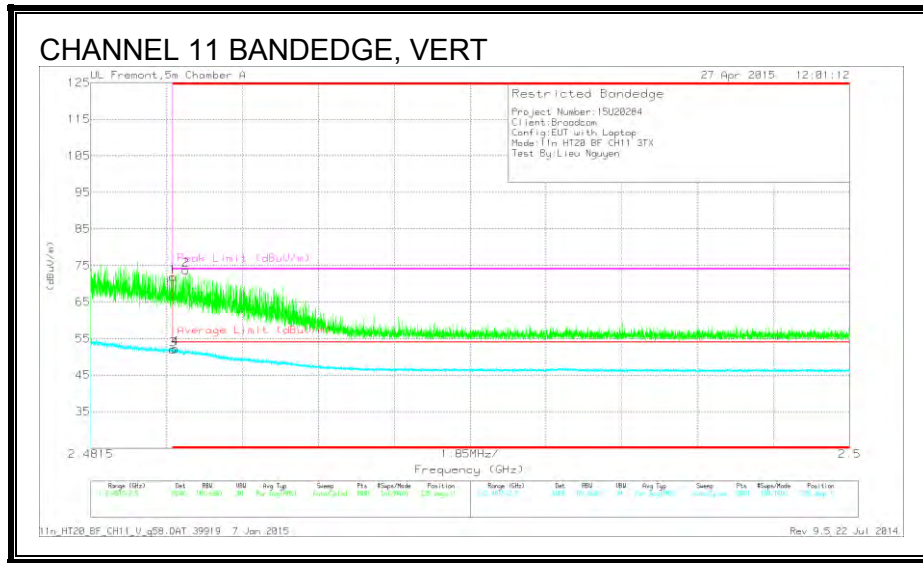


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	33.04	PK	32.5	5.7	0	71.24	-	-	74	-2.76	235	332	V
2	* 2.484	34.89	PK	32.5	5.7	0	73.09	-	-	74	-91	235	332	V
3	* 2.484	13.2	RMS	32.5	5.7	.55	51.95	54	-2.05	-	-	235	332	V
4	* 2.484	13.47	RMS	32.5	5.7	.55	52.22	54	-1.78	-	-	235	332	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 12)**

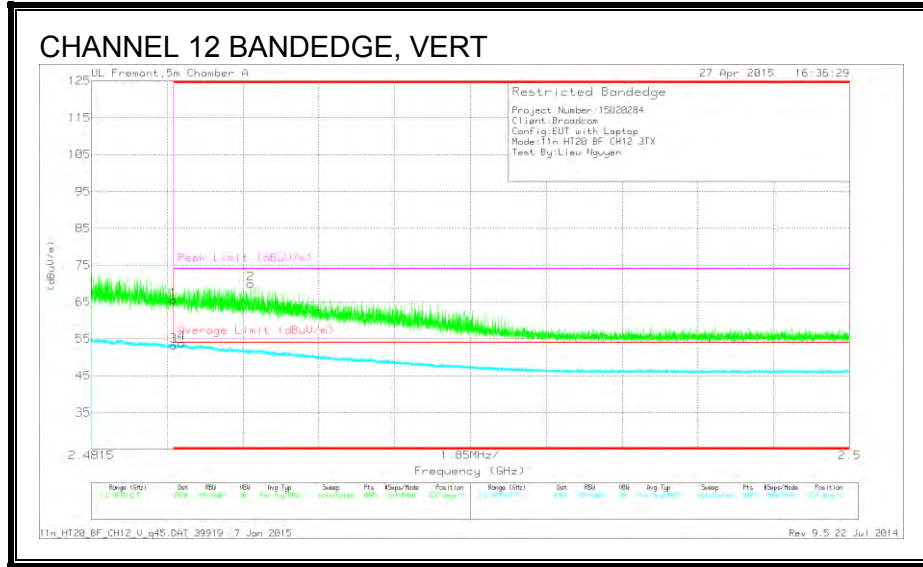


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	26.74	PK	32.5	5.7	0	64.94	-	-	74	-9.06	237	128	V
3	* 2.484	14.34	RMS	32.5	5.7	.55	53.09	54	-.91	-	-	237	128	V
4	* 2.484	14.94	RMS	32.5	5.7	.55	53.69	54	-.31	-	-	237	128	V
2	* 2.485	31.14	PK	32.5	5.7	0	69.34	-	-	74	-4.66	237	128	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 13)**

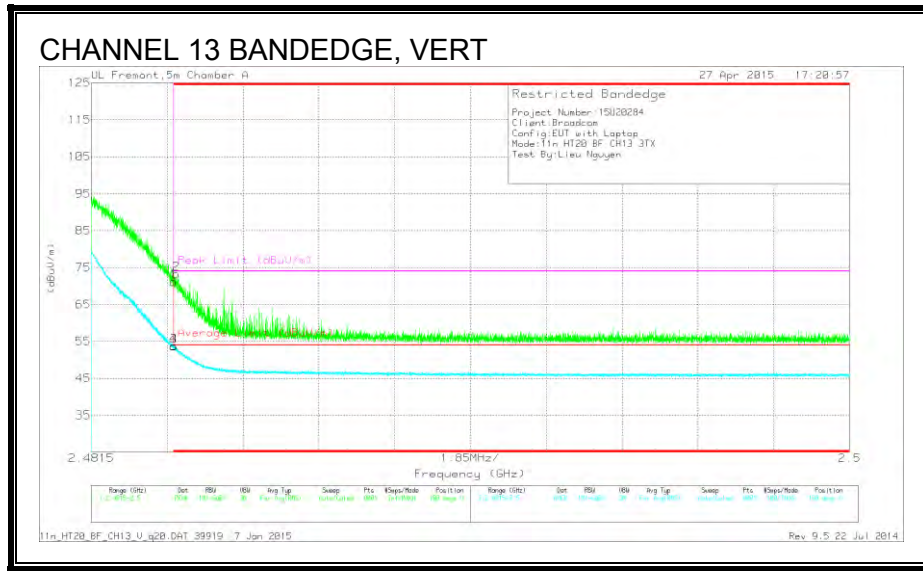

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	32.34	PK	32.5	5.7	0	70.54	-	-	74	-3.46	180	348	V
2	* 2.484	34.42	PK	32.5	5.7	0	72.62	-	-	74	-1.38	180	348	V
3	* 2.484	14.96	RMS	32.5	5.7	.55	53.71	54	-29	-	-	180	348	V
4	* 2.484	14.9	RMS	32.5	5.7	.55	53.65	54	-35	-	-	180	348	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL**

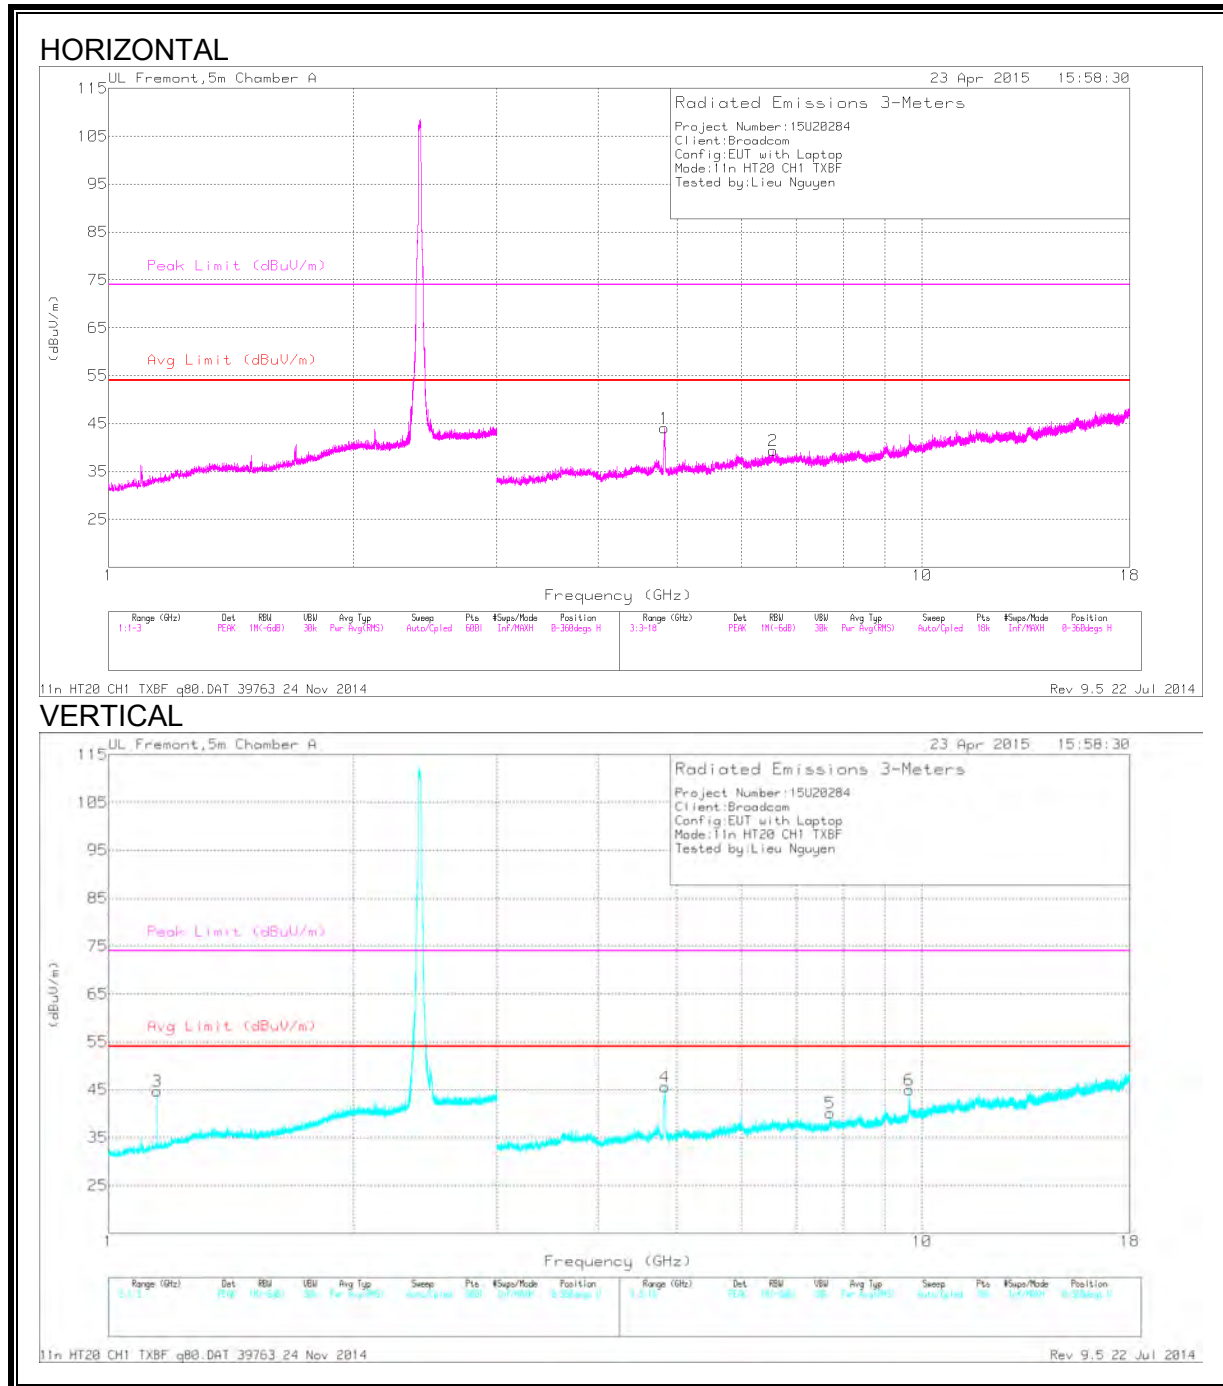

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 1.146	36.4	PK2	28	-22.6	0	41.8	-	-	74	-32.2	75	137	V
	* 1.146	24.59	MAv1	28	-22.6	.55	30.54	54	-23.46	-	-	75	137	V
1	* 4.824	54.29	PK2	34.3	-29.7	0	58.89	-	-	74	-15.11	131	264	H
	* 4.824	40.36	MAv1	34.3	-29.7	.55	45.51	54	-8.49	-	-	131	264	H
4	* 4.83	50.53	PK2	34.3	-29.8	0	55.03	-	-	74	-18.97	127	104	V
	* 4.829	35.75	MAv1	34.3	-29.8	.55	40.8	54	-13.2	-	-	127	104	V
5	* 7.708	37.13	PK2	35.5	-26.4	0	46.23	-	-	74	-27.77	212	199	V
	* 7.71	26.01	MAv1	35.5	-26.4	.55	35.66	54	-18.34	-	-	212	199	V
2	6.556	31.61	PK	35.9	-28.1	0	39.41	-	-	-	-	0-360	101	H
6	9.644	32.06	PK	36.7	-23.8	0	44.96	-	-	-	-	0-360	101	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

**MID CHANNEL**

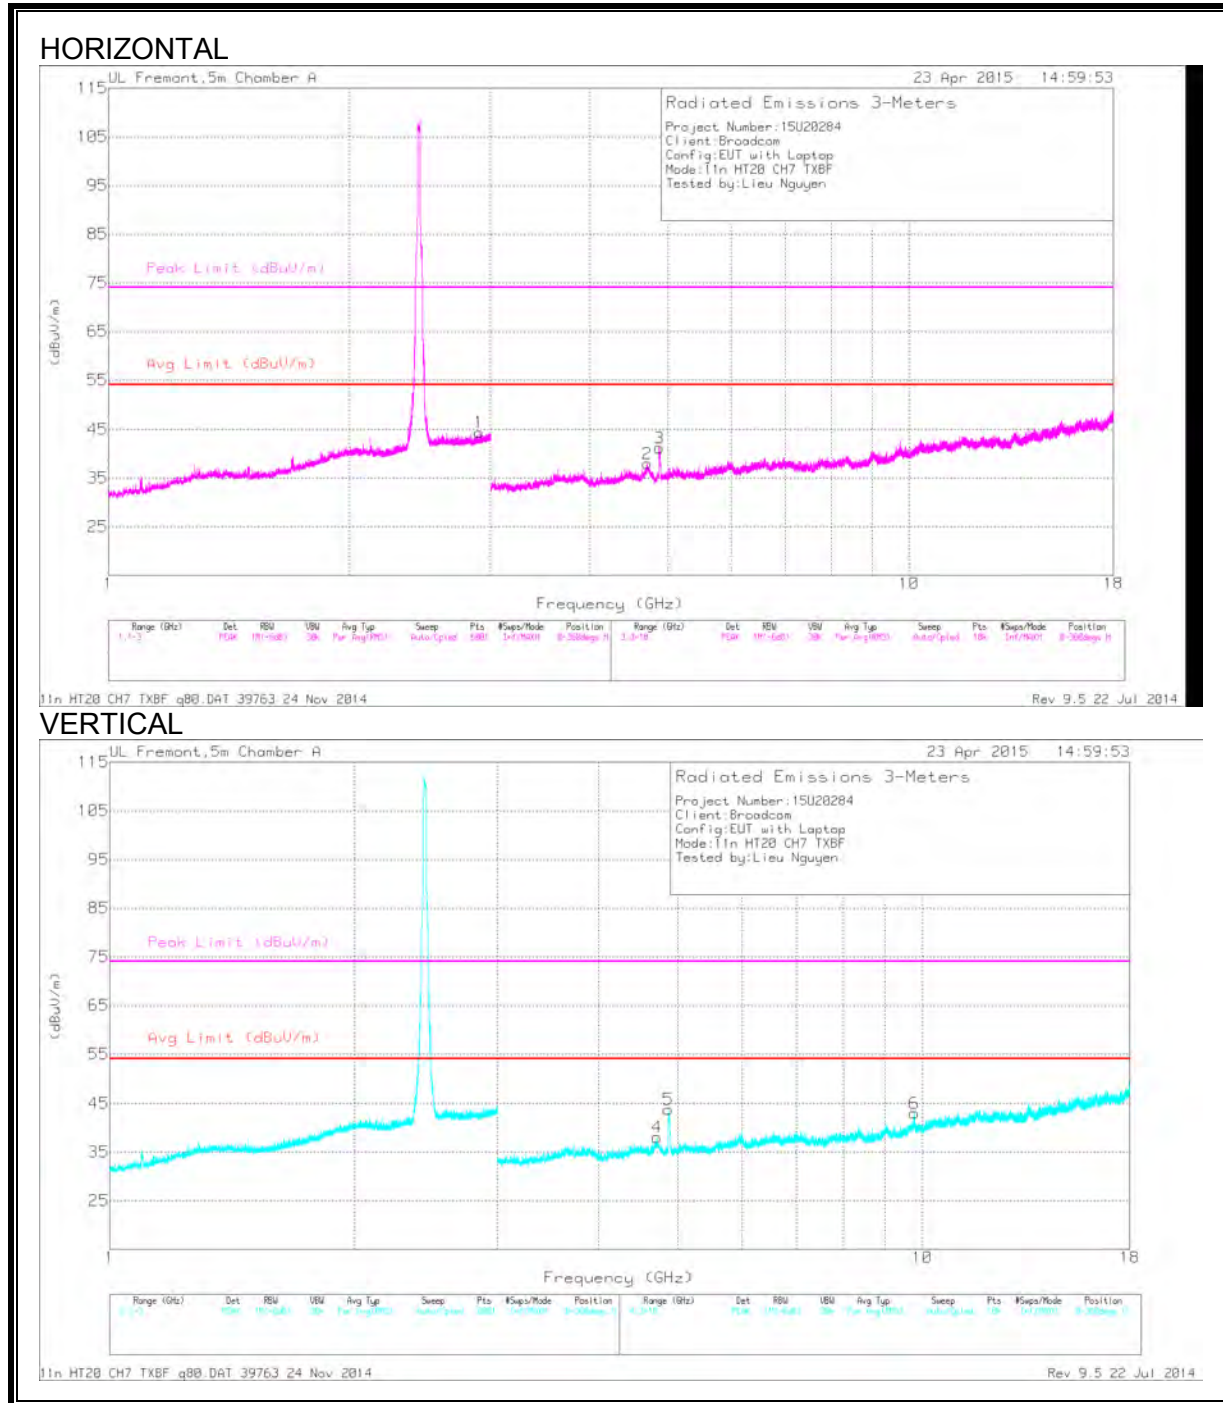

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.712	40.4	PK2	34.2	-29.2	0	45.4	-	-	74	-28.6	80	137	H
	* 4.713	28.74	MAv1	34.2	-29.2	.55	34.29	54	-19.71	-	-	80	137	H
3	* 4.882	47.06	PK2	34.2	-30.4	0	50.86	-	-	74	-23.14	239	282	H
	* 4.882	33.65	MAv1	34.2	-30.4	.55	38	54	-16	-	-	239	282	H
4	* 4.718	40.36	PK2	34.2	-29.1	0	45.46	-	-	74	-28.54	3	378	V
	* 4.718	28.68	MAv1	34.2	-29.1	.55	34.33	54	-19.67	-	-	3	378	V
5	* 4.864	43.36	PK2	34.2	-30.2	0	47.36	-	-	74	-26.64	142	236	V
	* 4.864	31.01	MAv1	34.2	-30.2	.55	35.56	54	-18.44	-	-	142	236	V
1	2.904	31.89	PK	32.6	-20.1	0	44.39	-	-	-	-	0-360	101	H
6	9.776	30.08	PK	36.9	-24	0	42.98	-	-	-	-	0-360	101	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band


-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

**HIGH CHANNEL**

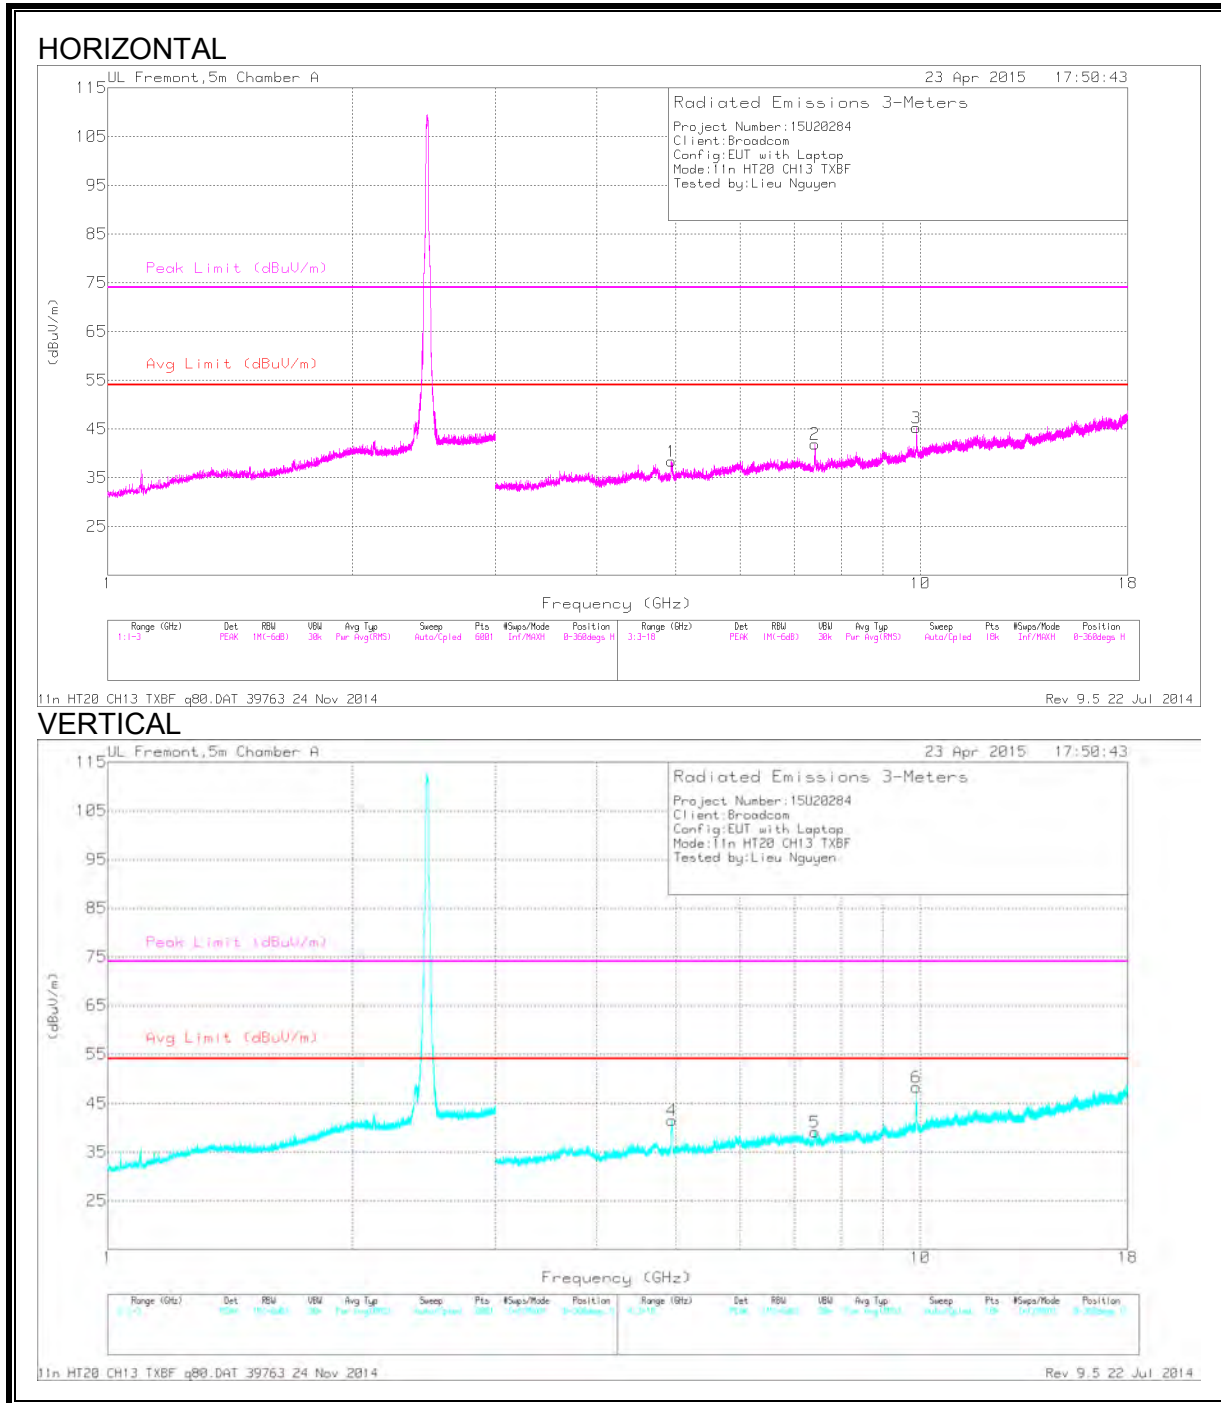



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.942	47.03	PK2	34.1	-30.4	0	50.73	-	-	74	-23.27	285	335	H
	* 4.943	32.85	MAv1	34.1	-30.4	.55	37.1	54	-16.9	-	-	285	335	H
2	* 7.422	39.48	PK2	35.4	-27.2	0	47.68	-	-	74	-26.32	169	367	H
	* 7.419	27.8	MAv1	35.4	-27.3	.55	36.45	54	-17.55	-	-	169	367	H
4	* 4.947	49.24	PK2	34.1	-30.4	0	52.94	-	-	74	-21.06	130	141	V
	* 4.945	35.46	MAv1	34.1	-30.4	.55	39.71	54	-14.29	-	-	130	141	V
5	* 7.416	40.18	PK2	35.4	-27.3	0	48.28	-	-	74	-25.72	328	329	V
	* 7.414	27.89	MAv1	35.4	-27.3	.55	36.54	54	-17.46	-	-	328	329	V
3	9.888	32.03	PK	37.1	-23.9	0	45.23	-	-	-	-	0-360	200	H
6	9.888	35.1	PK	37.1	-23.9	0	48.3	-	-	-	-	0-360	200	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing


PK - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

## 9.6. TX ABOVE 1 GHz 802.11n HT40 CDD 1Tx MODE IN THE 2.4 GHz BAND

### RESTRICTED BANDEDGE (CHANNEL 3)

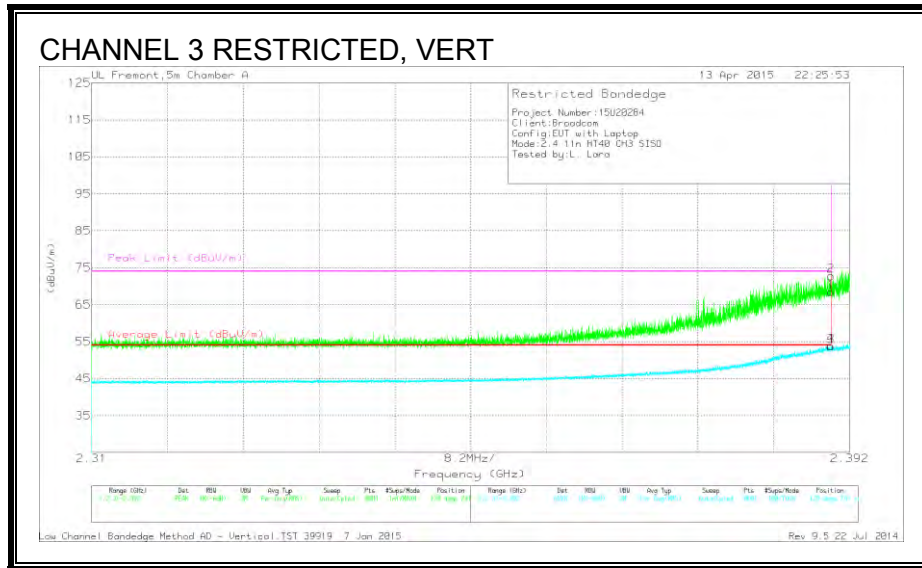


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.53	PK	32	4.9	0	68.43	-	-	74	-5.57	129	241	V
2	* 2.39	35.85	PK	32	4.9	0	72.75	-	-	74	-1.25	129	241	V
3	* 2.39	16.71	RMS	32	4.9	.13	53.74	54	-26	-	-	129	241	V
4	* 2.39	16.76	RMS	32	4.9	.13	53.79	54	-21	-	-	129	241	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEDGE (CHANNEL 4)**

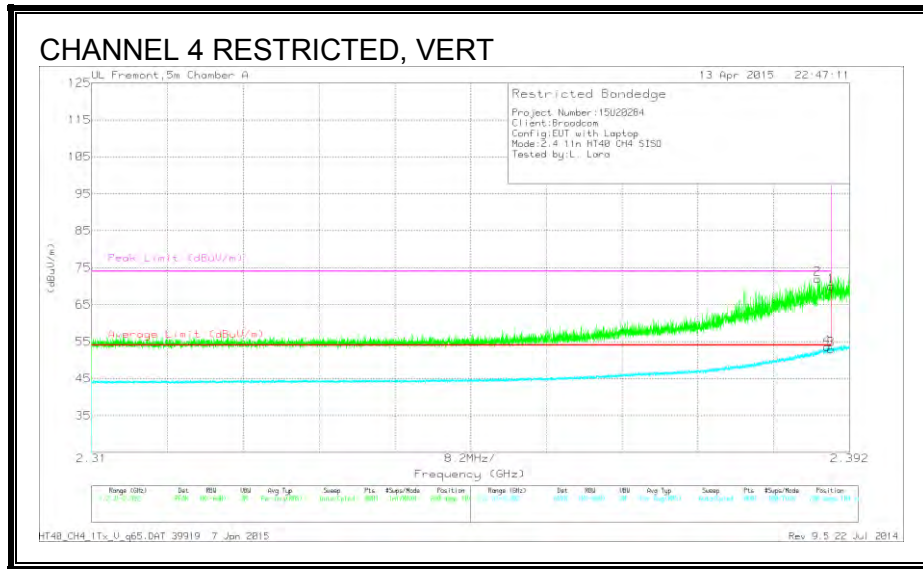


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	35.1	PK	32	4.9	0	72	-	-	74	-2	280	104	V
1	* 2.39	33.13	PK	32	4.9	0	70.03	-	-	74	-3.97	280	104	V
3	* 2.39	15.9	RMS	32	4.9	.13	52.93	54	-1.07	-	-	280	104	V
4	* 2.39	16.46	RMS	32	4.9	.13	53.49	54	-51	-	-	280	104	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEDGE (CHANNEL 5)**

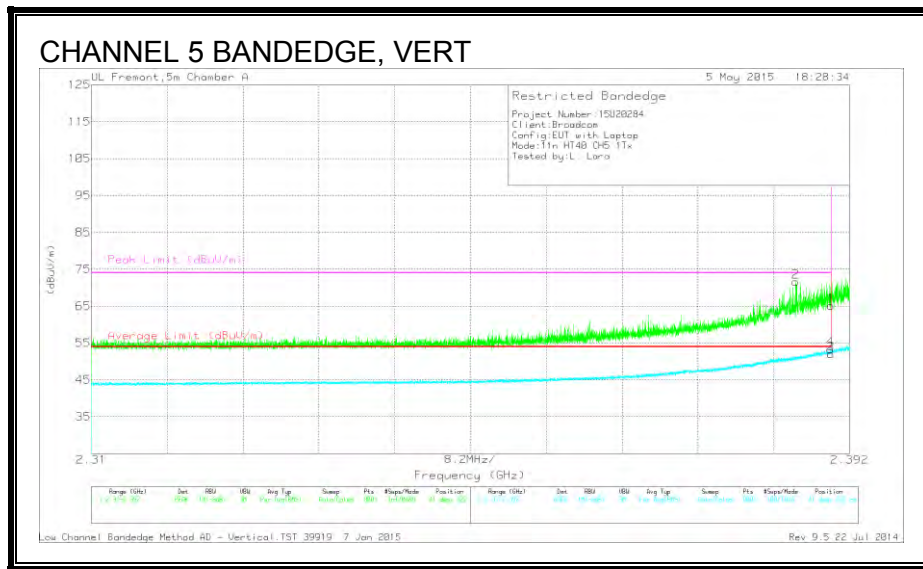


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.386	34.73	PK	32	4.9	0	71.63	-	-	74	-2.37	41	222	V
1	* 2.39	28.24	PK	32	4.9	0	65.14	-	-	74	-8.86	41	222	V
3	* 2.39	15.01	RMS	32	4.9	.13	52.04	54	-1.96	-	-	41	222	V
4	* 2.39	16.24	RMS	32	4.9	.13	53.27	54	-.73	-	-	41	222	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEDGE (CHANNEL 6)**

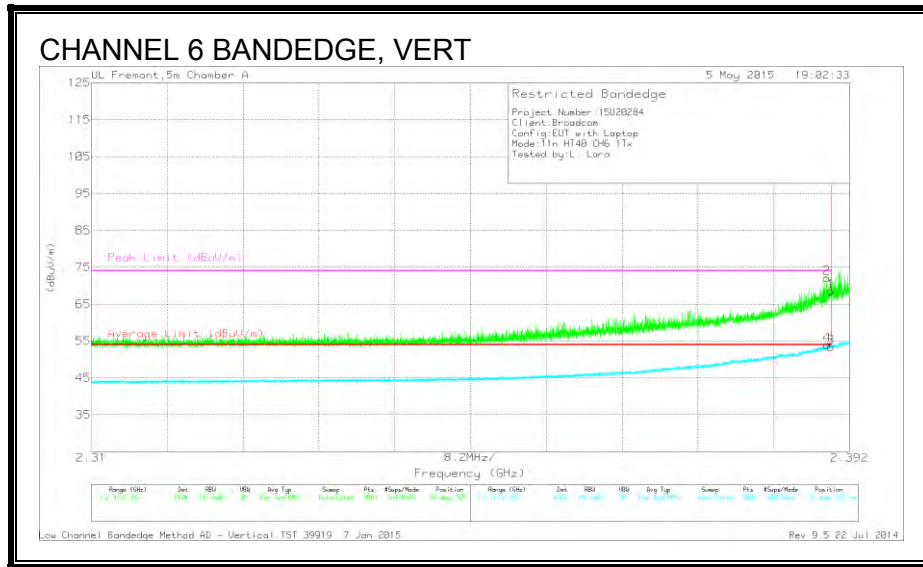


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.61	PK	32	4.9	0	68.51	-	-	74	-5.49	39	225	V
2	* 2.39	35.16	PK	32	4.9	0	72.06	-	-	74	-1.94	39	225	V
3	* 2.39	16.33	RMS	32	4.9	.13	53.36	54	-.64	-	-	39	225	V
4	* 2.39	16.95	RMS	32	4.9	.13	53.98	54	-.02	-	-	39	225	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEGE (CHANNEL 7)**

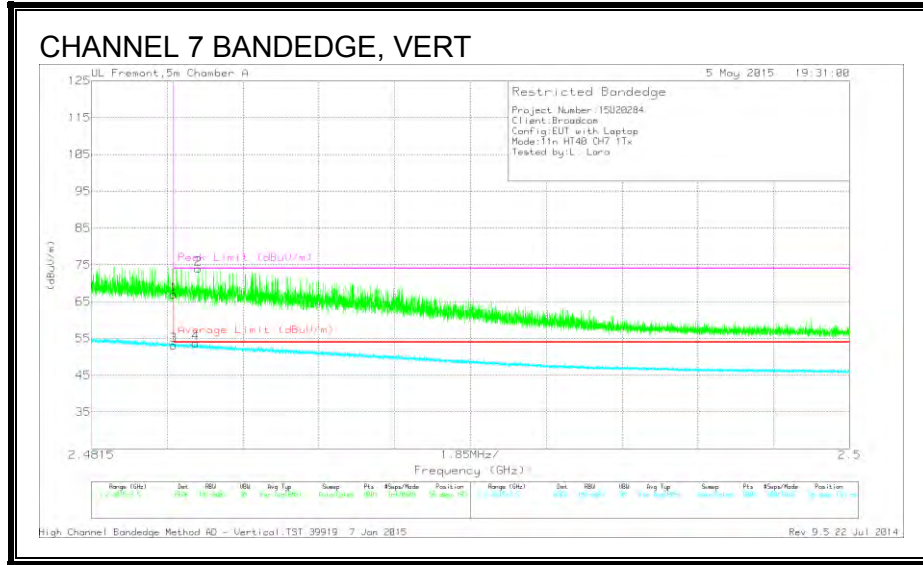


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29.84	PK	32.1	5	0	66.94	-	-	74	-7.06	56	193	V
2	* 2.484	36.83	PK	32.1	5	0	73.93	-	-	74	-0.07	56	193	V
3	* 2.484	15.93	RMS	32.1	5	.13	53.16	54	-.84	-	-	56	193	V
4	* 2.484	16.48	RMS	32.1	5	.13	53.71	54	-.29	-	-	56	193	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 8)**

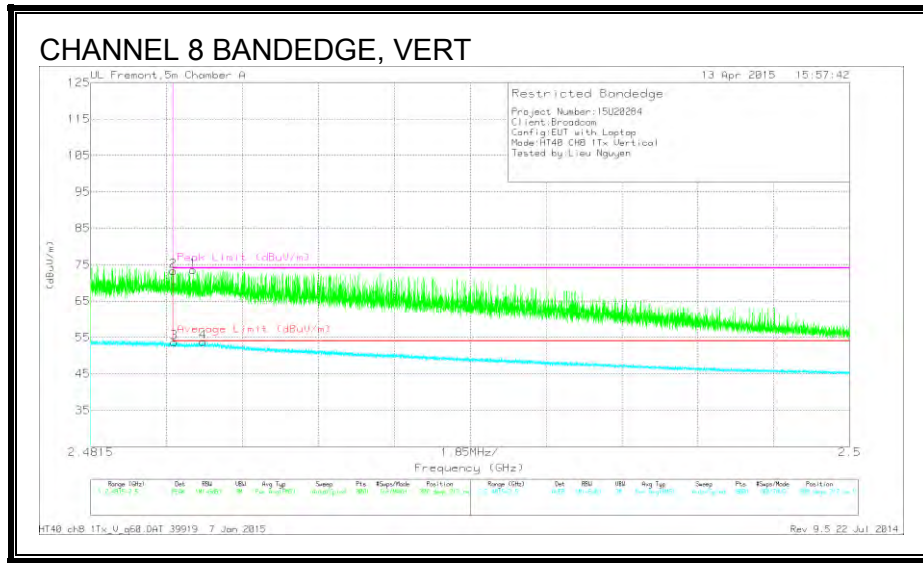


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.43	PK	32.1	5	0	73.53	-	-	74	-47	308	212	V
2	* 2.484	36.12	PK	32.1	5	0	73.22	-	-	74	-78	308	212	V
3	* 2.484	16.55	RMS	32.1	5	.13	53.78	54	-22	-	-	308	212	V
4	* 2.484	16.68	RMS	32.1	5	.13	53.91	54	-09	-	-	308	212	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 9)**

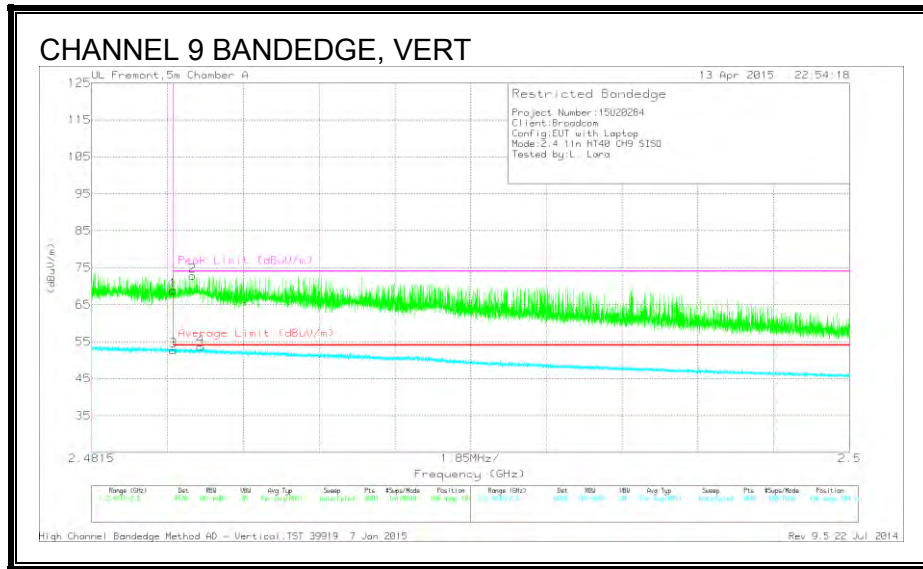

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	31.74	PK	32.1	5	0	68.84	-	-	74	-5.16	106	104	V
2	* 2.484	35.7	PK	32.1	5	0	72.8	-	-	74	-1.2	106	104	V
3	* 2.484	15.4	RMS	32.1	5	.13	52.63	54	-1.37	-	-	106	104	V
4	* 2.484	16.37	RMS	32.1	5	.13	53.6	54	-4	-	-	106	104	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection



**AUTHORIZED BANDEGE (CHANNEL 10)**

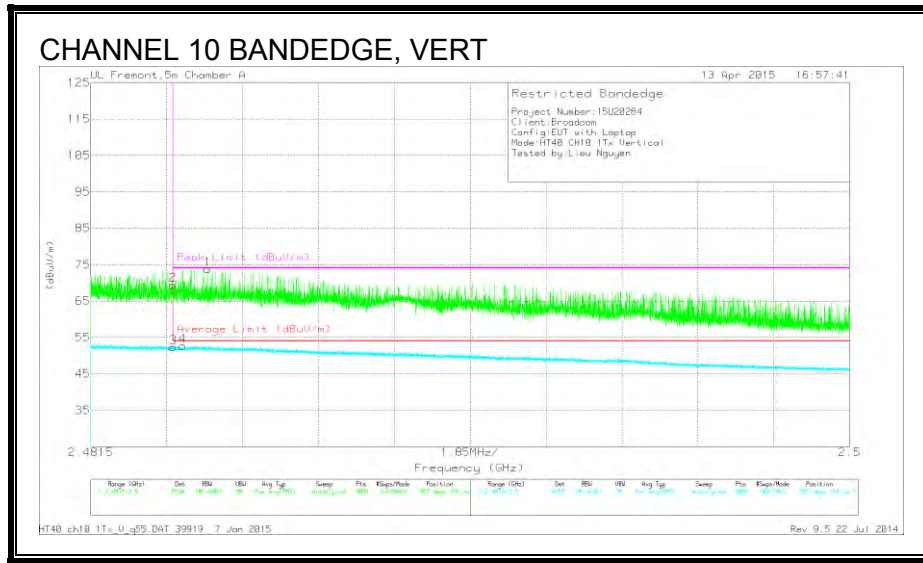


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.69	PK	32.1	5	0	73.79	-	-	74	-21	307	166	V
2	* 2.484	32.28	PK	32.1	5	0	69.38	-	-	74	-4.62	307	166	V
3	* 2.484	15.19	RMS	32.1	5	.13	52.42	54	-1.58	-	-	307	166	V
4	* 2.484	15.5	RMS	32.1	5	.13	52.73	54	-1.27	-	-	307	166	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 11)**

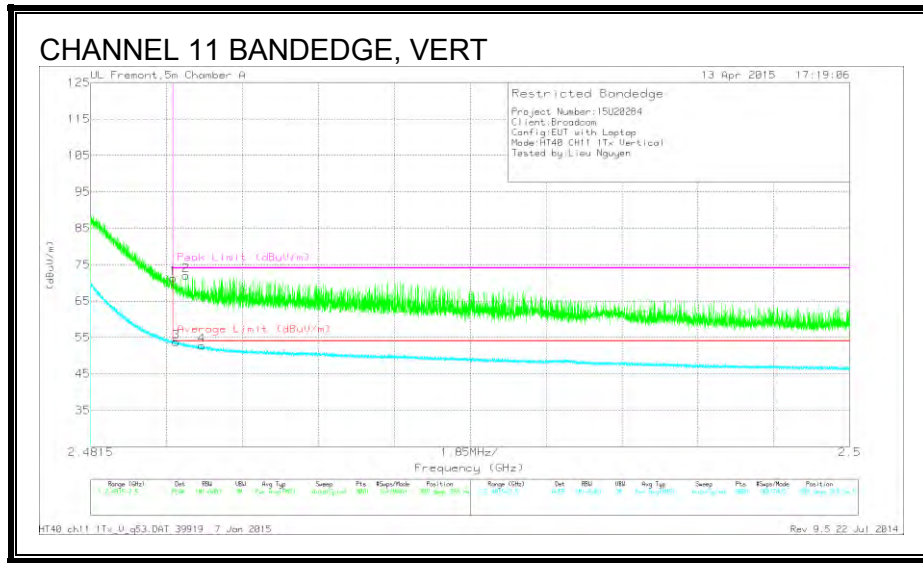

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	34.14	PK	32.1	5	0	71.24	-	-	74	-2.76	309	268	V
2	* 2.484	34.87	PK	32.1	5	0	71.97	-	-	74	-2.03	309	268	V
3	* 2.484	16.67	RMS	32.1	5	.13	53.9	54	-.1	-	-	309	268	V
4	* 2.484	15.68	RMS	32.1	5	.13	52.91	54	-1.09	-	-	309	268	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

## 9.7. TX ABOVE 1 GHz 802.11n HT40 CDD 2Tx MODE IN THE 2.4 GHz BAND

### RESTRICTED BANDEDGE (CHANNEL 3)

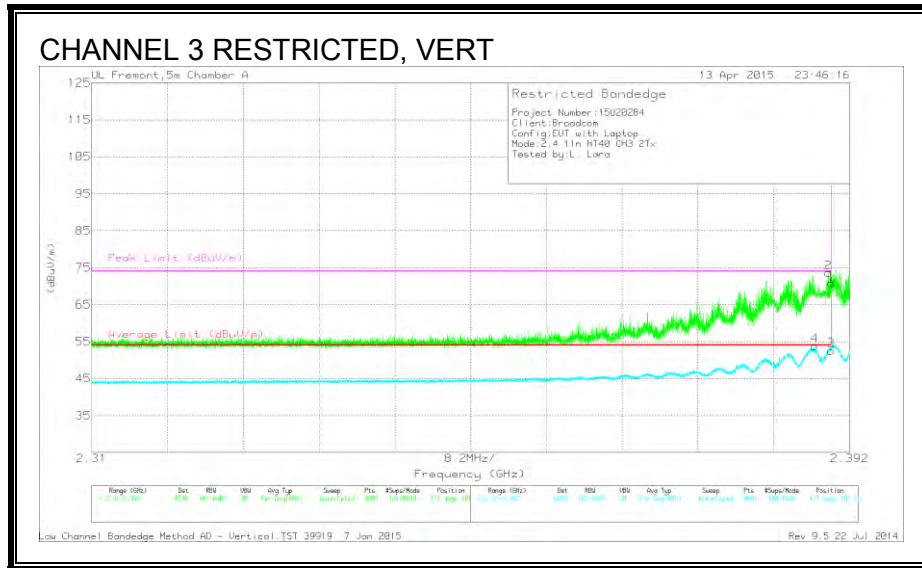


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.388	16.77	RMS	32	4.9	.13	53.8	54	-.2	-	-	171	101	V
1	* 2.39	33.94	PK	32	4.9	0	70.84	-	-	74	-3.16	171	101	V
2	* 2.39	36.74	PK	32	4.9	0	73.64	-	-	74	-.36	171	101	V
3	* 2.39	15.52	RMS	32	4.9	.13	52.55	54	-1.45	-	-	171	101	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEDGE (CHANNEL 4)**

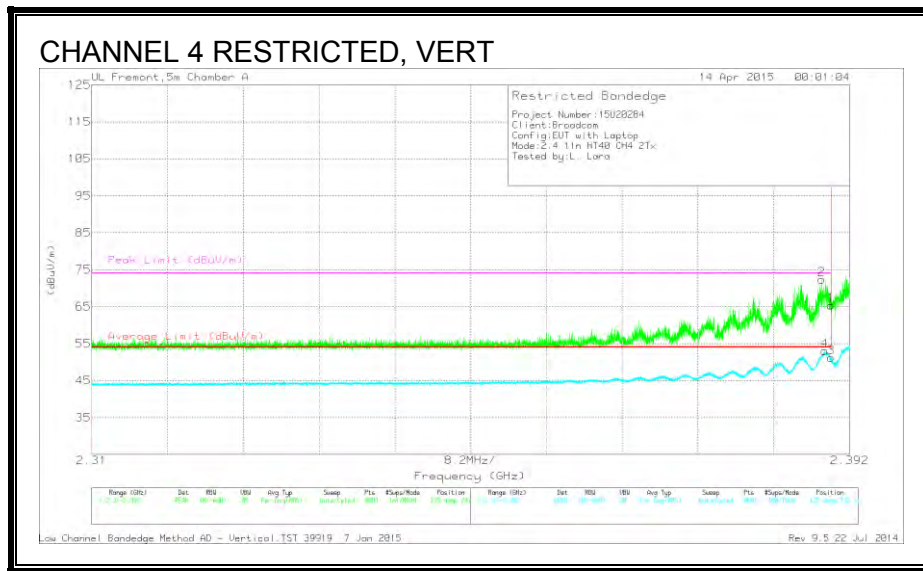


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	35.46	PK	32	4.9	0	72.36	-	-	74	-1.64	125	242	V
4	* 2.389	16.05	RMS	32	4.9	.13	53.08	54	-.92	-	-	125	242	V
1	* 2.39	28.49	PK	32	4.9	0	65.39	-	-	74	-8.61	125	242	V
3	* 2.39	14.21	RMS	32	4.9	.13	51.24	54	-2.76	-	-	125	242	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 8)**

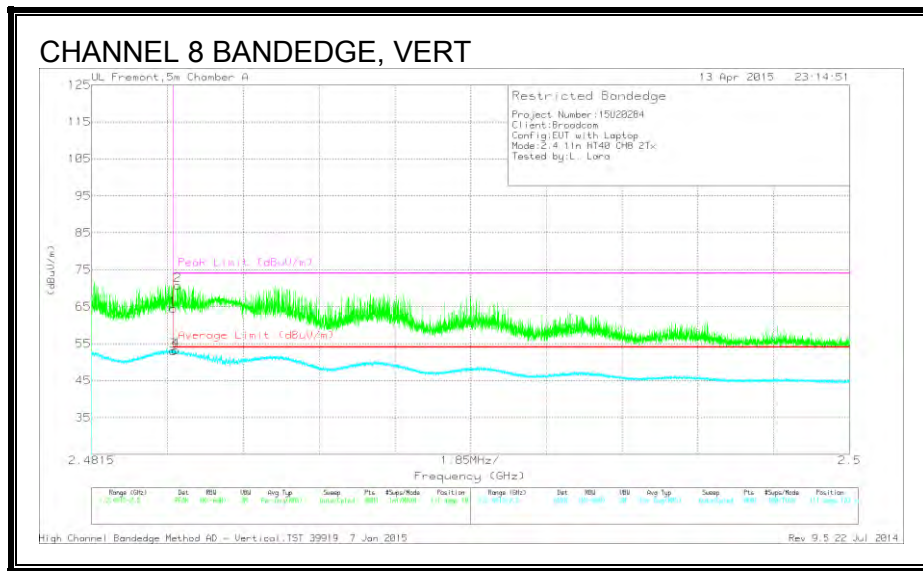


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	27.41	PK	32.1	5	0	64.51	-	-	74	-9.49	111	183	V
2	* 2.484	33.69	PK	32.1	5	0	70.79	-	-	74	-3.21	111	183	V
3	* 2.484	15.83	RMS	32.1	5	.13	53.06	54	-94	-	-	111	183	V
4	* 2.484	16.03	RMS	32.1	5	.13	53.26	54	-74	-	-	111	183	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 9)**

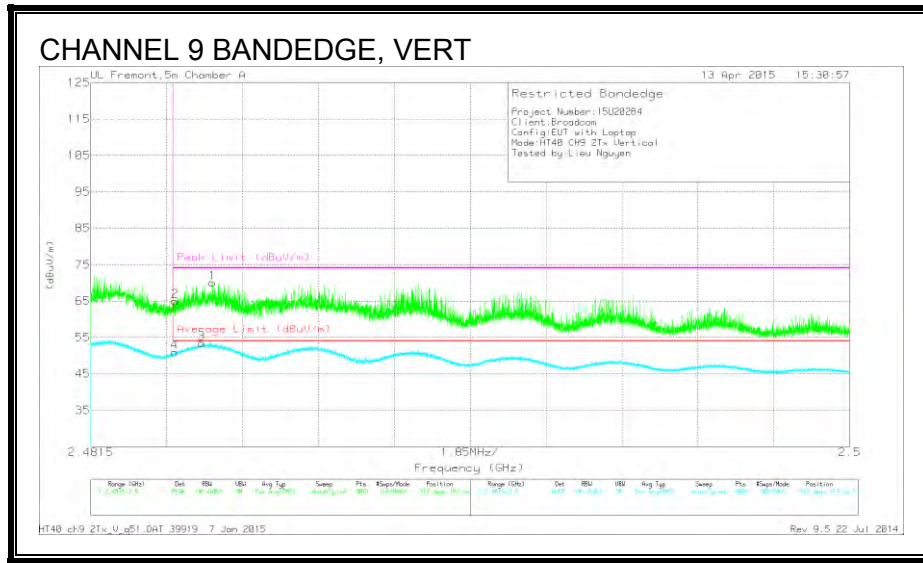


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	32.96	PK	32.1	5	0	70.06	-	-	74	-3.94	312	163	V
2	* 2.484	27.84	PK	32.1	5	0	64.94	-	-	74	-9.06	312	163	V
3	* 2.484	16.35	RMS	32.1	5	.13	53.58	54	-.42	-	-	312	163	V
4	* 2.484	13.79	RMS	32.1	5	.13	51.02	54	-2.98	-	-	312	163	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEGE (CHANNEL 10)**

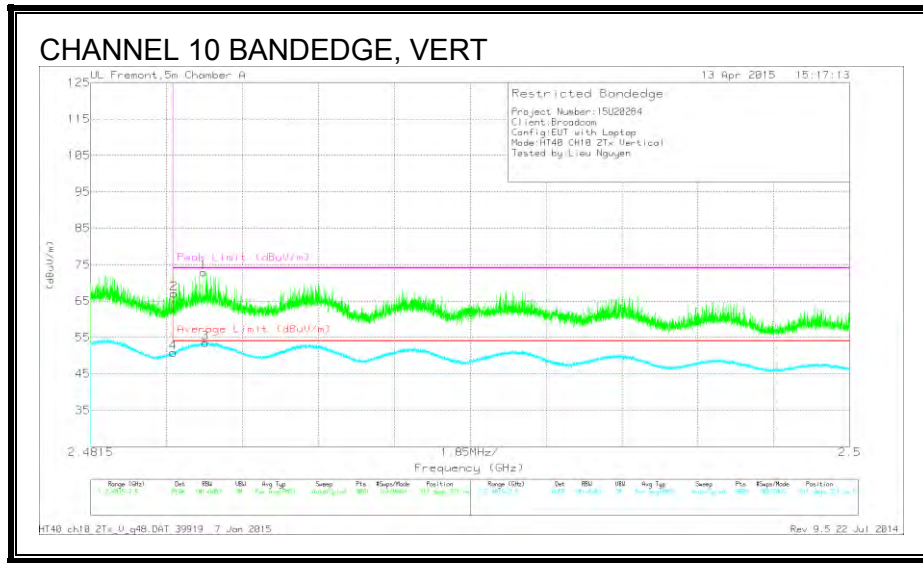


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	35.75	PK	32.1	5	0	72.85	-	-	74	-1.15	311	221	V
2	* 2.484	29.99	PK	32.1	5	0	67.09	-	-	74	-6.91	311	221	V
3	* 2.484	16.45	RMS	32.1	5	.13	53.68	54	-32	-	-	311	221	V
4	* 2.484	13.67	RMS	32.1	5	.13	50.9	54	-3.1	-	-	311	221	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 11)**

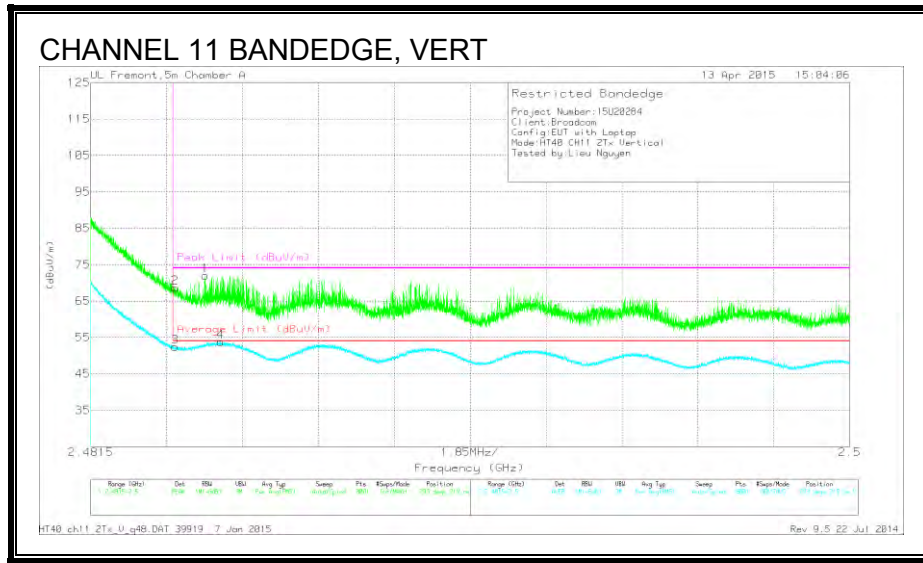

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	34.92	PK	32.1	5	0	72.02	-	-	74	-1.98	293	219	V
2	* 2.484	31.6	PK	32.1	5	0	68.7	-	-	74	-5.3	293	219	V
3	* 2.484	15.35	RMS	32.1	5	.13	52.58	54	-1.42	-	-	293	219	V
4	* 2.485	16.72	RMS	32.1	5	.13	53.95	54	-.05	-	-	293	219	V


\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection



**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL**

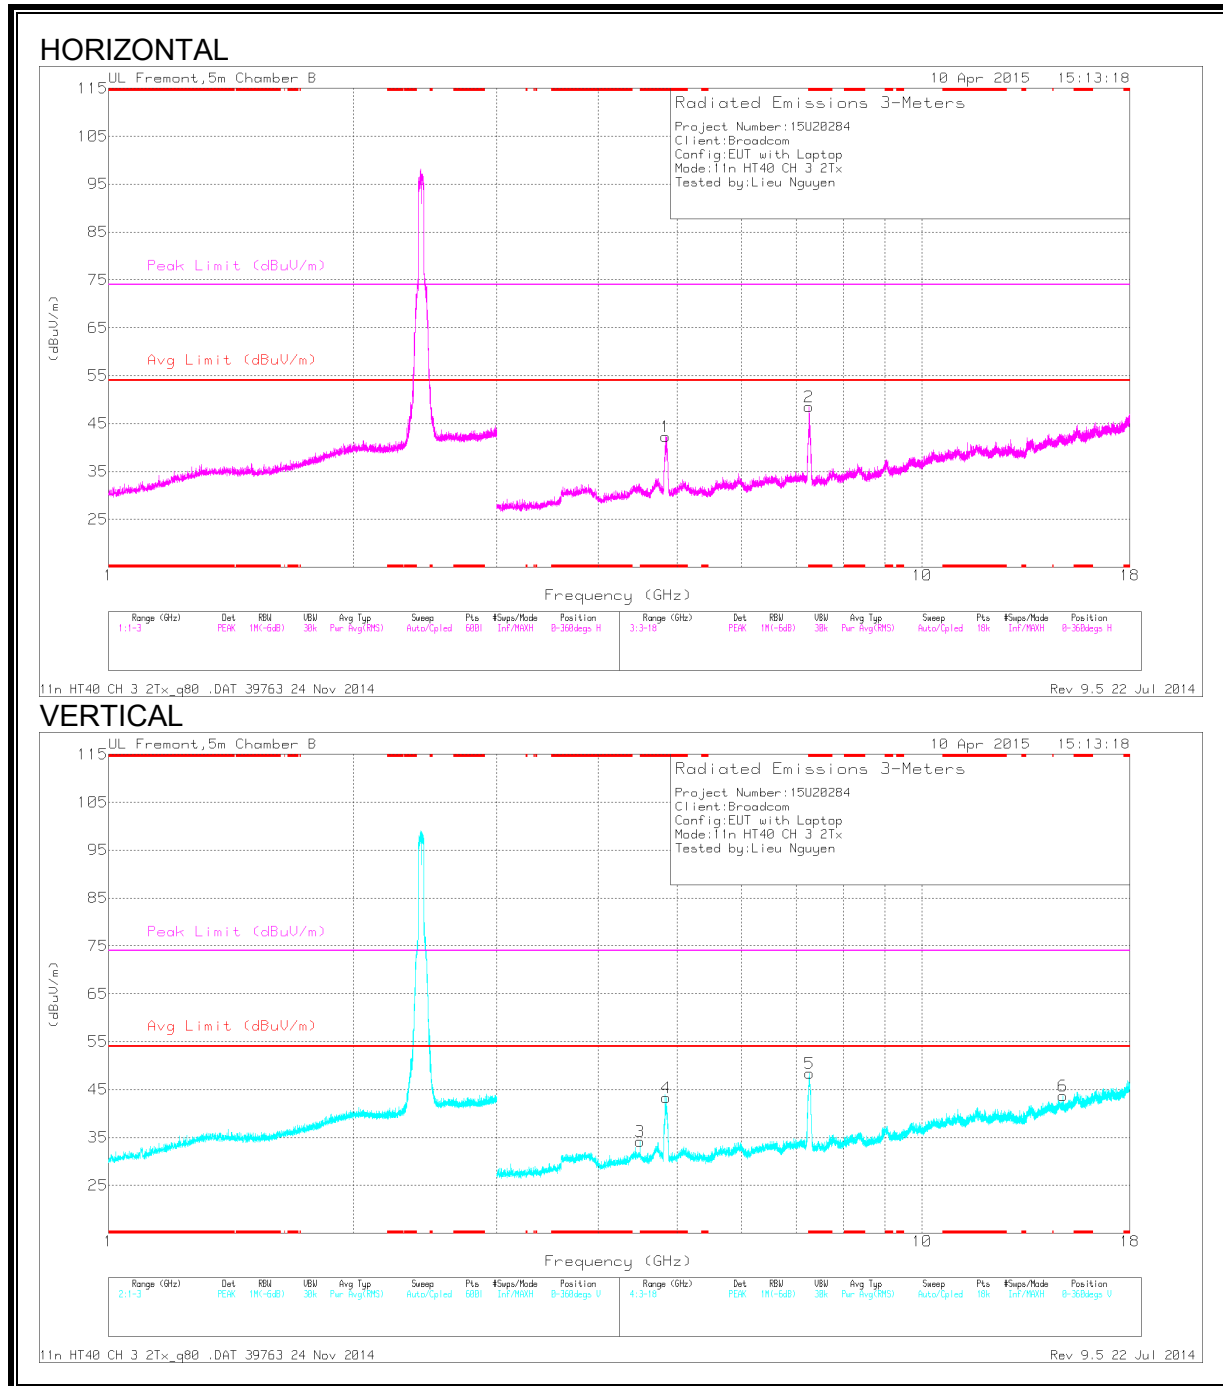

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.841	41.95	PK2	34.2	-29.8	0	46.35	-	-	74	-27.65	279	198	H
	* 4.84	31.45	MAv1	34.2	-29.8	.13	35.98	54	-18.02	-	-	279	198	H
2	* 7.258	48.75	PK2	35.3	-27.8	0	56.25	-	-	74	-17.75	213	274	H
	* 7.256	35.86	MAv1	35.3	-27.9	.13	43.39	54	-10.61	-	-	213	274	H
4	* 4.846	41.18	PK2	34.2	-30	0	45.38	-	-	74	-28.62	261	236	V
	* 4.845	30.67	MAv1	34.2	-29.9	.13	35.1	54	-18.9	-	-	261	236	V
5	* 7.271	45.49	PK2	35.3	-27.8	0	52.99	-	-	74	-21.01	45	273	V
	* 7.271	34.9	MAv1	35.3	-27.9	.13	42.43	54	-11.57	-	-	45	273	V
3	4.5	29.5	PK	34	-29.3	0	34.2	-	-	-	-	0-360	199	V
6	14.894	25.25	PK	39.9	-21.5	0	43.65	-	-	-	-	0-360	199	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

**MID CHANNEL**

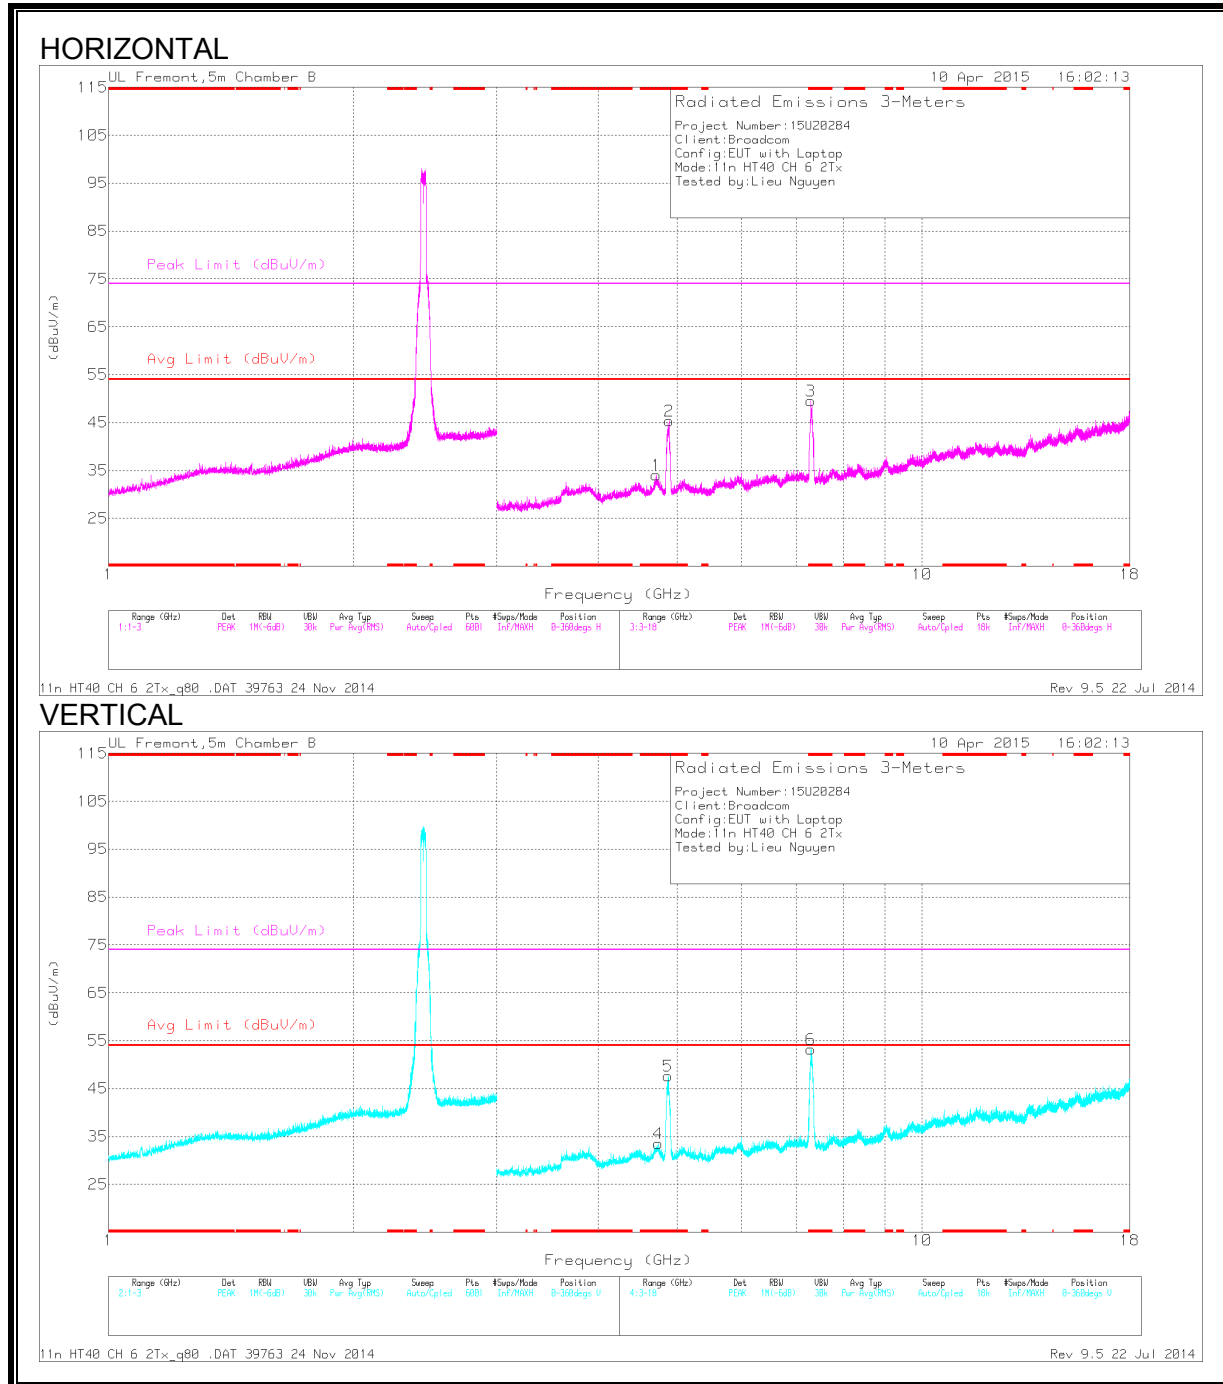

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.71	36.12	PK2	34.2	-29.2	0	41.12	-	-	74	-32.88	197	111	H
	* 4.71	24.46	MAv1	34.2	-29.2	.13	29.59	54	-24.41	-	-	197	111	H
2	* 4.885	43.62	PK2	34.2	-30.4	0	47.42	-	-	74	-26.58	85	268	H
	* 4.883	32.28	MAv1	34.2	-30.4	.13	36.21	54	-17.79	-	-	85	268	H
3	* 7.301	47.04	PK2	35.3	-28.1	0	54.24	-	-	74	-19.76	230	215	H
	* 7.301	33.73	MAv1	35.3	-28.1	.13	41.06	54	-12.94	-	-	230	215	H
4	* 4.742	36.09	PK2	34.3	-29.1	0	41.29	-	-	74	-32.71	271	110	V
	* 4.741	24.38	MAv1	34.3	-29.1	.13	29.71	54	-24.29	-	-	271	110	V
5	* 4.871	43.31	PK2	34.2	-30.3	0	47.21	-	-	74	-26.79	353	264	V
	* 4.873	31.54	MAv1	34.2	-30.4	.13	35.47	54	-18.53	-	-	353	264	V
6	* 7.301	44.53	PK2	35.3	-28.1	0	51.73	-	-	74	-22.27	47	213	V
	* 7.301	32.88	MAv1	35.3	-28.1	.13	40.21	54	-13.79	-	-	47	213	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

**HIGH CHANNEL**

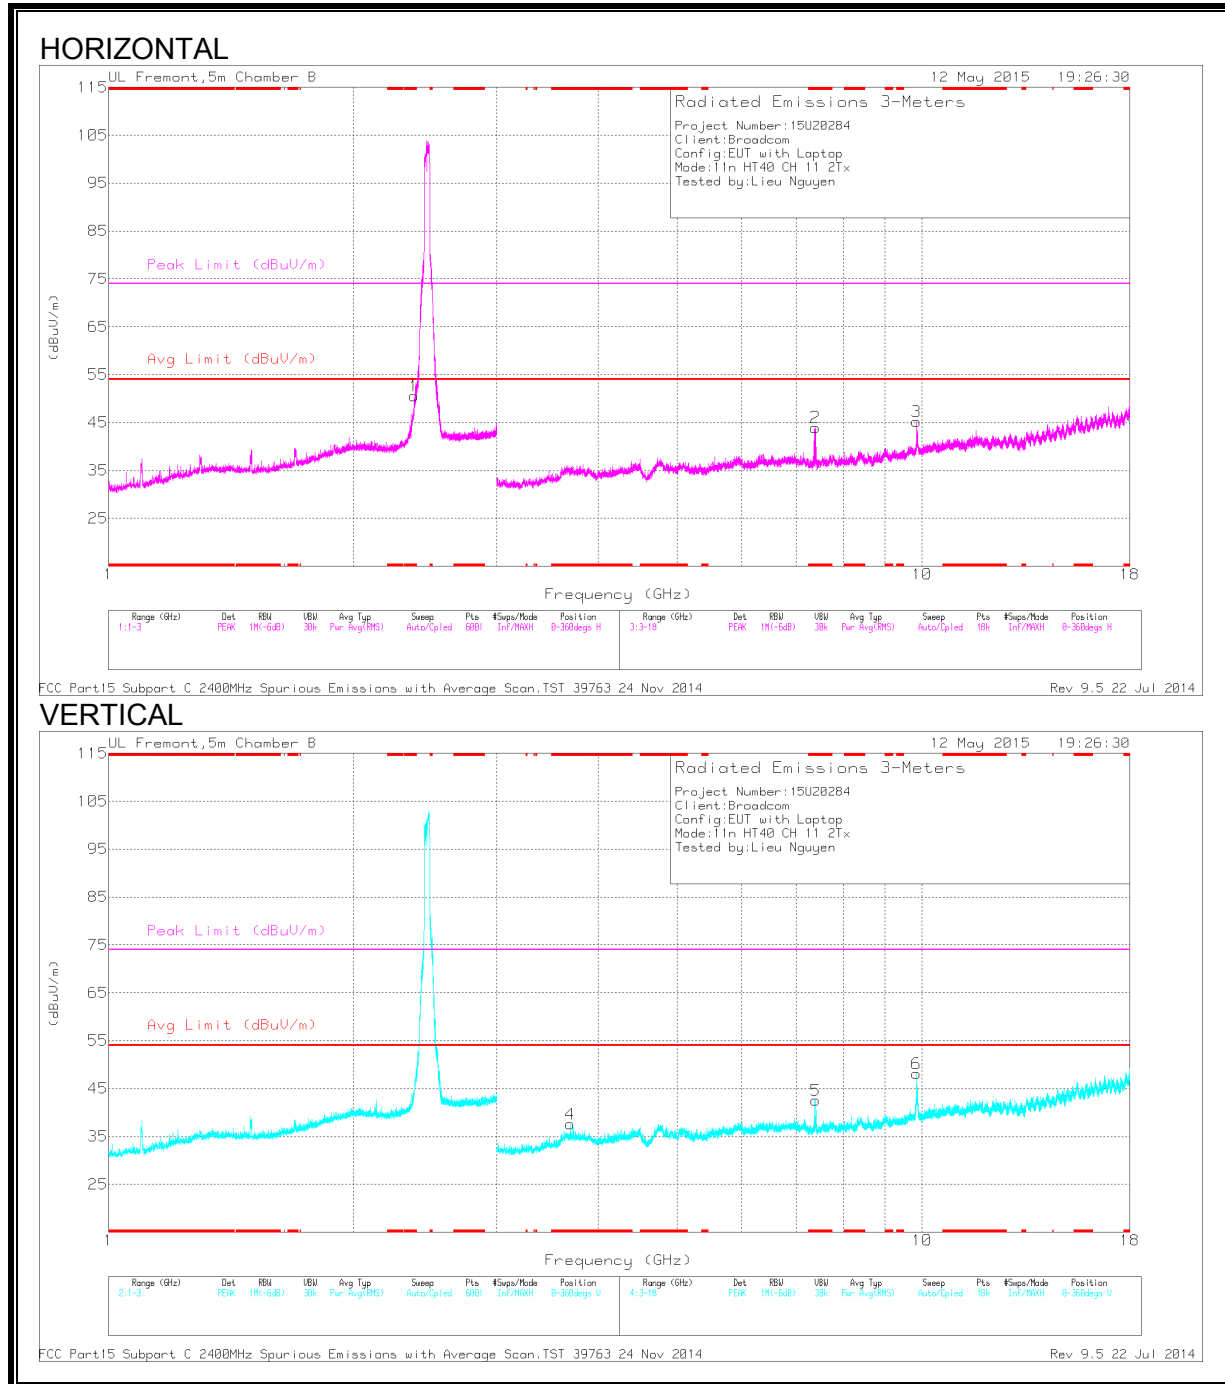

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.372	50.24	PK2	31.9	-20.9	0	61.24	-	-	74	-12.76	163	229	H
	* 2.374	35.24	MAv1	31.9	-20.9	.13	46.37	54	-7.63	-	-	163	229	H
2	* 7.393	50.16	PK2	35.4	-27.5	0	58.06	-	-	74	-15.94	174	178	H
	* 7.392	27.98	MAv1	35.4	-27.5	.13	36.01	54	-17.99	-	-	174	178	H
4	* 3.693	42.01	PK2	33.6	-31.1	0	44.51	-	-	74	-29.49	245	242	V
	* 3.693	32.34	MAv1	33.6	-31.1	.13	34.97	54	-19.03	-	-	245	242	V
5	* 7.397	44.37	PK2	35.4	-27.4	0	52.37	-	-	74	-21.63	358	294	V
	* 7.396	27.66	MAv1	35.4	-27.4	.13	35.79	54	-18.21	-	-	358	294	V
3	9.848	32.28	PK	37	-24.1	0	45.18	-	-	-	-	0-360	200	H
6	9.848	35.28	PK	37	-24.1	0	48.18	-	-	-	-	0-360	200	V


\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

## 9.8. TX ABOVE 1 GHz 802.11n HT40 CDD 3Tx MODE IN THE 2.4 GHz BAND

### RESTRICTED BANDEDGE (CHANNEL 3)

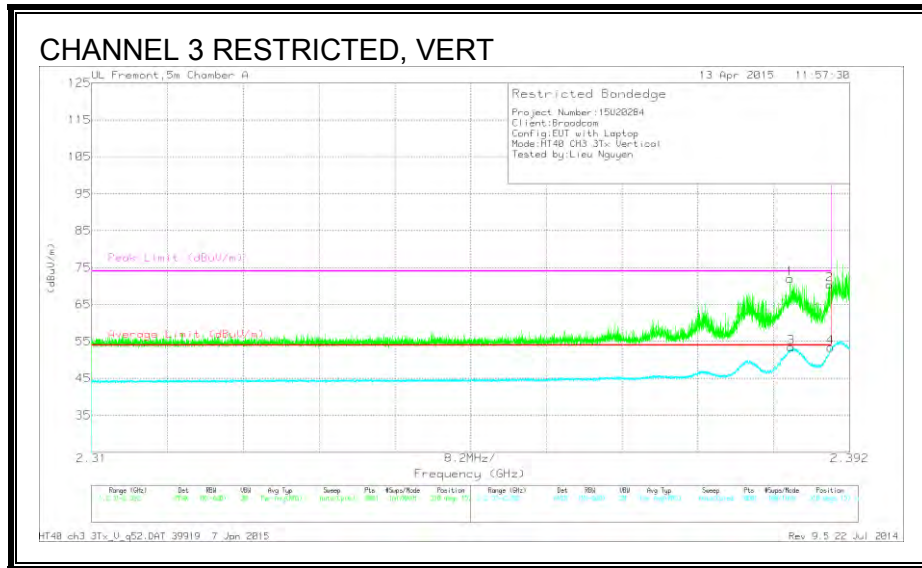


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.386	35.09	PK	32	4.9	0	71.99	-	-	74	-2.01	318	157	V
3	* 2.386	16.28	RMS	32	4.9	.13	53.31	54	-.69	-	-	318	157	V
2	* 2.39	33.48	PK	32	4.9	0	70.38	-	-	74	-3.62	318	157	V
4	* 2.39	16.23	RMS	32	4.9	.13	53.26	54	-.74	-	-	318	157	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEDGE (CHANNEL 4)**

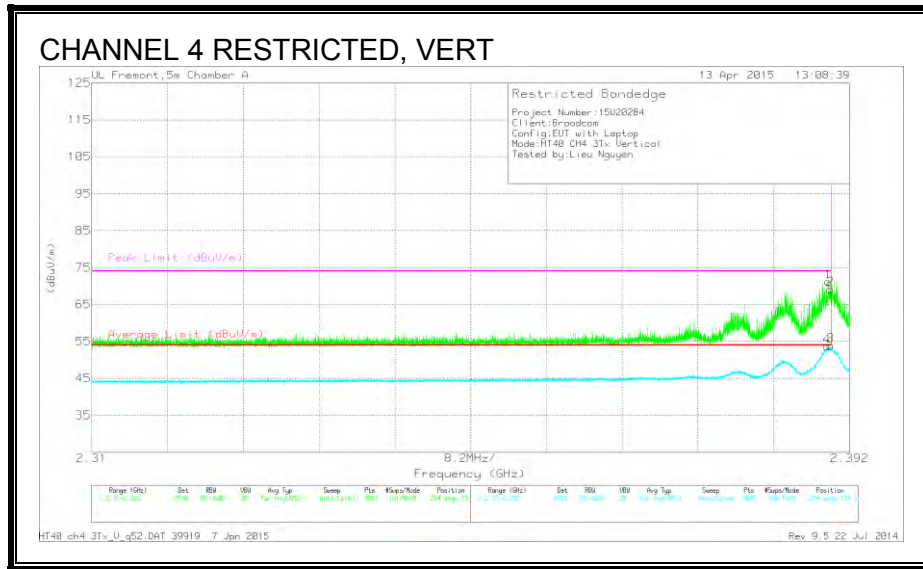

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.25	PK	32	4.9	0	71.15	-	-	74	-2.85	294	154	V
2	* 2.39	32.23	PK	32	4.9	0	69.13	-	-	74	-4.87	294	154	V
3	* 2.39	16.73	RMS	32	4.9	.13	53.76	54	-24	-	-	294	154	V
4	* 2.39	16.54	RMS	32	4.9	.13	53.57	54	-43	-	-	294	154	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection



**RESTRICTED BANDEDGE (CHANNEL 5)**

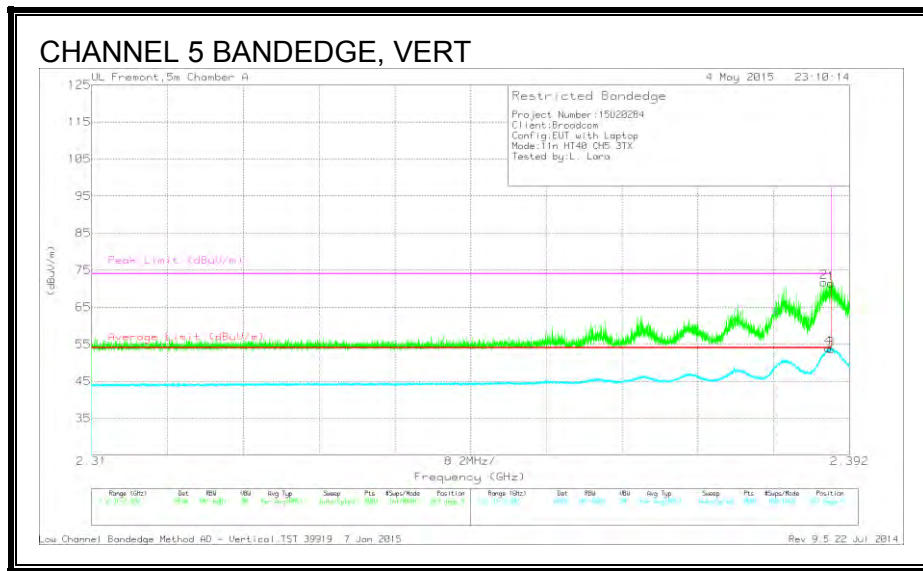


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.55	PK	32	4.9	0	71.45	-	-	74	-2.55	267	138	V
2	* 2.389	34.83	PK	32	4.9	0	71.73	-	-	74	-2.27	267	138	V
3	* 2.39	16.6	RMS	32	4.9	.13	53.63	54	-.37	-	-	267	138	V
4	* 2.39	16.9	RMS	32	4.9	.13	53.93	54	-.07	-	-	267	138	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEGE (CHANNEL 6)**

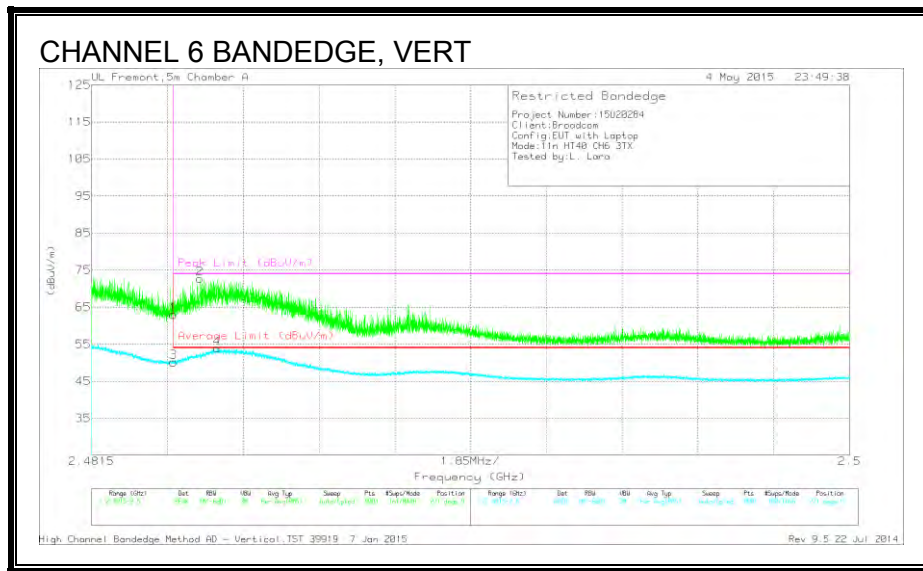


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	25.89	PK	32.1	5	0	62.99	-	-	74	-11.01	271	194	V
2	* 2.484	35.56	PK	32.1	5	0	72.66	-	-	74	-1.34	271	194	V
3	* 2.484	12.93	RMS	32.1	5	.13	50.16	54	-3.84	-	-	271	194	V
4	* 2.485	16.63	RMS	32.1	5	.13	53.86	54	-1.14	-	-	271	194	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 7)**

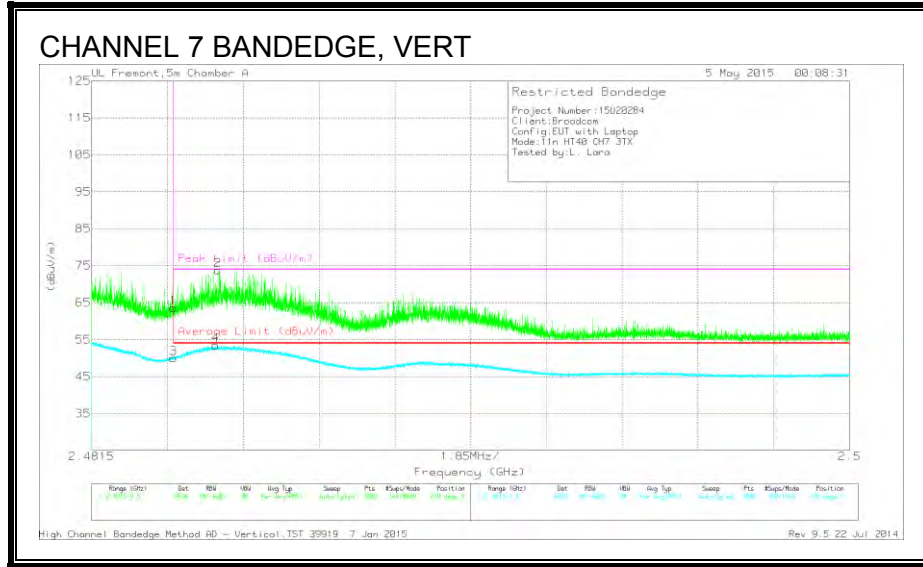


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	26.5	PK	32.1	5	0	63.6	-	-	74	-10.4	270	152	V
3	* 2.484	12.7	RMS	32.1	5	.13	49.93	54	-4.07	-	-	270	152	V
2	* 2.485	36.68	PK	32.1	5	0	73.78	-	-	74	-22	270	152	V
4	* 2.485	16.22	RMS	32.1	5	.13	53.45	54	-55	-	-	270	152	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 8)**

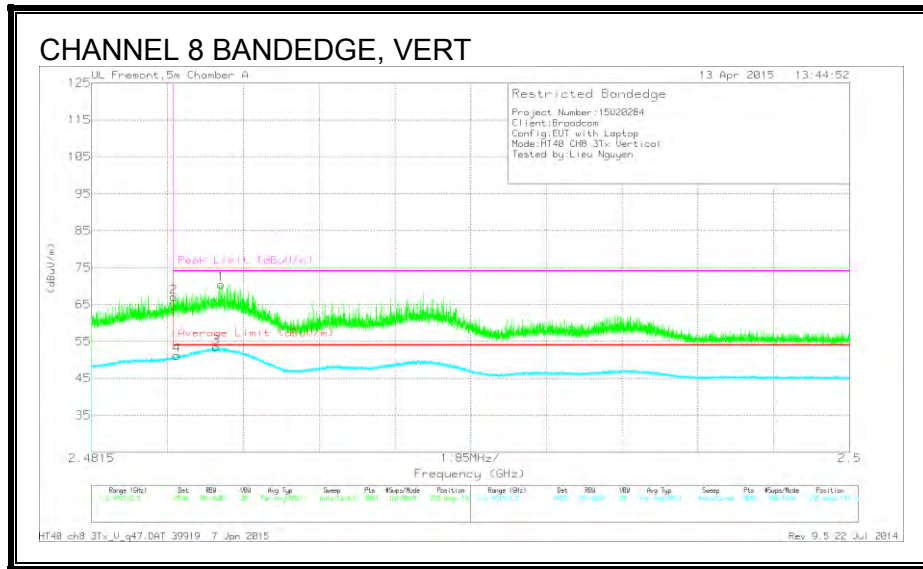


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	29.89	PK	32.1	5	0	66.99	-	-	74	-7.01	295	193	V
4	* 2.484	14.1	RMS	32.1	5	.13	51.33	54	-2.67	-	-	295	193	V
1	* 2.485	33.38	PK	32.1	5	0	70.48	-	-	74	-3.52	295	193	V
3	* 2.485	16.39	RMS	32.1	5	.13	53.62	54	-38	-	-	295	193	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 9)**

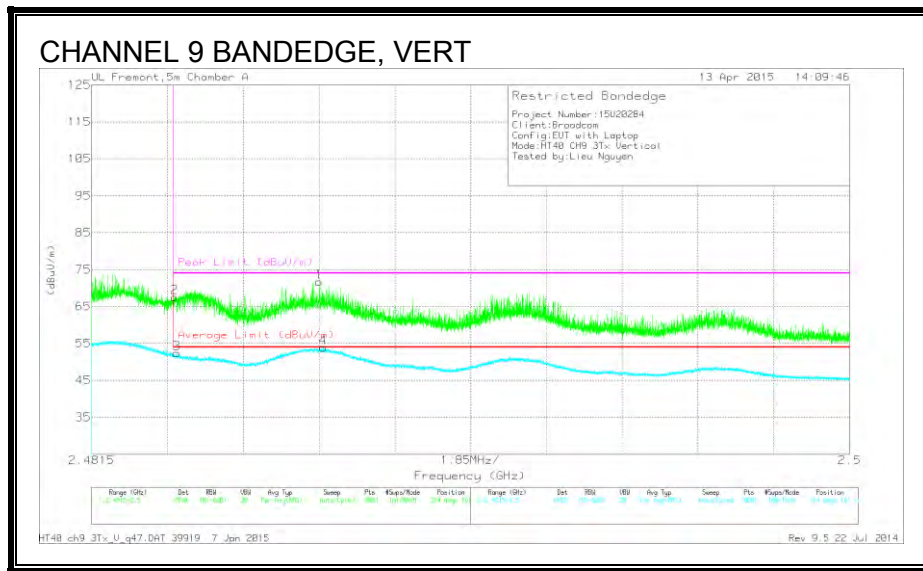


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	30.43	PK	32.1	5	0	67.53	-	-	74	-6.47	314	161	V
3	* 2.484	15.25	RMS	32.1	5	.13	52.48	54	-1.52	-	-	314	161	V
1	* 2.487	34.59	PK	32.1	5	0	71.69	-	-	74	-2.31	314	161	V
4	* 2.487	16.74	RMS	32.1	5	.13	53.97	54	-.03	-	-	314	161	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 10)**

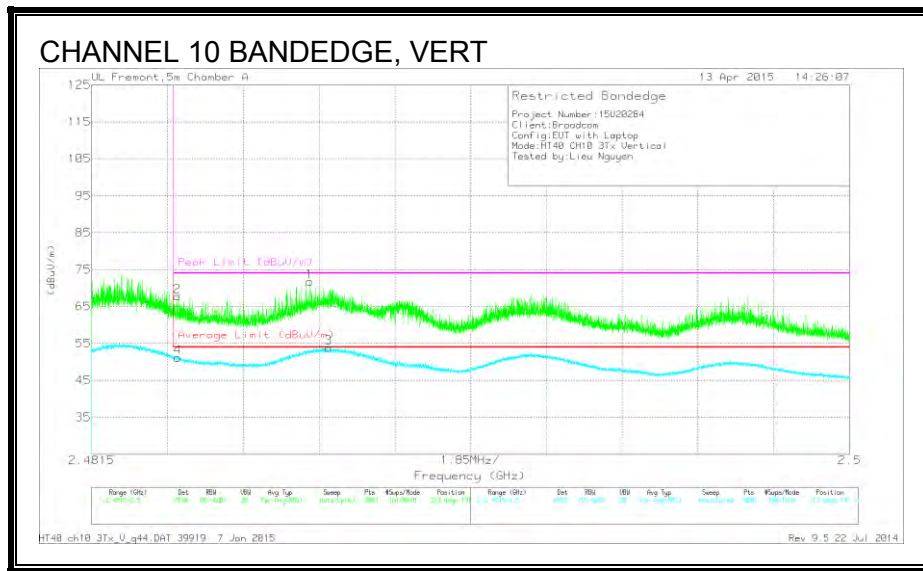


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	30.66	PK	32.1	5	0	67.76	-	-	74	-6.24	313	191	V
4	* 2.484	14.08	RMS	32.1	5	.13	51.31	54	-2.69	-	-	313	191	V
1	* 2.487	34.64	PK	32.1	5	0	71.74	-	-	74	-2.26	313	191	V
3	* 2.487	16.75	RMS	32.1	5	.13	53.98	54	-.02	-	-	313	191	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 11)**

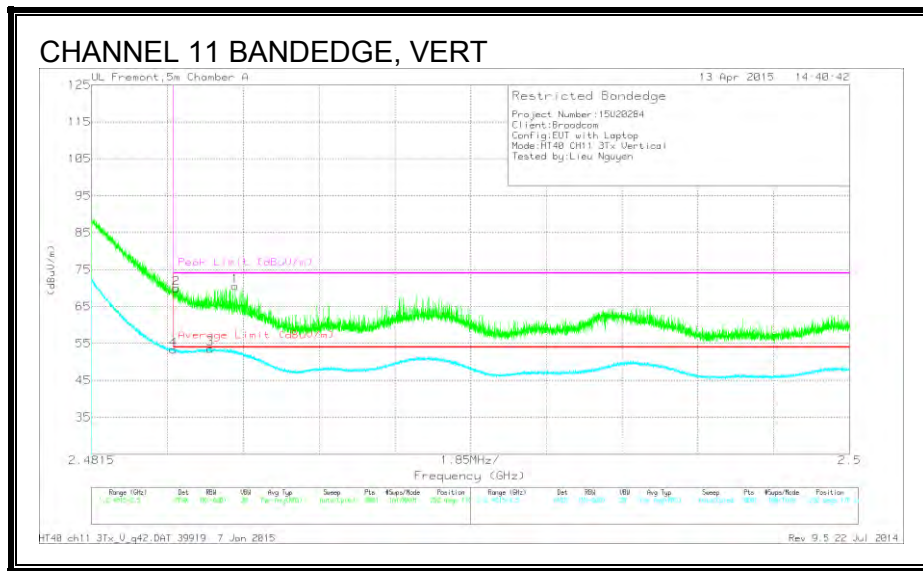

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	32.81	PK	32.1	5	0	69.91	-	-	74	-4.09	292	178	V
3	* 2.484	16.5	RMS	32.1	5	.13	53.73	54	-27	-	-	292	178	V
4	* 2.484	16.23	RMS	32.1	5	.13	53.46	54	-54	-	-	292	178	V
1	* 2.485	33.44	PK	32.1	5	0	70.54	-	-	74	-3.46	292	178	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL**

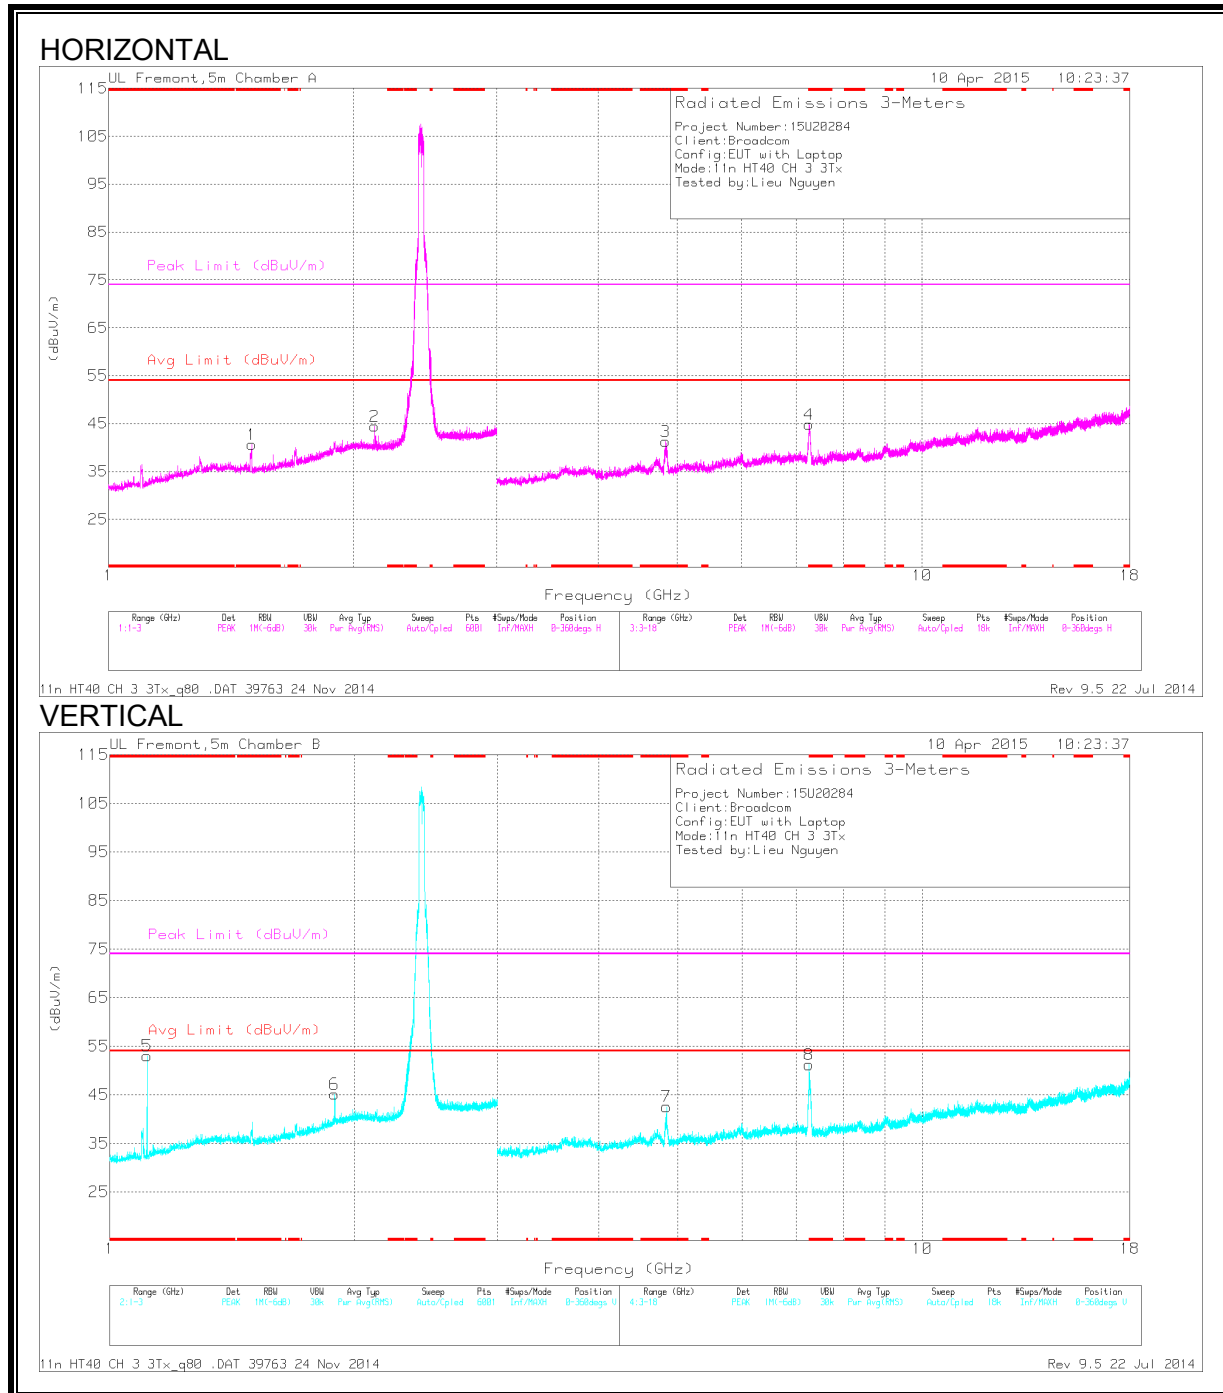



Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.5	40.88	PK2	28.6	-21.4	0	48.08	-	-	74	-25.92	27	223	H
	* 1.499	28.43	MAv1	28.6	-21.4	.13	35.76	54	-18.24	-	-	27	223	H
5	* 1.114	36.02	PK2	27.7	-22.7	0	41.02	-	-	74	-32.98	164	272	V
	* 1.114	24.17	MAv1	27.7	-22.7	.13	29.3	54	-24.7	-	-	164	272	V
3	* 4.837	47.54	PK2	34.3	-29.8	0	52.04	-	-	74	-21.96	68	202	H
	* 4.837	33.59	MAv1	34.3	-29.8	.13	38.22	54	-15.78	-	-	68	202	H
4	* 7.258	42.06	PK2	35.3	-27.8	0	49.56	-	-	74	-24.44	230	217	H
	* 7.257	30.27	MAv1	35.3	-27.9	.13	37.8	54	-16.2	-	-	230	217	H
7	* 4.841	47.25	PK2	34.2	-29.8	0	51.65	-	-	74	-22.35	272	155	V
	* 4.836	34.98	MAv1	34.3	-29.8	0	39.48	54	-14.52	-	-	272	155	V
8	* 7.272	49.42	PK2	35.3	-27.9	0	56.82	-	-	74	-17.18	91	300	V
	* 7.267	35.57	MAv1	35.3	-27.8	0	43.07	54	-10.93	-	-	91	300	V
6	1.891	34.52	PK	31.7	-21.1	0	45.12	-	-	-	-	0-360	101	V
2	2.123	33.85	PK	31.6	-21	0	44.45	-	-	-	-	0-360	101	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

**MID CHANNEL**

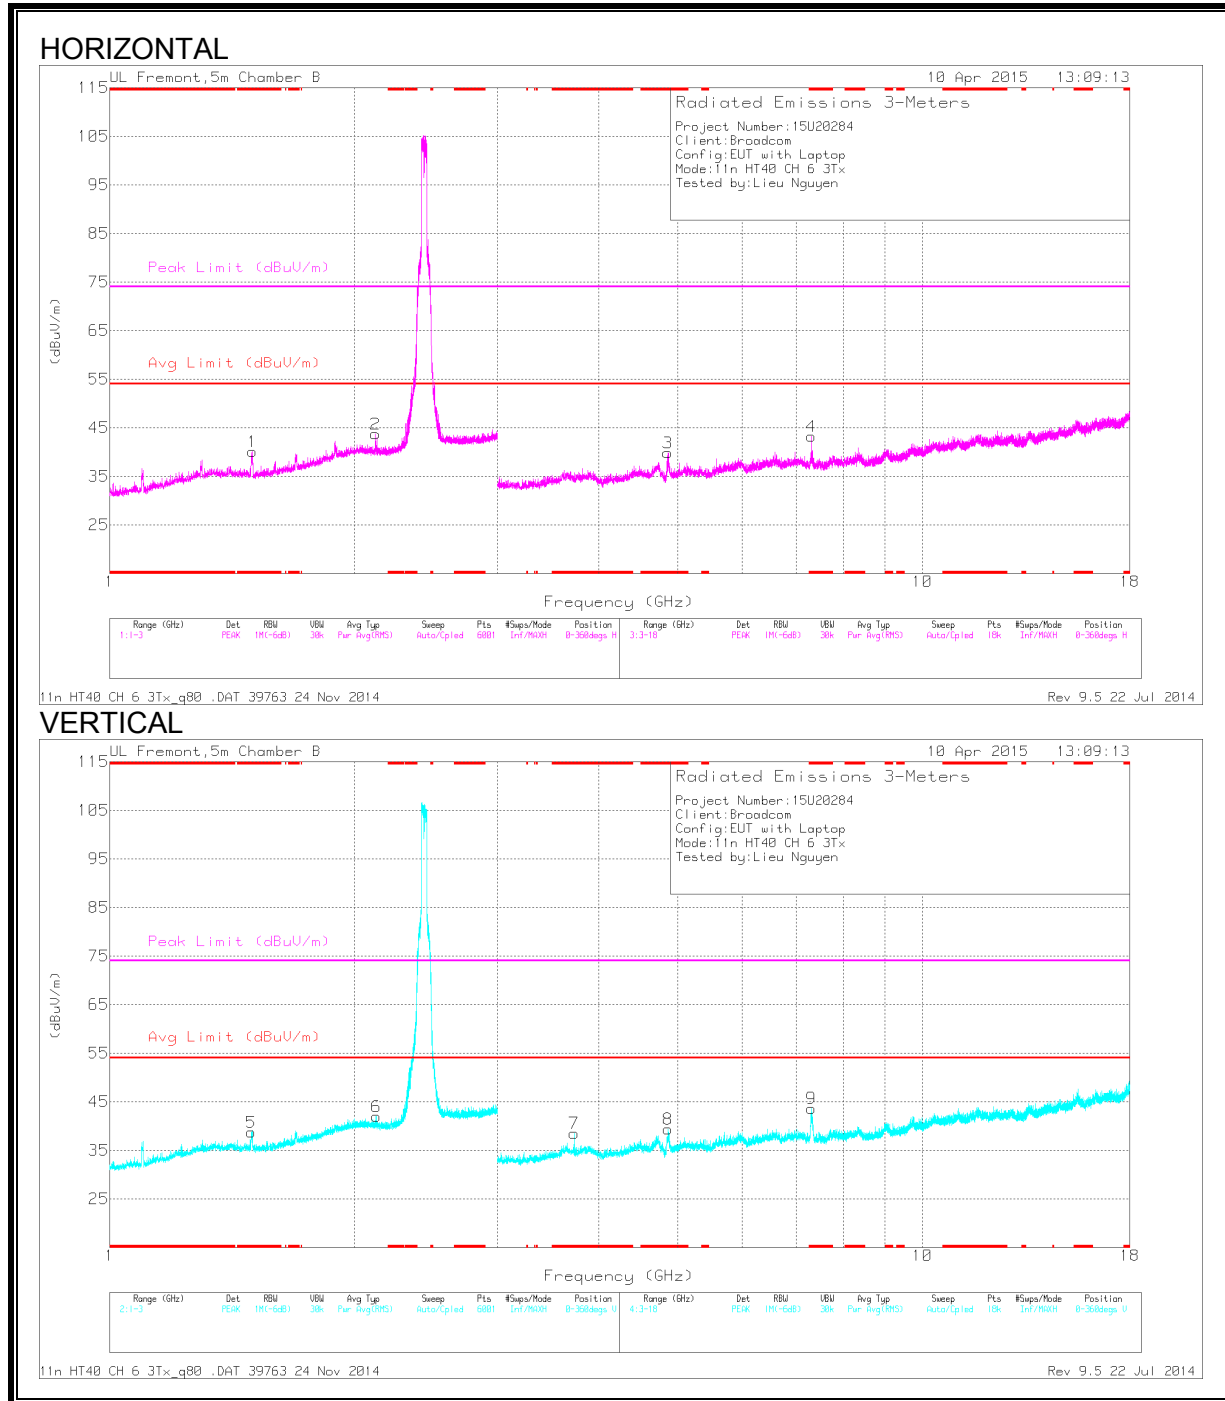

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.497	41.47	PK2	28.7	-21.4	0	48.77	-	-	74	-25.23	18	221	H
	* 1.499	28.56	MAv1	28.6	-21.4	.13	35.89	54	-18.11	-	-	18	221	H
5	* 1.493	39.07	PK2	28.7	-21.5	0	46.27	-	-	74	-27.73	205	203	V
	* 1.493	27.37	MAv1	28.7	-21.5	.13	34.7	54	-19.3	-	-	205	203	V
3	* 4.863	45.09	PK2	34.2	-30.2	0	49.09	-	-	74	-24.91	307	218	H
	* 4.864	32.02	MAv1	34.2	-30.2	.13	36.15	54	-17.85	-	-	307	218	H
4	* 7.302	42.75	PK2	35.3	-28.1	0	49.95	-	-	74	-24.05	143	230	H
	* 7.303	31.47	MAv1	35.3	-28.2	.13	38.7	54	-15.3	-	-	143	230	H
7	* 3.728	41.26	PK2	33.5	-31.1	0	43.66	-	-	74	-30.34	353	319	V
	* 3.731	29.27	MAv1	33.5	-31.1	.13	31.8	54	-22.2	-	-	353	319	V
8	* 4.864	43.36	PK2	34.2	-30.2	0	47.36	-	-	74	-26.64	142	236	V
	* 4.864	31.01	MAv1	34.2	-30.2	.13	35.14	54	-18.86	-	-	142	236	V
9	* 7.303	45.24	PK2	35.3	-28.2	0	52.34	-	-	74	-21.66	41	199	V
	* 7.304	33.83	MAv1	35.3	-28.2	.13	41.06	54	-12.94	-	-	41	199	V
2	2.124	32.99	PK	31.6	-20.9	0	43.69	-	-	-	-	0-360	101	H
6	2.129	31.25	PK	31.6	-20.9	0	41.95	-	-	-	-	0-360	200	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

**HIGH CHANNEL**

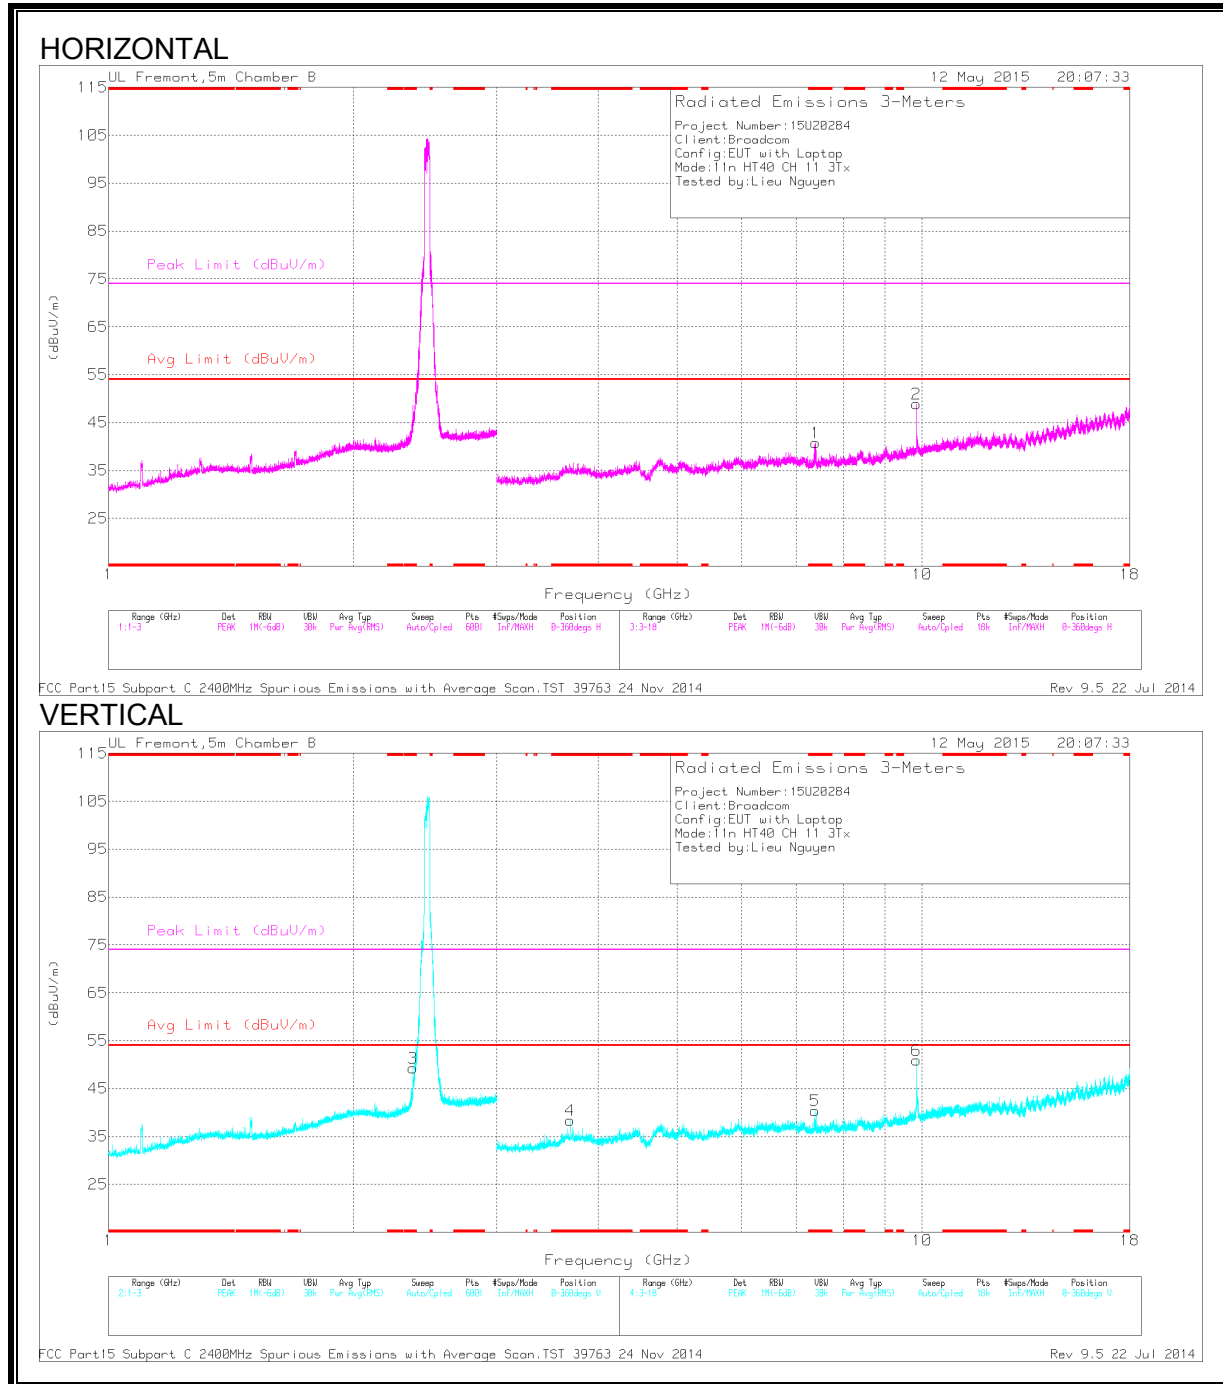

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 2.367	51.54	PK2	31.9	-20.8	0	62.64	-	-	74	-11.36	22	192	V
	* 2.366	30.75	MAv1	31.9	-20.8	.13	41.98	54	-12.02	-	-	22	192	V
1	* 7.4	44.59	PK2	35.4	-27.4	0	52.59	-	-	74	-21.41	36	287	H
	* 7.399	27.1	MAv1	35.4	-27.4	.13	35.23	54	-18.77	-	-	36	287	H
4	* 3.693	41.21	PK2	33.6	-31.1	0	43.71	-	-	74	-30.29	171	265	V
	* 3.693	32.33	MAv1	33.6	-31.1	.13	34.96	54	-19.04	-	-	171	265	V
5	* 7.38	45.72	PK2	35.4	-27.6	0	53.52	-	-	74	-20.48	338	236	V
	* 7.38	27.05	MAv1	35.4	-27.6	.13	34.98	54	-19.02	-	-	338	236	V
2	9.848	36.02	PK	37	-24.1	0	48.92	-	-	-	-	0-360	199	H
6	9.849	38.09	PK	37	-24.1	0	50.99	-	-	-	-	0-360	199	V


\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

### 9.9. TX ABOVE 1 GHz 802.11n HT40 TxBF 3Tx MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (CHANNEL 3)

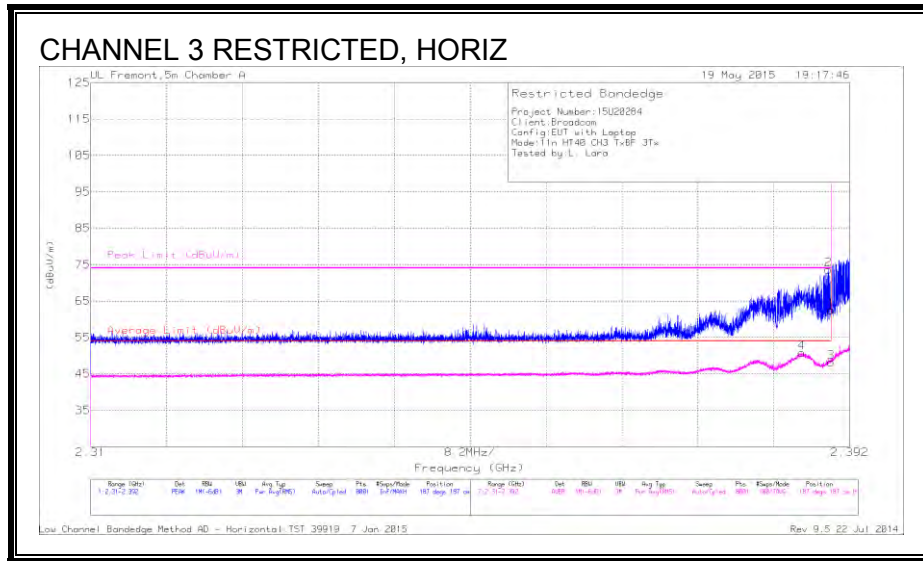


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	25.55	PK	32	4.9	0	62.45	-	-	74	-11.55	187	187	H
2	* 2.39	36.74	PK	32	4.9	0	73.64	-	-	74	-3.6	187	187	H
3	* 2.39	10.75	RMS	32	4.9	.53	48.18	54	-5.82	-	-	187	187	H
4	* 2.387	13.38	RMS	32	4.9	.53	50.81	54	-3.19	-	-	187	187	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEDGE (CHANNEL 4)**

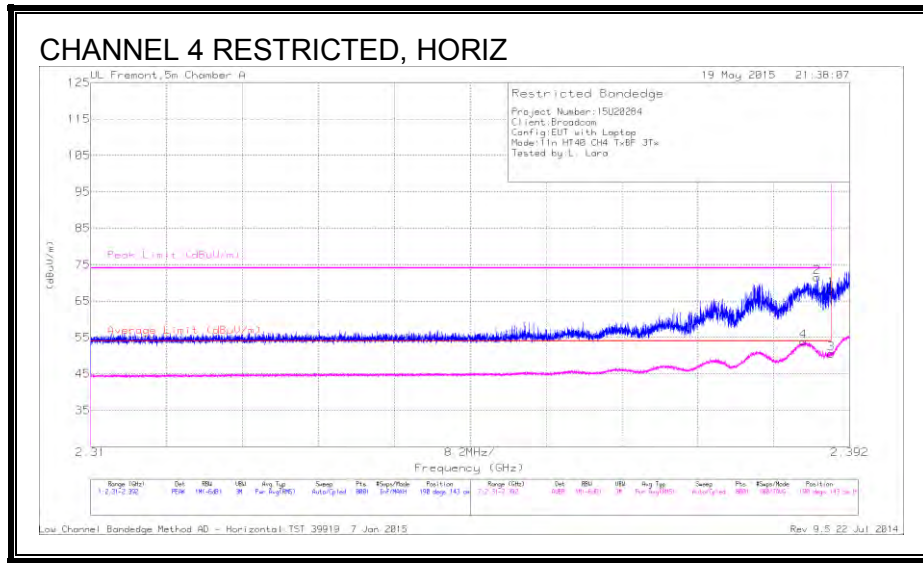


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.387	16.41	RMS	32	4.9	.53	53.84	54	-16	-	-	190	143	H
2	* 2.388	34.65	PK	32	4.9	0	71.55	-	-	74	-2.45	190	143	H
1	* 2.39	31.36	PK	32	4.9	0	68.26	-	-	74	-5.74	190	143	H
3	* 2.39	13.14	RMS	32	4.9	.53	50.57	54	-3.43	-	-	190	143	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 8)**

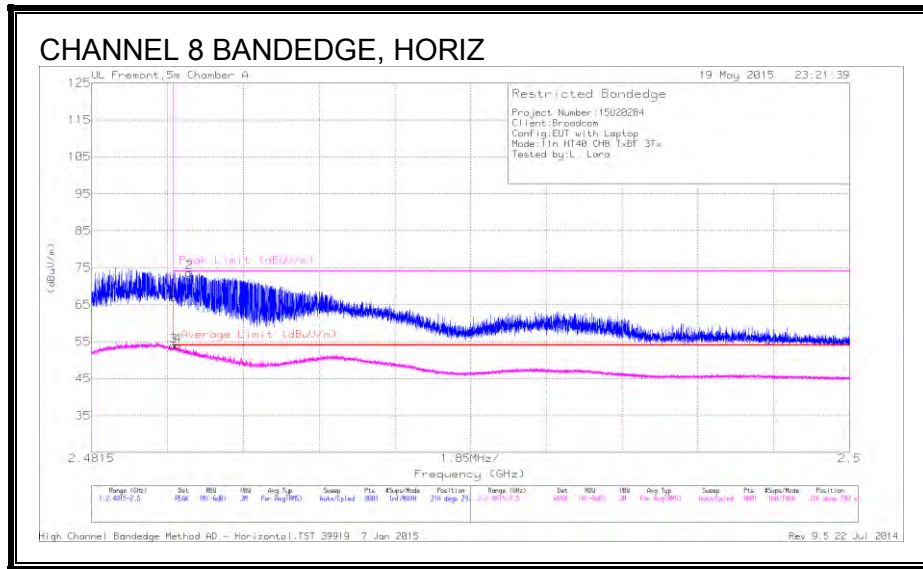

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29.85	PK	32.1	5	0	66.95	-	-	74	-7.05	316	293	H
2	* 2.484	36.55	PK	32.1	5	0	73.65	-	-	74	-35	316	293	H
3	* 2.484	16.25	RMS	32.1	5	.53	53.88	54	-12	-	-	316	293	H
4	* 2.484	16.3	RMS	32.1	5	.53	53.93	54	-.07	-	-	316	293	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection



**AUTHORIZED BANDEGE (CHANNEL 9)**

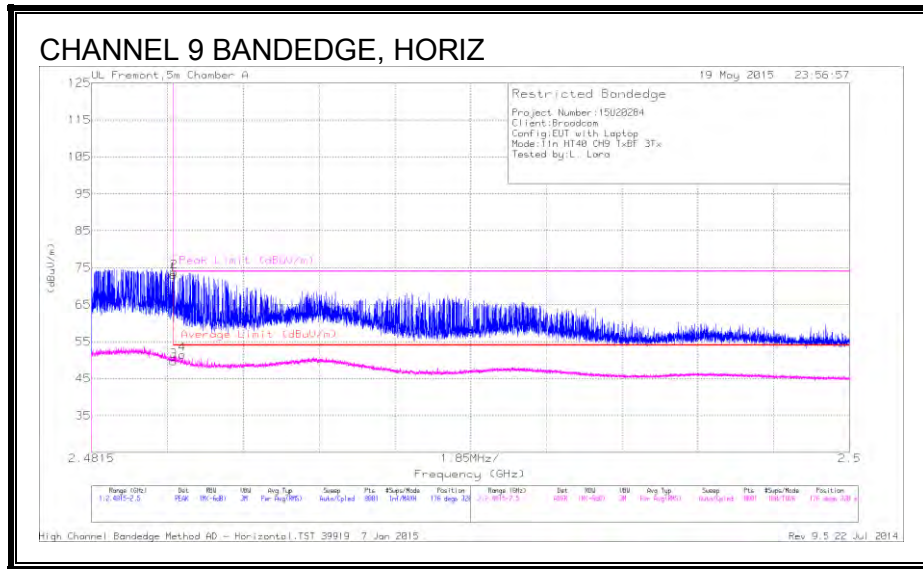


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	35.98	PK	32.1	5	0	73.08	-	-	74	-92	176	320	H
2	* 2.484	36.74	PK	32.1	5	0	73.84	-	-	74	-16	176	320	H
3	* 2.484	12.1	RMS	32.1	5	.53	49.73	54	-4.27	-	-	176	320	H
4	* 2.484	13.86	RMS	32.1	5	.53	51.49	54	-2.51	-	-	176	320	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 10)**

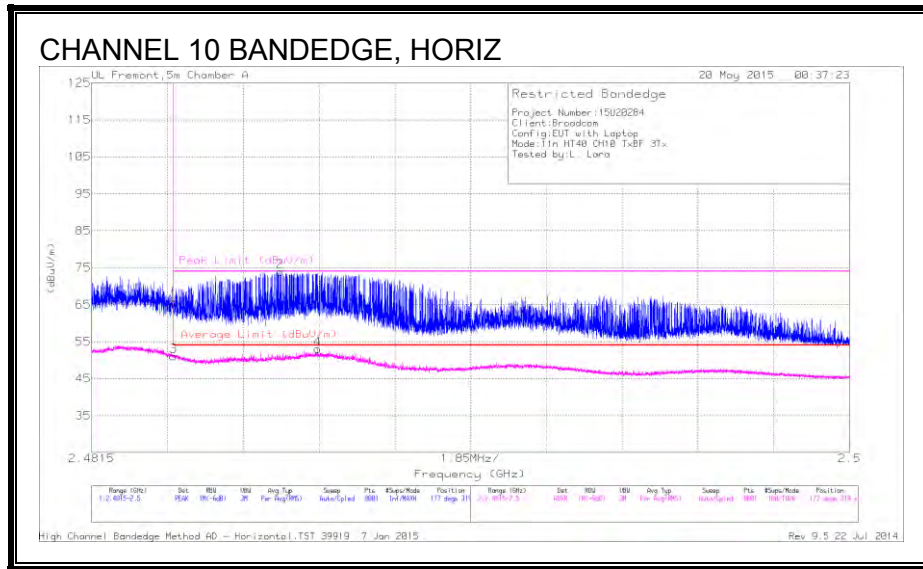


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	28.66	PK	32.1	5	0	65.76	-	-	74	-8.24	177	319	H
3	* 2.484	13.48	RMS	32.1	5	.53	51.11	54	-2.89	-	-	177	319	H
2	* 2.486	36.86	PK	32.1	5	0	73.96	-	-	74	-.04	177	319	H
4	* 2.487	15.37	RMS	32.1	5	.53	53	54	-1	-	-	177	319	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**AUTHORIZED BANDEDGE (CHANNEL 11)**

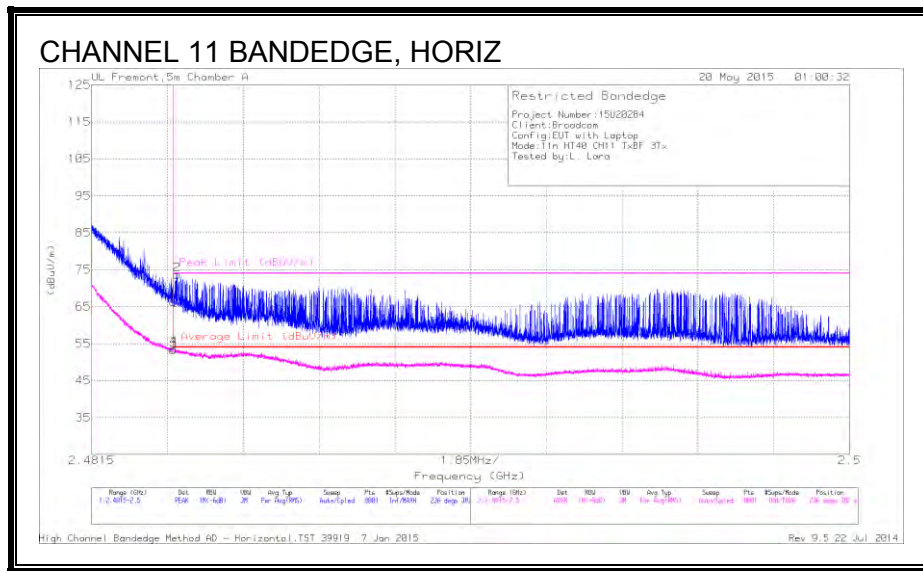

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29.21	PK	32.1	5	0	66.31	-	-	74	-7.69	236	382	H
2	* 2.484	36.54	PK	32.1	5	0	73.64	-	-	74	-36	236	382	H
3	* 2.484	15.68	RMS	32.1	5	.53	53.31	54	-69	-	-	236	382	H
4	* 2.484	16.03	RMS	32.1	5	.53	53.66	54	-34	-	-	236	382	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 RMS - RMS detection

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL**

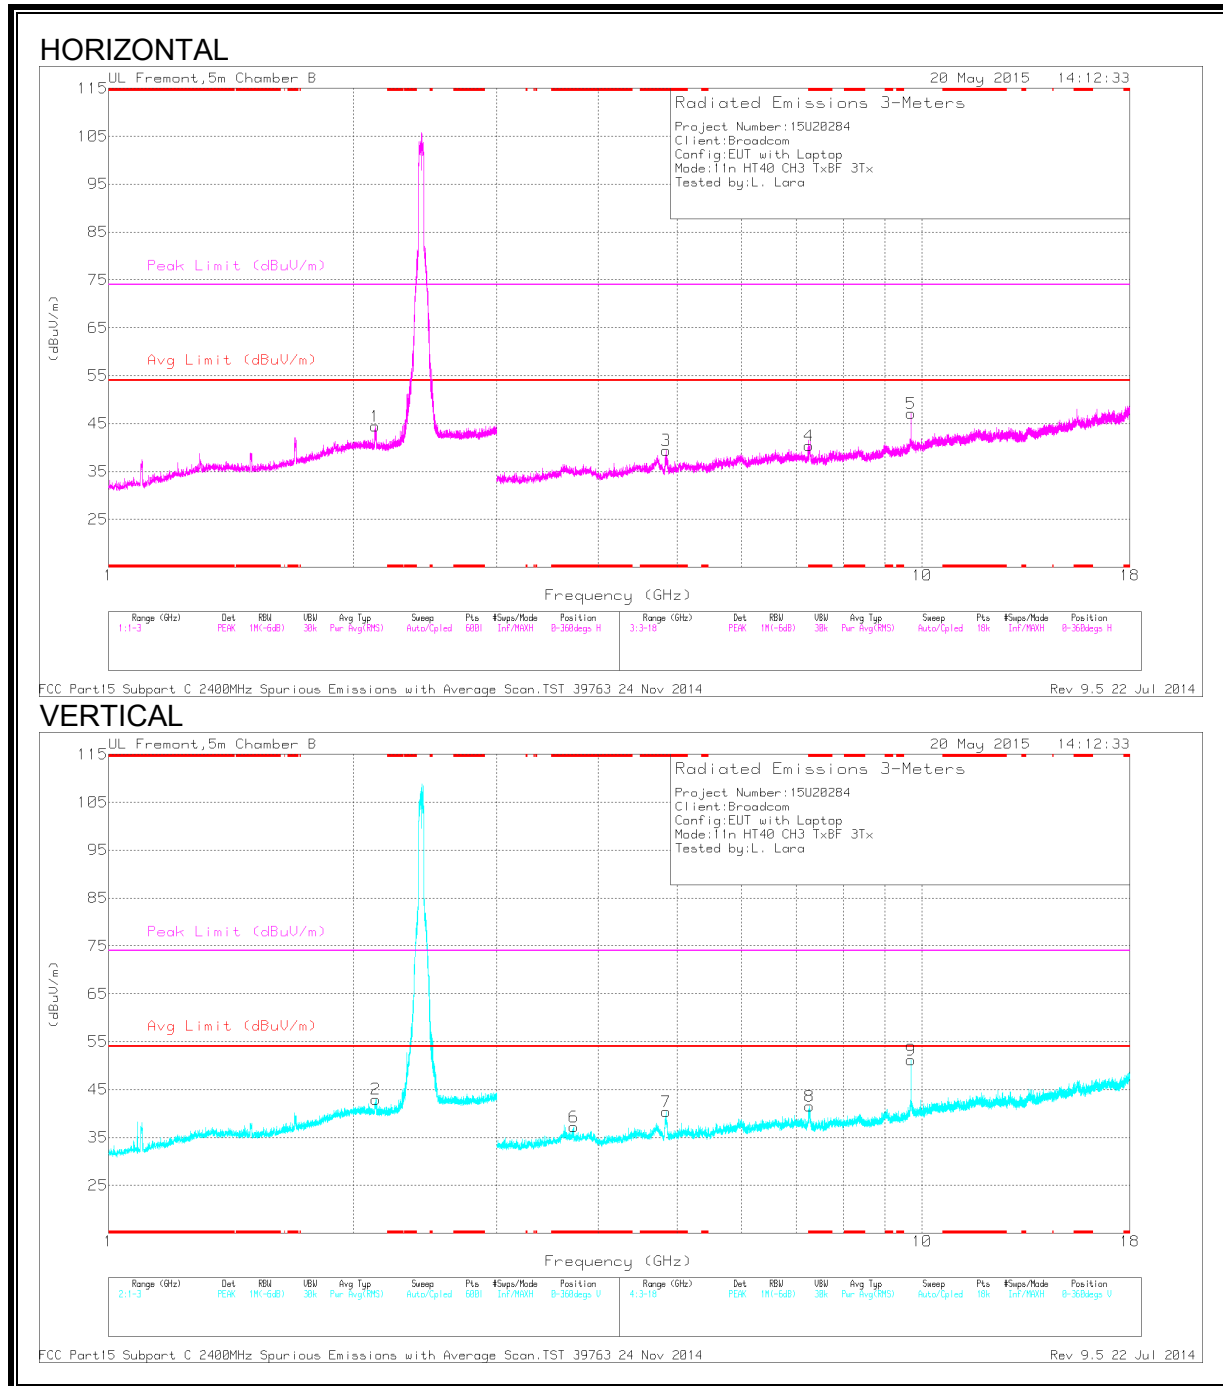

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.838	44.76	PK2	34.3	-29.8	0	49.26	-	-	74	-24.74	32	202	H
	* 4.848	31.98	MAv1	34.2	-30	.53	36.71	54	-17.29	-	-	32	202	H
4	* 7.257	42.48	PK2	35.3	-27.9	0	49.88	-	-	74	-24.12	280	280	H
	* 7.266	30.43	MAv1	35.3	-27.8	.53	38.46	54	-15.54	-	-	280	280	H
6	* 3.732	43.56	PK2	33.5	-31.1	0	45.96	-	-	74	-28.04	258	228	V
	* 3.73	30.31	MAv1	33.5	-31.1	.53	33.24	54	-20.76	-	-	258	228	V
7	* 4.834	44.17	PK2	34.3	-29.8	0	48.67	-	-	74	-25.33	300	248	V
	* 4.844	32.15	MAv1	34.2	-29.9	.53	36.98	54	-17.02	-	-	300	248	V
8	* 7.276	42.26	PK2	35.3	-27.9	0	49.66	-	-	74	-24.34	331	210	V
	* 7.276	30.77	MAv1	35.3	-27.9	.53	38.7	54	-15.3	-	-	331	210	V
1	2.125	33.71	PK	31.6	-20.9	0	44.41	-	-	-	-	0-360	101	H
2	2.132	32.3	PK	31.6	-20.9	0	43	-	-	-	-	0-360	101	V
5	9.688	33.87	PK	36.8	-23.6	0	47.07	-	-	-	-	0-360	101	H
9	9.688	37.99	PK	36.8	-23.6	0	51.19	-	-	-	-	0-360	199	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average

**MID CHANNEL**

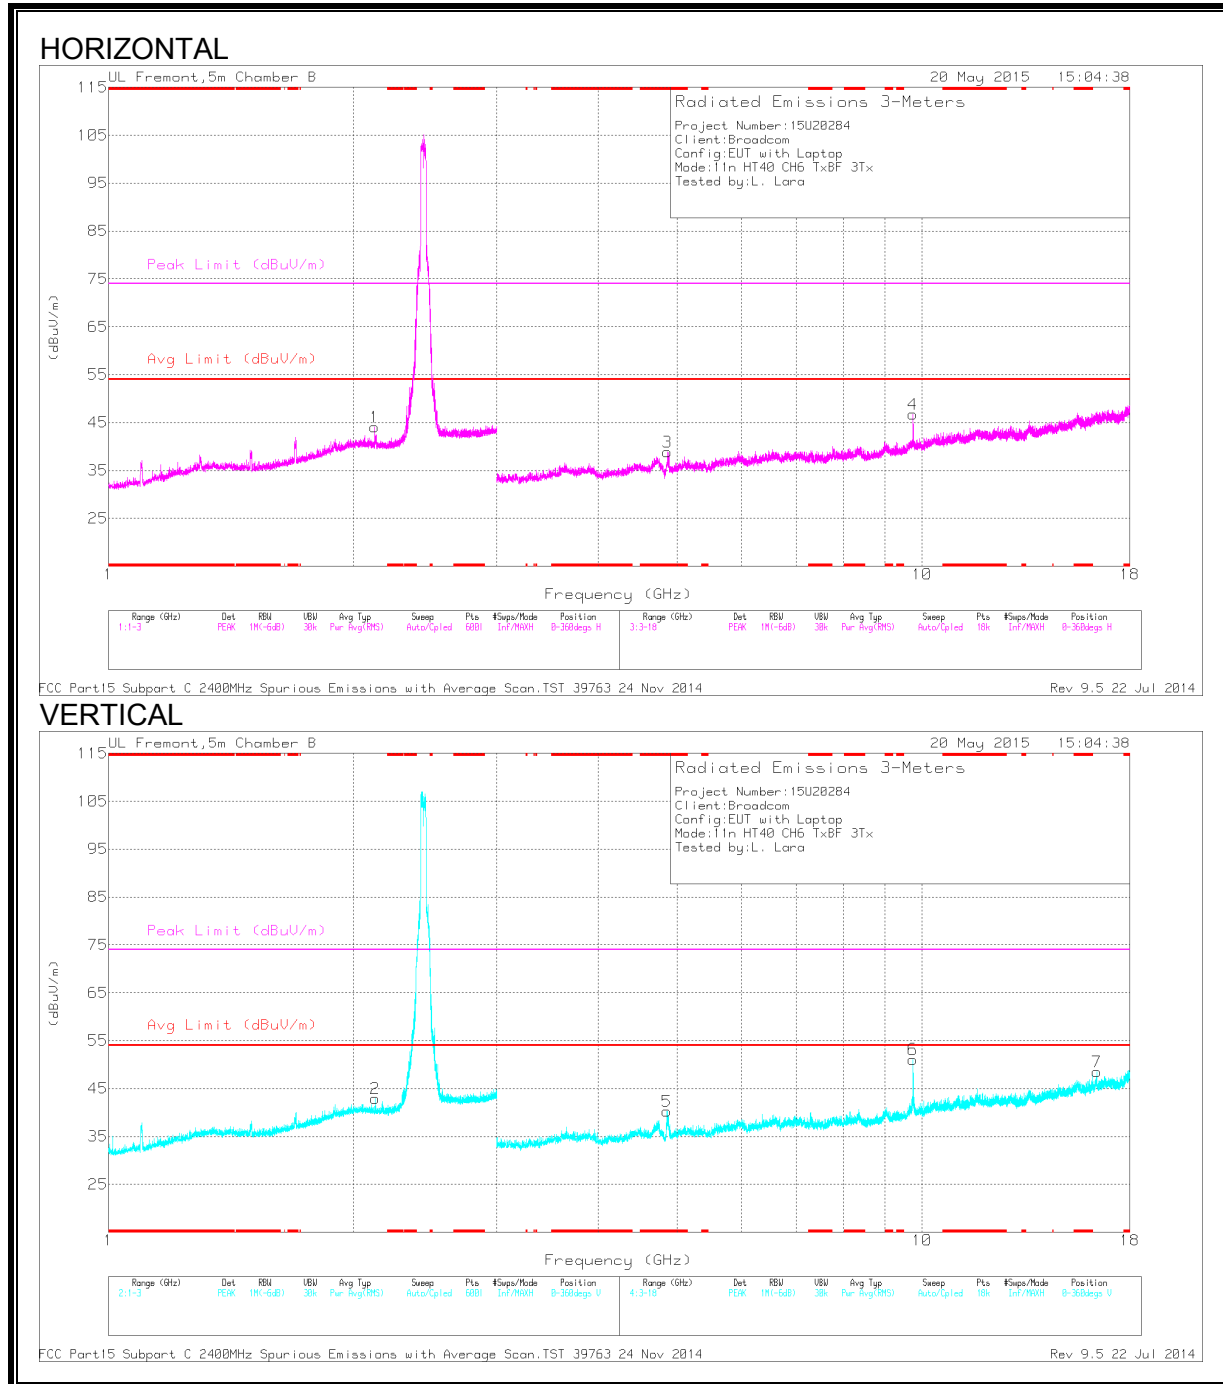

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.868	44.95	PK2	34.2	-30.3	0	48.85	-	-	74	-25.15	32	197	H
	* 4.873	31.34	MAv1	34.2	-30.4	.53	35.67	54	-18.33	-	-	32	197	H
5	* 4.859	44.33	PK2	34.2	-30.2	0	48.33	-	-	74	-25.67	259	245	V
	* 4.863	31.14	MAv1	34.2	-30.2	.53	35.67	54	-18.33	-	-	259	245	V
1	2.124	33.37	PK	31.6	-20.9	0	44.07	-	-	-	-	0-360	101	H
2	2.126	32.18	PK	31.6	-20.9	0	42.88	-	-	-	-	0-360	101	V
4	9.748	33.65	PK	36.9	-23.8	0	46.75	-	-	-	-	0-360	200	H
6	9.748	38.02	PK	36.9	-23.8	0	51.12	-	-	-	-	0-360	200	V
7	16.389	27.47	PK	41.2	-20.2	0	48.47	-	-	-	-	0-360	200	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band


-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

**HIGH CHANNEL**

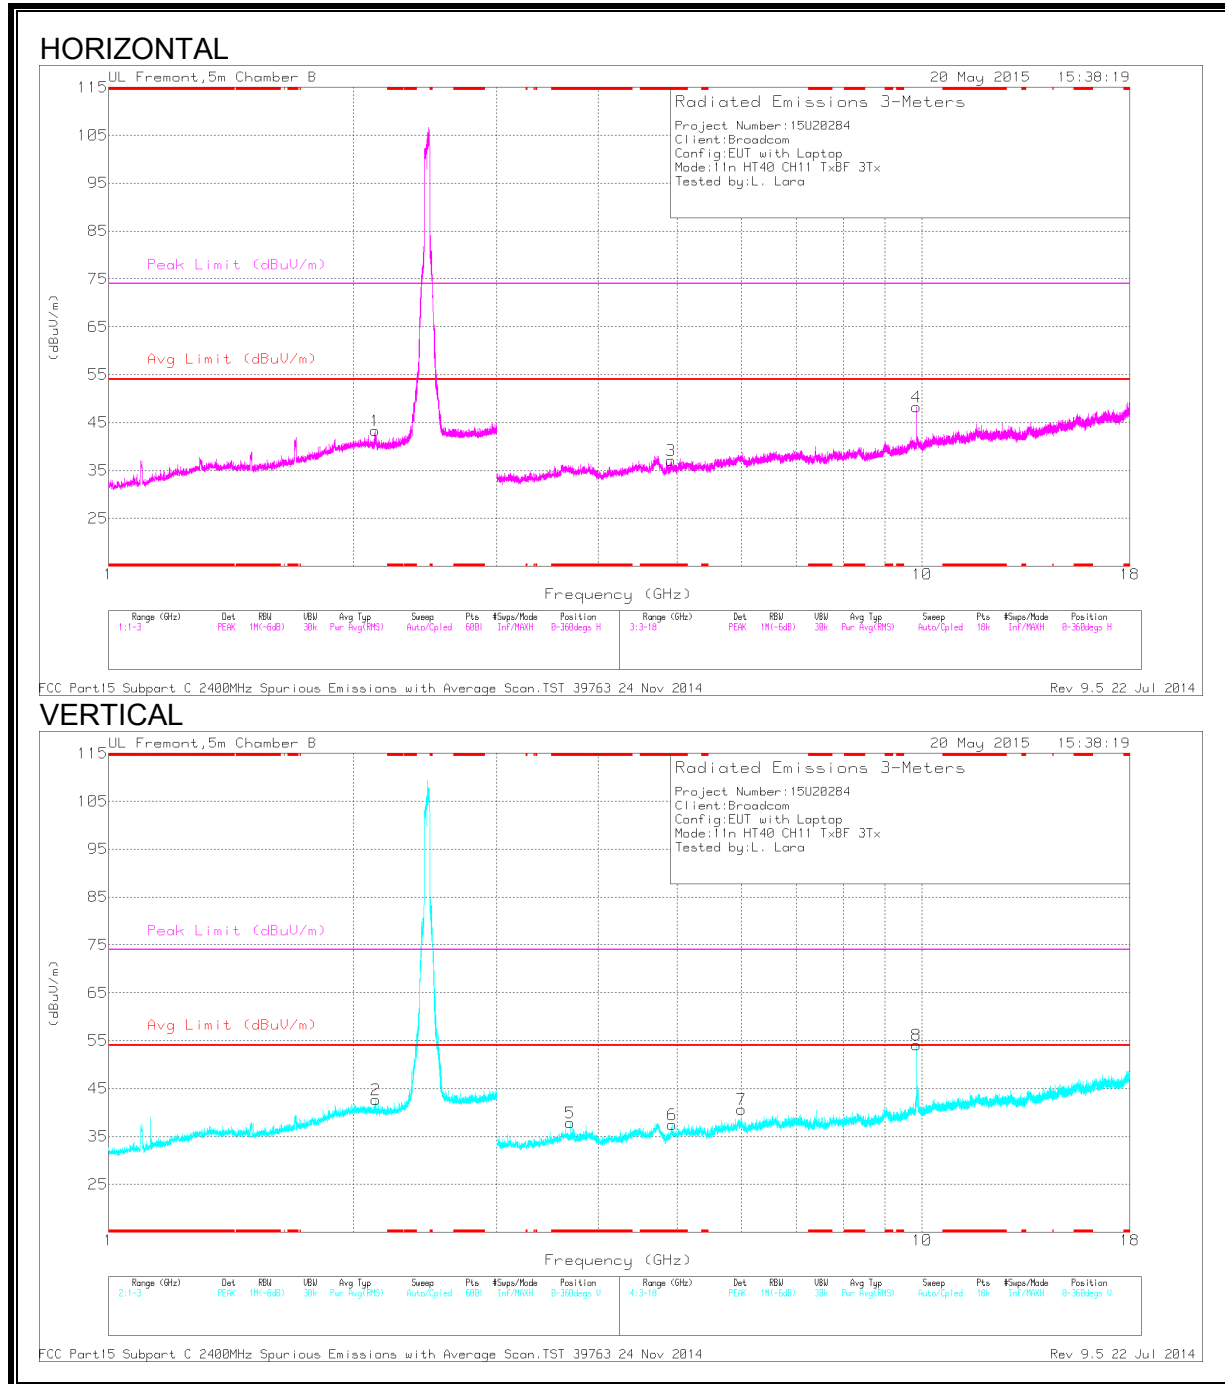



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.927	42.53	PK2	34.1	-30.5	0	46.13	-	-	74	-27.87	34	217	H
	* 4.923	30.47	MAv1	34.1	-30.5	.53	34.6	54	-19.4	-	-	34	217	H
5	* 3.693	42.23	PK2	33.6	-31.1	0	44.73	-	-	74	-29.27	289	137	V
	* 3.693	34.37	MAv1	33.6	-31.1	.53	37.4	54	-16.6	-	-	289	137	V
6	* 4.928	40.7	PK2	34.1	-30.5	0	44.3	-	-	74	-29.7	225	199	V
	* 4.927	30.1	MAv1	34.1	-30.5	.53	34.23	54	-19.77	-	-	225	199	V
1	2.125	32.64	PK	31.6	-20.9	0	43.34	-	-	-	-	0-360	101	H
2	2.129	31.96	PK	31.6	-20.9	0	42.66	-	-	-	-	0-360	200	V
7	6	33.76	PK	35.7	-28.8	0	40.66	-	-	-	-	0-360	101	V
4	9.848	35.31	PK	37	-24.1	0	48.21	-	-	-	-	0-360	199	H
8	9.848	41.26	PK	37	-24.1	0	54.16	-	-	-	-	0-360	199	V

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

## 9.10. WORST-CASE BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
8	90.095	50.42	PK	7.7	-30.6	27.52	43.52	-16	0-360	101	V
9	99.5938	45.33	PK	9.3	-30.6	24.03	43.52	-19.49	0-360	101	V
1	99.9125	46.81	PK	9.4	-30.6	25.61	43.52	-17.91	0-360	300	H
2	199.161	57.13	QP	12.5	-29.9	39.73	43.52	-3.79	1	100	H
10	199.83	48	PK	12.6	-29.9	30.7	43.52	-12.82	0-360	101	V
3	208	40.82	PK	10.7	-29.9	21.62	43.52	-21.9	0-360	101	H
4	298.7	52.1	PK	13.3	-29.4	36	46.02	-10.02	0-360	101	H
11	497.7	37.44	PK	17.6	-28.8	26.24	46.02	-19.78	0-360	101	V
5	497.8	39.41	PK	17.6	-28.8	28.21	46.02	-17.81	0-360	200	H
12	797.1	32.5	PK	21.3	-28.2	25.6	46.02	-20.42	0-360	200	V
6	799.4	36.24	PK	21.3	-28.2	29.34	46.02	-16.68	0-360	101	H
7	899.5	32.44	PK	22.3	-27.4	27.34	46.02	-18.68	0-360	101	H

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector  
 QP - Quasi-Peak detector

### 9.11. WORST-CASE 18-26 GHz

#### SPURIOUS EMISSIONS 18 – 26GHz



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T89 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	19.745	40.77	PK	33	-24.1	-9.5	40.16	54	-13.83	74	-33.83
2	21.171	41.9	PK	33.3	-23.7	-9.5	42	54	-12	74	-32
3	23.988	43.83	PK	34.2	-22.7	-9.5	45.83	54	-8.16	74	-28.16
4	18.899	41.97	PK	32.8	-24.6	-9.5	40.66	54	-13.33	74	-33.33
5	22.057	41.97	PK	33.7	-23.5	-9.5	42.66	54	-11.33	74	-31.33
6	25.607	44.93	PK	34.7	-23.3	-9.5	46.83	54	-7.16	74	-27.16

PK - Peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)


RSS-GEN Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup>Decreases with the logarithm of the frequency.

**RESULTS**

**6 WORST EMISSION**

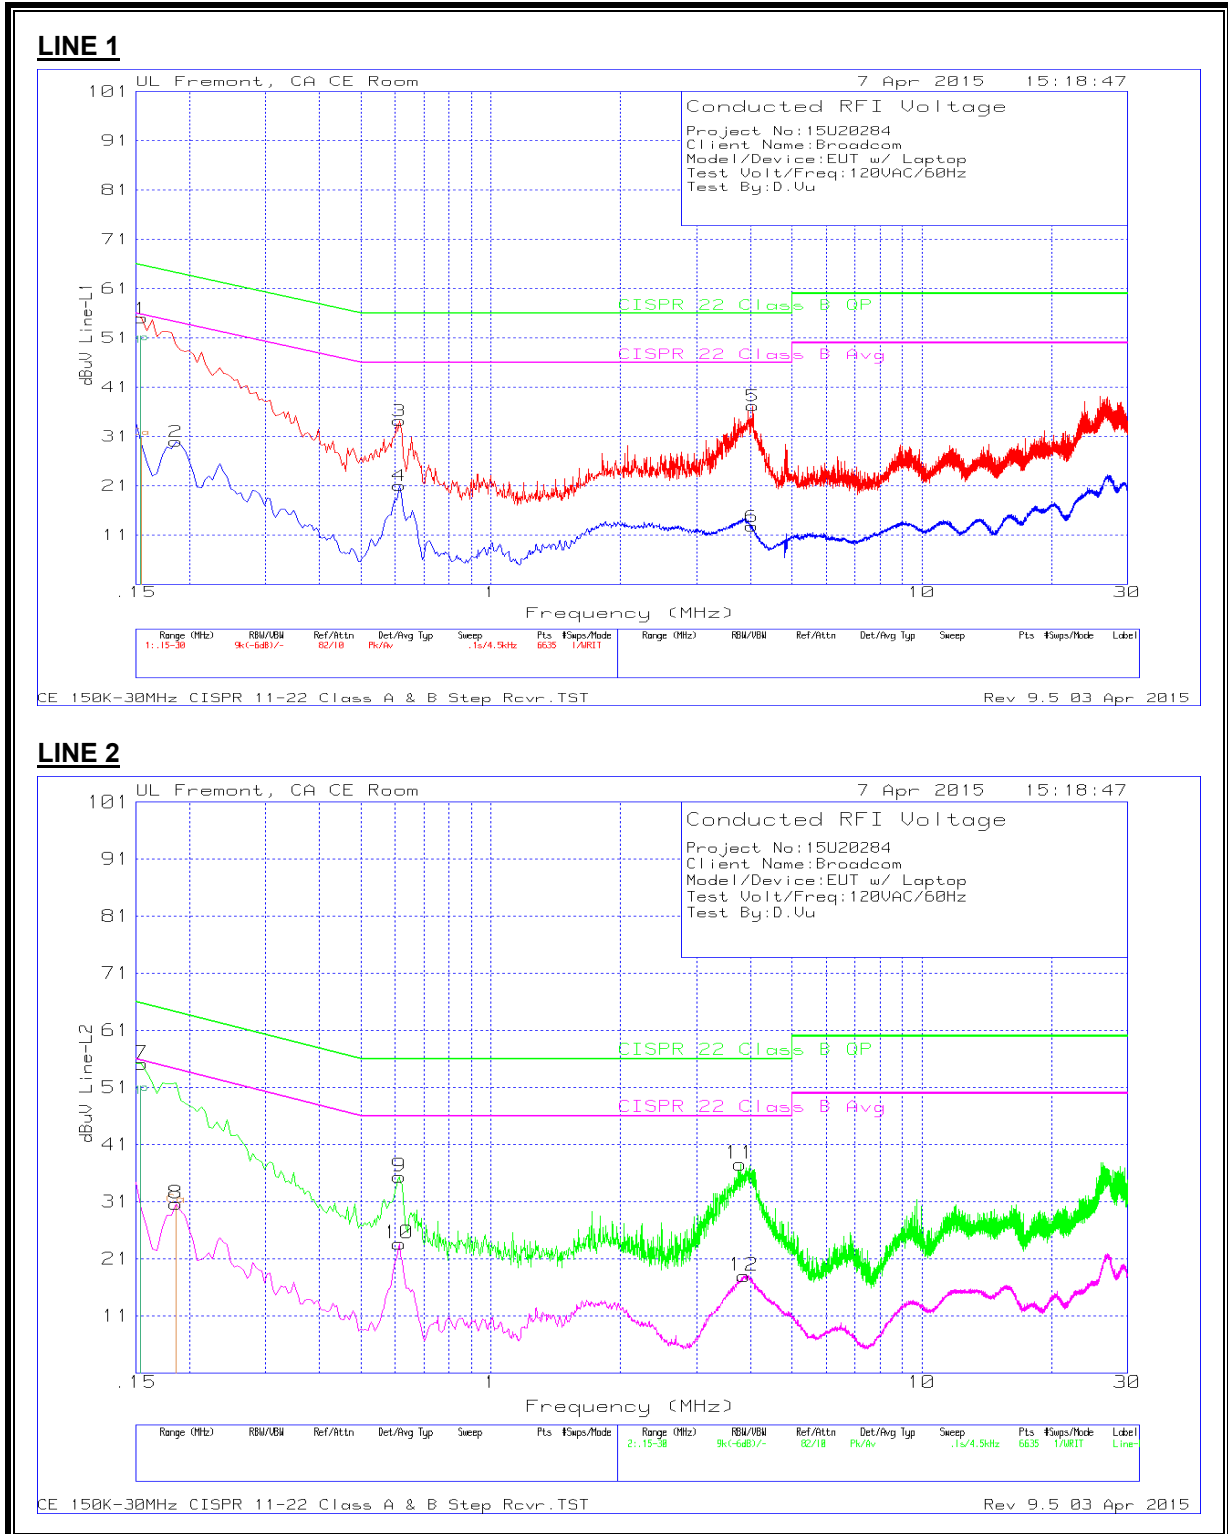

Trace Markers

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.1545	53.74	Pk	1.3	0	55.04	-	-	55.75	-.71
2	.186	29.02	Av	1	0	30.02	64.21	-34.19	54.21	-24.19
3	.6135	33.92	Pk	.3	0	34.22	-	-	46	-11.78
4	.6135	20.76	Av	.3	0	21.06	56	-34.94	46	-24.94
5	4.056	36.91	Pk	.2	.1	37.21	-	-	46	-8.79
6	4.0335	12.49	Av	.2	.1	12.79	56	-43.21	46	-33.21

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
7	.1545	53.77	Pk	1.4	0	55.17	-	-	55.75	-.58
8	.186	29.54	Av	1.1	0	30.64	64.21	-33.57	54.21	-23.57
9	.6135	35.09	Pk	.3	0	35.39	-	-	46	-10.61
10	.6135	23.35	Av	.3	0	23.65	56	-32.35	46	-22.35
11	3.7905	37.3	Pk	.2	.1	37.6	-	-	46	-8.4
12	3.867	17.7	Av	.2	.1	18	56	-38	46	-28

Pk - Peak detector

Av - Average detection